

TIBCO® MDM Add-on for Global Data Synchronization

User's Guide

*Software Release 3.0.1
August 2016*

Important Information

SOME TIBCO SOFTWARE EMBEDS OR BUNDLES OTHER TIBCO SOFTWARE. USE OF SUCH EMBEDDED OR BUNDLED TIBCO SOFTWARE IS SOLELY TO ENABLE THE FUNCTIONALITY (OR PROVIDE LIMITED ADD-ON FUNCTIONALITY) OF THE LICENSED TIBCO SOFTWARE. THE EMBEDDED OR BUNDLED SOFTWARE IS NOT LICENSED TO BE USED OR ACCESSED BY ANY OTHER TIBCO SOFTWARE OR FOR ANY OTHER PURPOSE.

USE OF TIBCO SOFTWARE AND THIS DOCUMENT IS SUBJECT TO THE TERMS AND CONDITIONS OF A LICENSE AGREEMENT FOUND IN EITHER A SEPARATELY EXECUTED SOFTWARE LICENSE AGREEMENT, OR, IF THERE IS NO SUCH SEPARATE AGREEMENT, THE CLICKWRAP END USER LICENSE AGREEMENT WHICH IS DISPLAYED DURING DOWNLOAD OR INSTALLATION OF THE SOFTWARE (AND WHICH IS DUPLICATED IN THE LICENSE FILE) OR IF THERE IS NO SUCH SOFTWARE LICENSE AGREEMENT OR CLICKWRAP END USER LICENSE AGREEMENT, THE LICENSE(S) LOCATED IN THE "LICENSE" FILE(S) OF THE SOFTWARE. USE OF THIS DOCUMENT IS SUBJECT TO THOSE TERMS AND CONDITIONS, AND YOUR USE HEREOF SHALL CONSTITUTE ACCEPTANCE OF AND AN AGREEMENT TO BE BOUND BY THE SAME.

This document contains confidential information that is subject to U.S. and international copyright laws and treaties. No part of this document may be reproduced in any form without the written authorization of TIBCO Software Inc.

TIBCO, Two-Second Advantage, TIBCO MDM, TIBCO MDM Studio, TIBCO MDM Add-on for Global Data Synchronization, TIBCO BusinessConnect, TIBCO ActiveMatrix BusinessWorks, TIBCO Enterprise Message Service are either registered trademarks or trademarks of TIBCO Software Inc. in the United States and/or other countries.

All other product and company names and marks mentioned in this document are the property of their respective owners and are mentioned for identification purposes only.

THIS SOFTWARE MAY BE AVAILABLE ON MULTIPLE OPERATING SYSTEMS. HOWEVER, NOT ALL OPERATING SYSTEM PLATFORMS FOR A SPECIFIC SOFTWARE VERSION ARE RELEASED AT THE SAME TIME. SEE THE README FILE FOR THE AVAILABILITY OF THIS SOFTWARE VERSION ON A SPECIFIC OPERATING SYSTEM PLATFORM.

THIS DOCUMENT IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

THIS DOCUMENT COULD INCLUDE TECHNICAL INACCURACIES OR TYPOGRAPHICAL ERRORS. CHANGES ARE PERIODICALLY ADDED TO THE INFORMATION HEREIN; THESE CHANGES WILL BE INCORPORATED IN NEW EDITIONS OF THIS DOCUMENT. TIBCO SOFTWARE INC. MAY MAKE IMPROVEMENTS AND/OR CHANGES IN THE PRODUCT(S) AND/OR THE PROGRAM(S) DESCRIBED IN THIS DOCUMENT AT ANY TIME.

THE CONTENTS OF THIS DOCUMENT MAY BE MODIFIED AND/OR QUALIFIED, DIRECTLY OR INDIRECTLY, BY OTHER DOCUMENTATION WHICH ACCOMPANIES THIS SOFTWARE, INCLUDING BUT NOT LIMITED TO ANY RELEASE NOTES AND "READ ME" FILES.

Copyright © 1999-2016 TIBCO Software Inc. All rights reserved.

TIBCO Software Inc. Confidential Information

Contents

Preface	vii
Changes from the Previous Release of this Guide	viii
Related Documentation	ix
TIBCO MDM Add-on for Global Data Synchronization Documentation	ix
TIBCO MDM Documentation	ix
Other TIBCO Product Documentation	x
Typographical Conventions	xi
Connecting with TIBCO Resources	xii
How to Join TIBCOCommunity	xii
How to Access TIBCO Documentation	xii
How to Contact TIBCO Support	xii
 Chapter 1 Overview	 1
Global Data Synchronization Network	2
Terminology Differences in the GDSN Edition	3
GDSN Specific Configuration Properties	4
GDSN Specific Roles	6
GDSN Predefined Components	7
 Chapter 2 GDSN Menu Options and Screens	 9
GDSN Specific Menu Items	10
Datapool Profiles in the Administration Menu	10
GDSN Specific Screens	11
All Company Profiles Screen	11
My Company Profiles Screen	11
Datapool Profiles Screen	13
Trading Partner Profiles Screen	14
View Repository Screen	15
Message Acknowledgements	16
Inbox UI	18
Event Log Search	19
GDSN Customization	21
Customizing Workitem Descriptions	21

Chapter 3 Synchronization	23
Synchronization Profiles	24
Viewing Synchronization Profiles	24
Creating Synchronization Profiles	24
Synchronization Formats	28
GDSN Specific Synchronization Formats	28
Synchronization Status	30
Updating Synchronization Status	30
Chapter 4 Validations and Codelists	33
1WorldSync Validations Overview	34
Supported 1WorldSync Validations	34
MDM Validation for 1WorldSync Mandatory Attributes	35
MDM Validation for 1WorldSync Optional Attributes	37
MDM Implementation of 1WorldSync Codelist	45
Chapter 5 Maintaining Validations and Codelists	55
Updating Codelists	56
Updating a Codelist Implemented Using Datasource	56
Updating a Codelist Implemented Using Enumeration	56
Updating Validations	58
Example	58
Chapter 6 Message Choreography	59
Message Choreography	60
MDM Message Choreography for 1WorldSync	61
1WorldSync Attribute Mapping	61
MDM Operations for 1WorldSync Messages	107
Specifying Catalogue Item Confirmation Response	109
Specifying Request For Catalogue Item Notification Message	110
Correction Versus Modify	111
Supported 1WorldSync Responses	112
Changing Message Choreography	113
Update Rulebase to support New Message Type	113
Update Map file to support New Message Type	113
Update Sync Operation Identifier Rulebase	113
Status Derivation	113
Message Handler Selection	114
Configurable Components	115
Record Validation on UI	115

Synchronization Profile Validation	115
Rulebase for Protocol Selection	115
Chapter 7 GDSN Impact on Workflows and Rulebase	117
GDSN Impact on Rulebase	118
Modifying Business Process Rules	118
SyncOperationAttribute	118
GDSN Impact on Workflows	119
GDSN Specific Workflows	119
Chapter 8 Setting up CIM to CIM	123
Overview	124
Need for Synchronization	124
Types of Synchronization	124
How it Works	124
Steps to Sync CIM Instances	125
Step 1 - Queue Configuration	126
Queue Setup for CIM to CIM Integration Messages	126
Changes to ConfigValues.xml for TIBCO EMS	126
Step 2 - Enterprise Creation and Data Prepopulation	129
BrandOwner Enterprise Creation	129
VeloSelMarketplace Enterprise Creation	130
Bottler1 Enterprise Creation	131
Bottler2 Enterprise Creation	132
Data generated through XML Pack Import	133
Step 3 - Database Changes	136
Bottler Subscription Rulebase	136
BrandOwner Translation Map	136
VeloSelMarketplace Translation Map	136
VeloSelMarketplace Subscription Rulebase	137
VeloSelMarketplace Translation Maps (Instance 2)	137
Step 4 - Company Profile and GLN Creation	138
BrandOwner Enterprise	138
VeloSelMarketplace Enterprise	139
Bottler1 Enterprise	139
Bottler2 Enterprise	139
Step 5 - Trading Partner Profile Creation	141
BrandOwner Enterprise	141
VeloSelMarketplace Enterprise	141
Bottler1 and Bottler2	142
Step 6 - Rulebase Changes	143
Changes to rbsynchtradingpartners.xml Rulebase File	143

Step 7- Datasource and Input Map creation for BrandOwner	145
Step 8 (Optional) - Processing Reverse Relationships	148
Change to the wfin26cim2cimsyncV1.xml Workflow	148
Change to the wfin26catsourceimportv2.xml Workflow	149
Change to the wfin26catsourcecv5.xml Workflow	149
Change to the wfin26prodnotifprocessv2.xml Workflow	149
Step 9 - Testing your CIM to CIM Setup	151
Troubleshooting CIM to CIM	152
Chapter 9 Supplier and Retailer Setups	153
Supplier Setup	154
Create the Supplier Enterprise	154
Define the Supplier Enterprise	154
Define Repository for Outgoing Messages	155
Select Repository for Incoming Messages	157
Retailer Setup	158
Create the Retailer Enterprise	158
Define the Retailer Enterprise	158
Select Repository for Incoming Messages	159
Select Approvers for Received Records	159
Select Editors for Received Records	160
Detect New Backend Systems	160
Chapter 10 Setting up GPC Classification Scheme Data Load	161
Configuring GPC Classification Scheme Loading	162
Configuring Support for GPC Code	164
Adding GPC Dropdowns for Editing Records in a Repository	164
Chapter 11 Configure TIBCO BusinessConnect and TIBCO BusinessWorks	167
Configuring TIBCO BusinessConnect	168
Prerequisites	168
TIBCO Administrator Setup	169
BusinessConnect Setup	170
Prerequisites	170
New BusinessConnect Configuration	171
Create Participants	172
New Operations	179
System Settings	182
Business Agreement	184
Deploy the BusinessConnect configuration (Single Server Mode)	185
Business Works Setup	190

Prerequisites	190
Setup	190
Testing the MDM-BusinessWorks-BusinessConnect Connectivity	196
Appendix A GDSN Predefined Components	197
Overview	198
GDSN-Specific Maps	199
GDSN-Specific Forms	200
GDSN-Specific Rulebases	201
GDSN-Specific Workflows	204
Appendix B Error Messages	207
Catalog Errors	208
Rulebase Errors	212
Administration Errors	213
Miscellaneous Errors	214
Appendix C GDSN Samples	215
1WorldSync Samples	216
mlxml indoc (supplier)	216
sync messages (retailer)	217
sync messages (supplier)	218
cim2cim metadata	222

Preface

The *TIBCO MDM* provides Global Data Synchronization (GDSN) functionality through a GDSN Add-on component called the *TIBCO MDM Add-On for Global Data Synchronization*.

Topics

- [Changes from the Previous Release of this Guide, page viii](#)
- [Related Documentation, page ix](#)
- [Typographical Conventions, page xi](#)
- [Connecting with TIBCO Resources, page xii](#)

Changes from the Previous Release of this Guide

This section itemizes the major changes to this guide from the previous release:

Support for TIBCO MDM 9.0.0

This release supports only TIBCO MDM 9.0.0.

Related Documentation

This section lists documentation resources you may find useful.

TIBCO MDM Add-on for Global Data Synchronization Documentation

The following documents form the TIBCO MDM Add-On for Global Data Synchronization documentation set:

- *TIBCO MDM Add-on For Global Data Synchronization Installation Guide*: A manual for instructions on installation and configuration of the GDSN Add-On.
- *TIBCO MDM Add-on For Global Data Synchronization User's Guide*: A manual for instructions on usage of the GDSN Add-On.
- *TIBCO MDM Add-On for Global Data Synchronization Release Notes*: Read the release notes for a list of new and changed features. This document also contains lists of known issues and closed issues for this release.

TIBCO MDM Documentation

The following documents form the TIBCO MDM documentation set:

- *TIBCO MDM Installation and Configuration Guide*: A manual for instructions on site preparation, installation, and configuration.
- *TIBCO MDM User's Guide*: A manual that explains features and benefits of TIBCO MDM from the business users' viewpoint. It describes the features and functionality as well as all the screens.
- *TIBCO MDM System Administrator's Guide*: A manual that explains features relevant to the system administrator.
- *TIBCO MDM Customization Guide*: A manual to understand how the application can be customized to your enterprise needs.
- *TIBCO MDM Best Practice Guide*: A manual to learn the best practices while using the TIBCO MDM features and functionalities.
- *TIBCO MDM Workflow Reference*: A reference for automation of business processes.
- *TIBCO MDM Web Services Guide*: A reference for using web services in MDM.
- *TIBCO MDM Release Notes*: A list of new and changed features. This document also contains lists of known issues and closed issues for this release.

Other TIBCO Product Documentation

You may find it useful to read the documentation for the following TIBCO products:

TIBCO MDM Studio Documentation

- *TIBCO MDM Studio Process Designer User's Guide.*
- *TIBCO MDM Studio Process Designer Tutorial.*
- *TIBCO MDM Studio Repository Designer User's Guide.*
- *TIBCO MDM Studio Repository Designer Tutorial.*
- *TIBCO MDM Studio Rulebase Designer Guide.*
- *TIBCO MDM Studio Rulebase Designer Tutorial.*
- *TIBCO MDM Studio UI Builder User's Guide.*
- *TIBCO MDM Studio UI Builder Tutorial.*
- *TIBCO MDM Studio Release Notes.*

Other TIBCO Product Documentation

- *TIBCO Enterprise Message Service™ software:* The application can send and receive messages using the Java Message Service (JMS) protocol. The software also integrates with TIBCO Rendezvous and TIBCO SmartSockets™ messaging products.
- *TIBCO BusinessWorks software™:* This is a scalable, extensible, and easy to use integration platform that allows you to develop and test integration projects. It includes a graphical user interface (GUI) for defining business processes and an engine that executes the process.
- *TIBCO BusinessConnect™ software:* You can send and receive XML or non-XML business documents over the Internet. Based on a mutually agreed process flow and common document format, you and your trading partners can conduct secure and verifiable business transactions online.

Typographical Conventions

The following typographical conventions are used in this manual.

Table 1 General Typographical Conventions

Convention	Use
code font	Code font identifies commands, code examples, filenames, pathnames, and output displayed in a command window. For example: Use <code>MyCommand</code> to start the foo process.
bold code font	Bold code font is used in the following ways: - In procedures, to indicate what a user types. For example: Type admin. - In large code samples, to indicate the parts of the sample that are of particular interest. - In command syntax, to indicate the default parameter for a command. For example, if no parameter is specified, <code>MyCommand</code> is enabled: <code>MyCommand [enable disable]</code>
<i>italic font</i>	Italic font is used in the following ways: - To indicate a document title. For example: See <i>TIBCO BusinessWorks Concepts</i>. - To introduce new terms. For example: A portal page may contain several portlets. <i>Portlets</i> are mini-applications that run in a portal. - To indicate a variable in a command or code syntax that you must replace. For example: <code>MyCommand</code> <i>pathname</i>
Key combinations	Key name separated by a plus sign indicate keys pressed simultaneously. For example: <code>Ctrl+C</code> . Key names separated by a comma and space indicate keys pressed one after the other. For example: <code>Esc, Ctrl+Q</code> .
	The note icon indicates information that is of special interest or importance, for example, an additional action required only in certain circumstances.
	The tip icon indicates an idea that could be useful, for example, a way to apply the information provided in the current section to achieve a specific result.
	The warning icon indicates the potential for a damaging situation, for example, data loss or corruption if certain steps are taken or not taken.

Connecting with TIBCO Resources

How to Join TIBCOCommunity

TIBCOCommunity is an online destination for TIBCO customers, partners, and resident experts. It is a place to share and access the collective experience of the TIBCO community. TIBCOCommunity offers forums, blogs, and access to a variety of resources. To register, go to <http://www.tibcommunity.com>.

How to Access TIBCO Documentation

Documentation for this and other TIBCO products is available on the TIBCO Documentation site:

<https://docs.tibco.com>

Documentation on the TIBCO Documentation site is updated more frequently than any documentation that might be included with the product. To ensure that you are accessing the latest available help topics, visit us at <https://docs.tibco.com>.

How to Contact TIBCO Support

For comments or problems with this manual or the software it addresses, contact TIBCO Support as follows:

- For an overview of TIBCO Support, and information about getting started with TIBCO Support, visit this site:

<http://www.tibco.com/services/support>

- If you already have a valid maintenance or support contract, visit this site:

<https://support.tibco.com>

Entry to this site requires a user name and password. If you do not have a user name, you can request one.

Chapter 1 **Overview**

This chapter provides an overview of the TIBCO MDM Add-on for Global Data Synchronization.

Topics

- [Global Data Synchronization Network, page 2](#)
- [Terminology Differences in the GDSN Edition, page 3](#)
- [GDSN Specific Configuration Properties, page 4](#)
- [GDSN Specific Roles, page 6](#)
- [GDSN Predefined Components, page 7](#)

Global Data Synchronization Network

The Global Data Synchronisation Network (GDSN) was created as an industry endorsed initiative to overcome product data inaccuracies and increase efficiency among trading partners and their supply chains. GDSN is a web based, interconnected network of interoperable data pools and a global registry.

With GDSN you can capture and exchange product information in a secure environment conforming to global standards. By using GDSN you can assure that data exchanged between trading partners is accurate and compliant with universally supported standards.

GDSN consists of supplier and retailer trading partner, data pools that hold and process trading partner data and the GS1 Global Registry. A directory that helps locate data sources and keep relationships between trading partners in sync.

With GDSN, trading partners always have the latest information in their systems. Any changes made to one company's database are automatically and immediately provided to all of the other companies who do business with them.

With accurate and updated data, a supplier and a customer can do business in a smoother, quicker, and less expensive way.

Terminology Differences in the GDSN Edition

This section lists the differences between the GDSN and MDM software editions. The default edition is MDM.

Table 2 Terminology Differences in GDSN

GDSN Name	MDM Name
Repository	Repository
Synchronize	Synchronize
Trading Partner	Backend System
Record	Record
Datapool	Integration Hub

GDSN Specific Configuration Properties

The following configuration properties are specific to GDSN:

Table 3 GDSN Specific Configuration Properties

Property	Configuration Outline	Value	Description
Plugins	Advanced	GDSN	List of Plugins installed. For example, GDSN.
Software Edition >Application Usage Profile	Basic	GDSN	Defines whether the application is used for data synchronization (GDSN) or master data management (MDM)
Software Edition > Common Menus Configuration	Advanced	config/security/allmenu.xml	The configuration file location for common menus (navigation bar)
Function > Enable Market Place	Advanced	True	Marketplace related menus is visible.
Function > Company Profile	Advanced	True	Company Profile menu is visible.
Integration Setup - External > Connector Rulebase	Advanced	standard/rulebase/rbconnectorprotocolderivation_gdsn.xml	The rulebase to identify the protocol (for example, CIM2CIM, 1WorldSync)
Integration Setup - External > Sync Status Rulebase	Advanced	standard/rulebase/rbsyncstatusupdatederation.xml	Sync status derivation, used to identify operation and suboperation.
Integration Setup - External > Synchronization Format Specific Attributes File	Advanced	rbformatattributes_gdsn.xml	The name of the rulebase file used to customize format specific attributes on the Synchronization profile View and Edit screen.

Table 3 GDSN Specific Configuration Properties

Property	Configuration Outline	Value	Description
Rule Base->Send Message Screen Rulebase File	Advanced	rbsendMessage_gdsn.xml	The name of the rulebase file used to customize record attribute display on the SendMessage screen
Integration Setup - External -->Work Item Description Rulebase File	Advanced	rbworkitemdescription_gdsn.xml	The name of the rulebase file to customize work item messages

GDSN Specific Roles

You can access the **Roles** screen by clicking **Administration > Roles**. It displays all available Roles and descriptions.

In addition to the standard MDM roles, the following roles are GDSN specific and visible only in the GDSN edition of MDM:

Channel Manager

Is a user responsible for business activity in a particular sales channel. Typically responsible for relationships with Datapools or a set of buying organizations.

Sales Rep

Is a member of the supplier sales organization who acts upon current items in the Inbox that pertains to their area. Sales Rep is not created for the MDM edition. If it existed already, it is not deleted during migration.

Roles

 Show Users		
	Role Name	Role Description
☐	Administrator	Manages users, roles, permissions, and so on.
☐	Command Line User	Persons having command line access
☐	Channel Manager	Role who has data stewardship
☐	External User	External User
☐	Repository Approver	Approver for changes to records
☐	Repository Editor	Editor who can initiate changes to records
☐	Repository Manager	Role who manages metadata
☐	Support Engineer	Support Engineer who can inquire raw data
☐	Work Supervisor	Role who can override workflow actions and reassign work items

GDSN Predefined Components

For GDSN, a set of predefined components such as maps, rulebases, workflows, and templates are shipped with the application.

All these components are located in relevant folders under
\$MQ_HOME/plugins/gdsn/<version>/common/standard

For details, see [GDSN Predefined Components, page 197](#).

Chapter 2

GDSN Menu Options and Screens

This chapter describes the GDSN-specific options (that are not displayed in the standard MDM version) in the menus and screens in MDM.


Topics

- [Datapool Profiles in the Administration Menu, page 10](#)
- [All Company Profiles Screen, page 11](#)
- [My Company Profiles Screen, page 11](#)
- [Datapool Profiles Screen, page 13](#)
- [Trading Partner Profiles Screen, page 14](#)
- [View Repository Screen, page 15](#)
- [Message Acknowledgements, page 16](#)
- [Inbox UI, page 18](#)
- [Event Log Search, page 19](#)
- [Customizing Workitem Descriptions, page 21](#)

GDSN Specific Menu Items

Datapool Profiles in the Administration Menu

The **Administration** menu includes a **Datapool Profiles** option that is specific to the GDSN version of MDM.

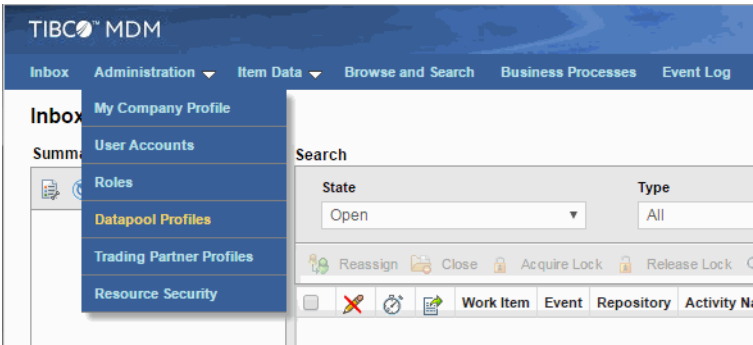

A *Datapool Profile* defines an electronic sales channel, datapool, or hub - where backend systems can exchange goods. Datapool Profiles and credentials are used to establish new datapools and manage the datapool activities.

A Datapool Profile correlates to a workflow associated with the datapool and you can subscribe or unsubscribe a Datapool as required. Datapool credentials are provided automatically; however, you can define additional credentials. For more details, see [Datapool Profiles Screen, page 13](#).

GDSN Specific Screens

This section covers all GDSN specific screens or GDSN specific options in screens.

All Company Profiles Screen

The **All Company Profiles** screen is accessed by clicking **Administration > All Company Profiles > Create** and is used by super users to create enterprises.

You can specify the **Name**, and **Internal Name** for the enterprise, the **Industry Vertical**, and the **Type**. The **Type** list contains **Supplier**, **Retailer**, and **Datapool** as options.

Create Company

Name	
Internal Name	
Industry Vertical	
Type	Supplier v

My Company Profiles Screen

You can access the Company Profile screen by clicking **Administration > My Company Profile** and displays the profile of the company that you have logged into.

This screen consists of contact information and credentials for your company. The purpose of company credentials is to enable your organization to communicate with a datapool.

The following information is GDSN-specific:

Company

Name

test

Modify

Contact Information

Main Phone

No 'Main Phone' assigned.

General Info Email

No 'General Info Email' assigned.

Main FTP

No 'Main FTP' assigned.

Datapool

1 Sync

Credentials

Credentials

Create

Identity	Domain	Actions
0040885037340	GLN	Delete

Extended Credentials

Each credential can be supplemented with additional information known as extended credentials. To create extended credentials, click the **Credentials** link in the **Datapool** section of the Company Profile screen.

This data is used for authentication when communicating with the datapool. To define an extended credential, first define a basic credential.

Extended credentials are unique across enterprises. These constraints are implemented using predefined seed data and cannot be changed using the UI.

The following constraints apply to datapools:

- Basic credentials must be unique in an organization.
- Only one GLN per enterprise

To create extended credentials, click **Administration > My Company Profile >** and then click **Credentials** in the **Datapool** section. Click **Create**.

Create Credential

Company	supplier
Domain	GLN
Identity	0040885037340
Batch User ID	
User ID	admin
Password	*****
Synchronize With Global Registry	☒

Enter the required details and click **Save**.

Datapool

This section of the screen displays the datapool the company is subscribed to. A "Not subscribed to any Datapool" message indicates that no datapool subscriptions have been made for the company.

You can subscribe to a datapool by clicking **Datapool Profiles** (see [Datapool Profiles Screen, page 13](#)). This opens the Datapool Profiles screen that displays all the datapools supported by TIBCO MDM. Click **Subscribe** to subscribe to that datapool. Only datapools that the company is subscribed to are available for participation by the backend system.

Datapool Profiles Screen

This is the first screen you see when you click **Administration > Datapool Profiles**. It displays all datapools that you can subscribe to and are supported by TIBCO MDM.

Datapool

View All 

Datapool	Status	Actions
1SyncTest	Subscribed	Modify Unsubscribe
1Sync	Unsubscribed	Modify Subscribe
SA2	Unsubscribed	Modify Subscribe

Use this screen for the following activities:

- **Modify Datapool Profiles**

To modify a datapool profile, click **Modify** in the Actions column. The Datapool Profiles - Synchronization Formats screen is displayed. On this screen you can:

- **Modify supported synchronization formats.** TIBCO MDM supports formats specific to datapools, and default formats can be set for each datapool. If custom formats are required, they can be created using synchronization formats.
- **Create Credentials.** A Datapool credential uniquely identifies a datapool or backend system within a datapool. This establishes message origination and destination for that backend system. For example, a supplier wants to do business with a backend system through a datapool such as 1WorldSync. the datapool provides User IDs and Passwords or credentials to both the supplier and backend system, and identifies itself to both using its own password and credentials.

- **Subscribe or Unsubscribe to Datapools**

Click the Subscribe or Unsubscribe button in the Actions column.

- **Filter Datapools**

By default, all datapools are displayed. They can be sorted based on subscription from the **View** drop-down list.

There are two forms of Datapool profiles. The most common form is when a company wants to communicate with a Datapool. In this case, the only data elements visible are:

- Subscribe to this Datapool.
- Define any integration URL, if applicable.
- Define credentials. Here, the credentials of the Datapool are defined (and not the company as company credentials are defined in the Company Profile).
- Some preexisting credentials are displayed as read only. These credentials are global and can only be modified by a super user.

A supplier organization Datapool Profile consists of:

- Documents for communication - such as Item Add, or Item Publish.
- A document format - such as EANUCC, XML, 1WorldSync, and so on.

Trading Partner Profiles Screen

You can access the screen by clicking **Administration > Trading Partner Profiles**, and then clicking **Create**.

Using this screen you can create a new trading partner profile for your company. Two ways to exchange data with a trading partner are:

- Publish data to the Datapool from where the data gets synchronized with the trading partner.
- Deliver the data to the trading partner directly through FTP or email.

Trading Partner Profiles			
Name			
Global		☐	
Contact Information			
Phone			
Synchronization Defaults			
Default Synchronization Format		None	
Transport Mechanism		☐ Email ☐ FTP ☒ Local	
Email			
FTP Details			
Name		Directory	
Host		Login	
Password		Re-enter Password	

The **Datapool** option in this screen is GDSN-specific. Select to subscribe.

When you view a trading partner profile, if not subscribed to any datapools, you see the message "Not subscribed to any datapools" in the **Datapool Participation** section.

View Repository Screen

The View Repository screen displays the content of a selected repository and you can access by clicking **Item Data > Repositories**. The following information is GDSN-specific:

Selected Predefined Classification Schemes

Classification schemes that are provided with the application by default are referred to as predefined classification schemes and are listed here. The schemes listed here are those selected at the time of creating the repository.

View Repository

Repository Name

SYNC1

Last Modified

2016-06-28 15:14:21.0

Repository Description

sync1

Attribute History

No

Table Name

MCT_34335

Last Modified By

admin,admin

Display Name

sync1

Precedence Management

No

Attributes

Relationships

Output Maps

Classification Schemes

Upload

Delete

Show Usage

Classification Scheme Name	Description	Scheme Type	User Defined?
GPC	GPC	Rulebase Based Mapping	YES
UDEX	UDEX	Rulebase Based Mapping	YES

OK

You can click the Classification Scheme name to view details; this displays the Classification Scheme Modify screen. On this screen, click **Show Usage** to view the Classification Scheme Usage.

Message Acknowledgements

When a message is sent from a Supplier to a Retailer, the retailer can send an acknowledgment for the message using the Send Response utility.

Enabling Message Acknowledgments

By default, message acknowledgements are not enabled. You need to enable permissions for a user to send a response.

1. Go to **Administration >Resource Security**.
2. From the list, select **Resource Type** as **Repository** and **Resources** as **<name of Repository>**. Click **Show Permissions**. The **Manage Resource Security for Repositories** screen is displayed.

3. On the **Manage Resource Security for Repositories** screen, select **Resource Type** as **Record** and click the **Add Grantee** button.

Manage Resource Security for Repositories

Repository Name: sync1
 Repository Description: sync1
 Resource Type: Record
 Resources: All

+ Add Grantee **✗ Delete Grantee**

Grantee	Type
☒ admin	User

Permission Name	Default	Allow	Deny
Modify	Allowed	☐	☐
Override datapool action	Allowed	☐	☐
Save with errors	Denied	☐	☐
Show History	Allowed	☐	☐
Allow confirmation of record without workflow	Denied	☐	☐
Allow action - Send Message	Allowed	☒	☐
Allow record saved as unconfirmed without workflow	Allowed	☐	☐
Allow action - Send Response	Denied	☐	☐
Update synchronization status	Allowed	☐	☐

Save **Cancel**


4. You can assign a user or a role as grantee. Select the grantee and click **OK**.
5. A list of permissions is displayed in the **Permission Name** column. Click **Allow** against **Allow action - Send Response** permission and click **Save**.

Sending Message Acknowledgments

To send a record as a response, do the following:

1. Click **Browse and Search**. From the **Repository Name** list, select the name of the repository.
2. Click **View All**. A list of records is displayed.
3. Click the record ID of a record.

4. From the **More Actions** menu, select **Send Response**.



5. The Send Response screen is displayed.

Send Response

Record ID	testwvreadd0-00600000002914
Record ID Extension	testwvreadd-00600000002914-ext
SHORTDESC	Item-add-BASE_UNIT_OR_EACH
Datapool Name	SA2
Trading Partner Name	DS-0040885021622
Current Record State	PUBLISHED
Action	☐ REVIEW ☐ ACCEPTED ☐ SYNCHRONISED ☐ REJECTED
Retailer Credential	GLN - 0040885022629

6. On the Send Response screen, you can set the following options:
- Action: You can select Review, Received, Synchronised, or Rejected.
 - Retailer Credential: You can select the retailer credential from the dropdown list.
7. Click **Submit**. The Record View screen is displayed.
8. Click **Ok**. The acknowledgment is sent to the Supplier.

Inbox UI

You can access the page by clicking **Inbox** on the main menu. The Inbox shows a list of tasks or work items assigned or delegated based on the configured business process rule. The Inbox content is influenced by your Role. Work items are classified as notification (no action required) or action (action required).

You can search for items (by clicking the **Search** button) based on criteria such as:

- **State:** View work items by state - All, Cancelled, Closed, Open, or Timed out work items.
- **Type:** Filter work items by type - All, Action Items, Notifications.

- **Document Type:** Filter work items by Document Type such as All, Mass Update, Record Content Notification, Record Edit, or Synchronization.
- **Action:** Filter work items by the Action performed, such as Data Change, Data Correction, MassUpdate, Record Add, Record Add Notification, and Synchronization.
- **Trading Partner:** Filter work items by trading partner.
- **Event ID:** Filter work items by entering the exact event ID.
- **From Date/To Date:** Filter work items created within a certain date range. It is not mandatory to specify both the start and end dates of a period that you are tracking. You can specify either of them.
- **Repository:** Filter work items by repository. It displays the list of repositories to which you have access (at least LIST access). Work items can be searched for a specific repository. To remove a filter the search needs to be cleared.
- **Record Attribute:** Filter work items based on the values of Record Attributes. For example, to search SecurityID - 00049822430355; you can either enter the complete SecurityID or enter a partial value (00049822) to get the work item.
- **Sort by Record Attribute:** Sort work items based on record attribute. Select the record attribute from the drop-down list. If you want to sort the list in the descending order of the record attribute, select the Descending check box.
- **Datapool:** Filter work items by datapool.
- **Show Action Items First:** If selected, displays action items followed by notifications.
- **Search/Sort:** Enter your search criteria and click Search/Sort to generate a list of work items matching your criteria. If you want to change the search criteria, click Clear to reset the criteria.
- **Clear:** Clears the search
- **Configure:** To configure the columns displayed in the table.

Inbox

> Search

Summary	State	All	Type	All	Document Type	All	Action	All
	Event ID		Repository	All	Keyword		Datapool	All
	From Date		To Date					
	Search Clear Close							

Event Log Search

To access this page, click **Event Log** in the main menu and then click the **Search** option.

The Event Log screen shows a list of all events in the system. You can click **Search** to search for events based on criteria such as:

- Event Status
- Event Type
- Event ID
- User ID
- Operation
- Trading Partner
- Datapool
- Event Start Date
- Event End Date
- Record ID
- RecordID Ext.

Event Log

Search

Hide Search

Event Status

All

Event ID

Operation

All

Event Start Date

2016-06-28 11:50:17.707

Event End Date

2016-07-28 11:50:17.707

Event Type

All

User ID

Trading Partner

All

Datapool

All

Record ID

RecordID Ext

Search

Clear

Cancel

Restart

Resubmit

Rollback

	Event ID	Event	Date/Time	Last Update Date/Time	Duration(D:H:M:S)	Status	Trading Partner	Curr
☐	40004	Synchronization	2016-07-25 16:04:39.0	2016-07-25 16:13:31.0	8 Minutes,52 Seconds	Error	tp_ret	D ^
☐	40002	Synchronization	2016-07-25 16:01:59.0	2016-07-25 16:12:12.0	10 Minutes,13 Seconds	Error	N/A	D
☐	40001	Record Add	2016-07-25 15:53:02.0	2016-07-25 15:53:03.0	1 Seconds	Success	N/A	D
☐	40000	Record Add	2016-07-25 15:52:40.0	2016-07-25 15:52:50.0	10 Seconds	Success	N/A	D
☐	39008	Datapool response notification	2016-07-20 16:49:23.0	2016-07-20 16:49:24.0	1 Seconds	Success	N/A	D v

Items/Page

50

<<

<

Page

1

of 5

>

>>

97.108.124:8080/eml/ListRuleDomain?domainentry=businessproc...

GDSN Customization

Customizing Workitem Descriptions

You can include hyperlinks to objects such as Repositories, Catalogs, Trading Partners, and so on in your workitem description. You can include only one hyperlink per object in a message by including the relevant token in the description.

For details on tokens that can be used, refer to chapter Customizing Workitem Descriptions in the *TIBCO MDM Customization Guide*.

GDSN Specific Information

For the \$Catalog\$ token that is used to create a hyperlink with a catalog, the name of the catalog appears in place of the token, hyperlinked to the latest version of the catalog. However, there are some exceptions applicable to the GDSN version:

- Catalogue Item Notification (CIN) message notifications received by retailers
- Catalog Item Confirmation (CIC) received by suppliers, which were not sent to the retailers using the catalog

Chapter 3 **Synchronization**

This chapter describes GDSN-specific information in synchronization profiles and formats in TIBCO MDM.

Topics

- [Synchronization Profiles, page 24](#)
- [GDSN Specific Synchronization Formats, page 28](#)
- [Using Custom Synchronization Formats, page 29](#)
- [Updating Synchronization Status, page 30](#)

Synchronization Profiles

Synchronization Profiles provide a way of extracting information from repositories. As part of the Synchronization Profile definition, you can choose records and attributes to be extracted, record versions, whether to apply transformation rules, and where to send the extracted data. Synchronization Profiles once created can be reused to extract data.

Viewing Synchronization Profiles

You can access this page by clicking **Item Data > Synchronization Profiles**. Details for all available synchronization profiles can be viewed here, with related information in specific columns such as the Repository, Synchronization Format, Delivery, and so on.

Synchronization Profiles

Filter By Trading Partner Name ALL

Create

Modify

Delete

Copy

Validate

Synchronize

Show History

Show Usage

Synchronization Profile	Repository Name	Trading Partner	Synchronization Format	Output Map	Deliver To
☐ LINK_00001122110004	sync1	tp_ret	1SYNC	1SYNC	Trading partner with data pc
☐ LINK_00001122110028	sync1	tp_ret	1SYNC	1SYNC	Trading partner with data pc
☐ SINGLE_DATAPOOL_00001122110042	sync1	N/A	1SYNC	1SYNC	Datapool
☐ SINGLE_TP_00001122110059	sync1	tp_ret	1SYNC	1SYNC	Trading partner with data pc
☐ LINK_TP_00001122110066	sync1	tp_ret	1SYNC	1SYNC	Trading partner with data pc
☐ LINK_TP_00001122110080	sync1	tp_ret	1SYNC	1SYNC	Trading partner with data pc
☐ LINK_DATAPOOL_00001122110103	sync1	N/A	1SYNC	1SYNC	Datapool
☐ LINK_DATAPOOL_00001122110127	sync1	N/A	1SYNC	1SYNC	Datapool
☐ SINGLE_TP_00001122110141	sync1	tp_ret	1SYNC	1SYNC	Trading partner with data pc
☐ SINGLE_TP_00001122110196	sync1	tp_ret	1SYNC	1SYNC	Trading partner with data pc
☐ SINGLE_DATAPOOL_00001122110202	sync1	N/A	1SYNC	1SYNC	Datapool
☐ SINGLE_DATAPOOL_00001122110216	sync1	N/A	1SYNC	1SYNC	Datapool

1 Items per page 50 Results: 1 - 35 of 35

Creating Synchronization Profiles

You can create synchronization profiles by clicking **Item Data > Synchronization Profiles** and then clicking **Create** on the Synchronization Profiles screen. When creating a Synchronization Profile, some options are GDSN-specific.

Delivery

In the Delivery section of the **Create Synchronization Profile** screen, you can select the entity to deliver records to. The following entities are GDSN-specific:

Delivery

Deliver To

☐ Trading Partner

☒ Datapool

☐ Trading partner on datapool

Datapool

None

Output Map

Select a value

Delivery Mechanism

☒ Local

☐ FTP

☐ E-mail

Destination Address

— Datapool

Datapool is the central repository. When you select **Datapool**, and click **Synchronize**, the system sends the data as a message to the Datapool. The message is sent in the XML format and the system requires an acknowledgement from the Datapool. You need to provide the name of the Datapool, the output map, and the delivery mechanism.

— Trading Partner on Datapool

When you select this option, and click **Synchronize**, the message is sent to only those trading partners who are subscribed to the Datapool. The trading partner should have a valid GLN account with the Datapool. You can select multiple trading partners in this option. You need to specify both the Datapool and trading partners subscribed to the Datapool. You also need to specify the Output Map format and the delivery mechanism.

Format Specific Attributes

Format Specific Attributes vary based on where you want to deliver the records. If **Datapool** is selected in the **Delivery** group, the following is displayed:

- **Operation:** You can select from the following operations:

Format Specific Attributes

Operation

☐ Add ☐ Data Correction ☐ Cancel ☐ Discontinue ☐ Reinstate

Classification Scheme

UDEX

Deliver Synchronization Profile

☒ Yes ☐ No

Supplier Credential

GLN - 0040885037340

Generate Output file?

☒

Save

Cancel

- **Add:** Adds the record to the Datapool.
- **Data Correction:** If there is a discrepancy in the published record, you can select Data Correction to rectify the record. In this case, the record reverts to its original state.
- **Cancel:** If you cancel a record, you cannot publish or reinstate the same record within 24 to 48 months of cancellation.
- **Discontinue:** If you discontinue a record, you cannot publish the same record within 24 to 48 months.
- **Reinstate:** Using reinstate, you can republish a discontinued record.
- **Classification Scheme:** The classification scheme listed in the Company Profile are displayed here.
- **Supplier Credential:** The credentials listed in the Company Profile are displayed here.
- **Deliver Synchronization Profile:** Select Yes if you wish to deliver the synchronization profile to the backend system.
- **Generate Output file?:** Select the option to generate output file.

If **Trading Partner on Datapool** is selected in the **Delivery** group, the following additional fields are displayed:

Format Specific Attributes

Operation

☐ Add ☐ Data Correction

Classification Scheme

None

Deliver Synchronization Profile

☐ Publish ☒ Yes ☐ No

Supplier Credential

GLN - 0040885037340

Generate Output file?

☒

- **Operation:** You can select from the following operations:
 - **Add:** Adds the record to the Datapool.
 - **Data Correction:** If there is a discrepancy in the published record, you can select Data Correction to rectify the record. In this case, the record reverts to its original state.
 - **Publish:** Publishes the record to the selected backend systems.
- **Classification Scheme:** The classification scheme listed in the Company Profile are displayed here.
- **Supplier Credential:** The credentials listed in the Company Profile are displayed here.
- **Deliver Synchronization Profile:** Select Yes if you wish to deliver the synchronization profile to the backend system.
- **Generate Output file?:** Select the option to generate output file.

Synchronization Formats

You can access this screen by clicking **Item Data > Synchronization Formats**. The application currently provides a set of predefined synchronization formats.

GDSN Specific Synchronization Formats

Synchronization formats define the attributes and structure of the data required by the consumers of that data (external systems or datapools).

Output maps define mappings of repository attributes to synchronization formats. When a repository is synchronized, the synchronization format provides the structure for the output information.

For GDSN, many predefined synchronization formats are supplied which are not modified. The following are GDSN-specific synchronization formats:

- 1SYNC
- EAN.UCC
- EAN.UCC.SUBSCRIPTION
- GS1
- SA2
- TIBCO
- XML

Synchronization Formats

 Delete  Copy  Show Usage						
Synchronization Format Name	Description	Pre-defined	Fixed Length	Delimiter	Text Qualifier	
☐ 1SYNC	1SYNC Catalog Format	Yes	No	Comma	None	
☒ EAN.UCC	EAN.UCC Catalog Format	Yes	No	Comma	None	
☐ EAN.UCC.SUBSCRIPTION	Subscription Catalog Format	Yes	No	Comma	None	
☐ GS1	GS1 Catalog Format	Yes	No	Comma	None	
☐ SA2	SA2 Catalog Format	Yes	No	Comma	None	
☐ TIBCO	TIBCO Catalog Format	Yes	No	Comma	None	
☐ XML	XML Catalog Format	Yes	No	Comma	None	

Using Custom Synchronization Formats

1. Copy the EAN.UCC synchronization format to create the <CustomUCC> format.
 - Select the EAN.UCC format check box and click the **Copy** button.
 - Provide a name and description on the Synchronization Format copy screen.
2. Create output map <CustomOutputMap>.
 - Go to **Item Data->Repositories**
 - Select a repository, go to the **Output Maps** tab, click **Create**.
3. Change the rulebase to select <CustomOutputMap>. For more information on creating a rulebase, refer the *TIBCO MDM Studio Rulebase Designer Guide*. The modified rulebase section will look like the following:

```
<assign>
<var>OUTPUTFORMAT</var>
<const type="string">CustomOutputMap</const>
</assign>
```



If you are not using the default EAN.UCC format, you need to make changes to the rulebase to publish an output map created for a custom synchronization format.

Navigate to

<MQ_COMMONDIR>/standard/rulebase/rbsyncstatusupdatederivation.xml
to add the name of custom output map instead of "EAN.UCC" as in the following section:

```
<assign>
<var>OUTPUTFORMAT</var>
<const type="string">EAN.UCC</const>
</assign>
```

There may be several similar replacements required.

4. Perform **Update sync status**. For more information on updating synchronization status, see [Updating Synchronization Status, page 30](#).

Synchronization Status

Updating Synchronization Status


Records are always synchronized with Datapools. The synchronization state (sync status) of a record can be incorrect in the following cases:

1. Datapool failed to respond.
2. Message(s) failed in Datapool(s) and there was no response from messages.
3. Response was received but response format was not comprehensive and the processing failed.
4. Record was synchronized outside the application. For instance, you migrated from MDM to another GDSN system.

When the synch status is incorrect, it affects the next message generated by the application and synchronization is not possible. To resolve this issue, the synch status needs to be updated.

To update the synch status of the record, do the following:

1. Click **Browse and Search**. A list of Repositories are displayed.
2. In the **Repository** list, select the repository.
3. Click **View All Records**. A list of records is displayed.
4. Click on the record whose synch status you want to update. The **View Record** screen is displayed.
5. Click **More Actions > update synch status**.



6. The Update Synch Status screen is displayed.

7. Specify the following fields on the **Update Synch Status** screen:
- Datapool
 - Trading Partner
 - Operation
 - Sub-Operation

Update Synch Status

Repository

Repository

MC_V2VITEMMASTER

MC_V2VItemMaster

Record ID - Ext	U11 - U11	Status	CONFIRMED
Record Description		Version	1
Last Modified On	2010-03-25	Last Modified By	Admin
Datapool		Trading Partner	
Operation		Sub-Operation	

New Synch Status

8. Click **Save** to update synch status.



An out-of-box installation assumes that EAN.UCC is associated with the repository. If this format is not associated, the operation fails. To correct this, either associate the synchronization format or use another synchronization format in the rulebase `rbsyncstatusupatederivation.xml`.

Chapter 4 **Validations and Codelists**

This chapter describes validations in MDM for mandatory and optional attributes in 1WorldSync and MDM's implementation of the 1WorldSync codelists.

Topics

- [1WorldSync Validations Overview, page 34](#)
- [MDM Validation for 1WorldSync Mandatory Attributes, page 35](#)
- [MDM Validation for 1WorldSync Optional Attributes, page 37](#)
- [MDM Implementation of 1WorldSync Codelist, page 45](#)

1WorldSync Validations Overview

While communicating to subscribers, 1WorldSync specifies certain rules to be followed to ensure that the data received is correct. 1WorldSync performs validation on different types of messages received and processed.

Supported 1WorldSync Validations

MDM supports the following 1WorldSync validations:

- When messages of type **Item Load** (Item Add, Item Modify Item Link, or Item Unlink transaction) are received
- When messages of type **Item Publish** are received

For more details, refer [MDM Validation for 1WorldSync Mandatory Attributes](#) and [MDM Validation for 1WorldSync Optional Attributes](#) for validations implemented in MDM for mandatory and optional attributes by 1WorldSync for Item Load messages.

MDM Validation for 1WorldSync Mandatory Attributes

The following table lists validations implemented in MDM for mandatory attributes specified by 1WorldSync for Item Load messages (Item Add, Item Modify).

In the table below:

- **IM Attribute** is the attribute name in 1WorldSync.
- **1WorldSync Error Code** is the error displayed by 1WorldSync in case of validation problems.
- **MDM Repository Attribute** is corresponding name of the 1WorldSync attribute in the MDM Repository.
- **1WorldSync Catalog Output Map Attribute** is the name of an attribute created by MDM using the 1WorldSync Catalog Output Map.

Table 4 Validation for 1WorldSync mandatory attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Global Trade Item Number	1021, 1024, 1025	GTIN	GTIN
GTIN Name	1040	GTIN_NAME	GTIN_NAME
Product Type	1080	UOM	PRODUCT_TYPE
Target Market	1160	TARGET_MARKET_ID	TARGET_MARKET
Language	No error code available	DESLANGUAGE	LANGUAGECODE
Information Provider (GLN)	1011 1061, 1064, 1062, 4020	INFORMATION_PROVIDER_ID	INFORMATION_PROVIDER
Brand Name	1050	ITEM_BRAND_NAME	BRAND_NAME
Item Classification Code (GPC)	1070	ADDITIONAL_CLASS_CAT_CODE	ALT_ITEM_CLASSN_CODE
Qty of Next Level Item(s)	1130	UNITS_PER_CONTAINER	PACK

Table 4 Validation for 1WorldSync mandatory attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Ordering Unit Indicator	1140	ORDERING_UNIT	ORDERING_UNIT_INDICATOR
Start Availability Date	1150	START_AVAILABILITY_DATE	START_AVAILABILITY_DATE
Height	1100	PRODUCTHEIGHT	HEIGHT
Height UOM	1101	HEIGHT_UOM	HEIGHT_UOM
Width	1120	PRODUCTWIDTH	WIDTH
Width UOM	1121	WIDTH_UOM	WIDTH_UOM
Depth	1110	PRODUCTDEPTH	DEPTH
Depth UOM	1111	DEPTH_UOM	DEPTH_UOM

MDM Validation for 1WorldSync Optional Attributes

The following table lists validations implemented in MDM for optional and dependant attributes specified by 1WorldSync for Item Load messages (Item Add, Item Modify).

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Alternate Item Classification Scheme	1071, 1077, 3085	ADDITIONAL_CLASS_CAT_CODE	ALT_ITEM_CLASSN_CODE
		CLASSIFICATIONSCHEME	CLASSIFICATION_SCHEME
Flash Point Temperature UOM	1548, 1549	FLASHPOINT_TEMP1	FLASHPOINT_TEMP
		FLASHPOINT_UNITS1	FLASHPOINT_TEMP_UOM
Product Strength UOM	1686, 1687	PROD_STRENGTH	PROD_STRENGTH
		PROD_STRENGTH_UOM	PROD_STRENGTH_UOM
Product Strength Basis UOM	1689, 1690	PROD_STRENGTH_BASIS	PROD_STRENGTH_BASIS
		PROD_STRENGTH_BASIS_UOM	PROD_STRENGTH_BASIS_UOM
Diameter UOM	1780, 1781	DIAMETER	DIAMETER
		DIAMETER_UOM	DIAMETER_UOM
Drained Weight UOM	1783, 1784	DRAINED_WEIGHT	DRAINED_WEIGHT
		DRAINED_WEIGHT_UOM	DRAINED_WEIGHT_UOM
Gross Weight UOM	1786, 1787	GROSSWEIGHT	GROSS_WEIGHT
		GROSS_WEIGHT_UOM	GROSS_WEIGHT_UOM
Net Weight UOM	1790, 1789	NETWEIGHT	NET_WEIGHT
		NET_WEIGHT_UOM	NET_WEIGHT_UOM

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Volume UOM	1801, 1802	VOLUME	VOLUME
		VOLUME_UOM	VOLUME_UOM
Width UOM	1804, 1805	PRODUCTWIDTH	WIDTH
		WIDTH_UOM	WIDTH_UOM
Max Stacking Weight UOM (formerly Max Admissible Stacking Weight UOM)	1901, 1902	STACKING_WEIGHT_MAX	MAX_ADM_STACKING_WEIGHT
		MAX_ADM_STACKING_WEIGHT_UOM	MAX_ADM_STACKING_WEIGHT_UOM
Storage/Handling Temp UOM	6228	STORAGE_HANDL_TEMP_MIN_UOM	STORAGE_HANDL_TEMP_MIN_UOM
		STORAGE_HANDL_TEMP_MAX_UOM	STORAGE_HANDL_TEMP_MAX_UOM
Alternate Item Number	2002	ALTERNATE_ID	ALTERNATE_ITEM_ID
		ALTERNATE_ITEMID_MNT_AGENCY	ALTERNATE_ITEMID_MNT_AGENCY
Fat Content Basis of Measure UOM	2084, 2085	FAT_CONTENT_BASIS_MEASURE	FAT_CONTENT_BASISOF_MEASURE
		FAT_CONTENT_BASIS_UOM	FAT_CONTENT_BASIS_UOM
Net Content (Metric) UOM (formerly Size (Metric) UOM)	4043	BASE_UNIT	BASE_UNIT_INDICATOR
		NET_CONTENT_PRIMARY	SIZE_METRIC
		NET_CONTENT_UOM	SIZE_METRIC_UOM

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Ordering Unit Indicator	3013, 3014, 3015	ORDERING_UNIT	ORDERING_UNIT_INDICATOR
Gross Weight		GROSSWEIGHT	GROSS_WEIGHT
Gross Weight UOM		GROSS_WEIGHT_UOM	GROSS_WEIGHT_UOM
Product Strength Basis	3040, 3041	PROD_STRENGTH	PROD_STRENGTH
		PROD_STRENGTH_BASIS	PROD_STRENGTH_BASIS
Ordering Unit Indicator	3051	ORDER_INCREMENT	ORDER_QUANTITY_MULTIPLE
		ORDERING_UNIT	ORDERING_UNIT_INDICATOR
Ordering Unit Indicator	3053	MAXIMUMORDER	MAX_ORDER_QUANTITY
		ORDERING_UNIT	ORDERING_UNIT_INDICATOR
Ordering Unit Indicator	3055	MINIMUMORDER	MIN_ORDER_QUANTITY
		ORDERING_UNIT	ORDERING_UNIT_INDICATOR
Fat Content Basis of Measure	3100, 3101	FAT_PERCENT_IN_DRY_MATTER	FAT_CONTENT
		FAT_CONTENT_BASIS_MEASURE	FAT_CONTENT_BASISOF_MEASURE
Non GTIN Pallet Height UOM	3138	PACKAGEDHEIGHT	NONGTIN_PL_HEIGHT
		NONGTIN_PL_HEIGHT_UOM	NONGTIN_PL_HEIGHT_UOM
Non GTIN Pallet Gross Weight UOM	3140	NONGTIN_PL_GR_WEIGHT	NONGTIN_PL_GR_WEIGHT
		NONGTIN_PL_GR_WEIGHT_UOM	NONGTIN_PL_GR_WEIGHT_UOM

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Global Item Classification Code	1072	ADDITIONAL_CLASS_CAT_CODE	ALT_ITEM_CLASSN_CODE
EAN/UCC Code	4008	EAN_UCC_CODE	EAN_UCC_CODE
EAN/UCC Type		EAN_UCC_TYPE	EAN_UCC_TYPE
EAN/UCC Code	4002, 4003	EAN_UCC_CODE	EAN_UCC_CODE
Qty of Next Level Item(s)	212, 4005, 106, 4023	UNITS_PER_CONTAINER	PACK
Brand Name	1051	ITEM_BRAND_NAME	BRAND_NAME
Sub Brand	1740	ITEM_SUB_BRAND_NAME	SUB_BRAND
Ordering Unit Indicator	655, 111	ORDERING_UNIT	ORDERING_UNIT_INDICATOR
Special Item Code	4022	SPECIAL_ITEM_CODE	SPECIAL_ITEM_CODE
Depth UOM	3120	DEPTH_UOM	DEPTH_UOM
Width UOM		WIDTH_UOM	WIDTH_UOM
Height UOM		HEIGHT_UOM	HEIGHT_UOM
Diameter UOM		DIAMETER_UOM	DIAMETER_UOM
Peg Hole Number	6216	PEG_HORIZONTAL	PEG_HORIZONTAL
		PEG_VERTICAL	PEG_VERTICAL
		PEG_HOLE_NUMBER	PEG_HOLE_NUMBER

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Peg Horizontal UOM	6216	PEG_HORIZONTAL	PEG_HORIZONTAL
		PEG_HORIZONTAL_UOM	PEG_HORIZONTAL_UOM
Peg Vertical UOM	6216	PEG_VERTICAL	PEG_VERTICAL
		PEG_VERTICAL_UOM	PEG_VERTICAL_UOM
Net Content (Metric (formerly Size Imperial UOM))	6216	NET_CONTENT_SECONDARY,	SIZE_IMPERIAL,
		NET_CONTENT_SECONDARY_UOM	SIZE_IMPERIAL_UOM
Net Content (Metric (formerly Size (Metric)))	6216	NET_CONTENT_PRIMARY	SIZE_METRIC
		NET_CONTENT_UOM	SIZE_METRIC_UOM
List Price Basis UOM	6216	LIST_PRICE_BASIS_PER_UNIT	LIST_PRICE_BASISPERUNIT
		LIST_PRICE_BASISPERUNIT_UOM	LIST_PRICE_BASISPERUNIT_UOM
Product Size Code Maintenance Agency	6216	SIZE_CODE	PROD_SIZE_CODE
		SIZE_CODE_LIST_AGENCY	PROD_SIZE_CODE_MAINT_AGENCY
Storage/Handling Temp UOM	6216	STORAGE_HANDLING_TEMP_MAX,	STORAGE_HANDL_TEMP_MAX,
		STORAGE_HANDL_TEMP_MAX_UOM	STORAGE_HANDL_TEMP_MAX_UOM
Storage/Handling Temp UOM	6216	STORAGE_HANDLING_TEMP_MIN	STORAGE_HANDL_TEMP_MIN
		STORAGE_HANDL_TEMP_MIN_UOM	STORAGE_HANDL_TEMP_MIN_UOM

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Color	6216	COLOR	COLOR
Color Code Maintenance Agency		COLOR_CODE_AGENCY	COLOR_CODE_MNT_AGENCY
Organic Claim Agency	6216	ORGANIC_CLAIM_AGENCY	ORGANIC_CLAIM_AGENCY
Organic Claim Item Code		ORGANIC_CODE	ORGANIC
Material Code Agency	6216	MATERIAL_CODE_AGENCY	MATERIAL_CODE_AGENCY
Packaging Material Code		PKG_MATERIAL_CODE	PACKAGING_MATERIAL_CODE
Packaging Material Composition		PACKAGING_WEIGHT	PACKAGING_WEIGHT
Packaging Material Composition UOM		PACKAGING_WEIGHT_UOM	PACKAGING_WEIGHT_UOM
List Price Basis Per Unit	6216	LIST_PRICE	LIST_PRICE
List Price Basis Per Unit UOM		PRICEUOMCODE	PRICEUOMCODE
		LIST_PRICE_BASISPERUNIT_UOM	LIST_PRICE_BASISPERUNIT_UOM
		LIST_PRICE_BASISPERUNIT	LIST_PRICE_BASISPERUNIT
		LIST_PRICE_DATE_START	LIST_PRICE_DATE_START

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Tax (Rate)	6216	TAX_RATE	TAX_RATE
Type Code Tax (Rate)		TAX_TYPE_CODE	TAX_TYPE
Type Description Tax (Rate)		TAX_TYPE_DESC	TAX_TYPE_DESC
Type Agency		TAX_AGENCY_CODE	TAX_AGENCY_CODE
Tax Amount	6216	TAX_AMOUNT	TAX_AMOUNT
Tax Amount Currency		CURRENCY_CODE	CURRENCY_CODE
Tax (Amount) Type Description		TAX_AMT_TAX_TYPE_DESC	TAX_AMT_TAX_TYPE_DESC
Tax (Amount) Type Agency		TAX_AMT_TAX_AGENCY_CODE	TAX_AMT_TAX_AGENCY_CODE
Tax (Amount) Type Code		TAX_AMT_TAX_TYPE_CODE	TAX_AMT_TAX_TYPE_CODE
Alternate Item Classification Code	1078	UDEXCODE	GLOBAL_CLASSIFICATION_CODE
Information Provider (GLN)	VE-0180_VE-0190	INFORMATION_PROVIDER_ID	INFORMATION_PROVIDER

Table 5 Validation for 1WorldSync Optional Attributes

IM Attribute	1WorldSync Error Code	Repository Attribute	Sync Profile Attribute
Brand Owner (formerly Owning Organization)	VE-0270	BRAND_OWNER_ID	OWNING_ORGANIZATION_G LN
Variant	VE-0320	VARIANT	VARIANT
Functional Name	VE-0330	PRODUCTNAME	PROD_NAME

MDM Implementation of 1WorldSync Codelist

Certain 1WorldSync attributes accept only values from a code list. The following table lists the MDM implementation of the 1WorldSync code list. For a given attribute in the 'IM Attribute' column, the Repository Attribute column lists how the code list is implemented on the attribute.

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Language	DESCLANGUAGE	LANGUAGE_CODES
Storage/Handling Temp UOM	STORAGE_HANDL_TEMP_MAX_UOM STORAGE_HANDL_TEMP_MIN_UOM	TEMP_CODES
Barcode Type	BAR_CODE_TYPE	BAR_CODE_TYPES
Alternate Item Classification Scheme	CLASSIFICATIONSCHEME	CLASSIFICATION_SCHEMES
Country of Origin	COUNTRYOFORIGINCODE	COUNTRY
Country of Assembly	TRADE_ITEM_COUNTRY_ASSEMBLY	COUNTRY
Variable Trade Item Type	VARIABLE_TRADE_ITEM_TYPE	No Datasource. Code values are of type enumeration, contained in the rulebase XML file.

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Depth UOM	DEPTH_UOM	LINEARUNIT
Width UOM	WIDTH_UOM	
Height UOM	HEIGHT_UOM	
Diameter UOM	DIAMETER_UOM	
Peg Horizontal UOM	PEG_HORIZONTAL_UOM	
Peg Vertical UOM	PEG_VERTICAL_UOM	
Size Dimension UOM	SIZE_DIMENSION_UOM	
Non GTIN Pallet Height UOM	NONGTIN_PL_HEIGHT_UOM	WEIGHTUNIT
Gross Weight UOM	GROSS_WEIGHT_UOM	
Net Weight UOM	NET_WEIGHT_UOM	
Drained Weight UOM	DRAINED_WEIGHT_UOM	
Material Weight UOM	MATERIAL_WEIGHT_UOM	
Packaging Material Composition UOM	PACKAGING_WEIGHT_UOM	
Non GTIN Pallet Gross Weight UOM	NONGTIN_PL_GR_WEIGHT_UOM	
Max Stacking Weight UOM	MAX_ADM_STACKING_WEIGHT_UOM	

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Fat Content UOM,	FAT_CONTENT_UOM	PRICE_MATERIAL_UOM_CODES
Fat Content Basis of Measure UOM	FAT_CONTENT_BASIS_UOM	
Product Strength UOM	PROD_STRENGTH_UOM	
Product Strength Basis UOM	PROD_STRENGTH_BASIS_UOM	
List Price Basis Basis UOM	LIST_PRICE_BASISPERUNIT_UOM	
Suggested Retail Price Basis UOM	RECOMMEND_PRICE_PERUNIT_UOM	
Selling UOM	SELLING_UOM	SELLING_ORDERING_UOM_CODES
Ordering UOM	ORDERING_UOM	
Price Comparison Measurement UOM	PRICE_COMP_UOM	
Order Sizing Factor UOM	ORDER_SIZING_FACTOR_UOM	
Generic Ingredient Strength Units of Measure	GENERIC_INGREDIENT_STR_UOM	GENERIC INGR_STRGTH_UOM_CODES
Product Size Code Maintenance Agency	SIZE_CODE_LIST_AGENCY	PRODUCT_SIZE_CODE_AGENCIES
Organic Claim Agency	ORGANIC_CLAIM_AGENCY	ORGANIC_CLAIM_AGENCY_CODES
Size System	SIZE_SYSTEM	SIZE_SYSTEM_CODES
Size Group	SIZE_GROUP	SIZE_GROUP_CODES
Size Type	SIZE_TYPE	SIZE_TYPE_CODES
Composition Width UOM	TRADE_ITEM_COMPOSITION_WIDTH_UOM	No Datasource.
		Code values are of type enumeration, contained in the rulebase xml file.

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Packaging Material Code	PKG_MATERIAL_CODE	PACKAGING_MATERIAL_CODES
Material Code Agency	MATERIAL_CODE_AGENCY	PACKAGING_MATERIAL_CODES
Returnable Package Deposit Amount Currency	RETURN_PKG_DEPOSIT_AMOUNT_CURR	CURRENCY_CODES
Tax Amount Currency	CURRENCY_CODE	
List Price Currency	PRICEUOMCODE	
Retail Price On Trade Item Currency	RETAIL_PRICE_ON_ITEM_CURR	
Security Tag Location	SECURITY_TAG_LOCATION	SECURITY_TAG_LOCATIONS
Security Tag Type	SECURITY_TAG_TYPE	SECURITY_TAG_TYPES
Packaging Marked Expiration Date Type	PKG_MARKED_EXPIRE_DATE_TYPE	No Datasource. Code values is of type enumeration, contained in the rulebase xml file.
Package Marks Diet Allergen	PACKAGE_MARKS_DIET_ALLERGEN	PACKAGE_MARKS_DIET_ALLERGEN
Package Marks Free From	PACKAGE_MARKS_FREE_FROM	PACKAGE_MARKS_FREE_FROM_LIST
Package Marks Ethical	PACKAGE_MARKS_ETHICAL	No Datasource. Code values are of type enumeration, contained in the rulebase xml file.
Pallet Code	PALLET_TYPE_CODE	PALLET_TYPE_CODES
Pallet Terms and Conditions	PALLET_HANDL_ONWAY_RETURN	PALLET_TERMS_AND_CONDITIONS
Import Classification Type	IMPORT_CLASS_TYPE	IMPORT_CLASSIFICATION_TYPES

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Min Storage Humidity UOM	STORAGE_HUMIDITY_MIN_UOM	No Datasource.
Max Storage Humidity UOM	STORAGE_HUMIDITY_MAX_UOM	Code values are of type enumeration, contained in the rulebase xml file.
Min DC Delivery Temp UOM	DELIVERY_DC_TEMP_UOM	TEMP_CODES
Max DC Delivery Temp UOM		
Min Market Delivery Temp UOM	DELIVERY_MARKET_TEMP_UOM	
Max Market Delivery Temp UOM		
Flash Point Temperature UOM	FLASHPOINT_UNITS1	
Storage/Handling Temp UOM	STORAGE_HANDL_TEMP_MAX_UOM STORAGE_HANDL_TEMP_MIN_UOM	
Compliance Regulation Code	CLASS_COMPLIANCE_REG_CODE	CLASS_COMPLIANCE_REG_CODES
Goods Pick Up Lead Time UOM	GOODS_PICKUP_LEAD_TIME_UOM	No Datasource. Code values are of type enumeration, contained in the rulebase xml file.
Price Comparison Content Type	PRICE_COMP_CONTENT_TYPE	PRICECOMPARISONCONTENTTYPES
Price By Measure Type	PRICE_BY_MEASURE_TYPE	PRICE_BY_MEASURE_TYPES
Target Consumer Gender	TARGET_CONSUMER_GENDER	No Datasource. Code values are of type enumeration, contained in the rulebase xml file.
Season Parameter	SEASON_PARAMETER	SEASON_PARAMETERS

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Dangerous Goods Regulation Code	HAZMAT_CLASSCODE1	DANGER_GOODS_REGULATI ON_CODES
Color Code Maintenance Agency	COLOR_CODE_AGENCY	COLOR_CODE_AGENCIES_1 SYNC
Handling Instruction Code	SPECIAL_HANDLING_CODE	SPECIAL_HANDLING_CODE S
Lead Time UOM	LEADTIMEUOMCODE	No Datasource.
Organic Trade Item Code	ORGANIC_CODE	ORGANIC_TRADE_ITEM_CO DES
Packaging Terms And Condition	PACKAGING_TERMS_CONDI TIONS	PKG_TERMS_CONDITIONS_ CODES
Packaging Type Code	PACKAGING_TYPE_CODE	PACKAGING_TYPE_CODES
Primary Delivery Methods	PRIMARY_DELIVERY_METH OD	PRIMARY_DELIVERY_METH OD_CODES
GTIN Variation Registry	GTIN_VARIATION_REGIST RY	No Datasource. Code values are of type enumeration, contained in the rulebase xml file.

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Base Unit Indicator	BASE_UNIT	No Datasource. Code values are of type enumeration, contained in the rulebase xml file.
Consumer Unit Indicator	CONSUMER_UNIT	
Dangerous Goods Indicator	DANGEROUS_GOODS	
Dispatch Unit Indicator	DESPATCH_UNIT	
Has Batch Number	HAS_BATCH_NUMBER	
Invoice Unit Indicator	INVOICE_UNIT	
Is Trade Item Reorderable	IS_REORDERABLE	
Is Size Based Pricing	IS_TRADEITEM_SIZE_BASED_PRIC	
Net Content Declared	NET_CONTENT_DEC_INDICATED	
Ordering Unit Indicator	ORDERING_UNIT	
Packaging Marked Returnable	PACKAGE_MARKED_RETURNABLE	
Pricing On Product	PRICE_ON_PACKAGE	
Pricing Item Indicator	PRICING_ITEM	
Is Private	PRIVATE	
Private Label	PRIVATE_LABEL	
Product Marked Recyclable	PROD_MARKED_RECYCLABLE	
Right of Return for Non-Sold Trade Item	RIGHT_RETURN_NONSOLD_TRADE	
Variable Weight Trade Item	VARIABLE_UNIT	
Product Marked with Ingredients	WITH_INGREDIENTS	
Is Barcode Symbology Derivable	ISBARCODEDERIVABLE	
EANUCC Type	EAN_UCC_TYPE	EANUCCTYPE

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Volume UOM	VOLUME_UOM	VOLUMEUNIT
Net Content UOM	NET_CONTENT_UOM	NETCONTENTUNIT
Product Type	UOM	UNITDESCRIPTOR
Target Market	TARGET_MARKET_ID	COUNTRY
Alternate Item Identification Maintenance Agency	ALTERNATE_ITEMID_MNT_AGENCY	ALTERNATEITEMIDMAINTAINAGENCY
Special Item Code	SPECIAL_ITEM_CODE	SPECIALITEMCODE
Is Ingredient Irradiated	INGREDIENT_IRRADIATED	No Datasource. Code values are of type enumeration, contained in the rulebase xml file.
Is Raw Material Irradiated	RAW_MATERIAL_IRRADIATED	
Is Trade Item Irradiated	IRRADIATED	
Genetically Modified	GENETICALLY_MODIFIED	
Is Product Subject To A Manufacturer Take Back Program	TAKE_BACK_PROGRAM	
Is Hazardous Component Brokendown Easily For Recycling	HAZARDOUS_COMP_REMOVABLE	
Is Product Disassembly By Recycling Facility Completed Using Standard Tools	DESIGN_FOR_EASY_DISASSEMBLY	
Product RoHS Compliance Code	IS_RIGID_PLASTIC_PACKAGING	

Table 6 MDM Implementation of 1WorldSync Codelist

IM Attribute	Repository Attribute	MDM Datasource Name
Does Product Contain SCCPs	CONTAINS_SCCP	No Datasource. Code values are of type enumeration, contained in the rulebase xml file.
Does Product Contain PVC	CONTAINS_PVC	
Can Product Be Easily Upgraded Or Maintained By Consumer	IS_UPGRADEABLE_OR_MAINTAIN	
Is TradeItem Auto Powered Down Enabled When Shipped To Customer	POWER_DOWN_ENABLED	
Is Product Chemical Not Intended For Human Consumption	CHEMICAL_FOR_HUMAN_CONSUME	
Is Product A Pesticide	CONTAINS_PESTICIDE	
Is Product Aerosol	CONTAINS_PROPELLANT	
Is Product Considered Universal Waste	IS_UNIVERSAL_WASTE	
Is Product RPPC Compliant In TargetMarket	IS_ROHS_COMPLIANT	
Is TradeItem Packed Irregularly	IS_ITEM_PACKED_IRREGULARLY	
Has Display Ready Packaging	HAS_DISPLAY_READY_PKG	

Chapter 5 **Maintaining Validations and Codelists**

This chapter provides details on updating codelists and adding validations.

Topics

- [Updating Codelists, page 56](#)
- [Updating Validations, page 58](#)

Updating Codelists

Certain attribute values are from a list of values only, called the code list. Values not in the list are not accepted. In MDM, code lists are implemented using a rulebase and in most cases, populated using a predefined datasource created for the tibcocim/tadmin (enterprise/user) super user.

If datapool has released an update to the code list, first establish whether the code list was implemented using a **datasource** or **enumeration**.

Updating a Codelist Implemented Using Datasource

Follow these steps to update the code list in MDM:

1. Find the name of the datasource used for the code list. See [MDM Implementation of 1WorldSync Codelist, page 45](#).
2. Create a CSV file of the updated codelist.
3. Log in to the super user enterprise.
4. Click **Item Data > Data Sources**.
5. Modify the datasource as obtained in step 1.
6. Expand the Attribute tab on the Data Source Modify page. Ensure the attribute name in the datasource definition on the UI and the CSV file's (created in step 2) header are the same.
7. Provide the CSV file created in step 2 to the **File to Upload** field.
8. Click **Save and Upload**.
9. Check the Event Log to ensure the event completes successfully, and all rows of the CSV file import successfully.

Updating a Codelist Implemented Using Enumeration

Follow these steps to update the code list in MDM:

1. Edit the
`$MQ_COMMON_DIR/standard/rulebase/_XX_mastercatalog_validation.xml` file. Here XX is the name of datapool for which you want to update the code list.
2. Find the name of the MDM attribute for which the enumeration is defined.
3. In the validation file, search for the constraint with the attribute name. For example, to update the code list for MATERIAL_WEIGHT_UOM for 1WorldSync,

update following constraint in the `_1sync_mastercatalog_validation.xml` validation file.

```
<constraint>
  <name>Drop down for MATERIAL_WEIGHT_UOM</name>
  <description>Valid value list for MATERIAL_WEIGHT_UOM</description>
  <usefor>
    <var>MATERIAL_WEIGHT_UOM</var>
  </usefor>
  <action>
    <select novalue="default">
<enum header="yes" col="2">
      <const type="string">UOM<sep/>Description</const>
<const type="string">ON<sep/>Ounces per square yard</const>
<const type="string">GM<sep/>Grams per square meter</const>
</enum>
    </select>
  </action>
</constraint>
```

For more details on rulebase constraints, refer to the *TIBCO MDM Studio Rulebase Designer* guide.

Updating Validations

To add a new validation, add a new constraint with the new attribute name in the relevant rulebase.

Example

New Attribute to Add

Consider a new mandatory attribute **Target Region** to be added to 1WorldSync. And presume that **TARGET_REGION** is the attribute name added to both the 1WorldSync catalog format and TIBCO format.

Files to Add Constraint to

The constraint should be added to both the files listed below, both in the \$MQ_COMMON_DIR/standard/rulebase folder.

_1sync_mastercatalog_catalogvalidation.xml
_1sync_catalogvalidation.xml

Constraint to Add

```
<constraint>
  <name>Mandatory validation for TARGET_REGION </name>
  <description>This attribute is mandatory.</description>
  <usefor>
    <var> TARGET_REGION </var>
  </usefor>
  <action>
    <check>
      <explanation>This attribute is mandatory.</explanation>
      <defined>
        <var />
      </defined>
    </check>
  </action>
</constraint>
```

Chapter 6 **Message Choreography**

This chapter provides details on message choreography.

Topics

- [Message Choreography, page 60](#)
- [MDM Message Choreography for 1WorldSync, page 61](#)
- [Changing Message Choreography, page 113](#)
- [Changing Message Choreography, page 113](#)
- [Configurable Components, page 115](#)

Message Choreography

Message choreography, in this context, refers to the information flow between a specific datapool (1WorldSync for instance) and the GS1 Global Registry.

GDSN supports trading partners to use the (certified) datapool of their choice to synchronize data with other trading partners in GDSN. GDSN certified datapools helps in continued synchronization of data, and registered trading partners are assured of updated and accurate data in their systems.

MDM currently supports 1WorldSync datapool. For MDM to work with this datapool, some specific changes are required.

Validation takes place in 2 instances: on the record ID when entering the records and when synchronizing data. GS1 and 1WorldSync specify certain rules which must be followed to ensure that the quality of data received is correct.

MDM Message Choreography for 1WorldSync

1WorldSync Attribute Mapping



In the following table, "Sync Profile Attribute" refers to the 1WorldSync Output map attribute. Sync is the abbreviated form of Synchronization.

The following table lists how attributes in 1WorldSync map to attributes in MDM.

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Global Trade Item Number	String	GTIN	GTIN	os:envelope/catalogueRequest/document/item/gtin
Information Provider	String	INFORMATION_PROVIDER	INFORMATION_PROVIDER_ID	os:envelope/catalogueRequest/document/item/informationProviderGLN
Effective Date	Date	TDC_PRODUCTION_DATE	TDC_PRODUCTION_DATE	os:envelope/catalogueRequest/document/item/effectiveDate
GTIN Name	String	GTIN_NAME	GTIN_NAME	os:envelope/catalogueRequest/document/item/globalAttributes/gtinName
NA	String	LANGUAGECODE	DESLANGUAGE	"This is a common attribute, which is being used in many elements of the 1WorldSync message, for example: os:envelope/catalogueRequest/document/item/targetMarketAttributes/productDescription[@lang]; os:envelope/catalogueRequest/document/item/targetMarketAttributes/shortDescription[@lang]"

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Product Type	String	PRODUCT_TYPE	UOM	os:envelope/catalogueRequest/document/item/globalAttributes/productType
Brand Name	String	BRAND_NAME	ITEM_BRAND_NAME	os:envelope/catalogueRequest/document/item/globalAttributes/brandName
Brand Owner GLN	String	OWNING_ORGANIZATION_GLN	BRAND_OWNER_ID	os:envelope/catalogueRequest/document/item/globalAttributes/brandOwnerGLN
Net Content	Decimal	SIZE_METRIC	NET_CONTENT_PRIMARY	os:envelope/catalogueRequest/document/item/globalAttributes/netContent[<i>uom</i>]
Net Content UOM	String	SIZE_METRIC_UOM	NET_CONTENT_UOM	os:envelope/catalogueRequest/document/item/globalAttributes/netContent[<i>uom</i>]
Alternate Item Classification Code	String	GLOBAL_CLASSIFICATION_CODE	UDEXCODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/alternateClassification/code
Packaging Type	String	PACKAGING_TYPE	PACKAGING_TYPE_CODE	os:envelope/catalogueRequest/document/item/globalAttributes/packagingInformation/packagingTypeCode
Qty of Next Level Item(s)	String	PACK	UNITS_PER_CONTAINER	os:envelope/catalogueRequest/document/item/globalAttributes/totalQuantityOfNextLowerTradeItem
Packaging Information Height	Float	PACKAGING_HEIGHT	PACKAGING_HEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingInformation/height

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Packaging Information Height UOM	Varchar	PACKAGING_HEIG HT_UOM	PACKAGING_HEIG HT_UOM	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ packagingInformation/h eight
Packaging Information Depth	Float	PACKAGING_DEPT H	PACKAGING_DEPT H	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ packagingInformation/d epth
Packaging Information Depth UOM	Varchar	PACKAGING_DEPT H_UOM	PACKAGING_DEPT H_UOM	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ packagingInformation/d epth
Packaging Information Width	Float	PACKAGING_WIDT H	PACKAGING_WIDT H	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ packagingInformation/w idth
Packaging Information Width UOM	Varchar	PACKAGING_WIDT H_UOM	PACKAGING_WIDT H_UOM	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ packagingInformation/w idth
Inner Pack	String	INNER_PACK	UNITS_PER_INNE R_CONTAINER	os:envelope/catalogueR equest/document/item/g lobalAttributes/innerP ack
Product Form	String	PRODUCT_FORM	FORM_DESCRIPTOR	os:envelope/catalogueR equest/document/item/g lobalAttributes/Produc tForm
Base Unit Indicator	Boolean	BASE_UNIT_INDI CATOR	BASE_UNIT	os:envelope/catalogueR equest/document/item/g lobalAttributes/isBase Unit
Consumer Unit Indicator	Boolean	IS_TRADE_ITEM_ CONSUMER_UNIT	CONSUMER_UNIT	os:envelope/catalogueR equest/document/item/g lobalAttributes/isCons umerUnit

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Variable Weight Trade Item	Boolean	VARIABLE_WEIGHT_TRADE_ITEM	VARIABLE_UNIT	os:envelope/catalogueRequest/document/item/globalAttributes/isVariableWeightItem
Num of Complete Layers Cont in Item/GTIN Pallet Hi	Integer	HI	HI	os:envelope/catalogueRequest/document/item/globalAttributes/hi
Num of Items in a Complete Layer/GTIN Pallet Ti	Integer	TI	TI	os:envelope/catalogueRequest/document/item/globalAttributes/ti
Storage/Handling Temp Max	Decimal	STORAGE_HANDLING_TEMP_MAX	STORAGE_HANDLING_TEMP_MAX	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemTemperatureInformation/maximumTemperature
Storage/Handling Temp UOM	String	STORAGE_HANDLING_TEMP_MAX_UOM	STORAGE_HANDLING_TEMP_MAX_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/storageHandlingTempMax[@uom]
Storage/Handling Temp Min	Decimal	STORAGE_HANDLING_TEMP_MIN	STORAGE_HANDLING_TEMP_MIN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemTemperatureInformation/minimumTemperature
Storage/Handling Temp UOM	String	STORAGE_HANDLING_TEMP_MIN_UOM	STORAGE_HANDLING_TEMP_MIN_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/storageHandlingTempMin[@uom]
Own Label/Private Label	Boolean	OWN_LABEL_PRIVATE_LABEL	PRIVATE_LABEL	os:envelope/catalogueRequest/document/item/globalAttributes/brandDistributionTradeItemType

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Number of Items/Pallet	Integer	NUM_OF_ITEMS_PER_PALLET	PALLET_QUANTITY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/numberOfItemsPerPallet
Target Market	String	TARGET_MARKET	TARGET_MARKET_ID	os:envelope/catalogueRequest/document/item/targetMarketAttributes/targetMarket
Target Market Description	String	TARGET_MARKET_DESC	TARGET_MARKET_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/targetMarketName
NA	String	MARKET_GROUP	MARKET_GROUP	os:envelope/catalogueRequest/document/publication/marketGroup
EANUCC Code	String	EAN_UCC_CODE	EAN_UCC_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/gslTradeItemIdentificationKey/value
EANUCC Type	String	EAN_UCC_TYPE	EAN_UCC_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/gslTradeItemIdentificationKey/code
Manufacturer GLN	String	MANUFACTURER_GLN	null	os:envelope/catalogueRequest/document/item/targetMarketAttributes/manufacturer/gln
Sub Brand	String	SUB_BRAND	ITEM_SUB_BRAND_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/subBrand
Functional Name	String	PROD_NAME	PRODUCTNAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/functionalName[@lang]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Variant	String	VARIANT	VARIANT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='variants']/row/attrQualMany[@name='variant']/value
Country of Origin	String	COUNTRY_OF_ORIGIN	COUNTRYOFORIGINCODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/countryOfOrigin/countryCode
Is Private	Boolean	IS_PRIVATE	PRIVATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isPrivate
Primary Delivery Method	String	PRIMARY_DELIVERY_METHOD	PRIMARY_DELIVERY_METHOD	os:envelope/catalogueRequest/document/item/targetMarketAttributes/distributionDetails/distributionMethodCode
Coupon Family Code	Integer	COUPON_FAMILY_CODE	COUPON_FAMILY_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/couponFamilyCode
Has Batch Number	Boolean	HAS_BATCH_NUMBER	HAS_BATCH_NUMBER	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hasBatchNumber
Net Content Declared	Boolean	NET_CONTENT_DECLARED_INDICATED	NET_CONTENT_DECLARED_INDICATED	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isNetContentDeclaration
Product Strength	Decimal	PROD_STRENGTH	PROD_STRENGTH	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonFoodIngredient/ingredientStrength/ingredientStrength

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Product Strength UOM	String	PROD_STRENGTH_UOM	PROD_STRENGTH_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productStrength[@uom]
Product Strength Basis	Decimal	PROD_STRENGTH_BASIS	PROD_STRENGTH_BASIS	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonFoodIngredient/ingredientStrength/ingredientStrengthBasis
Product Strength Basis UOM	String	PROD_STRENGTH_BASIS_UOM	PROD_STRENGTH_BASIS_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productStrengthBasis[@uom]
Product Size Code	String	PROD_SIZE_CODE	PROD_SIZE_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productSize/code
Product Size Code Maintenance Agency	String	PROD_SIZE_CODE_MAINT_AGENCY	SIZE_CODE_LIST_AGENCY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productSize/maintenanceAgency
Product Description	String	PROD_DESC	SHORTDESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productDescription[@lang]; os:envelope/catalogueRequest/document/item/targetMarketAttributes/shortDescription[@lang]
Product Color Description	String	PROD_COLOR_DESC	PROD_COLOR_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/color/description

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Min Product Lifespan from Arrival	Integer	MIN_PROD_LIFE_SPAN	LIFESPAN_FROM_ARRIVAL_MIN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/minimumTradeItemLifespanFromArrival
Additional Description	String	ADDITIONAL_DESCRIPTION	ADDITIONAL_DESCRIPTION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/additionalDescription
Order Sizing Factor	String	ORDER_SIZING_FACTOR	ORDER_SIZING_FACTOR	os:envelope/catalogueRequest/document/item/targetMarketAttributes/orderSizingFactor
Lead Time	Integer	LEAD_TIME	LEADTIME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/distributionDetails/orderingLeadTime
Order Quantity Multiple	Integer	ORDER_QUANTITY_MULTIPLE	ORDER_INCREMENT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/orderQuantityMultiple
Min Order Quantity	Integer	MIN_ORDER_QUANTITY	MINIMUMORDER	os:envelope/catalogueRequest/document/item/targetMarketAttributes/minimumOrderQuantity
Max Order Quantity	Integer	MAX_ORDER_QUANTITY	MAXIMUMORDER	os:envelope/catalogueRequest/document/item/targetMarketAttributes/maximumOrderQuantity
Start Availability Date	Date	START_AVAILABILITY_DATE	START_AVAILABILITY_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/startAvailabilityDate
End Availability Date	Date	END_AVAILABILITY_DATE	END_AVAILABILITY_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/endAvailabilityDate

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
First Ship Date	Date	FIRST_SHIP_DATE	FIRST_SHIP_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/firstShipDate
Last Ship Date	Date	LAST_SHIP_DATE	LAST_SHIP_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/lastShipDate
Height	Decimal	HEIGHT	PRODUCTHEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/height
Height UOM	String	HEIGHT_UOM	HEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/height[@uom]
Width	Decimal	WIDTH	PRODUCTWIDTH	os:envelope/catalogueRequest/document/item/targetMarketAttributes/width
Width UOM	String	WIDTH_UOM	WIDTH_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/width[@uom]
Depth	Decimal	DEPTH	PRODUCTDEPTH	os:envelope/catalogueRequest/document/item/targetMarketAttributes/depth
Depth UOM	String	DEPTH_UOM	DEPTH_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/depth[@uom]
Non GTIN Pallet Height	Decimal	NGTIN_PL_HEIGHT	PACKAGEDHEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonGTINPalletHeight

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Non GTIN Pallet Height UOM	String	NGTIN_PL_HEIGHT_UOM	NGTIN_PL_HEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonGTINPalletHeight[@uom]
Diameter	Decimal	DIAMETER	DIAMETER	os:envelope/catalogueRequest/document/item/targetMarketAttributes/diameter
Diameter UOM	String	DIAMETER_UOM	DIAMETER_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/diameter[@uom]
Drained Weight	Decimal	DRAINED_WEIGHT	DRAINED_WEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/drainedWeight
Drained Weight UOM	String	DRAINED_WEIGHT_UOM	DRAINED_WEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/drainedWeight[@uom]
Gross Weight	Decimal	GROSS_WEIGHT	GROSSWEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/grossWeight
Gross Weight UOM	String	GROSS_WEIGHT_UOM	GROSS_WEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/grossWeight[@uom]
Non GTIN Pallet Gross Weight	Decimal	NGTIN_PL_GROSSWEIGHT	NGTIN_PL_GROSSWEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonGTINPalletGrossWeight
Non GTIN Pallet Gross Weight UOM	String	NGTIN_PL_GROSSWEIGHT_UOM	NGTIN_PL_GROSSWEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonGTINPalletGrossWeight[@uom]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Net Weight	Decimal	NET_WEIGHT	NETWEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/netWeight
Net Weight UOM	String	NET_WEIGHT_UOM	NET_WEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/netWeight[@uom]
Packaging Material Composition	String	PACKAGING_WEIGHT	PACKAGING_WEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial[@uom]
Packaging Material Composition UOM	String	PACKAGING_WEIGHT_UOM	PACKAGING_WEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial[@uom]
Peg Horizontal	Decimal	PEG_HORIZONTAL	PEG_HORIZONTAL	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pegMeasurements/pegHorizontal
Peg Horizontal UOM	String	PEG_HORIZONTAL_UOM	PEG_HORIZONTAL_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pegMeasurements/pegHorizontal[@uom]
Peg Vertical	Decimal	PEG_VERTICAL	PEG_VERTICAL	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pegMeasurements/pegVertical
Peg Vertical UOM	String	PEG_VERTICAL_UOM	PEG_VERTICAL_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pegMeasurements/pegVertical[@uom]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Volume	Decimal	VOLUME	VOLUME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/volume
Volume UOM	String	VOLUME_UOM	VOLUME_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/volume[@uom]
Percentage of Alcohol per Volume	Decimal	PERCENT_ALCOHOL_PER_VOL	PERCENT_ALCOHOL	os:envelope/catalogueRequest/document/item/targetMarketAttributes/percentageOfAlcoholPerVolume
Packaging Material Code	String	PACKAGING_MATERIAL_CODE	PKG_MATERIAL_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial/packagingInformation/packagingMaterial/packagingMaterialTypeCode
Product Marked with Ingredients	Boolean	PROD_MARKEDWITH_INGREDIENTS	WITH_INGREDIENTS	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productMarkedWithIngredients
Product Marked Recyclable	Boolean	PROD_MARKED_RECYCLABLE	PROD_MARKED_RECYCLABLE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productMarkedRecyclable
Packaging Marked Returnable	Boolean	PACKAGE_MARKED_RETURNABLE	PACKAGE_MARKED_RETURNABLE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMarkedReturnable
Dispatch Unit Indicator	Boolean	DISPATCH_UNIT_INDICATOR	DESPATCH_UNIT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isDispatchUnit

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Invoice Unit Indicator	Boolean	INVOICE_UNIT_INDICATOR	INVOICE_UNIT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isInvoiceUnit
Ordering Unit Indicator	Boolean	ORDERING_UNIT_INDICATOR	ORDERING_UNIT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isOrderableUnit
Handling Instruction Code	String	PROD_HANDLING_INSTRUCTION	SPECIAL_HANDLING_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/handlingInstructions/handlingInstructionCode
Max Stacking Weight	Decimal	MAX_ADM_STACKING_WEIGHT	STACKING_WEIGHT_MAX	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemStacking/stackingWeightMaximum
Max Stacking Weight UOM	String	MAX_ADM_STACKING_WEIGHT_UOM	MAX_ADM_STACKING_WEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/maximumStackingWeight[@uom]
Stacking Factor	Integer	STACKING_FACTOR	STACKING_FACTOR	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemStacking/stackingFactor
Pallet Code	String	PALLET_CODE	PALLET_TYPE_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingInformation/platformTypeCode
Pallet Terms and Conditions	String	PALLET_HANDLING_REUSE	PALLET_HANDLING_REUSE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingInformation/platformTermsAndConditionsCode

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Dangerous Goods Hazardous Code	String	HAZARD_CODE	HAZMAT_CODE1	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/dangerousGoods/transportationClassification/regulationTransportationMode/hazardousInformationHeader/hazardousInformationDetail/dangerousGoodsHazardousCode
Dangerous Goods Class Code	String	HAZMAT_CLASS_CODE	HAZMAT_CLASSCODE1	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/dangerousGoods/transportationClassification/regulationTransportationMode/hazardousInformationHeader/hazardousInformationDetail/classOfDangerousGoods
Dangerous Goods Regulation Code	String	HAZARD_TYPE_CLASS_SYSTEM	HAZARD_TYPE_CLASS_SYSTEM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/transportationClassification/regulationTransportationMode/hazardousInformationHeader/dangerousGoodsRegulationCode
U.N. Dangerous Goods Number	String	DANGEROUS_GOODS_SUB_ID	DANGEROUS_GOODS_HAZARD_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/dangerousGoods/transportationClassification/regulationTransportationMode/hazardousInformationHeader/hazardousInformationDetail/unitedNationsDangerousGoodsNumber

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Dangerous Goods Packing Group	String	DANGEROUS_GOODS_PACK_GROUP	DANGEROUS_GOODS_PACK_GROUP	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/dangerousGoods/transportationClassification/regulateTransportationMode/hazardousInformationHeader/hazardousInformationDetail/dangerousGoodsPackingGroup
Dangerous Goods Shipping Name	String	DANGEROUS_GOODS_SHIP_NAME	DANGEROUS_GOODS_SHIP_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/dangerousGoods/transportationClassification/regulateTransportationMode/hazardousInformationHeader/hazardousInformationDetail/dangerousGoodsShippingName
Dangerous Goods Technical Name	String	DANGEROUS_GOODS_TECH_NAME	DANGEROUS_GOODS_TECH_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/dangerousGoods/transportationClassification/regulateTransportationMode/hazardousInformationHeader/hazardousInformationDetail/dangerousGoodsTechnicalName
Flash Point Temperature	Decimal	FLASHPOINT_TEMP	FLASHPOINT_TEMP1	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/transportationClassification/regulateTransportationMode/hazardousInformationHeader/flashPointTemperature

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Flash Point Temperature UOM	String	FLASHPOINT_TEMP_UOM	FLASHPOINT_UNIT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/transportationClassification/hazardousInformationHeader/flashPointTemperature
Hazmat Special Instructions	String	HAZMAT_SPECIAL_INSTRUCTIONS	HAZMAT_SPECIAL_INSTRUCTIONS	os:envelope/catalogueRequest/document/item/targetMarketAttributes/hazardousMaterial/dangerousGoods/specialInstructions
Trade Item Group Code	String	TRADEITEM_GROUP_CODE	TRADEITEM_GROUP_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemGroupIdentification/tradeItemGroupIdentificationCodeReference
Trade Item Group Description	String	TRADEITEM_GROUP_DESC	TRADEITEM_GROUP_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemGroupIdentification/tradeItemGroupIdentificationCodeDescription
Pricing On Product	Boolean	PRICING_ON_PRODUCT	PRICE_ON_PACKAGE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pricingOnProduct
Material Safety Data Sheet Number	String	MAT_SAFETY_DATA_SHEET_NUM	MAT_SAFETY_DATA_SHEET_NUM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/safetyDataSheetInformation/sDSSheetNumber
Number of Layers Per Pallet/Non GTIN Pallet Hi	Integer	N_GTIN_PALLET_HI	N_GTIN_PALLET_HI	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonGTINPalletHi

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Number of Trade Items Per Pallet Layer/Non GTIN Pallet Ti	Integer	N_GTIN_PALLET_TI	N_GTIN_PALLET_TI	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonGTINPalletTi
Alternate Item Classification Scheme	String	CLASSIFICATION_SCHEME	CLASSIFICATION_SCHEME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/alternateClassification/scheme
Color	String	COLOR	COLOR	os:envelope/catalogueRequest/document/item/targetMarketAttributes/color
Color Code Maintenance Agency	String	COLOR_CODE_MNT_AGENCY	COLOR_CODE_AGENCY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/color/agency
List Price	Decimal	LIST_PRICE	LIST_PRICE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/cataloguePrice/price
List Price Currency	String	LIST_PRICE_CURRENCY	PRICEUOMCODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/cataloguePrice/price[@currency]
List Price Basis Per Unit	Decimal	LIST_PRICE_BASISPERUNIT	LIST_PRICE_BASIS_PER_UNIT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/cataloguePrice/basisPerUnit
List Price Basis Per Unit UOM	String	LIST_PRICE_BASISPERUNIT_UOM	LIST_PRICE_BASISPERUNIT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/cataloguePrice/basisPerUnit[@uom]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Suggested Retail Price	Amount	RECOMMEND_SALE S_PRICE	SUGGESTED_RETA IL_PRICE	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ suggestedRetail/price[@currency]
Suggested Retail Price Currency	String	RECOMMEND_PRIC E_CURRENCY	RECOMMEND_PRIC E_CURRENCY	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ suggestedRetail/price[@currency]
Suggested Retail Price Basis Per Unit	Decimal	RECOMMEND_PRIC E_PERUNIT	RECOMMEND_PRIC E_PERUNIT	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ suggestedRetail/basisP erUnit[@uom]
Suggested Retail Price Basis Per Unit UOM	String	RECOMMEND_PRIC E_PERUNIT_UOM	RECOMMEND_PRIC E_PERUNIT_UOM	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ suggestedRetail/basisP erUnit[@uom]
Right of Return for Non-Sold Trade Item	Boolean	RIGHT_RETURN_N SOLD_TRADE	RIGHT_RETURN_N SOLD_TRADE	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ rightOfReturnForNonSol dTradeItem
Tax Rate	Decimal	TAX_RATE	TAX_RATE	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ taxRate/rate
Tax (Rate) Type Code	String	TAX_TYPE	TAX_TYPE_CODE	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ taxRate/typeCode
Alternate Item Number	String	ALTERNATE_ITEM _ID	ALTERNATE_ID	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ alternateItemIdentific ation/id

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Alternate Item Identification Maintenance Agency	String	ALTERNATE_ITEM ID_MNT_AGENCY	ALTERNATE_ITEM ID_MNT_AGENCY	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/alternateItemIdentific ation/agency
Replaced by GTIN	String	REPLACED_ITEM_ GTIN	REPLACED_BY_GT IN	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/ referencedTradeItem/re referencedTradeItemGTIN/ referencedTradeItem/re referencedTradeItemTypeC ode=REPLACED_BY
Organic Trade Item Code	String	ORGANIC	ORGANIC_CODE	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/ organic/organicClaim/o rganicTradeItemCode
Degree of Original Wort	String	DEGREE_OF_ORIG INAL_WORT	DEGREE_OF_ORIG INAL_WORT	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/ degreeOfOriginalWort
Fat Content UOM	String	FAT_CONTENT_UO M	FAT_CONTENT_UO M	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/ fatContent[@uom]
Fat Content Basis of Measure UOM	String	FAT_CONTENT_BA SIS_UOM	FAT_CONTENT_BA SIS_UOM	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/ fatContentBasisOfMeasu re[@uom]
Units Per Consumer Unit	Integer	UNITS_PER_CONS UMER_UNIT	UNITS_PER_CONS UMER_UNIT	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/ unitsPerConsumerUnit
Total Units per Case	Integer	TOTAL_UNITS_PE R_CASE	UNITS_PER_CASE	os:envelope/catalogueRquest/document/item/tar getMarketAttributes/ totalUnitsPerCase

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Pricing Item Indicator	Boolean	PRICING_ITEM_INDICATOR	PRICING_ITEM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pricingItemIndicator
NA	Date	PUBLISH_DATE	PUBLISH_DATE	os:envelope/catalogueRequest/document/publication/publishDate
First Order Date	Date	FIRST_ORDER_DATE	FIRST_ORDER_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/firstOrderDate
Last Order Date	Date	LAST_ORDER_DATE	LAST_ORDER_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/lastOrderDate
Global Classification Code	String	ALT_ITEM_CLASSN_CODE	ADDITIONAL_CLASSES_CAT_CODE	os:envelope/catalogueRequest/document/item/globalAttributes/globalClassificationCategory/code
Pricing Pack	Decimal	PRICING_PACK	PRICING_PACK	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pricingPack
List Price Effective Start Date	Date	LIST_PRICE_DATE_START	LIST_PRICE_DATE_START	os:envelope/catalogueRequest/document/item/targetMarketAttributes/cataloguePrice/effectiveStartDate
List Price Effective End Date	Date	LIST_PRICE_DATE_END	LIST_PRICE_DATE_END	os:envelope/catalogueRequest/document/item/targetMarketAttributes/cataloguePrice/effectiveEndDate
Special Item Code	String	SPECIAL_ITEM_CODE	SPECIAL_ITEM_CODE	os:envelope/catalogueRequest/document/item/globalAttributes/marketingInformation/specialItemCode

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Feature Benefit	String	FEATURED_PRODUCT_DESC	FEATURED_PRODUCT_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemFeatureBenefit
Is Raw Material Irradiated	String	RAW_MATERIAL_IRRADIATED	RAW_MATERIAL_IRRADIATED	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isRawMaterialIrradiated
Is Ingredient Irradiated	String	INGREDIENT_IRRADIATED	INGREDIENT_IRRADIATED	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isIngredientIrradiated
Peg Hole Number	Integer	PEG_HOLE_NUMBER	PEG_HOLE_NUMBER	os:envelope/catalogueRequest/document/item/targetMarketAttributes/pegMeasurements/pegHoleNumber
Barcode Type	String	BAR_CODE_TYPE	BAR_CODE_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/dataCarrierTypeCode
Country of Assembly	String	TRADE_ITEM_COUNTRY_ASSEMBLY	TRADE_ITEM_COUNTRY_ASSEMBLY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemCountryOfAssembly
Variable Trade Item Type	String	VARIABLE_TRADE_ITEM_TYPE	VARIABLE_TRADE_ITEM_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/variableTradeItemType
Campaign End Date	Date	CAMPAIGN_END_DATE	CAMPAIGN_END_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/campaignEndDate

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Campaign Name	String	CAMPAIGN_NAME	CAMPAIGN_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productActivityDetails/countryOfActivity/countryCode
Campaign Start Date	Date	CAMPAIGN_START_DATE	CAMPAIGN_START_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/campaignStartDate
Marketing Message	String	TRADE_ITEM_MARKETING_MESSAGE	TRADE_ITEM_MARKETING_MESSAGE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemMarketingMessage
Season Calendar Year	Integer	SEASON_CALENDAR_YEAR	SEASON_CALENDAR_YEAR	os:envelope/catalogueRequest/document/item/targetMarketAttributes/season/seasonCalendarYear
Season Name	String	SEASON_NAME	SEASON_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/season/seasonName
Season Parameter	String	SEASON_PARAMETER	SEASON_PARAMETER	os:envelope/catalogueRequest/document/item/targetMarketAttributes/season/seasonParameter
Seasonal Start Date	Date	SEASON_AVAILABILITY_START_DATE	SEASON_AVAILABILITY_START_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/season/seasonalAvailabilityStartDate
Seasonal End Date	Date	SEASON_AVAILABILITY_END_DATE	SEASON_AVAILABILITY_END_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/season/seasonalAvailabilityEndDate

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Target Consumer Age	String	TARGET_CONSUMER_AGE	TARGET_CONSUMER_AGE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/targetConsumerAge
Target Consumer Gender	String	TARGET_CONSUMER_GENDER	TARGET_CONSUMER_GENDER	os:envelope/catalogueRequest/document/item/targetMarketAttributes/targetConsumerGender
Feature Benefit	String	TRADE_ITEM_FEATURE_BENEFIT	TRADE_ITEM_FEATURE_BENEFIT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemFeatureBenefit
Compliance Regulation Code	String	CLASS_COMPLIANCE_REG_CODE	CLASS_COMPLIANCE_REG_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/regulatoryInformation/regulationTypeCode
Import Classification Type	String	IMPORT_CLASS_TYPE	IMPORT_CLASS_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/importIdentification/importClassification/importClassificationTypeCode
Import Classification Value	String	IMPORT_CLASS_VALUE	IMPORT_CLASS_VALUE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/importClassification/importClassificationValue
Max DC Delivery Temp	Decimal	DELIVERY_DC_TEMP_MAX	DELIVERY_DC_TEMP_MAX	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemTemperatureInformation/maximumTemperature
Max DC Delivery Temp UOM	String	DELIVERY_DC_TEMP_UOM	DELIVERY_DC_TEMP_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/deliveryToDCTemperatureMaximum[@uom]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Max Market Delivery Temp	Decimal	DELIVERY_MARKET_TEMP_MAX	DELIVERY_MARKET_TEMP_MAX	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemTemperatureInformation/maximumTemperature
Max Market Delivery Temp UOM	String	DELIVERY_MARKET_TEMP_UOM	DELIVERY_MARKET_TEMP_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/deliveryToMarketTemperatureMaximum[@uom]
Max Storage Humidity	Decimal	STORAGE_HUMIDITY_MAX	STORAGE_HUMIDITY_MAX	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemHumidityInformation/maximumHumidityPercentage
Min DC Delivery Temp	Decimal	DELIVERY_DC_TEMP_MIN	DELIVERY_DC_TEMP_MIN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemTemperatureInformation/minimumTemperature
Min Market Delivery Temp	Decimal	DELIVERY_MARKET_TEMP_MIN	DELIVERY_MARKET_TEMP_MIN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemTemperatureInformation/minimumTemperature
Min Storage Humidity	Decimal	STORAGE_HUMIDITY_MIN	STORAGE_HUMIDITY_MIN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemHumidityInformation/minimumHumidityPercentage
Product Range	String	PRODUCT_RANGE	PRODUCT_RANGE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/productRange

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Inner Pack	String	QUANTITY_OF_INNER_PACK	QUANTITY_OF_INNER_PACK	os:envelope/catalogueRequest/document/item/targetMarketAttributes/innerPack
Composition Width	Decimal	TRADE_ITEM_COMPOS_WIDTH	TRADE_ITEM_COMPOS_WIDTH	os:envelope/catalogueRequest/document/item/globalAttributes/tradeItemCompositionWidth
Composition Width UOM	String	TRADE_ITEM_COMPOS_WIDTH_UOM	TRADE_ITEM_COMPOS_WIDTH_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemCompositionWidth[@uom]
Descriptive Size Dim	String	DESCRIPTIVE_SIZE_DIMENSION	DESCRIPTIVE_SIZE_DIMENSION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonPackageDimensions/nonPackageSizeDimension/nonPackagedSizeDimension/descriptiveSizeDimension
Material Code	String	MATERIAL_CODE	MATERIAL_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/materialComposition/textileMaterial/textileMaterialComposition/materialCode
Material Content	String	MATERIAL_CONTENT	MATERIAL_CONTENT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/materialComposition/materialComposition/materialContent
Material Percentage	Decimal	MATERIAL_PERCENTAGE	MATERIAL_PERCENTAGE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/materialComposition/textileMaterial/textileMaterialComposition/materialPercentage

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Material Weight	Integer	MATERIAL_WEIGHT	MATERIAL_WEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/textileMaterial/textileMaterialComposition/materialWeight
Material Weight UOM	String	MATERIAL_WEIGHT_UOM	MATERIAL_WEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/materialWeight[@uom]
Organic Claim Agency	String	ORGANIC_CLAIM_AGENCY	ORGANIC_CLAIM_AGENCY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/organic/organicClaim/organicClaimAgencyCode
Size Dimension	Decimal	SIZE_DIMENSION	SIZE_DIMENSION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonPackageDimensions/nonPackageSizeDimension/nonPackagedSizeDimension/sizeDimension
Size Dimension UOM	String	SIZE_DIMENSION_UOM	SIZE_DIMENSION_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonPackageDimensions/nonPackageSizeDimension/sizeDimension[@uom]
Size Group	String	SIZE_GROUP	SIZE_GROUP	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonPackageDimensions/sizeGroupCode
Size System	String	SIZE_SYSTEM	SIZE_SYSTEM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonPackageDimensions/nonPackageSizeDimension/sizeSystemCode

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Size Type	String	SIZE_TYPE	SIZE_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonPackageDimensions/nonPackageSizeDimension/sizeTypeCode
Thread Count	String	THREAD_COUNT	THREAD_COUNT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/textileMaterial/textileMaterialComposition/materialThreadCount
Consumer Availability Date	Date	CONSUMER_UNIT_AVAIL_DATE	CONSUMER_UNIT_AVAIL_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/consumerAvailabilityDateTime
End Date of Exclusivity	Date	END_DATE_OF_EXCLUSIVITY	END_DATE_OF_EXCLUSIVITY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/endTimeOfExclusivity
End Date of Max Buying Qty	Date	END_DATE_MAX_BUYING	END_DATE_MAX_BUYING	os:envelope/catalogueRequest/document/item/targetMarketAttributes/endDateMaximumBuyingQuantity
End Date of Min Buying Qty	Date	END_DATE_MIN_BUYING	END_DATE_MIN_BUYING	os:envelope/catalogueRequest/document/item/targetMarketAttributes/endDateMinimumBuyingQuantity
First Delivery Date	Date	FIRST_DELIVERY_DATE_TIME	FIRST_DELIVERY_DATE_TIME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/firstDeliveryDateTime
Start Date of Max Buying Qty	Date	START_DATE_MAX_BUYING_QTY	START_DATE_MAX_BUYING_QTY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/startDateMaximumBuyingQuantity

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Start Date of Min Buying Qty	Date	START_DATE_MIN_BUYING_QTY	START_DATE_MIN_BUYING_QTY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/startDateMinimumBuyingQuantity
Deposit Value End Date	Date	DEPOSIT_VAL_EN D_DATE	DEPOSIT_VAL_EN D_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial/packagingInformation/packageDeposit/returnablePackageDepositAmount
Deposit Value Start Date	Date	DEPOSIT_VAL_EF F_DATE	DEPOSIT_VAL_EF F_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial/packagingInformation/packageDeposit/depositValueEffectiveDate
Offer On Pack	String	OFFER_ON_PACK	OFFER_ON_PACK	os:envelope/catalogueRequest/document/item/targetMarketAttributes/offerOnPack
Package Marks Diet Allergen	String	PACKAGE_MARKS_DIET_ALLERGEN	PACKAGE_MARKS_DIET_ALLERGEN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packageMarksDietAllergen
Package Marks Environment	String	PACKAGE_MARKS_ENVIRONMENT	PACKAGE_MARKS_ENVIRONMENT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMarkedLabelAccreditationCode
Package Marks Ethical	String	PACKAGE_MARKS_ETHICAL	PACKAGE_MARKS_ETHICAL	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMarkedLabelAccreditationCode
Package Marks Free From	String	PACKAGE_MARKS_FREE_FROM	PACKAGE_MARKS_FREE_FROM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packageMarksFreeFrom

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Packaging Marked Expiration Date Type	String	PKG_MARKED_EXPIRE_DATE_TYPE	PKG_MARKED_EXPIRE_DATE_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingDate/tradeItemDateOnPackagingTypeCode
Packaging Marked Recyclable Scheme	String	PKG_MARKED_RECYCLE_SCHEME	PKG_MARKED_RECYCLE_SCHEME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMarkedRecyclableScheme
Returnable Package Deposit Amount	Amount	RETURNABLE_PKG_DEPOSIT_AMT	RETURNABLE_PKG_DEPOSIT_AMT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial/packagingInformation/packagedeposit/returnablePackageDepositAmount
Returnable Package Deposit Code	String	RETURNABLE_PKG_DEPOSIT_CODE	RETURNABLE_PKG_DEPOSIT_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial/packagingInformation/packagedeposit/returnablePackageDepositAmount
Security Tag Location	String	SECURITY_TAG_LOCATION	SECURITY_TAG_LOCATION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/securityTagInformation/securityTagLocationCode
Security Tag Type	String	SECURITY_TAG_TYPE	SECURITY_TAG_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/securityTagInformation/securityTagTypeCode
Terms or Conditions Code	Varchar	PACKAGING_TERM_S_CONDITIONS	PACKAGING_TERM_S_CONDITIONS	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMaterial/packagingInformation/packagingTermsAndConditionsCode

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Generic Ingredient	String	GENERIC_INGREDIENT	GENERIC_INGREDIENT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonFoodIngredient/nonFoodIngredientName
Generic Ingredient Strength	String	GENERIC_INGREDIENT_STRENGTH	GENERIC_INGREDIENT_STRENGTH	os:envelope/catalogueRequest/document/item/targetMarketAttributes/nonFoodIngredient/ingredientStrength/ingredientStrength
Generic Ingredient Strength UOM	String	GENERIC_INGREDIENT_STR_UOM	GENERIC_INGREDIENT_STR_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/genericIngredientStrength[@uom]
Goods Pick Up Lead Time	Decimal	GOODS_PICKUP_LEAD_TIME	GOODS_PICKUP_LEAD_TIME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/goodsPickUpLeadTime
Goods Pick Up Lead Time UOM	String	GOODS_PICKUP_LEAD_TIME_UOM	GOODS_PICKUP_LEAD_TIME_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/goodsPickUpLeadTime[@uom]
Invoice Name	String	INVOICE_NAME	INVOICE_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/invoiceName
Is Size Based Pricing	Boolean	IS_TRADEITEM_SIZE_BASED_PRIC	IS_TRADEITEM_SIZE_BASED_PRIC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isTradeItemSizeBasedPricing
Is Trade Item Reorderable	Boolean	IS_REORDERABLE	IS_REORDERABLE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/isTradeItemReorderable

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Ordering UOM	String	ORDERING_UOM	ORDERING_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/orderingUnitOfMeasure
Selling UOM	String	SELLING_UOM	SELLING_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/sellingUnitOfMeasure
Max Buying Quantity	Integer	AGREED_MAX_BUYING_QUANTITY	AGREED_MAX_BUYING_QUANTITY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/agreedMaximumBuyingQuantity
Min Buying Quantity	Integer	AGREED_MIN_BUYING_QUANTITY	AGREED_MIN_BUYING_QUANTITY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/agreedMinimumBuyingQuantity
Price By Measure Type	String	PRICE_BY_MEASURE_TYPE	PRICE_BY_MEASURE_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/priceByMeasureType
Price Comparison Measurement	Decimal	PRICE_COMP_MEASUREMENT	PRICE_COMP_MEASUREMENT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/priceComparisonMeasurement
Price Comparison Measurement UOM	String	PRICE_COMP_UOM	PRICE_COMP_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/priceComparisonMeasurement[@uom]
Retail Price On Trade Item	Amount	RETAIL_PRICE_ON_ITEM	RETAIL_PRICE_ON_ITEM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/additionalTradeItemPrice/tradeItemPrice

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Price Comparison Content Type	String	PRICE_COMP_CONTENT_TYPE	PRICE_COMP_CONTENT_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/priceComparisonContentType
Suggested Retail Price Effective End Date	Date	EFFECTIVE_END_DATE	EFFECTIVE_END_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/suggestedRetail/effectiveEndDate
Suggested Retail Price Effective Start Date	Date	EFFECTIVE_START_DATE	EFFECTIVE_START_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/suggestedRetail/effectiveStartDate
Tax Amount	Amount	TAX_AMOUNT	TAX_AMOUNT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/taxAmount/dutyFeeTaxInformation/dutyFeeTaxAmount
Tax Amount Currency	String	CURRENCY_CODE	CURRENCY_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/taxAmount/currency
Tax (Rate) Type Agency	String	TAX_AGENCY_CODE	TAX_AGENCY_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/taxRate/agencyCode
Tax (Rate) Type Description	String	TAX_TYPE_DESC	TAX_TYPE_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/taxRate/typeDescription
Finish Description	String	TRADE_ITEM_FINISH_DESC	TRADE_ITEM_FINISH_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/tradeItemFinishDescription

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Min Product Lifespan from Production	String	MINLIFE_SPAN_F ROM_PRODUCTION	MIN_LIFE_SPAN_ TIME_OF_PUB	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ minimumTradeItemLifespa nFromProduction
Retail Price On Trade Item Currency	String	RETAIL_PRICE_O N_ITEM_CURR	RETAIL_PRICE_O N_ITEM_CURR	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ retailPriceOnTradeItem [@currency]
Returnable Package Deposit Currency	String	RETURN_PKG_DEP OSIT_AMT_CURR	RETURN_PKG_DEP OSIT_AMT_CURR	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ packagingMaterial/retu rnablePackageDepositAm ount[@currency]
Tax (Amount) Type Description	String	TAX_AMT_TAX_TY PE_DESC	TAX_AMT_TAX_TY PE_DESC	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ taxAmount/dutyFeeTaxIn formation/dutyFeeTaxTy peDescription
Tax (Amount) Type Agency	String	TAX_AMT_TAX_AG ENCY_CODE	TAX_AMT_TAX_AG ENCY_CODE	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ taxAmount/dutyFeeTaxIn formation/dutyFeeTaxAg ency/AgencyCode
Tax (Amount) Type Code	String	TAX_AMT_TAX_TY PE_CODE	TAX_AMT_TAX_TY PE_CODE	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ taxAmount/dutyFeeTaxIn formation/dutyFeeTaxTy peCode
Material Agency Code	String	MATERIAL_AGENC Y_CODE	MATERIAL_AGENC Y_CODE	os:envelope/catalogueR equest/document/item/t argetMarketAttributes/ materialComposition/te xtileMaterial/material AgencyCode

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Is Barcode Symbology Derivable	Boolean	ISBARCODEDERIVABLE	ISBARCODEDERIVABLE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/gslTradeItemIdentificationKey/isBarcodeSymbologyDerivable
Lead Time UOM	String	LEADTIMEUOM	LEADTIMEUOMCODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/leadTime[@uom]
TM Subdivision	String	TARGET_MARKET_SUBDIVISION	TARGET_MARKET_SUBDIVISION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/targetMarketSubdivisionCode
Party Receiving Private Data	String	PARTY_RECEIVING_PRIVATE_DATA	PARTY_RECEIVING_PRIVATE_DATA	os:envelope/catalogueRequest/document/item/targetMarketAttributes/partyReceivingPrivateDataGLN
GTIN Variation Registry	Boolean	GTIN_VARIATION_REGISTRY	GTIN_VARIATION_REGISTRY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/gtinVariationRegistry
Manufacturer Name	String	MANUFACTURER_NAME	MANUFACTURER_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/manufacturer/name
Green Dot Indicator	Boolean	GREEN_DOT_INDICATOR	PACKAGE_MARKED_GREEN_DOT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/greenDotIndicator
Order Sizing Factor UOM	String	ORDER_SIZING_FACTOR_UOM	ORDER_SIZING_FACTOR_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/orderSizingFactor[@uom]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
GLN Of Ship From Party	String	SHIP_LOCATION_GLN	SHIP_LOCATION_GLN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/partyInRole/gln with partyRoleCode = SHIP_FROM
Name Of Ship From Party	String	SHIP_LOCATION_NAME	SHIP_LOCATION_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/partyInRole/name with partyRoleCode = SHIP_FROM
Uniform Resource Identifier	String	URI	URI	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='externalFileLink']/row/attr[@name='uniformResourceIdentifier']
Link File Name	String	FILE_NAME_EXT	FILE_NAME_EXT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='externalFileLink']/row/attr[@name='externalFileLinkFileName']
File Format Name	String	FILE_FORMAT_NAME	FILE_FORMAT_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='externalFileLink']/row/attr[@name='fileFormatName']
File Effective Start Date	Date	FILE_EFFECTIVE_START_DATE	FILE_EFFECTIVE_START_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='externalFileLink']/row/attr[@name='fileEffectiveStartDateTime']

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
File Effective End Date	Date	FILE_EFFECTIVE_END_DATE	FILE_EFFECTIVE_END_DATE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='externalFileLink']/row/attr[@name='fileEffectiveEndTime']
Link Content Description	String	CONTENT_DESC	CONTENT_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany/row/attrQualMany[@name='externalFileLinkContentDescription']/value
File Format Description	String	FILE_FORMAT_DESC	FILE_FORMAT_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany/row/attrQualMany[@name='fileFormatDescription']/value
Consumer Usage Storage Instructions	String	STORAGE_INSTRUCTION	STORAGE_INSTRUCTION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQualMany[@name='consumerUsageStorageInstructions']/value
Layer Height	Decimal	LAYER_HEIGHT	LAYER_HEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQual[@name='layerHeight']
Layer Height UOM	String	LAYER_HEIGHT_UOM	LAYER_HEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQual[@name='layerHeight'][@qual]
Type Of Information	String	TYPE_INFORMATION	TYPE_INFORMATION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='externalFileLink']/row/attr[@name='typeOfInformation']

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Is Trade Item Packed Irregularly?	String	IS_ITEM_PACKED_IRREGULARLY	SHIP_LOCATION_NAME	os:envelope/catalogueRequest/document/item/globalAttributes/isTradeItemPackedIrregularly
Item Composition Depth	Decimal	ITEM_COMPOSITION_DEPTH	ITEM_COMPOSITION_DEPTH	os:envelope/catalogueRequest/document/item/globalAttributes/tradeItemCompositionDepth
Item Composition Depth UOM	Varchar	ITEM_COMPOSITION_DEPTH_UOM	ITEM_COMPOSITION_DEPTH_UOM	os:envelope/catalogueRequest/document/item/globalAttributes/tradeItemCompositionDepth/@uom
Package Marks Hygienic	String	PKG_MARKED_HYGIENIC	PKG_MARKED_HYGIENIC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/packagingMarkedLabelAccreditationCode
Tax Rate Applicability Code	String	TAX_RATE_APPLICABILITY_CODE	TAX_RATE_APPLICABILITY_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/taxRate/taxRateApplicabilityCode
Tax Amount Applicability Code	String	TAX_AMT_APPLICABILITY_CODE	TAX_AMT_APPLICABILITY_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/taxAmount/taxAmountApplicabilityCode
Clamp Pressure	Decimal	CLAMP_PRESSURE	CLAMP_PRESSURE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQual[@name='clampPressure']
Clamp Pressure UOM	String	CLAMP_PRESSURE_UOM	CLAMP_PRESSURE_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQual[@name='clampPressure'][@qual]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Orientation Type	String	ORIENTATION_TYPE	ORIENTATION_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='tradeItemOrientation']/row/attr[@name='orientationType']
Orientation Preference Sequence	Integer	ORIENTATION_PREFERENCE_SEQ	ORIENTATION_PREFERENCE_SEQ	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='tradeItemOrientation']/row/attr[@name='orientationPreferenceSequence']
Nesting Direction	String	NESTING_DIRECTION	NESTING_DIRECTION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/tradeItemNesting/nestingTypeCode
Nesting Type	String	NESTING_TYPE	NESTING_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/tradeItemNesting/nestingDirectionCode
Has Display Ready Packaging?	String	HAS_DISPLAY_READY_PKG	HAS_DISPLAY_READY_PKG	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attr[@name='hasDisplayReadyPackaging']
Electrical Usage Trade Item Classification Agency	String	ELEC_USAGE_CLASS_AGENCY	ELEC_USAGE_CLASS_AGENCY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/physicalResourceUsageInformation/physicalResourceUsageTradeItemClassification/physicalResourceUsageClassificationAgency

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Electrical Usage Trade Item Classification Name	String	ELEC_USAGE_CLASS_NAME	ELEC_USAGE_CLASS_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/physicalResourceUsageInformation/physicalResourceUsageTradeItemClassification/physicalResourceUsageClassificationName
Electrical Usage Subclassification Name	String	ELEC_USAGE_SUBCLASS_NAME	ELEC_USAGE_SUBCLASS_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/physicalResourceUsageInformation/physicalResourceUsageTradeItemClassification/physicalResourceUsageSubclassificationAgency
Display Dimension Type Code	String	DISPLAY_DIMENSION_CODE	DISPLAY_DIMENSION_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='displayDimensions']/row/attr[@name='displayDimensionTypeCode']
Dimension Depth	Integer	DISPLAY_DIMENSION_DEPTH	DISPLAY_DIMENSION_DEPTH	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='displayDimensions']/row/attrQual[@name='dimensionDepth']
Dimension Depth UOM	String	DISPLAY_DIMENSION_DEPTH_UOM	DISPLAY_DIMENSION_DEPTH_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='displayDimensions']/row/attrQual[@name='dimensionDepth'][@qual]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Dimension Width	Integer	DISPLAY_DIMENSION_WIDTH	DISPLAY_DIMENSION_WIDTH	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='displayDimensions']/row/attrQual[@name='dimensionWidth']
Dimension Width UOM	String	DISPLAY_DIMENSION_WIDTH_UOM	DISPLAY_DIMENSION_WIDTH_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='displayDimensions']/row/attrQual[@name='dimensionWidth'][@qual]
Dimension Height	Integer	DISPLAY_DIMENSION_HEIGHT	DISPLAY_DIMENSION_HEIGHT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='displayDimensions']/row/attrQual[@name='dimensionHeight']
Dimension Height UOM	String	DISPLAY_DIMENSION_HEIGHT_UOM	DISPLAY_DIMENSION_HEIGHT_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='displayDimensions']/row/attrQual[@name='dimensionHeight'][@qual]
Warranty Effective Date Type	String	WARRANTY_EFFECTIVE_DATE_TYPE	WARRANTY_EFFECTIVE_DATE_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/warrantyInformation/warrantyEffectiveDateType
Warranty Type	String	WARRANTY_TYPE	WARRANTY_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/warrantyInformation/warrantyType

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Warranty Constraint	String	WARRANTY_CONSTRAINT	WARRANTY_CONSTRAINT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/warrantyInformation/warrantyConditions/warrantyConstraint
Warranty Period	Integer	WARRANTY_DURATION	WARRANTY_DURATION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/warrantyInformation/warrantyConditions/warrantyDuration
Warranty Information Description	String	WARRANTY_DESC	WARRANTY_DESC	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/warrantyInformation/warrantyDescription
Is Product A Pesticide?	String	CONTAINS_PESTICIDE	CONTAINS_PESTICIDE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/doesTradeItemContainPesticide
Is Product Aerosol?	String	CONTAINS_PROPELLANT	CONTAINS_PROPELLANT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attr[@name='isProductAerosol']
Is Product Chemical Not Intended For Human Consumption?	String	CHEMICAL_FOR_HUMAN_CONSUME	CHEMICAL_FOR_HUMAN_CONSUME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attr[@name='isProductChemicalNotIntendedForHumanConsumption']
Percentage Of Plastic Components Made From a Plant Based Material	Integer	RENEWABLE_PLASTIC_PERCENT	RENEWABLE_PLASTIC_PERCENT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/renewablePlantBasedPlasticComponentsPercent

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Is Product Subject To A Manufacturer Take Back Program?	String	TAKE_BACK_PROG RAM	TAKE_BACK_PROG RAM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/doesManufacturerHaveTakeBackProgram
Manufacturer Take Back Program Fee	Integer	TAKE_BACK_PROG RAM_FEE	TAKE_BACK_PROG RAM_FEE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQualMany[@name='manufacturerTakeBackProgramFee']/value
Packaging Marked Recyclable Scheme	String	PKG_MARKED_RECYCLABLE	PKG_MARKED_RECYCLABLE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/packagingMarkedRecyclableScheme
Trade Item Default Time Limit Of Auto Power Down Function Value	Date	POWER_DOWN_DEF_TIME	POWER_DOWN_DEF_TIME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attr[@name='tradeItemDefaultTimeLimitOfAutoPowerDownFunctionValue']
Trade Item Default Time Limit Of Auto Power Down Function UOM	String	POWER_DOWN_DEF_TIME_UOM	POWER_DOWN_DEF_TIME_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attr[@name='tradeItemDefaultTimeLimitOfAutoPowerDownFunctionUOM']
Electrical Usage Agency Code	String	ELE_USAGE_AGENCY_CODE	ELE_USAGE_AGENCY_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrMany[@name='electricalUsageAgencyCode']/value
Is Trade Item Auto Powered Down Enabled When Shipped To Customer	String	POWER_DOWN_ENABLED	POWER_DOWN_ENABLED	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/isTradeItemAutomaticPowerDownEnabled

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Electrical Usage Class Code	String	ELEC_USAGE_CLASS_CODE	ELEC_USAGE_CLASS_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/physicalResourceUsageInformation/physicalResourceUsageTradeItemClassification/physicalResourceUsageClassificationCode
Electrical Usage Sub Class Code	String	ELEC_USAGE_SUBCLASS_CODE	ELEC_USAGE_SUBCLASS_CODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/physicalResourceUsageInformation/physicalResourceUsageTradeItemClassification/physicalResourceUsageSubclassificationCode
Maximum Energy Usage Time Period	Decimal	MAX_ENERGY_USAGE	MAX_ENERGY_USAGE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/physicalResourceUsageInformation/physicalResourceUsage/physicalResourceUsage
Maximum Energy Usage Time Period UOM	String	MAX_ENERGY_USAGE_UOM	MAX_ENERGY_USAGE_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='electricalUsage']/row/attrQual[@name='maximumEnergyUsageTimePeriod'][@qual]
Electrical Usage Class Screen Area Value	String	TOTAL_SCREEN_AREA	TOTAL_SCREEN_AREA	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/totalScreenArea
Electrical Usage Class Screen Area UOM	String	TOTAL_SCREEN_AREA_UOM	TOTAL_SCREEN_AREA_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQualMany[@name='electricalUsageClassScreenAreaValue']/value[@qual]

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Electrical Usage Class Resolution Code	String	DISPLAY_RESOLUTION	DISPLAY_RESOLUTION	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/displayResolutionCode
Electrical Usage Class Mode Code	String	RUN_MODE	RUN_MODE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/physicalResourceUsageInformation/physicalResourceUsage/runModeCode
Manufacturer Take Back Program Currency	String	TAKE_BACK_PROGRAM_FEE_CURR	TAKE_BACK_PROGRAM_FEE_CURR	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrQualMany[@name='manufacturerTakeBackProgramFee']/value[@qual]
Warranty Condition Effective Date Type	String	WARRANTY_CONDITION_EFFECTIVE_DATE_TYPE	WARRANTY_CONDITION_EFFECTIVE_DATE_TYPE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/warrantyInformation/warrantyEffectiveDateType
Warranty Period UOM	String	WARRANTY_DURATION_UOM	WARRANTY_DURATION_UOM	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrGroupMany[@name='warrantyConditionInfo']/row/attr[@name=warrantyPeriod']
Country of Last Provenance/Processing	String	COUNTRY_LAST_PROVENANCE	COUNTRY_OF_LAST_PROCESSING	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/productActivityDetails/countryOfActivity/countryCode productActivityTypeCode=LAST_PROCESSING

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Trade Channel	String	TRADE_CHANNEL	TRADE_CHANNEL	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attrMany[@name='tradeChannel']/value
Is Hazardous Component Broken Down Easily For Recycling	String	HAZARDOUS_COMPONENT_REMOVABLE	HAZARDOUS_COMPONENT_REMOVABLE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/areHazardousComponentsRemovable
Percent Of Product Components Labeled For Disassembly And Recycling	Decimal	DISASSEMBLY_CYCLE_PERCENT	DISASSEMBLY_CYCLE_PERCENT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/componentsLabeledForDisassemblyRecyclingPercent
Is Product Disassembly By Recycling Facility Completed Using Standard Tools	String	DESIGN_FOR_EASY_DISASSEMBLY	DESIGN_FOR_EASY_DISASSEMBLY	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attr[@name='isProductDisassemblyByRecyclingFacilityCompletedUsingStandardTools']
Is Product RPPC Compliant in Target Market	String	IS_RIGID_PLASTIC_PACKAGING	IS_RIGID_PLASTIC_PACKAGING	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/isTradeItemRigidPlasticPackagingContainer
Product RoHS Compliance Code	String	IS_ROHS_COMPLIANT	IS_ROHS_COMPLIANT	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/isTradeItemROHSCompliant
Is Product Considered Universal Waste?	String	IS_UNIVERSAL_WASTE	IS_UNIVERSAL_WASTE	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/isTradeItemUniversalWaste

Table 7 1WorldSync Attribute Mapping

1WorldSync Attribute	MDM Data Type	Sync Profile Attribute	Repository Attribute	Xpath in 1WorldSync message
Can Product Be Easily Upgraded Or Maintained By Consumer	String	IS_UPGRADEABLE_OR_MAINTAIN	IS_UPGRADEABLE_OR_MAINTAIN	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/isTradeItemConsumerUpgradeableOrMaintainable
Materials That Fail RoHS Compliance	String	ROHS_COMPL_FAILURE_MATERIAL	ROHS_COMPL_FAILURE_MATERIAL	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/roHSComplianceFailureMaterial
Link File Name	String	EXT_FILE_LINK_FILE_NAME	EXT_FILE_LINK_FILE_NAME	os:envelope/catalogueRequest/document/item/targetMarketAttributes/flex/attr[@name='externalFileLinkFileName']

MDM Operations for 1WorldSync Messages

The following is a list of 1WorldSync messages and corresponding operations selected by MDM for these messages.

Supplier Operations

Table 8 MDM Operations for 1WorldSync Messages (Supplier Operations)

1WorldSync message type	Operation selected on Synchronization Profile			Corresponding Operation and sub-operation selected in synchronization event
ITEM ADD	Incremental	Deliver To	Operation	Add: New
	Yes	Datapool	Add	
ITEM MODIFY/CORRECT	Incremental	Deliver To	Operation	
	Yes/No	Datapool	Data Correction/ Cancel/ Discontinue/ Reinstate	ADD:CORRECT Beside this ADD:CANCEL, ADD:DISCONTINUE and ADD:REINSTATE are also handled with this message.
LINK ADD	Incremental	Deliver To	Operation	LINK:NONE
	Yes /No	Datapool	Add/ Data Correction	
LINK DELETE	Incremental	Deliver To	Operation	LINK:UNLINK
	Yes/No	Datapool	Add/ Data Correction	

Table 8 MDM Operations for 1WorldSync Messages (Supplier Operations)

1WorldSync message type	Operation selected on Synchronization Profile			Corresponding Operation and sub-operation selected in synchronization event
PUBLICATION ADD	Incremental	Deliver To	Operation	PUBLISH:NEW
	Yes /No	Trading Partner on Datapool	Add/ Publish SubOperation for Add/Publish: New SubOperations Only applicable to Publish operation: For RELOAD-COPY: Initial Load For RELOAD-ORIGINAL- Initial Load+ Include Rejected Records	PUBLISH:IMPLICIT PUBLISH:RELOAD-COPY PUBLISH:RELOAD-ORIGINAL

Retailer Operations

Table 9 MDM Operations for 1WorldSync Messages (Retailer Operations)

Message Type	Incoming/ Outgoing	Description
1WorldSync Catalogue Item Notification (CIN)	Incoming	This new or initial or correction load message is received from Datapool when the supplier publishes the record for the retailer.
1WorldSync Catalogue Item Confirmation (CIC)	Outgoing	Catalog Item Confirmation message of the Received, Rejected, Review, and Synchronize type sent by the retailer in receipt of the CIN message received. For the steps to specify this message, refer Specifying Catalogue Item Confirmation Response.
1WorldSync Request For Catalogue Item Notification (RFCIN)	Outgoing	The RFCIN message sent by the retailer with isReload set as true/false. For the steps to specify this message, refer to Specifying Request For Catalogue Item Notification Message.
1WorldSync Catalogue Item Notification Response (CINR)	Outgoing	This response message is sent by MDM in response to CIN.
1WorldSync Catalogue Item Confirmation Response	Incoming	The Catalog Item Confirmation response (CICR) received from Datapool in response to CIC messages.
1WorldSync Request For Catalogue Item Notification Response	Incoming	The Request For Catalog Item Notification Response (RFCINR) received from Datapool in response to RFCIN messages.

Specifying Catalogue Item Confirmation Response

Follow these steps to specify the Catalogue Item Confirmation response in MDM.

1. Log in to the user's enterprise with user credentials.

2. Click **Browse and Search**.
3. Select a repository and click the **View All Records** link.
4. Select the record for which the CIC message is to be specified.
5. Select **More Actions > Send Response**.
6. Select the required Action.
 - **Review**: Select the Confirmation Status Code and Corrective Action.
 - **Received**: Select the Retailer Credential.
 - **Synchronised**: Select the Retailer Credential.
 - **Rejected**: Select the Confirmation Status Code and Corrective Action.
7. Click **Submit**.

Specifying Request For Catalogue Item Notification Message

Follow these steps to specify the Request For Catalogue Item Notification message in MDM.

1. Login to the user's enterprise with user credentials.
2. Click **Browse and Search**.
3. Select a repository and click the **View All Records** link.
4. Select the record for which message is to be specified.
5. Select **More Actions > Send Message**.
6. Select the **Action** as **RFCIN - Generate RFCIN Message**.
7. Select the **Datapool**.
8. Select **Trading Partner**.



Verify the **Company Credential** and **Trading Partner Credential** details.

9. Click **Submit**.

Correction Versus Modify

Based on GS1 Standards and Global Data Synchronization Network (GDSN) standards, changes to some attributes require a new GTIN (information regarding the GS1 Standards is available at www.gs1.org/gtinrules). For these attributes, MDM generates a **Correct** message. For changes to all other attributes, MDM generates a **Modify** message.

MDM sends Item correction for the following 1WorldSync attributes:

- Alternate Item Classification Code
- Alternate Item Classification Scheme
- Brand Name
- Brand Owner GLN
- Canceled Date
- Depth (if change > 20%)
- Depth UOM
- Discontinued Date
- EANUCC Code
- EANUCC Type
- Global Item Classification Code
- Gross Weight (if change > 20%)
- Gross Weight UOM
- Height (if change > 20%)
- Height UOM
- Net Content
- Net Content UOM
- Net Weight
- Net Weight UOM
- Product Type
- Qty of Next Level Item(s)
- Volume (if change > 20%)
- Volume UOM
- Width (if change > 20%)

- Width UOM

Supported 1WorldSync Responses

MDM supports the following 1WorldSync responses:

- Catalogue Response
 - ITEM MAINTENANCE CATALOGUE RESPONSE
 - ITEM LINK CATALOGUE RESPONSE
 - ITEM PUBLICATION CATALOGUE RESPONSE
 - MESSAGE EXCEPTION RESPONSE
 - 1SYNC GDSN ITEM REGISTRY RESPONSE
- Item Synchronization Response
- Item Authorization Response
- 1SYNC Catalogue Item Notification (1SYNC CIN)
- 1SYNC Catalogue Item Notification Response (1SYNC CINR)
- 1SYNC Catalogue Item Confirmation (1SYNC CIC)
- 1SYNC Catalogue Item Confirmation Response (1SYNC CICR)
- 1SYNC Request For Catalogue Item Notification (1SYNC RFCIN)
- 1SYNC Request For Catalogue Item Notification Response (1SYNC RFCINR)

Changing Message Choreography

Follow these steps for MDM to work with specific datapools:

Update Rulebase to support New Message Type

For MDM to support a new message type, the first step is to update the `rbformatattributes_gdsn.xml` rulebase file so the new synchronization format is detected in the synchronization profile UI.

1. Update the `$MQ_COMMON_DIR/standard/rulebase/rbformatattributes_gdsn.xml` file.

Update Map file to support New Message Type

The next step is to update the map file to support the new message type.

1. Update the datapool specific map file from the `$MQ_COMMON_DIR/standard/maps` folder.

For more details on datapool specific map files for different message types, refer to [GDSN-Specific Maps, page 199](#).

Update Sync Operation Identifier Rulebase

Next, update the datapool specific sync operation identifier rulebase to identify datapool specific sync operations.

1. Update the appropriate file in: `$MQ_COMMON_DIR/standard/rulebase`.
 - For 1WorldSync, the rulebase name is `rbtransorasupplier.xml`

Status Derivation

When a datapool receives a message from the MDM supplier or retailer applications, a response is sent to the appropriate application. Based on the response, MDM updates the status of the record. For example, if an "Item add" message is sent, the record is internally updated based on the response received from the datapool.

To update the status derivation, do the following:

1. To add or to update an operation from the UI on the supplier or retailer applications, change the constraints from the following file

```
$MQ_COMMON_DIR/standard/rulebase/rbsyncstatusupdatederation.xml.
```

2. To update from the UI, change the constraints in the

```
$MQ_COMMON_DIR/standard/rulebase/rbsyncstatusupdatederation.xml
```

 update `statusderivation.xml` file.
3. To update record status derivation on receiving a response from the datapool, change the constraints in the

```
$MQ_COMMON_DIR/standard/rulebase/statusderivation.xml
```

 file.

Message Handler Selection

To change the message handler selection, properties similar to the following should be updated in `$MQ_HOME/config/gdsn.config`

```
com.tibco.cim.connector.plugin.mapping.handlemessaging.supplier.*1
sync*=com.tibco.cim.init.connector.plugin.handlemessaging.supplier
.1Sync
```

```
com.tibco.cim.init.connector.plugin.handlemessaging.supplier.1Sync
.class=com.tibco.mdm.gdsn.integration.connector.TransoraMessagingH
andler
```

Configurable Components

Record Validation on UI

To enable record validation through the UI, depending on your datapool, copy the appropriate rulebase from the standard rulebase folder to your enterprise specific repository location:

File to copy

For 1WorldSync: `_1sync_mastercatalog_catalogvalidation.xml`

Copy from

`$MQ_HOME/plugins/gdsn/<version>/common/standard/rulebase`

Copy to

`$MQ_COMMON_DIR/<ENTERPRISE_INTERNALNAME>/catalog/master/<REPOSITORYID>`

Rename it to

`catalogvalidation.xml.`

Synchronization Profile Validation

Out-of-the-box catalog synchronization is provided through datapool specific rulebase files which declare validation rules.

File to copy

For 1WorldSync: `_1Sync_catalogvalidation.xml`

Copy from

`$MQ_HOME/plugins/gdsn/<version>/common/standard/rulebase`

Copy to

`$MQ_COMMON_DIR/standard/rulebase`

Rulebase for Protocol Selection

This rulebase decides the protocol to be used by the messaging handler for outgoing messages or the response handler for incoming messages.

`$MQ_COMMON_DIR/standard/rulebase/rbconnectorprotocolderivation_gdsn.xml`

Chapter 7

GDSN Impact on Workflows and Rulebase

This chapter describes the GDSN impact on workflows and rulebase in TIBCO MDM.

Topics

- [GDSN Impact on Rulebase, page 118](#)
- [GDSN Impact on Workflows, page 119](#)

GDSN Impact on Rulebase

Modifying Business Process Rules

In the Rule List screen, click the repository name to modify the rule. Use this screen to modify the existing conditions, actions, and defaults used in workflow processing. If a backend system is part of the rule template, only Datapools associated with that backend system are displayed.

SyncOperationAttribute

This function is used to find the operation date. The function gets the latest sync date for the given Operation (only ADD is supported) from a Datapool or Trading Partner.

Syntax

```
<var>OPERATION_DATE</var>
<op func="SyncOperationAttribute">
<const type="string">ADD</const>
<const type="string">1Sync</const>
<!--const type="string">Trading Partner Name</const-->
</op>
```

For this function, three parameters can be specified.

The second parameter is the marketplace or datapool name. This is optional; if not specified, the rulebase evaluates it.

The third parameter is the trading partner name and is optional. If not specified, it looks for all trading partners; if specified, it looks for the operation for the given trading partner.

GDSN Impact on Workflows

GDSN Specific Workflows

The following table lists the various GDSN processes along with supported Document Type, Document Sub Type, Repository, and so on.

Table 10 GDSN Processes

Document Type	Document Sub Type	Repository	Sync Profile	Default Sender	Default Receiver	Org Type	Software Edition	Doc Format	Process Definition Name	Default
Record Authorization Notification	Any	Any	Any	1Sync	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Record Authorization Notification	Any	Any	Any	1SyncTest	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Record Publication Notification	Any	Any	Any	1Sync	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Record Publication Request	Any	Any	Any	1Sync	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Record Publication Notification	Any	Any	Any	1SyncTest	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Record Publication Request	Any	Any	Any	1SyncTest	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Request for CIN Notification	Any	Any	Any	1SyncTest	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Request for CIN Notification	Any	Any	Any	1Sync	Any	Any	Any	Any	wfout1sync62cic26v1.xml - 1sync CIC Process	No
Any	Any	Any	Any	Any	Any	Any	Any	cim2cim document	wfoutveloselcin26v2.xml - CIN Process for CIM2CIM	No

Table 10 GDSN Processes

Document Type	Document Sub Type	Repository	Sync Profile	Default Sender	Default Receiver	Org Type	Software Edition	Doc Format	Process Definition Name	Default
Request for CIN Notification	Any	Any	Any	Any	Any	Any	Any	Any	wfin26rfcinv2.xml - Receive RFCIN Process	No
RFCIN Notification	Any	Any	Any	Any	Any	Any	Any	Any	wfin26catactionRFCINV2.xml - RFCIN Retailer Process	No
Record Publication Notification	Publication Delivery Notification	Any	Any	Any	Any	Any	Any	Any	wfin26prodnotifv2.xml - Response Notification process	No
Record Publication Notification	Any	Any	Any	Any	Any	Any	Any	Any	wfin26prodnotifretailerv4.xml - Record Notification process	No
Record Content Notification	Datapool Response Notification	Any	Any	Any	Any	Any	Any	Any	wfin26prodnotifv2.xml - Response Notification process	No
Record Content Notification	Registry Response Notification	Any	Any	Any	Any	Any	Any	Any	wfin26prodnotifv2.xml - Response Notification process	No
Record Content Notification	Internal Error Notification	Any	Any	Any	Any	Any	Any	Any	wfin26prodnotifv2.xml - Response Notification process	No
Record Content Notification	Record Add Notification	Any	Any	Any	Any	Retailer	Any	Any	wfin26prodnotifretailerv4.xml - Record Notification process	No
Record Content Notification	Data Change	Any	Any	Any	Any	Retailer	Any	Any	wfin26prodnotifretailerv4.xml - Record Notification process	No

Table 10 GDSN Processes

Document Type	Document Sub Type	Repository	Sync Profile	Default Sender	Default Receiver	Org Type	Software Edition	Doc Format	Process Definition Name	Default
Record Content Notification	Delete	Any	Any	Any	Any	Retailer	Any	Any	wfin26prodn otifretailerv4 .xml - Record Notification process	No
Record Content Notification	Discontinue	Any	Any	Any	Any	Retailer	Any	Any	wfin26prodn otifretailerv4 .xml - Record Notification process	No
Record Content Notification	Cancel	Any	Any	Any	Any	Retailer	Any	Any	wfin26prodn otifretailerv4 .xml - Record Notification process	No
Record Content Notification	Data Correction	Any	Any	Any	Any	Retailer	Any	Any	wfin26prodn otifretailerv4 .xml - Record Notification process	No
Record Content Notification	Record Add Notification	Any	Any	Any	Any	Any	Any	Any	wfin26prodn otifprocessv 2.xml - Record data notification Process	No
Record Content Notification	Data Change	Any	Any	Any	Any	Any	Any	Any	wfin26prodn otifprocessv 2.xml - Record data notification Process	No
Record Content Notification	Data Correction	Any	Any	Any	Any	Any	Any	Any	wfin26prodn otifprocessv 2.xml - Record data notification Process	No
Record Content Notification	Delete	Any	Any	Any	Any	Any	Any	Any	wfin26prodn otifprocessv 2.xml - Record data notification Process	No

Table 10 GDSN Processes

Document Type	Document Sub Type	Repository	Sync Profile	Default Sender	Default Receiver	Org Type	Software Edition	Doc Format	Process Definition Name	Default
Record Content Notification	Cancel	Any	Any	Any	Any	Any	Any	Any	wfin26prodn otifprocessv 2.xml - Record data notification Process	No
Record Content Notification	Discontinue	Any	Any	Any	Any	Any	Any	Any	wfin26prodn otifprocessv 2.xml - Record data notification Process	No
Record Authorization Notification	Any	Any	Any	Any	Any	Any	Any	Any	wfin26prodn otifbasicv3.x ml - Incoming Message processing Process	No
Purge Historical Data	Any	Any	Any	Any	Any	Any	Any	Any	wfin26purge v3.xml - Purge process	No
Any	Any	Any	Any	Any	Any	Any	Any	Any	wfoutagetri cs50cin26v2. xml - Agentrics CIN Process	No
Any	Any	Any	Any	1SyncTest	Any	Retailer	Any	1Sync docume nt	wfout1sync6 5cin26v1.xml - 1Sync CIN process	No
Any	Any	Any	Any	1Sync	Any	Retailer	Any	1Sync docume nt	wfout1sync6 5cin26v1.xml - 1Sync CIN process	No
Any	Any	Any	Any	1SyncTest	Any	Any	Any	Any	wfout1sync6 2cic26v1.xml - 1sync CIC Process	No
Any	Any	Any	Any	1Sync	Any	Any	Any	Any	wfout1sync6 2cic26v1.xml - 1sync CIC Process	No

Chapter 8

Setting up CIM to CIM

This chapter provides information on connecting two MDM applications. It describes the full setup for testing the CIM to CIM Synchronization capability.

Topics

- [Overview, page 124](#)
- [Step 1 - Queue Configuration, page 126](#)
- [Step 2 - Enterprise Creation and Data Prepopulation, page 129](#)
- [Step 3 - Database Changes, page 136](#)
- [Step 4 - Company Profile and GLN Creation, page 138](#)
- [Step 5 - Trading Partner Profile Creation, page 141](#)
- [Step 6 - Rulebase Changes, page 143](#)
- [Step 7- Datasource and Input Map creation for BrandOwner, page 145](#)
- [Step 8 \(Optional\) - Processing Reverse Relationships, page 148](#)
- [Step 9 - Testing your CIM to CIM Setup, page 151](#)
- [Troubleshooting CIM to CIM, page 152](#)

Overview

This document guides an Administrator through all the steps required to connect and synchronize two MDM environments.

Need for Synchronization

TIBCO MDM supports organizations to communicate with trading partners through datapools. For example, a supplier can do business with a trading partner through a datapool like 1WorldSync.

However, an organization may sometimes want to communicate privately with its trading partners without a third party datapool. Also, companies in different locations may need to internally synchronize data in their systems, involving datapools.

In such cases, organizations can deploy instances of CIM per location and synchronize as required. To do this, TIBCO provides an out-of-the-box functionality to connect and sync two or more CIM instances. Instances from different entities can communicate with each other directly, without involving a third party datapool.

Types of Synchronization

Synchronization can occur between any of the two types:

- Two or more enterprises on a single TIBCO MDM instance
- Two different TIBCO MDM instances

How it Works

This chapter walks you through a process in which four different enterprises are created on a single CIM instance.

- **BrandOwner**, **VeloselMarketPlace**, **Bottler1**, and **Bottler2** are four enterprises created.
- **BrandOwner** is the main enterprise of type Supplier. The BrandOwner subscribes to the **VeloselMarketplace** enterprise (to which it synchronizes all updates). It has **Bottler1** and **Bottler2** as trading partners.
- **VeloselMarketplace** is an enterprise of type Marketplace. Consider this as the central location to which data is synchronized and from where updates

are received (by the subscribed suppliers). It has **BrandOwner**, **Bottler1** and **Bottler2** as trading partners.

- **Bottler1** and **Bottler2** are enterprises of type Supplier. They are both subscribed to the **VeloselMarketplace** enterprise (to receive BrandOwner's updates) and have **BrandOwner** as a trading partner.

In the above scenario, whenever **Brandowner** has information to synchronize, for example a record, it is synchronized to **VeloselMarketplace**, from where **Bottler1** and **Bottler2** receive the update (record) because of their subscription.



You can synchronize by creating a special enterprise of type 'Marketplace' with the name as **VeloselMarketplace**. The name of the enterprise has to be **VeloselMarketplace** for the application to work as provided out-of-the-box.

Steps to Sync CIM Instances

The following steps are involved in synchronizing two CIM instances. Each step is explained in detail in the following sections.

1. [Step 1 - Queue Configuration](#)
Make the required queue configuration changes.
2. [Step 2 - Enterprise Creation and Data Prepopulation](#)
Run the required database scripts.
3. [Step 2 - Enterprise Creation and Data Prepopulation, page 129](#)
Run the application server. Create three or more enterprises. Populate the enterprises with data by running XML packs.
4. [Step 4 - Company Profile and GLN Creation](#)
Create company profiles and GLN credentials for each enterprise.
5. [Step 5 - Trading Partner Profile Creation](#)
Define trading partners for each enterprise and input GLNs.
6. [Step 6 - Rulebase Changes](#)
Make the required rulebase changes.
7. [Step 7- Datasource and Input Map creation for BrandOwner](#)
Create Datasource and InputMap for BrandOwner enterprise.
8. [Step 8 \(Optional\) - Processing Reverse Relationships, page 148](#)
Only required if you need reverse relationships processed.
9. [Step 9 - Testing your CIM to CIM Setup](#)
Test your setup.

Step 1 - Queue Configuration



If you are in the process of synchronizing 1WorldSync datapool, do not follow the steps listed here for queue setup; instead use the out-of-the-box queue configuration.

Queue Setup for CIM to CIM Integration Messages

For communication between two enterprises, you need gateways to transport messages across two firewalls and from the `Q_ECM_INTGR_STD_OUTBOUND_INTGR_MSG` queue of the sender instance to `Q_ECM_INTGR_STD_INBOUND_INTGR_MSG` queue of the receiver instance. These gateways cannot be used for testing, but a simple trick can be used to simulate it.

Because the messaging framework helps in mapping the logical and physical queue names and supports connectivity to multiple JMS servers from the same instance, you can use the `Q_ECM_INTGR_STD_INBOUND_INTGR_MSG` physical queue hosted on one of the JMS servers (the one connected to VeloselMarketplace) and map it to:

- the `StandardOutboundIntgrMsg` logical queue used to send outbound integration messages from the `BrandOwner` instance.
- the `StandardInboundIntgrMsg` logical queue used to receive inbound integration messages in the `VeloselMarketplace` instance.

Changes to ConfigValues.xml for TIBCO EMS

The following changes need to be done in `ConfigValues.xml`. To connect to two different queue managers, `BrandOwner` will need two different clusters.

If `BrandOwner` uses TIBCO EMS, add the following lines to `ConfigValues.xml` after the TIBCO Messaging Cluster section.

Change 1

Search for `<Category name="TIBCO EMS" visibility="Advanced">`.
Add the following lines:

```
<!-- V2V ENTRIES -->
<ConfValue description="com.tibco.cim.queue.cluster.TIBCOcluster2 - added for v2v" name="com.tibco.cim.queue.cluster.TIBCOcluster2"
propname="com.tibco.cim.queue.cluster.TIBCOcluster2" readonly="false"
sinceVersion="7.1" visibility="Basic">
  <ConfString default="inherit:com.tibco.cim.queue.cluster.DefCluster"
value="inherit:com.tibco.cim.queue.cluster.DefCluster"/>
```

```

</ConfValue>
<ConfValue
description="com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.class
- added for v2v"
name="com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.class"
propname="com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.class"
readonly="false" sinceVersion="7.1" visibility="Basic">
  <ConfString default =
    "com.tibco.mdm.integration.messaging.queue.tibco.TIBCOClusterLiaison"
    value =
    "com.tibco.mdm.integration.messaging.queue.tibco.TIBCOClusterLiaison"/>
</ConfValue>
<ConfValue description = "com.tibco.cim.queue.cluster.TIBCOCluster2.defUser -
added for v2v" name = "com.tibco.cim.queue.cluster.TIBCOCluster2.defUser"
propname = "com.tibco.cim.queue.cluster.TIBCOCluster2.defUser" readonly =
"false" sinceVersion = "7.1" visibility = "Basic">
  <ConfString default = "admin" value = "admin"/>
</ConfValue>
<ConfValue description =
"com.tibco.cim.queue.cluster.TIBCOCluster2.defPassword - added for v2v" name
= "com.tibco.cim.queue.cluster.TIBCOCluster2.defPassword" propname =
"com.tibco.cim.queue.cluster.TIBCOCluster2.defPassword" readonly = "false"
sinceVersion = "7.1" visibility = "Basic">
  <ConfString default = "" value = ""/>
</ConfValue>
<ConfValue description =
"com.tibco.cim.queue.cluster.TIBCOCluster2.defClientID - added for v2v" name
= "com.tibco.cim.queue.cluster.TIBCOCluster2.defClientID" propname =
"com.tibco.cim.queue.cluster.TIBCOCluster2.defClientID" readonly = "false"
sinceVersion = "7.1" visibility = "Basic">
  <ConfString default = "null" value = "null"/>
</ConfValue>
<ConfValue description =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServers"
name =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServers"
propname =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServers"
readonly = "false" sinceVersion = "7.1" visibility = "Basic">
  <ConfString default = "LocalhostServer" value = "LocalhostServer"/>
</ConfValue>
<ConfValue description =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServer.Lo
calhostServer" name =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServer.Lo
calhostServer" propname =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServer.Lo
calhostServer" readonly = "false" sinceVersion = "7.1" visibility = "Basic">
  <ConfString default = "tcp://localhost:7222" value =
"tcp://localhost:7222"/>
</ConfValue>
<ConfValue description =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServer.en
coding.LocalhostServer - added for v2v" name =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServer.en
coding.LocalhostServer" propname =
"com.tibco.cim.queue.cluster.TIBCOCluster2.clusterLiaison.clusteredServer.en
coding.LocalhostServer" readonly = "false" sinceVersion = "7.1" visibility =
"Basic">
  <ConfString default = "UTF-8" value = "UTF-8"/>
</ConfValue>

```

```

<ConfValue description =
"com.tibco.cim.queue.queue.StandardOutboundIntgrMsg.cluster - added for v2v"
name = "com.tibco.cim.queue.queue.StandardOutboundIntgrMsg.cluster" propname
= "com.tibco.cim.queue.queue.StandardOutboundIntgrMsg.cluster" readonly =
"false" sinceVersion = "7.1" visibility = "Basic">
  <ConfString default = "TIBCOCluster2" value = "TIBCOCluster2"/>
</ConfValue>
<ConfValue description =
"com.tibco.cim.queue.queue.StandardOutboundIntgrMsg.addToJNDI - added for
v2v" name = "com.tibco.cim.queue.queue.StandardOutboundIntgrMsg.addToJNDI"
propname = "com.tibco.cim.queue.queue.StandardOutboundIntgrMsg.addToJNDI"
readonly = "false" sinceVersion = "7.1" visibility = "Basic">
  <ConfBool default = "false" value = "false"/>
</ConfValue>
<ConfValue description =
"com.tibco.cim.queue.queue.StandardInboundIntgrMsg.cluster - added for v2v"
name = "com.tibco.cim.queue.queue.StandardInboundIntgrMsg.cluster" propname =
"com.tibco.cim.queue.queue.StandardInboundIntgrMsg.cluster" readonly =
"false" sinceVersion = "7.1" visibility = "Basic">
  <ConfString default = "TIBCOCluster2" value = "TIBCOCluster2"/>
</ConfValue>

```

Change 2

Search for **<Category name="StandardOutboundIntgrMsg" visibility="Advanced">**. Add the following lines:

```

<!-- V2V ENTRIES -->
<ConfValue description = "" isHotDeployable = "false" name = "EMS Queue Name"
propname =
"com.tibco.cim.queue.queue.StandardOutboundIntgrMsg.cluster.TIBCOCluster2.qu
eue" sinceVersion = "7.0" visibility = "Advanced">
  <ConfString default = "Q_ECM_INTGR_STD_OUTBOUND_INTGR_MSG" value =
"Q_ECM_INTGR_STD_OUTBOUND_INTGR_MSG"/>
</ConfValue>

```

Change 3

Search for **<Category name="StandardInboundIntgrMsg" visibility="Advanced">**. Add the following lines:

```

<!-- V2V ENTRIES -->
<ConfValue description="" isHotDeployable="false" name="EMS Queue Name"
propname="com.tibco.cim.queue.queue.StandardInboundIntgrMsg.clust er.TIBCO
cluster2.queue" sinceVersion="7.0" visibility="Advanced">
  <ConfString default="Q_ECM_INTGR_STD_ OUTBOUND _INTGR_MSG"
value="Q_ECM_INTGR_STD_ OUTBOUND_INTGR_MSG"/>
</ConfValue>

```

Step 2 - Enterprise Creation and Data Prepopulation



Ensure that the Application Server is running.

Create four or more enterprises:

Enterprise	Type
BrandOwner See BrandOwner Enterprise Creation, page 129 .	Supplier
VeloselMarketplace See VeloselMarketplace Enterprise Creation, page 130 .	Marketplace
Bottler1 See Bottler1 Enterprise Creation, page 131 .	Supplier
Bottler2 See Bottler2 Enterprise Creation, page 132 .	Supplier

BrandOwner Enterprise Creation

Set up the BrandOwner enterprise as follows:

1. Create a **BrandOwner** Enterprise of type **Supplier** with Internal Name as **bowner**.

Attribute	Value
Enterprise	BrandOwner
Enterprise Type	Supplier
Internal Name	bowner

2. Create a user **admin** with first name **admin** and last name **admin**. Assign the **Work Supervisor** and **Admin** roles to this user.


Attribute	Value
User Name	admin
First/Middle/Last	admin//admin

Attribute	Value
Roles	Work Supervisor/Admin

Import XML Pack for BrandOwner Enterprise

Import an XML pack to prepopulate the enterprise with some data.

- 1. Log in to the **BrandOwner** enterprise.
- 2. Select **System Operations > Import Meta Data**.

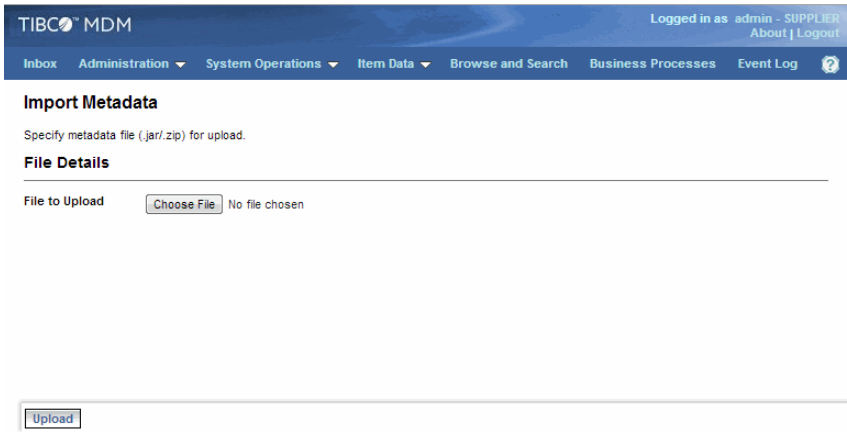

- 3. Provide the path to the following xml file:
\$MQ_COMMON_DIR/common/standard/samples/cim2cimmetadata/Brandowner/BrandOwner-MetaData.jar.

To see what data is generated by importing this XML pack, see [Data generated through XML Pack Import, page 133](#).

VeloselMarketplace Enterprise Creation



This is just for subscription purposes. The real Velosel Marketplace Enterprise resides on Instance 2.

- 1. Create an Enterprise **VeloselMarketplace** of type **Marketplace** with Internal Name as **Veloselm**.

Attribute	Value
Enterprise	VeloselMarketplace

Attribute	Value
Enterprise Type	Marketplace
Internal Name	Veloselm

2. Create a user **admin** with first name **admin** and last name **user**. Assign the **Work Supervisor** and **Admin** roles to this user.

Attribute	Value
User Name	admin
First/Middle/Last	admin//admin
Roles	Work Supervisor/Admin

Import XML Pack for VeloselMarketplace Enterprise

Import an XML pack to prepopulate the enterprise with some data.

1. Log in to the **VeloselMarketplace** enterprise.
2. Select **System Operations > Import Meta Data**.
3. Provide the path to the following xml file:
`$MQ_COMMON_DIR/standard/samples/cim2cimmetadata/VeloselMarketplace/VeloselMarketplace-MetaData.jar`

To see what data is generated by importing this XML pack, see [Data generated through XML Pack Import, page 133](#).

Bottler1 Enterprise Creation

1. Create an Enterprise **Bottler1** of type **Supplier** with Internal Name as **Bottler1**.

Attribute	Value
Enterprise	Bottler1
Enterprise Type	Supplier
Internal Name	Bottler1

- 2. Create a user **admin** with first name **admin** and last name **user**. Assign the Work Supervisor and **Admin** roles to this user.

Attribute	Value
User Name	admin
First/Middle/Last	admin/ /admin
Roles	Work Supervisor/ Admin

Import XML Pack for Bottler1 Enterprise

Import an XML pack to prepopulate the enterprise with some data.

- 1. Log in to the **Bottler1** enterprise.
- 2. Select **System Operations > Import Meta Data**.
- 3. Provide the path to the following xml file:
\$MQ_COMMON_DIR/standard/samples/cim2cimmetadata/Bottler1/Bottler1-MetaData.jar.

To see what data is generated by importing this XML pack, see [Data generated through XML Pack Import, page 133](#).

Bottler2 Enterprise Creation

- 1. Create an Enterprise **Bottler2** of type **Supplier** with Internal Name as **Bottler2**

Attribute	Value
Enterprise	Bottler2
Enterprise Name	Supplier
Internal Name	Bottler2

- 2. Create a user **admin** with first name **admin** and last name **user**. Assign the **Work Supervisor** and **Admin** roles to this user.

Attribute	Value
User Name	admin
First/Middle/Last	admin/ /admin

Attribute	Value
Roles	Work Supervisor/Admin

Import XML Pack for Bottler2 Enterprise

Import an XML pack to prepopulate the enterprise with some data.

1. Log in to the **Bottler2** enterprise.
2. Select **System Operations > Import Meta Data**.
3. Provide the path to the following xml file:
\$MQ_COMMON_DIR/standard/samples/cim2cimmetadata/Bottler2/Bottler2-MetaData.jar

To see what data is generated by importing this XML pack, see [Data generated through XML Pack Import, page 133](#).

Data generated through XML Pack Import

By importing the various XML packs, the respective enterprises are populated with the following:

Repository

A Repository MC_V2VITEMMASTER

Repositories

Delete	Copy	Manage Input Maps	Get Record Count	Create Named Version	Export Records	S
Repository Name	ID					
MC_V2VITEMMASTER	35031					

Attributes

Some custom attributes in repository MC_V2VITEMMASTER

VeloselExt

	Position	Name	Display Name	Column Name	Type	Length	Display in Record List
**	4	AttrStr	AttrStr	CATTRSTR	String	256	No
**	5	AttrInt	AttrInt	CATTRINT	Integer	0	No
**	6	AttrDec	AttrDec	CATTRDEC	Decimal	0	No
**	7	AttrDate	AttrDate	CATTRDATE	Date	0	No
**	8	AttrAmt	AttrAmt	CATTRAMT	Amount	0	No

Output Maps

An output map OM_V2VOUTPUT based on the EANUCCExt Output format created in repository MC_V2VITEMMASTER

View Repository

Repository

MC_V2VITEMMASTER

Last Modified

03/12/2010 16:32:48

Repository

MC_V2VItemMaster

Table Name

Last Modified By

MCT_35031
admin,admin

Attributes

Relationships

Output Maps

Classification Schemes

Modify

Delete

Copy

Show Usage

Output Map Name	Description	Output Format
☐ OM_V2VOUTPUT	EANUCCExt output map	EANUCCEXT

Synchronization Format

EANUCCEXT synchronization format with some custom attributes

TIBCO MDM

Inbox

Administration

System Operations

Item Data

Browse and Search

Synchronization Formats

Delete

Copy

Show Usage

Synchronization Format Name	Description	Pre-defined	Fixed Length
☐ EANUCCEXT	EAN.UCCExt Catalog Format	No	No
☐ 1SYNC	1SYNC Catalog Format	Yes	No
☐ EAN.UCC	EAN.UCC Catalog Format	Yes	No
☐ EAN.UCC.SUBSCRIPTION	Subscription Catalog Format	Yes	No

Business Process Rules

The following Business Process rules are created:

- **Brandowner** enterprise
 - Custom Protocol Selection
 - Rulebase Selection
- **VeloselMarketplace** enterprise
 - Custom Protocol Selection
 - Rulebase Selection
 - Repository Selection for Received Records

- **Bottler1** and **Bottler2** enterprises
 - Custom Protocol Selection
 - Repository Selection for Received Records

Step 3 - Database Changes

Run the following scripts from the database:

The OrgID of your organization and replace it in the SQL below where it displays <Org ID Here>.

Bottler Subscription Rulebase

```
insert into ConfigurationDefinition (ID, TYPE, OWNERID, GLOBAL, NAME,
SELECTOR, DESCRIPTION, DEFINITIONTYPE, DEFINITION, ACTIVE, MODMEMBERID,
MODDATE, MODVERSION)
VALUES (Mq_Sequence_1.nextval, 'Rulebase', <Brandowner's Org ID Here>, 'N',
'Bottler Subscription', 'SUBSCRIPTION', 'Select Subscription.', 'File',
'bottler/rulebase/rbsynchtradingpartner.xml', 'Y', 1, SYSDATE, 1);
COMMIT;
```

BrandOwner Translation Map

```
insert into ConfigurationDefinition
(ID, TYPE, OWNERID, GLOBAL, NAME, SELECTOR, DESCRIPTION, DEFINITIONTYPE,
DEFINITION,
ACTIVE, MODMEMBERID, MODDATE, MODVERSION)
VALUES (Mq_Sequence_1.nextval, 'XSLT', <Brandowner's Org ID Here>, 'N',
'Custom Map', 'CONNECTOR',
'Message Translation.', 'File',
'standard/maps/mpfromcatact26toveloselcinv1.xsl', 'Y', 1, SYSDATE, 1);
COMMIT;
```

VeloselMarketplace Translation Map

```
insert into ConfigurationDefinition
(ID, TYPE, OWNERID, GLOBAL, NAME, SELECTOR, DESCRIPTION, DEFINITIONTYPE,
DEFINITION,
ACTIVE, MODMEMBERID, MODDATE, MODVERSION)
VALUES (Mq_Sequence_1.nextval, 'XSLT', <VeloselMarketplace's Org ID Here>,
'N', 'Custom Map', 'CONNECTOR', 'Message Translation.', 'File',
'standard/maps/mpfromcatact26toveloselcinv1.xsl', 'Y', 1, SYSDATE, 1);
COMMIT;
```

```
insert into ConfigurationDefinition
(ID, TYPE, OWNERID, GLOBAL, NAME, SELECTOR, DESCRIPTION, DEFINITIONTYPE,
DEFINITION,
ACTIVE, MODMEMBERID, MODDATE, MODVERSION)
VALUES (Mq_Sequence_1.nextval, 'XSLT', <VeloselMarketplace's Org ID Here>,
'N', 'Custom Map', 'CONNECTOR',
'Message Translation to create Response.', 'File',
'standard/maps/mpfromveloselcintoveloselcinv1.xsl', 'Y', 1, SYSDATE, 1);
COMMIT;
```

VeloselMarketplace Subscription Rulebase

Make the rulebase Global for simplicity:

```
insert into ConfigurationDefinition (ID, TYPE, OWNERID, GLOBAL, NAME,
SELECTOR, DESCRIPTION, DEFINITIONTYPE, DEFINITION, ACTIVE, MODMEMBERID,
MODDATE, MODVERSION) VALUES (mq_sequence_1. nextval, 'Rulebase',
<VeloselMarketplace's Org ID Here>, 'N', 'Bottler Subscription',
'SUBSCRIPTION', 'Select Subscription.', 'File',
'bottler/rulebase/rbsynchveloselmarketplace.xml', 'Y', 1, SYSDATE, 1)
COMMIT;
```

VeloselMarketplace Translation Maps (Instance 2)

- XSL Map for translating CIM CIN to mlXML:
mpfromveloseltomlxml26v1.xsl
- XSL Map for translating CIM CIN to CIM CIN Response:
mpfromveloselcintoveloselcinrv1.xsl



For simplicity, you can make all the above Subscription Rulebase and Translation Map files globally available as follows:

- Enter a value '1' instead of **<Brandowner's OR VeloselMarketplace's Org ID Here>** for column OWNERID
- Enter a value 'Y' instead of 'N' for column GLOBAL.

Step 4 - Company Profile and GLN Creation

Create GLN credentials for each enterprise. These credentials are used to uniquely identify the enterprise to communicate with.

BrandOwner Enterprise

- 1. Log in to the **BrandOwner** enterprise.
- 2. Subscribe to **VeloselMarketplace**.
 - a. Select **Administration >Datapool Profiles** and click **Subscribe** (in the Actions column) against **VeloselMarketplace**.
 - b. Click **Modify** against **VeloselMarketplace**, click **Modify** in the **Supported Synchronization Formats** section and select the **EANUCC** synchronization format. Click **Save**.
- 3. Create a Company Profile called **BrandOwner** and create a GLN for it.
 - a. Select **Administration >My Company Profile**.
 - b. Create a valid credential by clicking the **Create** link in the **Credential** section.
 - c. On the **Create Credential** screen, provide **Domain** as **GLN** and **ID** as **<GLN>**. Click **Save**.

Company

Name

BrandOwner

Contact Information

[Main Phone](#)

[General Info Email](#)

[Main FTP](#)

No 'Main Phone' assigned.

No 'General Info Email' assigned.

No 'Main FTP' assigned.

Datapool

VeloselMarketplace

[Credentials](#)

Credentials

Identity	Domain
0044444447786	GLN

VeloselMarketplace Enterprise

1. Log in to the **VeloselMarketplace** enterprise.
2. Subscribe to **VeloselMarketplace**.
 - a. Select **Administration > Datapool Profiles** and click **Subscribe** (in the Actions column) against **VeloselMarketplace**.
 - b. Click **Modify** against **VeloselMarketplace**, click **Modify** in the **Supported Synchronization Formats** section and select the **EANUCC** synchronization format. Click **Save**.
3. Create a Company Profile **VeloselMarketplace** and create a GLN for it.
 - a. Select **Administration > Company Profile**
 - b. Create a valid GLN by clicking the **Create** link in the **Credential** section.
 - c. On the **Create Credential** screen, provide **Domain** as **GLN** and **ID** as **<GLN>**. Click **Save**.

Bottler1 Enterprise

1. Log in to the **Bottler1** enterprise.
2. Subscribe to **VeloselMarketplace**
 - a. Select **Administration > Datapool Profiles** and click **Subscribe** (in the Actions column) against **VeloselMarketplace**.
 - b. Click **Modify** against **VeloselMarketplace**, click **Modify** in the **Supported Synchronization Formats** section and select the **EANUCC** synchronization format. Click **Save**.
3. Create a Company Profile called **Bottler1** and create a GLN for it.
 - a. Select **Administration > Company Profile**.
 - b. Create a valid GLN by clicking the **Create** link in the **Credential** section.
 - c. On the **Create Credential** screen, provide **Domain** as **GLN** and **ID** as **<GLN>**. Click **Save**.

Bottler2 Enterprise

1. Log in to the **Bottler2** enterprise.

2. Subscribe to **VeloselMarketplace**
 - a. Select **Administration > Datapool Profiles** and click **Subscribe** (in the Actions column) against **VeloselMarketplace**.
 - b. Click **Modify** against **VeloselMarketplace**, click **Modify** in the **Supported Synchronization Formats** section and select the **EANUCC** synchronization format. Click **Save**.
3. Create a Company Profile called **Bottler2** and create a GLN for it.
 - a. Select **Administration > Company Profile**.
 - b. Create a valid GLN by clicking the **Create** link in the **Credential** section.
 - c. On the **Create Credential** screen, provide **Domain** as **GLN** and **ID** as **<GLN>**. Click **Save**.

Step 5 - Trading Partner Profile Creation

Define trading partners for each enterprise and provide the GLN credentials of those trading partners.



The GLN credentials provided here for trading partners should be the same ones defined in [Step 4 - Company Profile and GLN Creation, page 138](#) for each enterprise.

BrandOwner Enterprise

1. Log in to the BrandOwner enterprise and define **Bottler1** and **Bottler2** as trading partners.
2. Create a Trading Partner Profile: **Bottler1**.
 - a. Select **Administration > Trading Partner Profiles**.
 - b. Create a Trading Partner with name as **Bottler1**; select **VeloselMarketplace** under the **Datapool** section; select the **EANUCCEXT** Synchronization format. Click **Save**.
 - c. Once the **Bottler1** Trading Partner Profile is created, click **Bottler1** in the Trading Partner Profiles List.
 - d. Click **Extended Credentials** against **VeloselMarketplace** in the **Datapool Participation** section.
 - e. Click **Create** to create a Credential for **Bottler1**.
 - f. Select Domain as **GLN**, and provide the <GLN> as the **Identity**. Click **Save**. The GLN you provide here should be the one defined in [Bottler1 Enterprise, page 139](#).
3. Follow the same steps to create a Trading Partner Profile: **Bottler2** and provide extended credentials listing the GLN.

VeloselMarketplace Enterprise

1. Log in to the **VeloselMarketplace** enterprise and define **BrandOwner**, **Bottler1** and **Bottler2** as trading partners.

- 2. Create a Trading Partner Profile: **BrandOwner**.
 - a. Select **Administration > Trading Partner Profiles**.
 - b. Create a Trading Partner with the name **BrandOwner**; From the **Datapool** section, select **VeloselMarketplace**. Now select the **EANUCCEXT** Synchronization format. Click **Save**.
 - c. After you create the **BrandOwner** Trading Partner Profile, click **BrandOwner** in the Trading Partner Profiles List.
 - d. Click **Extended Credentials** against **VeloselMarketplace** in the **Datapool Participation** section.
 - e. Click **Create** to create a Credential for **BrandOwner**.
 - f. Select Domain as **GLN**, and provide the <GLN> as the **Identity**. Click **Save**. The GLD you provide here should be the one defined in [Bottler1 Enterprise, page 139](#).

Create Credential

Company Name

Domain

Identity

Bottler1

GLN

0044444447793

Save

Cancel

- 3. Follow the same steps to define **Bottler1** and **Bottler2** as trading partners and provide extended credentials listing their respective GLN IDs.

Bottler1 and Bottler2

Log in to the **Bottler1** and **Bottler2** enterprises respectively and define **BrandOwner** as a trading partner for each. Provide extended credentials listing the **BrandOwner** GLN.

Step 6 - Rulebase Changes

You need to make some changes to the `rbsynchtradingpartner.xml` rulebase file through which marketplaces and trading partners are specified.

Changes to `rbsynchtradingpartners.xml` Rulebase File

1. In `$MQ_COMMON_DIR/bottler/rulebase`, open the `rbsynchtradingpartner.xml` rulebase file.
2. Make the following changes in this file for variable declaration.

Declare Variables for Enterprises

1. Search for the following section:
`<!-- Convenience variables to hold GLN number to use.-->`
2. Provide the following as the first four variable declarations:
`BO_GLN, VM_GLN, TP1GLN, TP2GLN.`
3. Your code should read as follows:

```
<declare usage="local">
  <var>BO_GLN</var>
</declare>
<declare usage="local">
  <var>VM_GLN</var>
</declare>
<declare usage="local">
  <var>TP1GLN</var>
</declare>
<declare usage="local">
  <var>TP2GLN</var>
</declare>
```

Assign Credential Variables and Values

1. Search for the following section:
`<name>AssignCredentials</name>`
2. Provide the appropriate GLN variables (`BO_GLN, VM_GLN, TP1GLN, TP2GLN`) and the GLNs. Ensure that the GLNs match what you have defined in the UI.
3. Your code should read as follows:

```
<action>
  <assign>
    <var>BO_GLN</var>
    <const type="string">0044444447786</const>
  </assign>
```

```

<assign>
  <var>VM_GLN</var>
  <const type="string">0044444447779</const>
</assign>
<assign>
  <var>TP1GLN</var>
  <const type="string">0044444447793</const>
</assign>
<assign>
  <var>TP2GLN</var>
  <const type="string">0044444447700</const>
</assign>
</action>

```

Define Marketplaces for each Product

1. Search for:


```
<description>Marketplaces for Each Products</description>
```
2. Search for the following variable:


```
<var>SenderArray</var>
```
3. Assign the following variables to SenderArray:


```
<var>BO_GLN</var>
<var>BO_GLN</var>
```
4. Search for the following variable:


```
<var>ChannelArray</var>
```
5. Assign the following variables to ChannelArray:


```
<var>VM_GLN</var>
<var>VM_GLN</var>
```
6. Search for the following variable:


```
<var>TradingPartnerArray</var>
```
7. Assign the following variables to TradingPartnerArray:


```
<var>TP1GLN</var>
<var>TP2GLN</var>
```



Two variables are added to the Sender Array and Channel Array sections respectively, for two trading partners. You need as many variables in these sections as trading partners.

Step 7- Datasource and Input Map creation for BrandOwner

Create a datasource and input map for the BrandOwner enterprise.


Datasource Creation

1. Log in to the **BrandOwner** enterprise.
2. Select **Item Data > Data Sources**
 - a. Create Datasource DS_V2VItems.
 - b. Provide some data as input to the datasource.

Inputmap Creation

1. Create an input map between the DS_V2VItems datasource and the MC_V2VItemMaster repository.

- 2. Select **Item Data > Repositories**
 - a. Select the check box against the **MC_V2VITEMMASTER** repository and click the **Manage Input Maps** button.

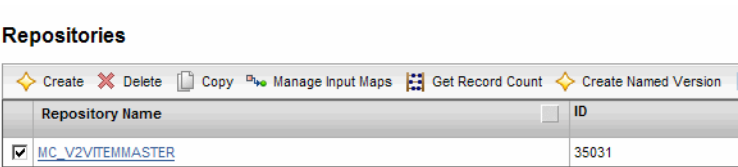

- b. Click **Create** to create a new input map.
 - c. On the **Create Input Map** screen:
 - d. Provide an Input Map **Name** and Input Map **Description**. Select **Split/Approval Required**.
 - e. Select **DS_V2VItems** check box and click **Next**.
 - f. Map the required attributes. The following are required:
 - Record ID
 - Record ID Extension
 - Related Records
 - SupplierID
 - GTIN
 - Brand_Owner_ID
 - Content_Owner_ID
 - Name_Of_Brand_Owner
 - Name_of_Datapool
 - Name_Of_Info_Provider
 - Source_Data_Pool_ID

– Target_Market_ID

▼ Unassigned

* Checking the box will not merge empty data fields

Name	Type	Data Source Attribute	Expression
Record ID	String	☐	@FRESH.ID
Record ID Extension	String	☐	@FRESH.EXT
Related Records	String	☐	@FRESH.CONTAINS

g. Click **Save**.

Step 8 (Optional) - Processing Reverse Relationships

By default, the workflows are set up to process forward relationships (for example: A contains B, B contains C, C contains D).

In case you have reverse relationship hierarchies (for example, A contained by B, B contained by C, and so on), you need to make some changes to process reverse relationships so that data is propagated correctly from BrandOwner to Marketplace and Bottlers.

Change to the wfin26cim2cimsyncV1.xml Workflow



This is the workflow for CIM to CIM synchronization.

1. Open the
\$MQ_COMMON_DIR/standard/workflow/wfin26cim2cimsyncV1.xml file.
2. Search for the following section:

```
<!-- Sample transition to flip the root of bundles -->
<!-- Transition FromActivity="HandleRecordCollectionForFlipDecision"
ToActivity="ManageRecordCollectionForFlip">
  <Description>If the Rulebase Selection Business Process Rule is
set, only then transition to ApplySynchRuleBase and Spawn Publish
Workflow</Description>
  <Rule>
    <Parameter name="Rulebase" type="string" eval="rule"
source="Rulebase Selection"
direction="in">inDoc</Parameter>
    <Parameter name="result" type="boolean" direction="out"/>
    <Condition format="bsh"><![CDATA[
      result = (Rulebase != null && !Rulebase.equals(""));
    ]]></Condition>
  </Rule>
</Transition>
<Transition FromActivity="ManageRecordCollectionForFlip"
ToActivity="ApplySynchRuleBase"/
-->
```

3. Uncomment this section (commented out by default) to process reverse relationships.

Change to the wfin26catsourceimportv2.xml Workflow



This is the workflow for import/load and import events.

1. Open the
\$MQ_COMMON_DIR/standard/workflow/wfin26catsourceimportv2.xml file.
2. Search for:
`<Activity Name="ManageRecordCollection">`
3. Search for the RelationshipName parameter:
`<Parameter direction="in" name="RelationshipName" type="string"
eval="constant">Contains</Parameter>`
4. Change this from **Contains** to **ContainedBy** to process reverse relationships.

Change to the wfin26catsourcev5.xml Workflow



This is the workflow for datasource loads and import of records.

1. Open the \$MQ_COMMON_DIR/standard/workflow/wfin26catsourcev5.xml file.
2. Search for:
`<Activity Name="ManageRecordCollection">`
3. Search for the RelationshipName parameter:
`<Parameter direction="in" name="RelationshipName" type="string"
eval="constant">Contains</Parameter>`
4. Change this from **Contains** to **ContainedBy** to process reverse relationships.

Change to the wfin26prodnotifprocessv2.xml Workflow



This workflow is used to process the incoming record messages and to save data.

1. Open the
\$MQ_COMMON_DIR/standard/workflow/wfin26prodnotifprocessv2.xml file.

2. Search for the following activities:

- <Activity Name="GetProductInfo">
- <Activity Name="GetProductInfo2">

3. Add the following parameter:

```
<Parameter direction="in" name="RelationshipName" type="string"
eval="constant">Contains</Parameter>.
```

Step 9 - Testing your CIM to CIM Setup

After completing all the outlined steps, you can test your CIM to CIM setup by doing the following:

1. Log in to the **BrandOwner** enterprise and add a record.
2. This record is synchronized to **VeloselMarketPlace** and to **Bottler1** and **Bottler2**.
3. You can login to **VeloselMarketPlace**, **Bottler1**, and **Bottler2** to verify the synchronization.

Troubleshooting CIM to CIM

Issue

In a CIM to CIM setup, when attempting to import over 100 records, you may get a "No data to read from socket" error. DB Error code: 17410.

Solution

This problem may be seen if you are on an Oracle 11 version lower than 11.1.0.7 (for example, 11.1.0.6). Try updating to 11.1.0.7.

Chapter 9 **Supplier and Retailer Setups**

This chapter describes Supplier and Retailer side setups in TIBCO MDM.

Topics

- [Supplier Setup, page 154](#)
- [Retailer Setup, page 158](#)

Supplier Setup

Create the Supplier Enterprise

Follow these steps to define your supplier enterprise.

1. Log in to the **tibcocim** enterprise with superuser credentials.
2. Select **Administration > All Company Profiles**.
 - a. Click **Create** and create a new Profile with Type as **Supplier**.
 - b. Create a user for the enterprise with **Administrator** and **Work Supervisor** Roles.
3. Log out of the enterprise.

Define the Supplier Enterprise

Follow these steps to define credentials, to subscribe to the datapool, to define the Synchronization Format, and to set up trading partners. 1Sync is used as an example here.

1. Log in to the newly created enterprise with the created user credentials.
2. Select **Administration > My Company Profile**.
 - a. Click the **Create** link in the **Credentials** section.
 - b. Create a Credential with Domain as **GLN** and provide your <**Supplier GLN**> as the Identity.
3. Select **Administration > Datapool Profiles**.
 - a. Subscribe to **1Sync** by clicking the **Subscribe** link in the **Actions** column.
 - b. Click **Modify** in the Actions column.
 - c. Click **Modify** again under **Supported Synchronization Formats**.
 - d. Select **1Sync** from the list of Synchronization Formats. Click **Save**.

4. Select **Administration > Trading Partner Profiles**.
 - a. Click **Create** to create a new Trading Partner.
 - b. Provide details to create the Trading Partner and select **1Sync** as the **Default Synchronization Format**. Click **Save**.
 - c. In newly created Trading Partner Profiles, click on **Modify**.
 - d. Select **1Sync** as the Datapool. Click **Save**.
 - e. Click the newly created trading partner in the trading partner list.
 - f. Click the **Extended Credentials** link against the 1Sync in the **Datapool Participation** section.
 - g. Click **Create** to create a credential.
 - h. Select Domain as **GLN** and provide the GLN of the trading partner as the Identity.
 - i. Click **Save**.
5. Select **Administration > My Company Profiles**.
 - a. Click the **Credentials** link against 1Sync in the **Datapool Participation** section.
 - b. Click **Create** to create a credential.
 - c. Select Domain as **GLN**. The Supplier GLN is populated in the **Identity** drop-down list.
 - d. Specify the **Batch User ID**, **User ID**, and **Password** for the Supplier GLN.
 - e. Click **Save**.



TIBCO MDM supports more than one GLN in an enterprise. You can create more than one GLN in an enterprise.

Define Repository for Outgoing Messages

Create or define the repository that messages will go out from.

1. Deploy repository model from TIBCO MDM Studio containing the **1Sync** output map and **UDEX** and **GPC** classification schemes. For more information on creating repositories, refer *TIBCO MDM Repository User's Guide*.
2. (Optional step) Perform this step to use MDM's out-of-the-box catalog validation file which has some predefined validations in sync with datapool validations.

On `$MQ_COMMON_DIR/standard/rulebase` , do the following:

- a. Copy the `_1sync_mastercatalog_catalogvalidation.xml` rulebase file to the `$MQ_COMMON_DIR/<enterprise>/catalog/master/<repositoryID>` folder.
- b. Rename the file `catalogvalidation.xml`.

Select Repository for Incoming Messages

Select the repository to which messages from the retailer side should be directed.

1. Log in with the Supplier credentials.
2. Create a Business Process Rule to select the repository for the Add Notification event. To create a Business Process Rule, follow these steps:
 - a. Click **Business Processes**, then click the **Repository Selection** rule.
 - b. Click the **Default** business process template and click **Create**.
 - c. Select **Conditions** > **the trading partner name is**, and then select your trading partner (specify the trading partner name only if you want messages from different trading partners to be added to partner specific repositories).
 - d. Select **Conditions** > **The UDEX Code is**, and then select your defined UDEX code or select **Any**.
 - e. Select **Actions** > **The repository to add the record to**, and then select your repository.
 - f. Select **Actions** > **Treat new CINs as 'data change' messages**, and then select **Yes, consider it as changes**.
 - g. Click **Save**.

Retailer Setup

Create the Retailer Enterprise

Follow these steps to define your retailer enterprise:

1. Log in to the **tibcocim** enterprise with superuser credentials.
2. Select **Administration > All Company Profiles**.
 - a. Click **Create** and create a new Profile with Type as **Retailer**.
 - b. Create a user for that enterprise with **Administrator** and **Work Supervisor** Roles.
3. Log out of the enterprise.

Define the Retailer Enterprise

The Retailer side setup is similar to the Supplier setup. See [Supplier Setup, page 154](#).

The only difference is the GLN definition. For example:

Case 1

If the Supplier and Retailer is TIBCO CIM, then on the Retailer side, follow these steps:

- When defining the GLN in the Company Profile, provide the Trading Partner GLN of the Supplier.
- When defining the Trading partner GLN, provide the Supplier GLN defined in the Company Profile.

Case 2

If the Supplier is not TIBCO CIM, then on the Retailer side, follow these steps:

- Define the GLN of the Retailer in the Company Profile.
- Define the Supplier GLN in the Trading Partner's GLN.



TIBCO MDM supports more than one GLN in an enterprise. You can create more than one GLN in an enterprise.

Select Repository for Incoming Messages

Select the repository to which messages from the supplier side should be directed.

1. Log in with the Retailer credentials.
2. Create a Business Process Rule to select the repository for the Add Notification event. To create a Business Process Rule, follow these steps:
 - a. Click **Business Processes**, then click the **Repository Selection** rule.
 - b. Click the **Default** business process template and click **Create**.
 - c. Select **Conditions > the trading partner name is**, and then select your trading partner (specify the trading partner name only if you want messages from different trading partners to be added to partner specific repositories).
 - d. Select **Conditions > The UDEX Code is**, and then select your defined UDEX code or select **Any**.
 - e. Select **Actions > The repository to add the record to**, and then select your repository.
 - f. Select **Actions > Treat new CINs as 'data change' messages**, and then select **Yes, consider it as changes**.
 - g. Click **Save**.

Select Approvers for Received Records

Set up a rule for approvers of received records. To set up a rule, follow these steps:

1. Click **Business Processes**, then click the **Approvers for Received Records** rule.
2. Click the **Default** Business Process Template. Click **Create** to create a new rule.
3. Under **Conditions > the trading partner name is**, and then select the defined trading partner.
4. Select **Actions > Set the participant user to**, and then provide the user information.
5. Select **Actions > Set the next work item state to**, and then define the next state of the workitem. For example, you can set the workitem state to **Final Step**.
6. Click **Save**.

Select Editors for Received Records

Set up a rule for editors of received records.

1. Click **Business Processes**, then click the **Editors for Received Records** rule.
2. Click the **Default** Business Process Template. Click **Create** to create a new rule.
3. Select **Conditions** > **the trading partner name is**, and then select the defined trading partner.
4. Select **Actions** > **Set the participant user to**, and then provide the user information.
5. Select **Actions** > **Set the next work item state to**, and then define the next state of the workitem. For example, you can set the workitem state to **Final Step/Done**.
6. Click **Save**.

Detect New Backend Systems

Set up a rule to define the user or role to notify when a new backend system is detected. To set up such a rule, follow these steps:

1. Click **Business Processes**, then click **Unknown Trading Partner Alert**.
2. Click the **Default** Business Process Template. Click **Create** to create a new rule.
3. Select **Actions** > **Set the participant user to**, and then provide the user information.
4. Click **Save**.

Chapter 10 **Setting up GPC Classification Scheme Data Load**

This chapter describes the procedure for setting up the data load for the Global Product Classification scheme.

Topics

- [Configuring GPC Classification Scheme Loading, page 162](#)
- [Configuring Support for GPC Code, page 164](#)

Configuring GPC Classification Scheme Loading

The GPC data source is provided as the out-of-the-box set up in the TIBCO CIM enterprise. For uploading new GPC codes into CIM, follow these steps:

1. Add the following dataset to the `filewatcher.xml` catalog.

```
<DataSet type="single">
  <!--
  There should be no MasterCatalog Element when importing a Standard
  Classification Scheme such as GPC, UDEX.
  -->
  <Name>DataSetS2</Name>
  <Credential domain="ZZ">
    <!-- This is a pre-defined credential-->
    <Identity>GLOBAL</Identity>
  </Credential>
  <Action>ImportClassificationScheme</Action>
  <URIInfo scheme="local">
    <Relative>MQ_COMMON_DIR</Relative>
    <!-- This directory is created outOfBox -->
    <URI>velosel/GPC</URI>
  </URIInfo>
  <Incremental>Yes</Incremental>
  <DataSource>
    <RevisionID>
      <!-- This a pre-defined data source in Velosel enterprise -->
      <BaseName>GPC</BaseName>
    </RevisionID>
  </DataSource>
  <ClassificationScheme>
    <RevisionID>
      <!-- This a pre-defined classification scheme -->
      <BaseName>GPC</BaseName>
    </RevisionID>
  </ClassificationScheme>
</DataSet>
```

2. Ensure that the following subdirectories exist under the `$MQ_COMMON_DIR/velosel/GPC/` directory.
 - incoming
 - rejected
 - done
3. Place the data file (`.csv`) in the `$MQ_COMMON_DIR/velosel/GPC/incoming` directory. The `.csv` file is used to upload when the FileWatcher polling interval time is over. All the rows from the `.csv` file are uploaded into the

GPC data source. If the upload is successful, the .csv file is copied into the done directory.

Configuring Support for GPC Code

Adding GPC Dropdowns for Editing Records in a Repository

For dependent drop-downs, add the following section to your catalog validation rulebase:

```
<declare>
<var>GPC_classification</var>
<link type="datasource">
<literal>GPC</literal>
</link>
</declare>
<constraint>
<name>GPC CODE</name>
<description>GPC CODE dropdown</description>
<usefor>
<var>GPC_SEGMENT_CODE</var>
</usefor>
<action>
<select novalue="option">
<table source="classification">
<literal>GPC_classification/SEGMENT_CODE</literal>
<literal>GPC_classification/SEGMENT_DESC</literal>
</table>
</select>
</action>
</constraint>
<constraint>
<name>FAMILY CODE</name>
<description>GPC Hierarchy Level 2 dropdown</description>
<usefor>
<var>GPC_FAMILY_CODE</var>
</usefor>
<condition>
<defined>
<var>GPC_SEGMENT_CODE</var>
</defined>
</condition>
<action>
<select novalue="default">
<table source="datasource">
<literal>GPC</literal>
<literal>FAMILY_CODE</literal>
<literal>FAMILY_DESC</literal>
</table>
</select>
</action>
</constraint>
<constraint>
<name>CLASS CODE</name>
<description>GPC Hierarchy Level 3 dropdown</description>
<usefor>
<var>GPC_CLASS_CODE</var>
</usefor>
```

```

</usefor>
<condition>
<defined>
<var>GPC_FAMILY_CODE</var>
</defined>
</condition>
<action>
<select novalue="default">
<table source="datasource">
<literal>GPC</literal>
<literal>CLASS_CODE</literal>
<literal>CLASS_DESC</literal>
<where>
<sql>
<and>
<eq>
<literal>SEGMENT_CODE</literal>
<const type="string">?</const>
</eq>
<eq>
<literal>FAMILY_CODE</literal>
<const type="string">?</const>
</eq>
</and>
</sql>
<var>GPC_SEGMENT_CODE</var>
<var>GPC_FAMILY_CODE</var>
</where>
</table>
</select>
</action>
</constraint>
<constraint>
<name>BRICK CODE</name>
<description>GPC Hierarchy Level 4</description>
<usefor>
<var>ADDITIONAL_CLASS_CAT_CODE</var>
</usefor>
<condition>
<defined>
<var>GPC_CLASS_CODE</var>
</defined>
</condition>
<action>
<select novalue="default">
<table source="datasource">
<literal>GPC</literal>
<literal>BRICK_CODE</literal>
<literal>BRICK_DESC</literal>
<where>
<sql>
<and>
<eq>
<literal>SEGMENT_CODE</literal>
<const type="string">?</const>
</eq>
<eq>
<literal>FAMILY_CODE</literal>
<const type="string">?</const>
</eq>
<eq>
<literal>CLASS_CODE</literal>
<const type="string">?</const>
</eq>
</and>
</sql>
<var>GPC_SEGMENT_CODE</var>
<var>GPC_FAMILY_CODE</var>
<var>GPC_CLASS_CODE</var>
</where>
</table>
</select>

```

```
</action>  
</constraint>
```

Chapter 11

Configure TIBCO BusinessConnect and TIBCO BusinessWorks

This chapter explains the process for configuring TIBCO BusinessConnect for sending documents to and receiving documents from different data pools.

This chapter contains the details for configuring only TIBCO BusinessConnect to work with the application. Refer to the appropriate documentation if you want to use any other AS2 Gateway.

TIBCO BusinessConnect 5.x supports JMS, however the TIBCO BusinessWorks plug-in for BusinessConnect 5.x is still required.

Topics

- [Configuring TIBCO BusinessConnect, page 168](#)
- [TIBCO Administrator Setup, page 169](#)
- [BusinessConnect Setup, page 170](#)
- [New BusinessConnect Configuration, page 171](#)
- [Business Works Setup, page 190](#)
- [Testing the MDM-BusinessWorks-BusinessConnect Connectivity, page 196](#)

Configuring TIBCO BusinessConnect

Prerequisites

- TIBCO BusinessConnect 5.3.0 must be installed on the system. Refer to *TIBCO Business Connect documentation* for details.
- A database must be installed. BusinessConnect 5.x supports Oracle, DB2, MySQL, and SQL Server.
- TRA 5.6.1, Business Works 5.7.2, TIBCO Administrator 5.4.0, TIBCO EMS 5.1.2 must be installed on the system.
- UserID and password to access the TIBCO BusinessConnect Admin console.
- Port 4080 or any other port on which TIBCO BusinessConnect is listening needs to be opened.

TIBCO Administrator Setup

1. Install TIBCO Administrator in console mode and read the installation guide.
2. For Linux/UNIX setup, create Domain using the domain utility
`TIBCO_TRA_HOME/bin/domainutility`.
 - Set defaults settings, give domain names as: `<<DOMAIN_NAME>>/`, choose UTF-8 for character set, default ports -> http port=9090, AJP 1.3 port =8009, shutdown port =8005, username=admin, password=admin
 - If UTF-8 does not work, change the characters to another character set
 - Change the owner to vsadmin and give all the rights to the **tibco** folder as -
`sudo chown -R vsadmin:vsadmin /home/tibco/`
`sudo chmod -R 777 /home/tibco`
3. On Windows, you can create a new domain using **Programs -> TIBCO -> TIBCO Runtime Agent & Adapter SDK 5.5 -> Domain Utility**.
4. After successfully configuring TIBCO Administrator, start TIBCO Administrator by executing the following on Linux/UNIX platform:
`<<TIBCO_HOME>>/administrator/domain/<<DOMAIN_NAME>>/bin/tibcoadmin_<<DOMAIN_NAME>>/&`
5. Start TIBCO Hawk Agent by executing the following on Linux/UNIX platform:
`<<TIBCO_HOME>>/tra/domain/<<DOMAIN_NAME>>/hawkagent_<<DOMAIN_NAME>>/&`
6. For Windows installations, start TIBCO Hawk Agent as an NT service.
7. On Windows, set up TIBCO Administrator as an NT service.
8. Access the Administrator URL as:
`http://<machinename>:9090/administrator/servlet/tibco_administrator`

BusinessConnect Setup

You can configure BusinessConnect by:

- Configuring BusinessConnect (new configuration)
- Importing an existing setup from another installation and customizing the imported BusinessConnect configuration

Prerequisites

1. **Database and Database user.**

A Database (which can be used by the BusinessConnect setup) should be configured.

2. **TIBCO EMS**

TIBCO EMS 5.1.2 should be installed and started as an NT service on Windows; on Linux it should be started on root.

3. **Install Unlimited Strength JCE Policy Files**

To use BusinessConnect security features, download and install Java™ Cryptography Extension (JCE) Unlimited Strength Jurisdiction Policy Files 1.5.0. To download and install the policy files, follow these steps:

- Download the required files from the following web sites:

Windows, Sun Solaris, HP-UX, Linux:

<http://java.sun.com/j2se/1.5.0/download.jsp>

IBM AIX:

<https://www14.software.ibm.com/webapp/iwm/web/preLogin.do?source=jcesdk>

- Unzip `jce_policy-1_5_0.zip`
- Copy `US_export_policy.jar` and `local_policy.jar` to:
`TIBCO_home\jre\1.5.0\lib\security`

4. **TIBCO Administrator and TIBCO Hawk**

TIBCO Administrator and TIBCO Hawk should be started.

New BusinessConnect Configuration


1. Start TIBCO Administrator
http://<machinename>:9090/administrator/servlet/tibco_administrator
Login as admin/admin.
2. Check if the BusinessConnect link appears in left side panel. If not, click **Application management -> All service instance -> machine name -> Plug-Ins -> Add ->** and browse to the bcwebadmin.war file of BusinessConnect.

The .war file can be found on:

<<TIBCO_HOME>>/bc/5.3/admin-plugins/ bcwebadmin.war

Adding the .war file takes some time.


3. In the left side panel, BusinessConnect is available. Click **BusinessConnect -> Manage Installation**.
4. Provide database details for installation and test connection for Oracle.
Sample database details:
JDBC Driver: tibcosoftwareinc.jdbc.oracle.OracleDriver
JDBC URL:
jdbc:tibcosoftwareinc:oracle://<oracleservername>:1521;SID=<<DATABASE_NAME>>

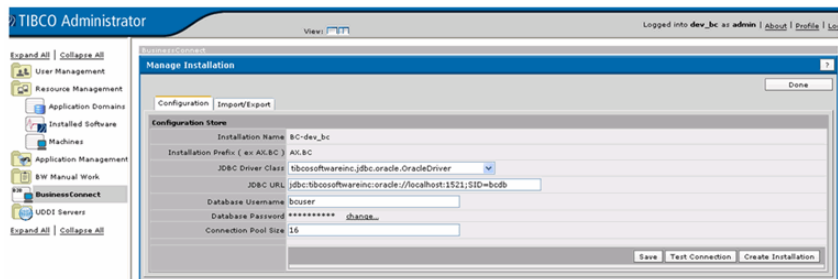


Create Participants

Participant of type Partner


- a. Click **BusinessConnect -> Participants**

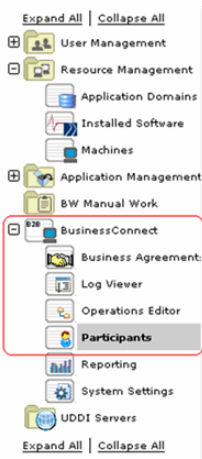

- b. Select type of participant as Partner and create and provide a name to the participant.



- c. Provide all relevant details, click the **Active** check box to activate the participant.

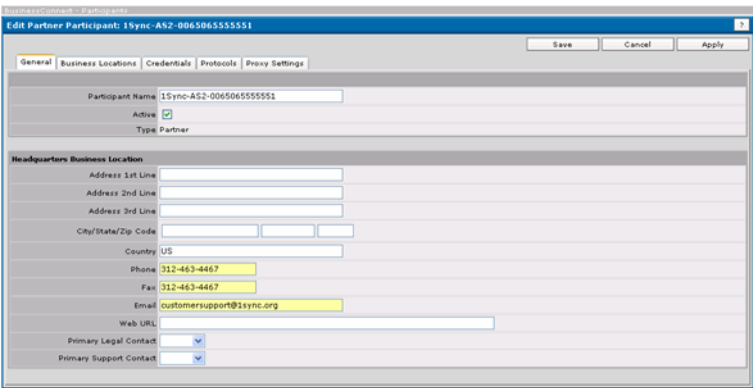

- d. Click the **Credentials** tab.
- e. Click the **New Certificate** tab. Provide the alias name and upload the certificate provided by the Trading partner (Data pool in case of MDM) followed by **Save**.

BusinessConnect - Participants
New Partner Participant: test_partner

New Certificate

Alias: test_certificate

Current Credential: no file [change](#)

[Save](#)

- f. Click the **Protocols -> Enable** tab.

BusinessConnect - Participants
New Partner Participant: test_partner

General Business Locations Credentials **Protocols** Proxy Settings

[Save](#) [Cancel](#)

Enabled Protocols

[Enable](#) [Disable](#)

Protocol Name

- g. Select the **EZComm** protocol check box and click **OK**.

BusinessConnect - Participants
New Partner Participant: test_partner

Enable

[OK](#) [Cancel](#)

☒ Protocol Name +

☒ EZComm

- h. Click the newly enabled protocol **EZcomm** as in the following screen.

BusinessConnect - Participants
New Partner Participant: test_partner


General Business Locations Credentials **Protocols** Proxy Settings

Enabled Protocols

[Enable](#) [Disable](#)

Protocol Name +
☒ EZComm


- i. Click the **Add New** link to create a new AS2 ID.

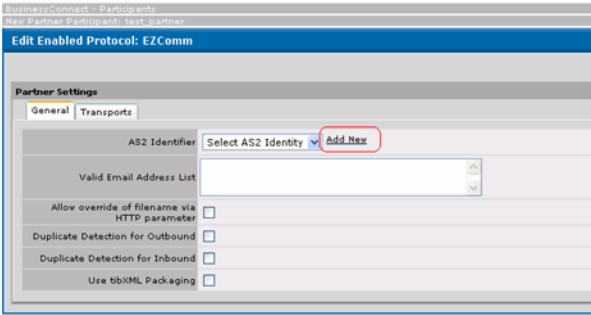


- j. Click the **Add New** tab to create a new AS2 ID.
- k. Create new AS2 ID.



- l. Select the newly created AS2 ID and click **OK**.

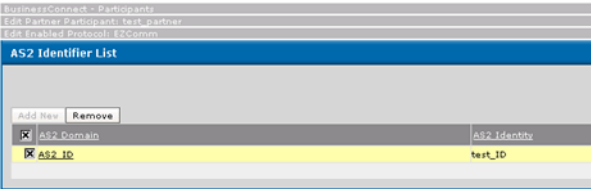

- m. Click **Transports** -> **Add** tab.

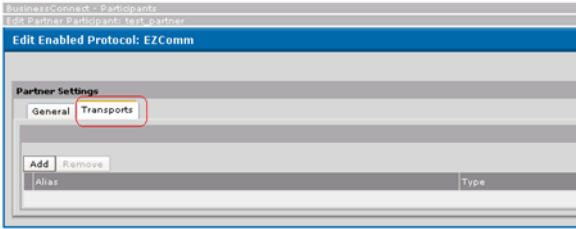

- n. Add details to Transport; select the Transport Type as AS2_HTTP, click **OK**.

BusinessConnect - Participants
 Edit Partner Participant: test_partner
 Edit Enabled Protocol: EZComm

New Transport

Transport Name: test_tp
 Transport Type: AS2_HTTP

- o. Provide details for the newly created Transport.

Transport Name: test_tp

URL: http://as2.preprod.1sync.org:4080/exchange/8380160030003

MIME Subject: VELOSEL-AS2-MIME-SUBJECT

Non-Repudiation of Receipt: ☒ checked

Sign: ☒ checked

Encrypt: ☒ checked

Compress: ☐

Compression Order: Before Signing

Request Receipt: Asynchronous

Return Receipt URL: http://10.97.97.130:4080/EZComm

Receipt Timeout (minutes): 30

Retry Count: 3

Retry Interval: 60

Socket Timeout (seconds): 300

Use HTTP Basic Authentication: ☐

Username:

Password:

- p. Change the URL as per the trading partner specification.

BusinessConnect - Participants

Edit Partner Participant: 1Sync-AS2-006506555551

Edit Enabled Protocol: EZComm

Edit AS2_HTTP Transport: 1SYNC_AS2

Save

Transport Name	1SYNC_AS2
URL	http://as2.preprod.1sync.org:4080/exchange/8380160030003
MIME Subject	VELOSEL-AS2-MIME-SUBJECT
Non-Repudiation of Receipt	☒
Sign	☒
Encrypt	☒
Compress	☐
Compression Order	Before Signing
Request Receipt	Async Signed
Return Receipt URL	http://220.225.79.3:4080/EZComm
Receipt Timeout (minutes)	30
Retry Count	3
Retry Interval	60
Socket Timeout (seconds)	300
Use HTTP Basic Authentication	☐
Username	
Password	set...

q. Keep the default proxy settings.

BusinessConnect - Participants

Edit Partner Participant: test_partner

Save

General Business Locations Credentials Protocol **Proxy Settings**

Proxy Alias	Proxy Type
-------------	------------

Connection Defaults

Use Proxies	☒
HTTP Proxy	Default
FTP Proxy	Default
SMTP Server	Default

r. Click **Save** to save the participant.

Participant of type Host

- Click **BusinessConnect -> Participant**.
- Select the type of participant as **Host** and create and provide a name to the participant.
- Click the **Active** check box to activate the participant.

- Click the **Credentials** tab -> **New Private Key**.

- Provide the alias of the key, upload the private key (public key of which has sent to Partner) and click **Save**.

- Click the **Protocols** tab and enable EZcomm protocol as enabled earlier to create Partner Participant.


- g. Create a new AS2 ID, clicking on the newly enabled protocol **EZcomm** -> **AS2 Identifier** -> **Add new** link. In AS2 Identity, provide GLN on data pool.

The screenshot shows a web-based form titled "BusinessConnect - Participants". Below the title are several links: "Edit Host Participant: Tibco-Dev-006506555551", "Edit Enabled Protocol: EZComm", and "AS2 Identifier List". The main form area has a blue header bar labeled "New". Below this, there are two input fields: "AS2 Domain" with a dropdown menu showing "AS2_ID" and a small downward arrow, and "AS2 Identity" with an empty text box. A "Save" button is located in the top right corner of the form area.

- h. Click **Save** to save the participant.

New Operations


- a. Click **Business Connect** -> **Operation Editor**.

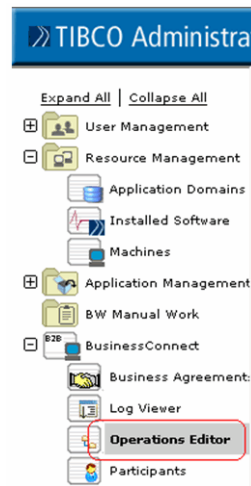


- b. Click the **Edit** button in the right pane for Protocol EZComm.




- c. Click the radio button for EZComm protocol and then click the **New Category** button.

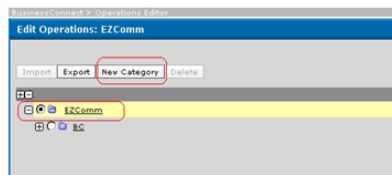


- d. Save the new category.



- e. Click the **new version** button to create a new version for the new category. Provide details and **Save** the version.




- f. Click the **New Operation** button to create a new operation for this version.

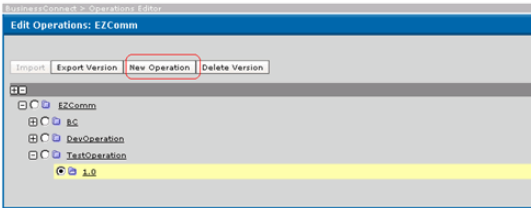

- g. Select the operation type as Asynchronous Request-Response and click **OK**.



- h. On the next screen, enter a name for the new operation.

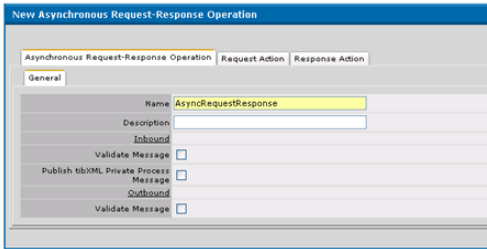


- i. Click the **Request Action** tab and select the **Require Digital Signature** and **Require Content Encryption** check boxes.

The screenshot shows the 'New Asynchronous Request-Response Operation' configuration window. The 'General' tab is selected, and the 'Name' field is set to 'request'. The 'Direction' is 'Initiator to Responder'. The 'Validation Schema Name' is 'no file'. The 'Require Digital Signature' and 'Require Content Encryption' checkboxes are both checked and highlighted with a red box. The 'Wait time for Response (seconds)' is set to 3600. The 'XML Document Validation' is set to 'XSD'. The 'Root XML Element Name' field is empty.


- j. Click the **Response Action** tab and select the check boxes as previously mentioned.
- k. Click the **Save** button to save the newly created operation.
- l. Create this operation once for all participants.

System Settings


- a. Click the **BusinessConnect -> System settings** menu in the left panel.

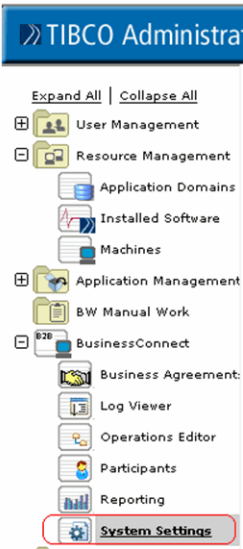

- b. Click **JDBC Configuration** in the right pane.

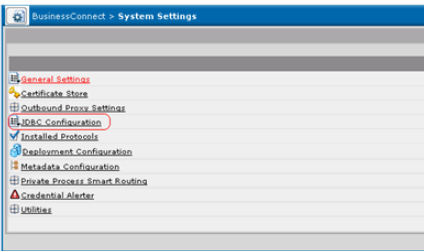

- c. Click **JDBC Configuration** to create new JDBC connection details for BusinessConnect.

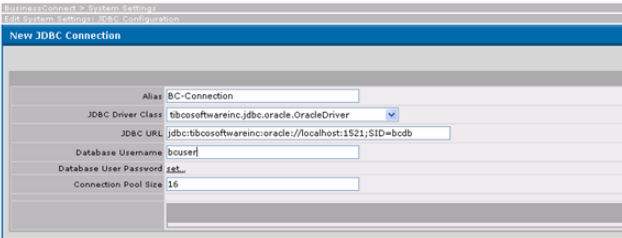

Sample database details are as follows:


JDBC Driver Class: `tibcosoftwareinc.jdbc.oracle.OracleDriver`

JDBC URL: `jdbc:tibcosoftwareinc:oracle://localhost:1521;SID=bcdb`

Database User: `bcuser`

Password: `bcuser`

- d. Click **Test Connection**, if the connection is successful, click **Save**.

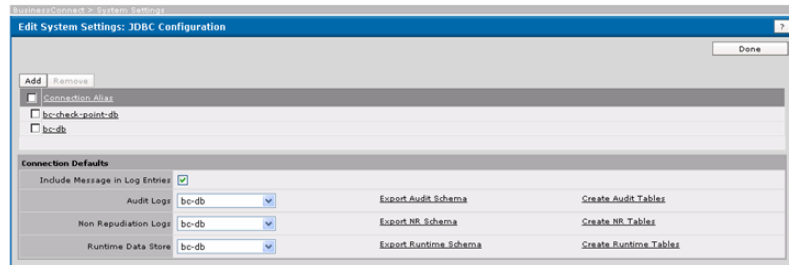


- e. Select the newly created BusinessConnect connection in Audit Logs, Non Repudiation Logs, Runtime Data Store, and click **Done**.

Business Agreement


- a. Click **BusinessConnect-> Business Agreement** in the left panel.
- b. Click the **New** tab to create a new agreement.




- c. Select the **Host party** and **Partner party** radio buttons for which you want to make an agreement as shown in the following screen and click **OK**.

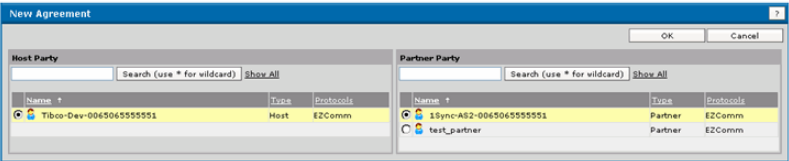


- d. Click the newly created Agreement.



- e. Click the **Valid** check box on the next screen and provide dates for start and end of the agreement.

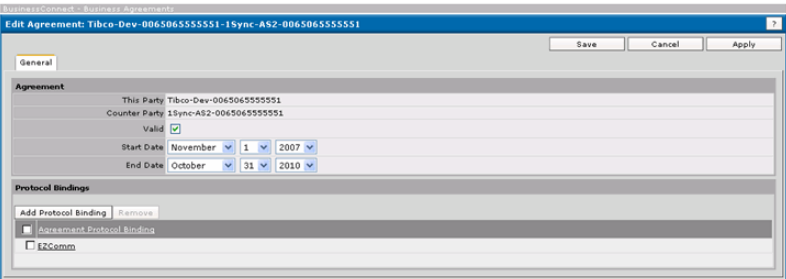

- f. Click the **Add Protocol Binding** tab, to add new protocol binding. Select EZComm from available protocols.
- g. Click the **EZComm** protocol link and provide details.
- h. Click the **Document Security** tab and select values.

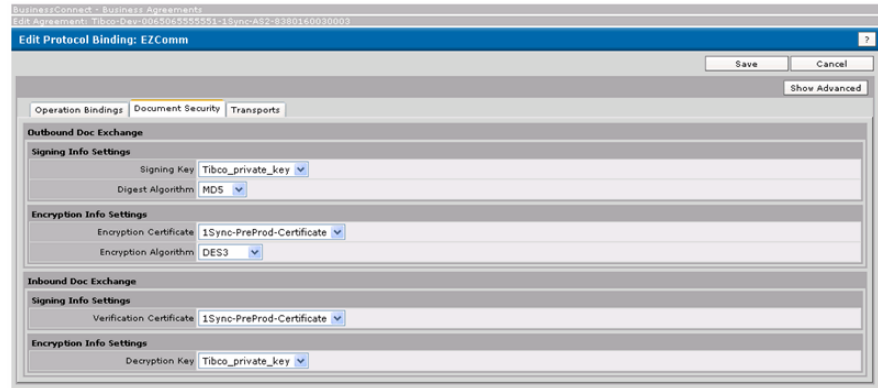

Here the values should be defined as follows:

Signing Key: Name of the TIBCO's private certificate.

Digest Algorithm: MD5


Encryption Certificate: Name of Trading Partner Certificate

Encryption Algorithm: Encryption algorithm used by Trading Partner

Verification Certificate: Name of Trading Partner Certificate

Decryption Key: Name of the TIBCO's private certificate

- i. Click the **Transports** tab and select values.

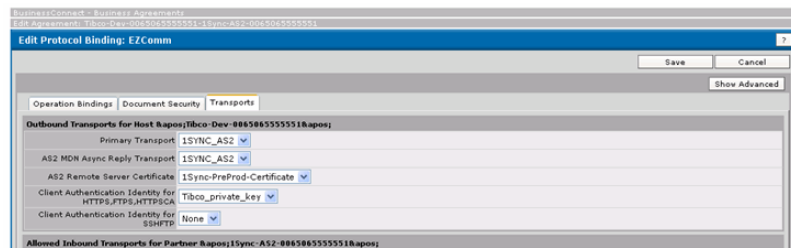


Deploy the BusinessConnect configuration (Single Server Mode)

- a. Deploy the configuration, click **Administrator -> Business Connect -> System Settings -> Deployment Configuration -> click Create deployment Configuration**. The Business Connect link in Application Management is displayed.
- b. Select a machine to deploy the Business Connect installation


Click **Application Management -> Business Connect -> Configuration ->**

Single Server.par. Select the machine name. If you do not see the machine name, it may be due to the hawk agent.


- c. Select **Application Management>BusinessConnect>Configuration>BusinessConnect>Configuration** and click **Save**.
- d. Click **Application Management -> BusinessConnect -> Configuration -> Business Connect ->HTTP**

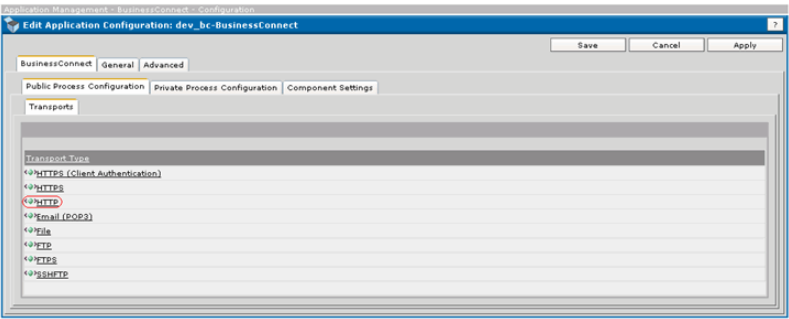


- e. Ensure the port is enabled and a proper value is provided.



- f. Click **Application Management -> BusinessConnect -> Configuration -> BusinessConnect**.

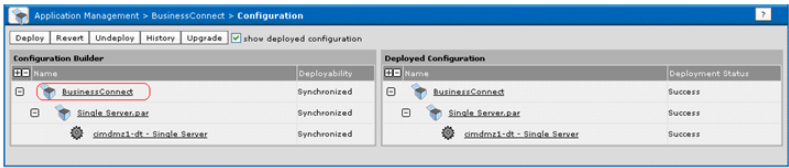

- g. Click the **Private Process Configuration** tab and select the **JMS** radio button.

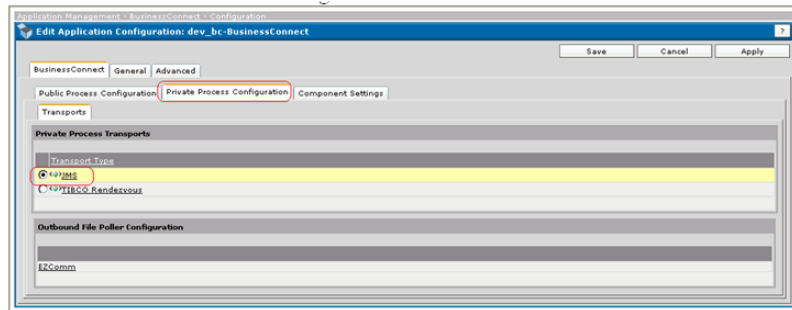

- h. Click the **JMS** link and provide the JMS details. After completing all the details click **Test connection** to test the JMS connection. Save the details, if the test connection is successful.


Sample details are as follows:

JNDI Context Factory:


`com.tibco.tibjms.naming.TibjmsInitialContextFactory`

JNDI Context URL: `tcp://localhost:7222`


Topic Connection Factory: TopicConnectionFactory
Queue Connection Factory: QueueConnectionFactory

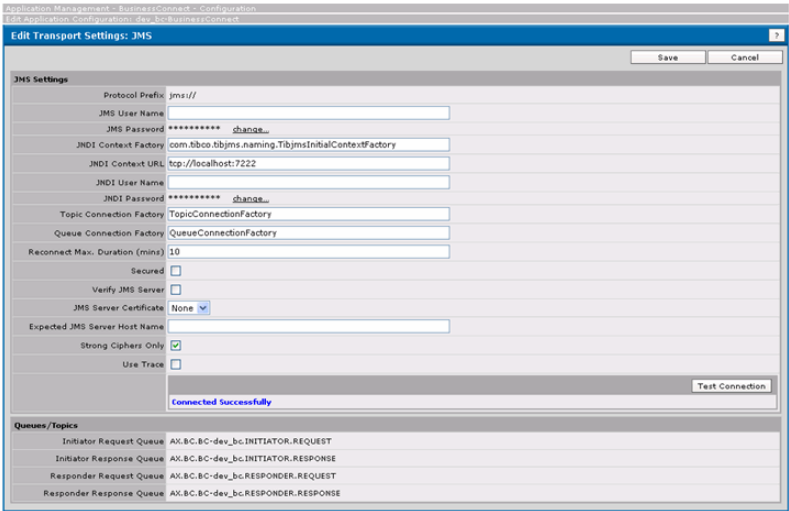


- i. Click **Application Management -> BusinessConnect -> Configuration -> Business Connect -> Deploy.**

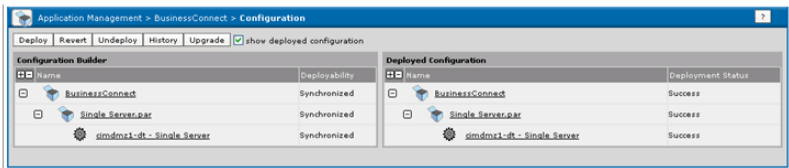

- j. Click the **Deploy** Tab. Ensure the **Start successfully deployed services** check box is selected.

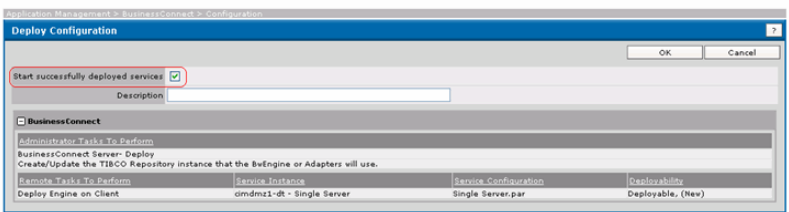

- k. Check the status of BusinessConnect availability. Click the **Application Management -> BusinessConnect -> Service Instance**. The BusinessConnect instance status displays as either stand by or running.



- l. If after the deployment, the BusinessConnect instance is not started, click **Application Management -> BusinessConnect -> Service Instance -> BusinessConnect Instance** check box and click **Start**.
- m. If all the actions are successful, the BusinessConnect instance should be in running state. If the BusinessConnect instance cannot be started successfully, check the TIBCO Administrator logs (`<<TIBCO_HOME>>administrator\domain\<<DOMAIN_NAME>>\logs\audit.txt`) to find the cause.


Business Works Setup

Prerequisites


1. Before you start a BW project, create a directory as follows:
`<<TIBCO_HOME>>\fsjndi\designerExtendedJars`
2. Add the following jars to this location:
 - fscontext.jar
 - jndi.jar
 - providerutil.jar
3. Edit the designer.tra file located in `<<TIBCO_HOME>>\designer\5.5\bin`.
4. Add the following entry to this file:
`tibco.class.path.extended`
`%CUSTOM_CP_EXT%%PSP%%STD_CP_EXT%:<<TIBCO_HOME>>/fsjndi/designerExtendedJars`

Setup


1. Start TIBCO Designer.
2. Click **New empty project**.

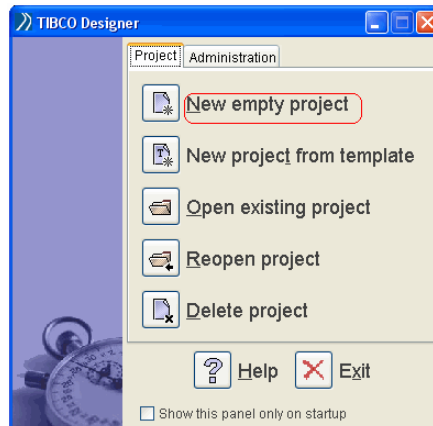

- Specify the project directory and encoding.

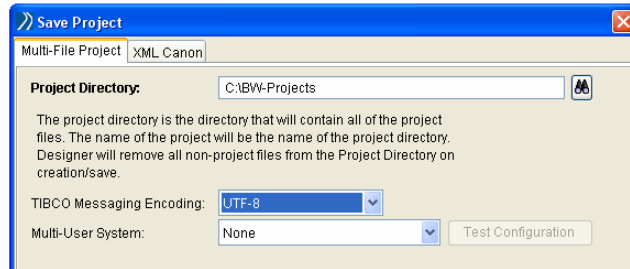

- Click **Project -> Import Full Project**.

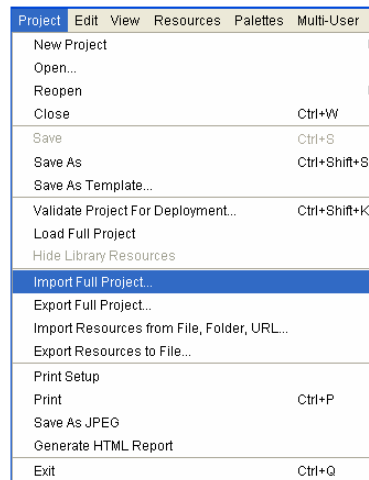


- Import `vcrepo.dat` from the existing BW project directory (directory of the same name as your existing BW configuration).
- Alternately, if you don't want to import the existing project, copy the existing BW project directory with another name. This is similar to importing the existing BW project.
- Edit the project as imported and copied above.

8. Change the following Global variables per the project requirement:

- `bindingFile`: Provide the directory location where you want to place your binding file for this project.
- `receiveFile`: Provide the directory location where you want the received messages to be saved.
- `hostName`: Provide the name of the participant which you configured in BC as Participant of type Host.
- `tpName`: Provide the name of the participant which you configured in BC as Participant of type Partner.


The Sample values are as follows:

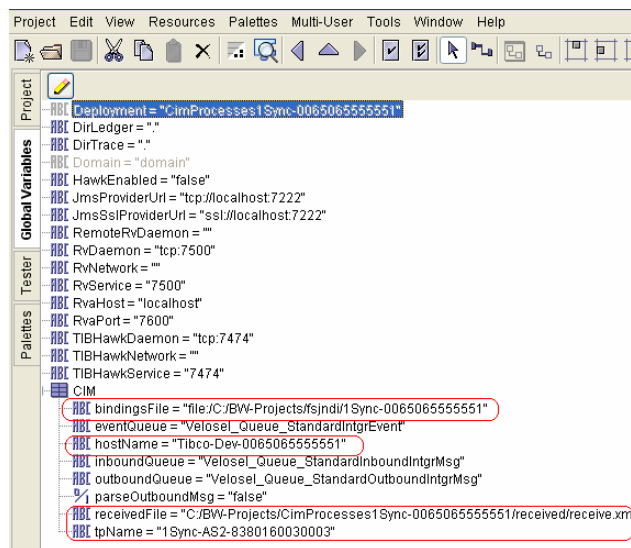


9. Click Project Tab -> Shared Connection.

10. If you already have a BusinessConnect connection configured, update the connection.

11. Click the 'Update from Configuration stores' button.

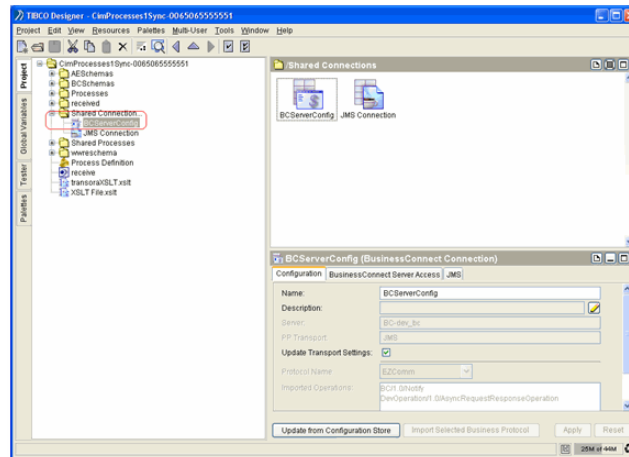


12. Select the **Select operations** check box; click **OK** on the next screen.

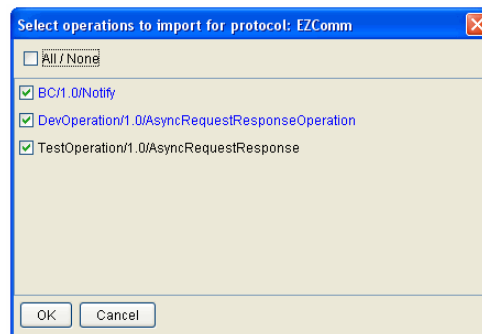

13. Click the **Import selected Business Protocol** button.

14. Click the **BusinessConnect Server Access** tab.

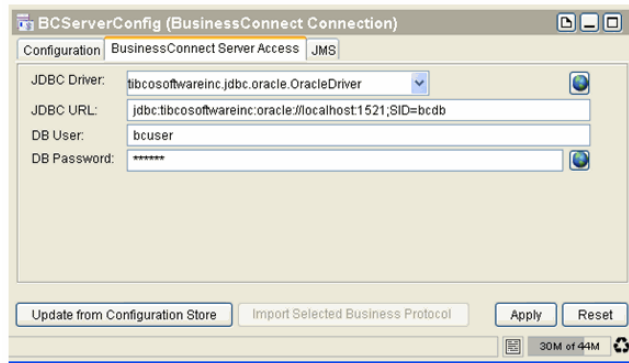


15. Click **Update from Configuration Store** followed by the **Import Selected Business Protocol** button.


16. Click the **JMS** tab of the previous screen.

17. Click **Update from Configuration Store** followed by the **Import Selected Business Protocol** button.

18. If you have created a new BusinessConnect connection, ensure the property 'Server Details' of all the activities point to a valid BC connection. A sample activity 'Send Request to TP' of process 'Send to TP Process' is as follows:

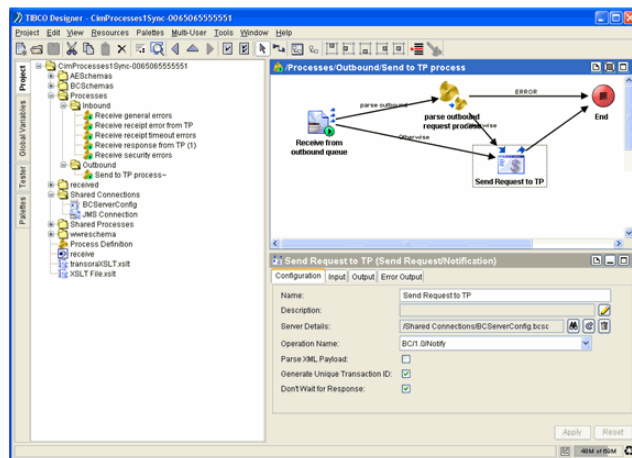


19. Start the test engine by clicking the **Tester** tab on the left followed by a green start signal.

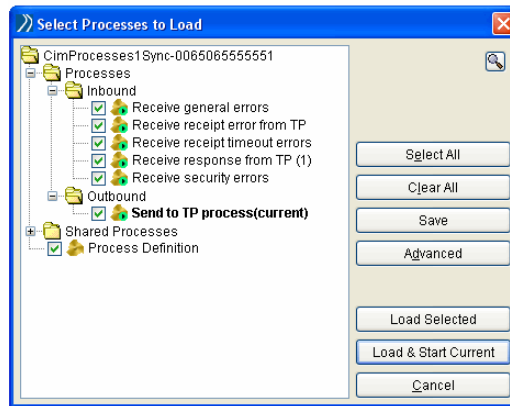

20. Click **Load selected**.

21. After a successful start, all processes should be visible.

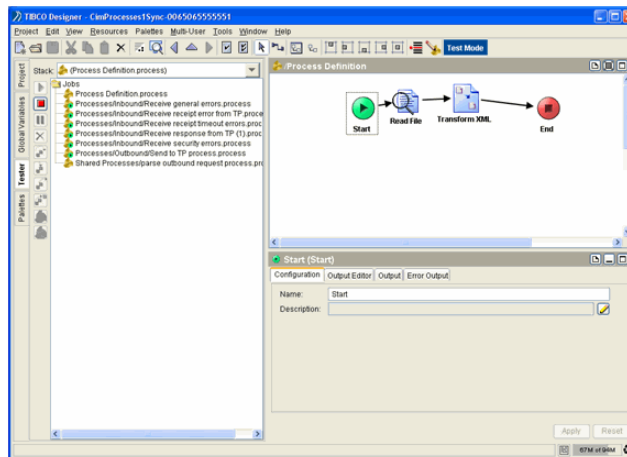

Testing the MDM-BusinessWorks-BusinessConnect Connectivity

To test the MDM-BusinessWorks-BusinessConnect connectivity, follow these steps:

1. Have a ready-to-publish catalog in MDM.
2. In TIBCO Designer, ensure the tBW tester is running, check for Processes\Outbound\Send To TP Process, and all setup done.
3. The Binding file accessed by the BW setup should have the IP of the machine from where testing has to be done.
4. The BC engine should be running and all setups should be done. Open TIBCO Administrator.
5. Publish the product from MDM.
6. Check BW for Processes\Outbound\Send To TP Process, whether the message received, as the activities flow shows green.
7. Check TIBCO Administrator for BusinessConnect, in Log Viewer, for a Audit Logs, for selected time range, whether the message reached and whether the message went out to the trading partner.
8. Check for acknowledgement from the datapool.
9. Check for response in BusinessConnect, BusinessWorks and MDM eventLog.
10. TIBCO BusinessConnect EZComm Protocol does not record advisory messages, such as the Responder Acknowledgement, in the audit log.

Appendix A **GDSN Predefined Components**

This appendix provides an overview of the out-of-the-box GDSN components provided in the `$MQ_HOME/plugins/gdsn/<version>/common/standard` folder.



We do not recommend that you modify components supplied in this directory. If a modification is required, maintain the modified file in an enterprise-specific directory.

Topics

- [Overview, page 198](#)
- [GDSN-Specific Maps, page 199](#)
- [GDSN-Specific Forms, page 200](#)
- [GDSN-Specific Rulebases, page 201](#)
- [GDSN-Specific Workflows, page 204](#)

Overview

This chapter contains a listing of all standard predefined components shipped with the application. There are standard MDM specific components, and incremental GDSN specific components. You can see these components if you have the GDSN plug-in installed.

GDSN Components

For GDSN, you can see maps, rulebases, workflows, and templates.

All these components are present in relevant folders under
`$MQ_HOME/plugins/gdsn/<version>/common/standard.`

GDSN-Specific Maps

This section introduces you to translation maps specific to GDSN provided in the \$MQ_HOME/plugins/gdsn/<version>/common/standard/maps folder.

Table 11 GDSN-Specific Maps

File	Description
mpfrom1sync62cicwlto26v1.xsl	This XSLT translates an incoming CIC message (1SYNC Item Authorization Response) to the mXML format.
mpfromcatact26to1sync65v1.xsl	This XSLT translates an outgoing mXML message to the 1Sync Catalog Request message format (1SYNC Item Maintenance message).
mpfromcatact26tononebxml70v1.xsl	This sample map file generates a non-ebxml outbound message.
mpfromcatact26toveloselcinv1.xsl	This file translates the outgoing mXML messages to a message format used in CIM-to-CIM synchronization.
mpfromcatact26toveloselcinv1_all_Attributes.xsl	This file translates the outgoing mXML messages to the message format used in CIM-to-CIM synchronization. It maps all the catalog attributes rather than filtering out EAN.UCC format specific attributes.
mpfromveloselcintoveloselcinrv1.xsl	This file is used in CIM-to-CIM synchronization to generate a response for an incoming message.
mpfromveloseltomlxml26v1.xsl	This file translates an incoming message to the mXML format during CIM-to-CIM synchronization.

GDSN-Specific Forms

This section introduces you to forms specific to GDSN provided in the `$MQ_HOME/plugins/gdsn/<version>/common/standard/forms` folder.

Table 12 GDSN-Specific Forms

File	Description
fmretailer.xml	Used to populate retailer information on retailer side

GDSN-Specific Rulebases

This section introduces you to rulebases specific to GDSN provided in the \$MQ_HOME/plugins/gdsn/<version>/common/standard/rulebase folder.

Table 13 GDSN-Specific Rulebases

File	Description
_1sync_catalogvalidation.xml	This rulebase declares validation rules for out-of-the-box catalog synchronization for 1Sync datapool.
_1sync_mastercatalog_catalogvalidation.xml	This rulebase declares validation rules for the master catalog used in synchronization having 1SYNC catalog output map.
rbapprover.xml	This is an empty rulebase which is used in the workflow wfin26prodnotifretailerv4.xml to flag any errors or warnings in the incoming message data. This rulebase should be customized as per your business process needs.
rbconnectorprotocolderivation_gdsn.xml	This rulebase decides the protocol to be used by the message handler for outgoing messages or the response handler for incoming messages.
rbconnectorrolederivation.xml	This rulebase decides the protocol to be used by the message handler for outgoing messages or the response handler for incoming messages.
rbduplicate.xml	This rulebase provides a sample duplicate check constraint for incoming messages. The sample rulebase is used to implement a duplicate check for GDSN incoming messages.
rbeditor.xml	This is an empty rulebase which is used in workflow wfin26prodnotifretailerv4.xml and other incoming message processing workflows to flag any errors or warnings in the incoming message data. This rulebase should be customized as per your business process needs.
rbformatattributes_gdsn.xml	Format specific attributes to be used for a marketplace.

Table 13 GDSN-Specific Rulebases

File	Description
rbgdsnrelationship.xml	This rulebase is used to identify the relationship to be used in the GDSN edition.
rbGPCClassificationscheme.xml	This rulebase drives the classification codes for the GPC predefined classification scheme.
rbresponsehandlerprotocolderivation_gdsn.xml	This rulebase is used to identify the protocol used for message processing.
rbretailerval.xml	This is a sample retailer validation rulebase.
rbsendMessage_gdsn.xml	The generic screen is available from the Product View screen, where there is an actions link for SendMessage based on the user privileges (Role). The UI that opens on clicking this link is completely customizable based on the underlined rulebase <code>rbsendMessage.xml</code>. Currently, it is used to send an RFCIN message and generate a fact sheet. The following customizations are possible: • Customize the product attributes that can be displayed. • Customize actions that can be performed. • Customize the MarketPlace and TradingPartner Credentials. • Customize the user defined attributes.
rbsyncstatusupdatededivation.xml	This sample rulebase is used to customize the manual synchronization status update action.
rbtolerance.xml	Permissible values for attributes are defined in this rulebase.
rbtransorasupplier.xml	This rulebase identifies different sync operations for the 1SYNC datapool.
rbUDEXClassificationscheme.xml	This rulebase derives the classification codes for the UDEX predefined classification scheme.

Table 13 GDSN-Specific Rulebases

File	Description
rbworkitemdescription_gdsn.xml	This rulebase derives out-of-the-box workitem descriptions for the GDSN edition.
rbcim2cimsupplier.xml	This rulebase identifies the operation state machine for CIM to CIM supply side.

GDSN-Specific Workflows

This section introduces you to workflows specific to GDSN provided in the \$MQ_HOME/plugins/gdsn/<version>/common/standard/workflow folder

Table 14 GDSN-Specific Workflows

File	Description
wfin26RFCINv2.xml	The workflow to receive and process publication request (RFCIN) for suppliers.
wfin26catsynchv7_gdsn.xml	The workflow to initiate synchronization with datapool or custom channel.
wfin26cim2cimsyncV1.xml	CIM to CIM synchronization workflow.
wfin26proddatanotifbasicv2.xml	The incoming record notification workflow for, primarily, data add/change messages. Recommended for GDSN retailers and similar usage where the received data needs to be processed and saved.
wfin26prodnotifbasicv3.xml	The incoming record notification workflow, primarily, for data publication messages. It is a variation of wfin26proddatanotifbasicv2.
wfin26prodnotifprocessv2.xml	The workflow to process the incoming record message and save data.
wfin26prodnotifretailerv4.xml	The workflow to process the incoming record message and save data. It is a variation of wfin26prodnotifprocessv2 targeted towards datapools and integration hubs.
wfin26prodnotifv2.xml	The workflow to receive a notification of a response for a previous synchronization request sent. The notification is issued by CIM when a response is received and processed.
wfin26catactionRFCINv2.xml	The workflow to implement initiation of publication request (RFCIN) for retailers.
wfout1sync62cic26v1.xml	The workflow to translate the incoming 1Sync CIC message to an mXML format.

Table 14 GDSN-Specific Workflows

File	Description
wfoutveloselcin26v2.xml	The workflow to translate the incoming CIM2CIM message to an mXML format.
wfout1sync65cin26v1.xml	The workflow to translate the incoming 1Sync CIN message to an mXML format.

Appendix B **Error Messages**

This appendix lists GDSN-specific error messages.

Topics

- [Catalog Errors, page 208](#)
- [Rulebase Errors, page 212](#)
- [Administration Errors, page 213](#)
- [Miscellaneous Errors, page 214](#)

Catalog Errors

This section contains GDSN-specific Catalog (CAT) errors.

Table 15 Catalog Errors

MDM Error Code	Error Description
CAT-1068	No credentials for Trading partner <Parameter name='VALUE'> (<Parameter name='VARIABLE'>) defined on <Parameter name='VARIABLE2'>.
CAT-1069	Datapool or trading partner credentials not provided. Correct and re-try.
CAT-1201	Organization currently not subscribed to any datapools. Ensure subscription to at least one datapool before attempting to synchronize.
CAT-1202	Synchronization profile associated with datapool <Parameter name='NAME'> not subscribed by your organization. Subscribe to the specified datapool first.
CAT-1203	Already subscribed to this datapool.
CAT-1247	Associate GPC/UDEX classification scheme with repository for synchronization with predefined datapools.
CAT-1271	Invalid synchronization profile; Trading partner <Parameter name='NAME'> deleted.
CAT-1279	Synchronization format <Parameter name='VALUE2'> not supported by Datapool <Parameter name='VALUE'>.
CAT-1280	Repository does not support output formats of datapool <Parameter name='VALUE'>.
CAT-1293	Warning: <Parameter name='VALUE'> with relationships.
CAT-1304	Cannot load Synchronization profile '<Parameter name='NAME'>'.
CAT-1305	Synchronization profile <Parameter name='VALUE'>.
CAT-1306	Synchronization profile <Parameter name='VALUE'> (<Parameter name='VALUE2'> items).
CAT-1307	Synchronization profile <Parameter name='VALUE'> (<Parameter name='VALUE2'> items) synchronization with <Parameter name='VALUE3'>.

Table 15 Catalog Errors

MDM Error Code	Error Description
CAT-1308	Synchronization profile <Parameter name='VALUE'> (<Parameter name='VALUE2'> items) synchronization on <Parameter name='VALUE3'>.
CAT-1309	Synchronization profile <Parameter name='VALUE'> synchronization with <Parameter name='VALUE3'>.
CAT-1310	Synchronization profile <Parameter name='VALUE'> synchronization on <Parameter name='VALUE3'>.
CAT-1311	Preview of synchronization profile <Parameter name='VALUE'> (<Parameter name='VALUE2'> items).
CAT-1312	Validation of synchronization profile <Parameter name='VALUE'> (<Parameter name='VALUE2'> items).
CAT-1313	Item <Parameter name='VALUE'> added to repository <Parameter name='VALUE2'>.
CAT-1314	Item <Parameter name='VALUE'> changed in repository <Parameter name='VALUE2'>.
CAT-1315	Item <Parameter name='VALUE'> deleted in repository <Parameter name='VALUE2'>.
CAT-1316	Conflicts in item <Parameter name='VALUE'> in repository <Parameter name='VALUE2'>. Action required.
CAT-1317	Synchronization profile <Parameter name='VALUE'> synchronization with <Parameter name='VALUE3'> on <Parameter name='VALUE4'>.
CAT-1318	Synchronization profile <Parameter name='VALUE'> (<Parameter name='VALUE2'> items) synchronization with <Parameter name='VALUE3'> on <Parameter name='VALUE4'>.
CAT-1319	On <Parameter name='VALUE3'>.
CAT-1320	Item <Parameter name='VALUE'> added <Parameter name='VALUE3'>.
CAT-1321	Item <Parameter name='VALUE'> changed <Parameter name='VALUE3'>.
CAT-1322	Item <Parameter name='VALUE'> deleted <Parameter name='VALUE3'>.
CAT-1323	Item <Parameter name='VALUE'> corrected <Parameter name='VALUE3'>.

Table 15 Catalog Errors

MDM Error Code	Error Description
CAT-1324	Item <Parameter name='VALUE'> pending <Parameter name='VALUE3'>.
CAT-1325	Item <Parameter name='VALUE'> pending with <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1326	Item <Parameter name='VALUE'> pre-authorized <Parameter name='VALUE3'>.
CAT-1327	Item <Parameter name='VALUE'> pre-authorized by <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1328	Item <Parameter name='VALUE'> authorized <Parameter name='VALUE3'>.
CAT-1329	Item <Parameter name='VALUE'> authorized by <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1330	Item <Parameter name='VALUE'> deleted <Parameter name='VALUE3'>.
CAT-1331	Item <Parameter name='VALUE'> deleted by <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1332	Item <Parameter name='VALUE'> rejected <Parameter name='VALUE3'>.
CAT-1333	Item <Parameter name='VALUE'> rejected by <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1334	Item <Parameter name='VALUE'> publication requested <Parameter name='VALUE3'>.
CAT-1335	Item <Parameter name='VALUE'> publication requested by <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1336	Item <Parameter name='VALUE'> load requested <Parameter name='VALUE3'>.
CAT-1337	Item <Parameter name='VALUE'> load requested to <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1338	Item <Parameter name='VALUE'> published <Parameter name='VALUE3'>.
CAT-1339	Item <Parameter name='VALUE'> published to <Parameter name='VALUE2'>.
CAT-1340	Item <Parameter name='VALUE'> changed <Parameter name='VALUE3'>.

Table 15 Catalog Errors

MDM Error Code	Error Description
CAT-1341	Item <Parameter name='VALUE'> changed to <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1342	Item <Parameter name='VALUE'> de-listed <Parameter name='VALUE3'>.
CAT-1343	Item <Parameter name='VALUE'> de-listed from <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1344	Item <Parameter name='VALUE'> withdrawn <Parameter name='VALUE3'>.
CAT-1345	Item <Parameter name='VALUE'> withdrawn from <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1346	Item <Parameter name='VALUE'> loaded <Parameter name='VALUE3'>.
CAT-1347	Item <Parameter name='VALUE'> loaded to <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1348	Item <Parameter name='VALUE'> corrected <Parameter name='VALUE3'>.
CAT-1349	Item <Parameter name='VALUE'> corrected to <Parameter name='VALUE2'> <Parameter name='VALUE3'>.
CAT-1350	Item <Parameter name='VALUE'> not received <Parameter name='VALUE3'>.
CAT-1351	Item <Parameter name='VALUE'> not received by <Parameter name='VALUE2'> <Parameter name='VALUE3'>.

Rulebase Errors

This section contains GDSN-specific Rulebase (RB) errors.

Table 16 Rulebase Errors

MDM Error Code	Error Description
RB-1110	Synchronization profile \$Catalog\$ is being synchronized with retailer \$TradingPartner\$. Approval required. (<Parameter name='RECORD_COUNT' /> records.)
RB-1111	Synchronization profile \$Catalog\$ is validated for synchronization with retailer \$TradingPartner\$. Review required. (<Parameter name='RECORD_COUNT' /> records.)
RB-1112	Synchronization profile \$Catalog\$ is being synchronized with trading partner \$TradingPartner\$. Approval required. (<Parameter name='RECORD_COUNT' /> records.)
RB-1113	Synchronization profile \$Catalog\$ is validated for synchronization with trading partner \$TradingPartner\$. Review required. (<Parameter name='RECORD_COUNT' /> records.)
RB-1115	A message was received for which the trading partner identified by <Parameter name='CUSTOM_DOMAIN' /> <Parameter name='CUSTOM_GLN' /> was not recognized. Actions required.

Administration Errors

This section contains GDSN-specific Administration (ADM) errors.

Table 17 Administration Errors

MDM Error Code	Error Description
ADM-3005	Invalid value <Parameter name='VALUE'> specified. Cannot generate Check digit.
ADM-3033	No trading partners found.
ADM-3315	Not subscribed to datapool.
ADM-3326	<Parameter name='TYPE'> of company cannot have trading partners.
ADM-3328	Global trading partner name <Parameter name='NAME'> already used within same enterprise. Specify unique name.
ADM-3329	Private trading partner name <Parameter name='NAME'> already used within same enterprise. Specify unique name.
ADM-3330	Global trading partner name <Parameter name='NAME'> used in another enterprise. Name should be unique across all enterprises.
ADM-3331	Private trading partner name <Parameter name='NAME'> used in another enterprise. Provide a unique name.
ADM-3332	Trading partner name <Parameter name='NAME'> already used.

Miscellaneous Errors

This section contains GDSN-specific errors in the Rulebase (RUL), General (GEN), and Service (SVC) categories.

Table 18 Misc Errors

MDM Error Code	Error Description
RUL-4620	Action Type must be either IRulebase.ELEM_ACTION_TYPE_THEN or IRulebase.ELEm_ACTION_TYPE_ELSE.
GEN-7073	Application shutting down. Internal error.
GEN-7218	Delete datapool <Parameter name='NAME'>?
GEN-7229	Synchronization format is default format for trading partner.
SVC-11013	Unsupported record state <Parameter name='RECORD_STATE'> specified for entity object.
SVC-11046	Cannot initiate workflow.

Appendix C **GDSN Samples**

This appendix lists GDSN sample details. The samples are located in the `$MQ_HOME/plugins/gdsn/1.2/common/standard/samples` folder.

Topics

- [1WorldSync Samples, page 216](#)
- [cim2cim metadata, page 222](#)

1WorldSync Samples

This section contains the details of GDSN-specific 1WorldSync samples.

mlxml indoc (supplier)

These samples are located in the
\$MQ_HOME/plugins/gdsn/1.2/common/standard/samples/1Sync/mlxml
indoc/Supplier folder:

- Add_Cancel.xml
- Add_Correct.xml
- Add_Discontinue.xml
- Add_New.xml
- Add-Reinstate.xml
- Link.xml
- Link-UnLink.xml
- Publish_New.xml
- Publish-Reload-copy.xml
- Publish-Reload-original.xml

These internal MDM messages are converted to 1WorldSync datapool format.

These are MDM specific internal formats for the corresponding sync operation/suboperation selected in the synchronization profile/workitem or send response/message screens.

The naming convention for the sample files is OPER_SUBOPER.xml, where OPER is the operation selected in synchronization event, SUBOPER is the suboperation selected in synchronization event. For details of operation and suboperation, refer [Table 8, MDM Operations for 1WorldSync Messages \(Supplier Operations\)](#), on page 107.

sync messages (retailer)

These samples are located in the
`$MQ_HOME/plugins/gdsn/1.2/common/standard/samples/1Sync/sync
 messages/Retailer` folder.

Table 19 1WorldSync Samples: Sync Messages (Retailer)

File name	Description
CICR.xml	Catalog Item Confirmation Response (CICR) received from Datapool in response to CIC messages.
CINR.xml	This message is sent by CIM in response to CIN.
CIN-Hierarchy-New.xml	This new/initial load message is received from Datapool when the supplier publishes the hierarchy for the retailer.
CIN-Hierarchy-Correction.xml	This correction message is received from Datapool when the supplier publishes the hierarchy for the retailer.
CIN-singleRecord-New.xml	This new/initial load message is received from Datapool when the supplier publishes single record for the retailer.
CIC_RECEIVED.xml	The CIC message with status as RECEIVED sent by retailer in receipt of CIN. By default, this is sent by CIM or by the retailer on clicking the send response link on the Record View page.
CIC_REJECTED.xml	The CIC message with status as REJECTED sent by retailer in receipt of CIN. This message is sent when a user takes action on authorization work item and selects Reject Notification or by the retailer on clicking the send response link on the Record View page.
CIC_REVIEW.xml	The CIC message with status as REVIEW sent by retailer in receipt of CIN. This message is sent when user takes action on authorization work item and selects Review Notification or by the retailer on clicking the send response link on the Record View page.
CIC_SYNCHRONISED.xml	The CIC message with status as SYNCHRONISED sent by retailer in receipt of CIN. This message is sent by the retailer on clicking the send response link on the Record View page.

Table 19 1WorldSync Samples: Sync Messages (Retailer)

File name	Description
Item Cancel.xml	When the supplier publishes the hierarchy for the retailer with CancelDate populated, this correction message is received from Datapool.
Item Delete.xml	This delete message is received from Datapool when the supplier publishes the delete operation for the retailer.
Item Discontinue.xml	When the supplier publishes the hierarchy for the retailer with DiscontinueDate populated, this correction message is received from Datapool.
RFCIN.xml	The RFCIN message sent by the retailer with isReload set as true/false. This message is sent on selecting the Send Message link on the Record View page. The Include Rejected Record option should be selected/cleared.
RFCINR.xml	Request For Catalog Item Notification Response (RFCINR) received from Datapool in response to RFCIN messages.

sync messages (supplier)

These samples are located in the
\$MQ_HOME/plugins/gdsn/1.2/common/standard/samples/1Sync/sync
messages/Supplier folder.

Table 20 1WorldSync Samples: Sync Messages (Supplier)

File name	Description	Operation Selected on Synchronization Profile		
Add_New.xml	ITEM ADD message is sent for the new records added but not synchronized to the datapool.	Incremental Yes	Deliver To Datapool	Operation Add
Add_Correct.xml	ITEM CORRECTION message having values for the modified records.	Incremental Yes/No	Deliver To Datapool	Operation Data Correction

Table 20 1WorldSync Samples: Sync Messages (Supplier)

File name	Description	Operation Selected on Synchronization Profile		
Add_Discontinue.xml	ITEM CORRECTION message having discontinueDate populated for the records, which have to be discontinued.	Incremental Yes/No	Deliver To Datapool	Operation Data Correction/ Discontinue
Add_Cancel.xml	ITEM CORRECTION message having cancelDate populated for the records, which have to be canceled.	Incremental Yes/No	Deliver To Datapool	Operation Data Correction/ Cancel
Add-Reinstate.xml	ITEM CORRECTION message not having cancelDate or discontinueDate for the records that were canceled or discontinued.	Incremental Yes/No	Deliver To Datapool	Operation Data Correction/ Reinstate
Link.xml	ITEM LINK ADD message sent to 1WorldSync if a new relationship for the parent record or change in relationship of parent record is detected.	Incremental Yes/No	Deliver To Datapool	Operation Add/Data Correction
Link-UnLink.xml	ITEM LINK DELETE message sent to 1WorldSync when a relationship change of parent record is detected.	Incremental Yes/No	Deliver To Datapool	Operation Add/ Data Correction
Publish_New.xml	PUBLICATION ADD message of New type sent to the retailer, for example, Trading Partner.	Incremental Yes/No	Deliver To Trading Partner on Datapool	Operation Add/ Publish

Table 20 1WorldSync Samples: Sync Messages (Supplier)

File name		Description			Operation Selected on Synchronization Profile	
Publish-Reload-original.xml	PUBLICATION ADD message of New type, sent to the retailer, for example, Trading Partner.	Incremental	Yes/No	Deliver To	Trading Partner on Datapool	Operation For RELOAD-ORIGINAL-Initial Load+ Include Rejected Records
Publish-Reload-copy.xml	PUBLICATION ADD message of InitialLoad type, sent to the retailer, for example, Trading Partner.	Incremental	Yes/No	Deliver To	Trading Partner on Datapool	Operation For RELOAD-COPY: Initial Load
CIC_REVIEW.xml	Catalog Item Confirmation message of the Review type received from Datapool initiated by retailer or Trading Partner. This is an incoming message.	None	None	None	None	None
CIC_RECEIVED.xml	Catalog Item Confirmation message of the Received type received from Datapool initiated by retailer or Trading Partner. This is an incoming message.	None	None	None	None	None

Table 20 1WorldSync Samples: Sync Messages (Supplier)

File name	Description	Operation Selected on Synchronization Profile		
CIC_REJECTED.xml	Catalog Item Confirmation message of the Rejected type received from Datapool initiated by retailer or Trading Partner. This is an incoming message.	None	None	None
CIC_SYNCHRONISED.xml	Catalog Item Confirmation message of the Synchronised type received from Datapool initiated by retailer or Trading Partner. This is an incoming message.	None	None	None

cim2cim metadata

This section contains the details of GDSN-specific cim2cim metadata samples located in the `$MQ_HOME/plugins/gdsn/1.2/common/standard/samples/cim2cim metadata` folder.

Table 21 *cim2cim Metadata Samples*

File name	Description
Bottler1-MetaData.jar	Bottler1-specific repository and Business Process Rules are created.
Bottler2-MetaData.jar	Bottler2-specific repository and Business Process Rules are created.
BrandOwner-MetaData.jar	Brandowner-specific repository and Business Process Rules are created.
VeloselMarketplace-MetaData.jar	VeloselMarketplace-specific repository and Business Process Rules are created.

Index

A

Add-on for Global Data Synchronization
 Configuration Properties [4](#)
 Pre-Defined Components [198](#)
 Forms [200](#)
 Maps [199](#)
 Rulebases [201](#)
 Workflows [204](#)

C

CIM to CIM
 Company Profile and GLN Creation [138](#)
 Data Pre-population [133](#)
 Datasource Creation [145](#)
 Enterprise Creation [129](#)
 Inputmap Creation [145](#)
 Overview [124](#)
 Queue Configuration [126](#)
 Reverse Relationships [148](#)
 Rulebase Changes [143](#)
 Steps to Sync [125](#)
 Synchronization [124](#)
 Synchronization Types [124](#)
 Testing Setup [151](#)
 Trading Partner Profile Creation [141](#)
 Codelists
 1Sync [45](#)
 Updating [56](#)
 Using Datasource [56](#)
 Using Enumeration [56](#)
 Configuring GPC Classification Scheme Loading [162](#)
 Configuring Support for GPC Code [164](#)
 customer support [xii, xii](#)

G

GDSN
 Properties [4](#)
 GDSN Menu Items
 Datapool Profiles [10](#)
 GDSN Screens
 Company Profiles [11](#)
 Datapool Profiles [13](#)
 Enterprise Profiles [11](#)
 Trading Partner Profiles [14](#)

M

Message Choreography [60](#)
 1Sync [61](#)
 Changing [113](#)

P

Predefined Components
 Overview [198](#)

R

Records
 Update Sync Status [30](#)
 Retailer Setup
 Overview [158](#)
 Rule
 Modify [118](#)

S

Supplier Setup

Overview [154](#)

support, contacting [xii](#), [xii](#)

Synchronization profile

Format Specific Attributes [25](#)

T

technical support [xii](#), [xii](#)

TIBCO Administrator

Setup [169](#)

TIBCO BusinessConnect

Configuring [168](#)

Setup [170](#)

TIBCO BusinessWorks

Setup [190](#)

V

Validations

1Sync

Mandatory Attributes [35](#)

Optional Attributes [37](#)

Overview [34](#)

Updating [58](#)