

ibiTM WebFOCUS[®]

Using Functions

Version 9.3.3 | January 2025

Contents

Contents	2
How to Use This Manual	45
Available Languages	45
Operating Systems	45
Introducing Functions	46
Using Functions	46
Types of Functions	47
ibi WebFOCUS-Specific Functions	49
Simplified Analytic Functions	49
Simplified Character Functions	50
Character Functions	53
Variable Length Character Functions	56
Character Functions for DBCS Code Pages	57
Maintain-specific Character Functions	58
Data Source and Decoding Functions	60
Simplified Date and Date-Time Functions	61
Date Functions	62
Standard Date Functions	62
Legacy Date Functions	64
Date-Time Functions	66
Maintain-specific Date and Time Functions	68
Maintain-specific Standard Date and Time Functions	68
Maintain-specific Legacy Date Functions	69
Simplified Conversion Functions	70
Format Conversion Functions	70

Maintain-specific Light Update Support Functions	72
Simplified Numeric Functions	73
Numeric Functions	73
Maintain-specific Script Functions	76
Simplified Statistical Functions	76
Machine Learning (Python-based) Functions	77
Simplified System Functions	78
System Functions	78
Simplified Geography Functions	80
Trigonometric Functions	82
Character Chart for ASCII and EBCDIC	83
Accessing and Calling a Function	92
Calling a Function	92
Call a Function	92
Store Output in a Field	93
Access the Maintain MNTUWS Function Library	94
Supplying an Argument in a Function	94
Argument Types	95
Argument Formats	95
Argument Length	96
Number and Order of Arguments	97
Verifying Function Parameters	97
Enable Parameter Verification	98
Control Function Parameter Verification	98
Verifying Parameters With Correctable Errors	100
Verifying Parameters With Uncorrectable Errors	101
Calling a Function From a DEFINE, COMPUTE, or VALIDATE Command	102
Call a Function From a COMPUTE, DEFINE, or VALIDATE Command	102
Calling a Function From a Dialogue Manager Command	103
Assigning the Result of a Function to a Variable	104

Assign the Result of a Function to a Variable	104
Calling a Function From a -SET Command	105
Branching Based on the Result of a Function	105
Branch Based on the Result of a Function	105
Branching Based on the Function's Result	106
Calling a Function From an Operating System RUN Command	107
Call a Function From an Operating System -RUN Command	107
Calling a Function From an Operating System -RUN Command	108
Calling a Function From Another Function	108
Call a Function From Another Function	108
Calling a Function From Another Function	109
Calling a Function in WHERE or IF Criteria	109
Call a Function in WHERE Criteria	109
Call a Function in IF Criteria	110
Calling a Function in WHERE Criteria	110
Using a Calculation or Compound IF Command	111
Calling a Function in WHEN Criteria	111
Call a Function in WHEN Criteria	112
Calling a Function in WHEN Criteria	112
Calling a Function From a RECAP Command	113
Call a Function From a RECAP Command	113
Calling a Function in a RECAP Command	114
Storing and Accessing an External Function	115
Storing and Accessing a Function on z/OS	115
Allocate a Load Library in z/OS Batch	115
Allocating the Load Library BIGLIB.LOAD in z/OS Batch (JCL)	116
Allocate a Load Library in TSO	116
Allocate a Load Library	116
Allocating the FUSELIB.LOAD Load Library	117
Concatenating a Load Library to USERLIB In TSO	117
Concatenating a Load Library to STEPLIB in Batch (JCL)	117

Storing and Accessing a Function on UNIX	118
Storing and Accessing a Function on Windows	118
Simplified Analytic Functions	119
FORECAST_MOVAVE: Using a Simple Moving Average	119
Calculate a Simple Moving Average Column	119
Calculating a New Simple Moving Average Column	121
Displaying Original Field Values in a Simple Moving Average Column	123
FORECAST_EXPAVE: Using Single Exponential Smoothing	124
Calculate a Single Exponential Smoothing Column	125
Calculating a Single Exponential Smoothing Column	127
FORECAST_DOUBLEXP: Using Double Exponential Smoothing	129
Calculate a Double Exponential Smoothing Column	130
Calculating a Double Exponential Smoothing Column	131
FORECAST_SEASONAL: Using Triple Exponential Smoothing	132
Calculate a Triple Exponential Smoothing Column	134
Calculating a Triple Exponential Smoothing Column	136
FORECAST_LINEAR: Using a Linear Regression Equation	137
Calculate a Linear Regression Column	138
Calculating a New Linear Regression Field	140
PARTITION_AGGR: Creating Rolling Calculations	142
Generate Rolling Calculations Using PARTITION_AGGR	142
Calculating a Rolling Average	145
Usage Notes for PARTITION_AGGR	148
PARTITION_REF: Using Prior or Subsequent Field Values in Calculations	151
Retrieve Prior or Subsequent Field Values for Use in a Calculation	151
Retrieving a Previous Record With PARTITION_REF	152
Usage Notes for PARTITION_REF	155
INCREASE: Calculating the Difference Between the Current and a Prior Value of a Field	155
Calculate the Difference Between the Current and a Prior Value of a Field	156
Calculating the Increase Between the Current and a Prior Value of a Field	157

PCT_INCREASE: Calculating the Percentage Difference Between the Current and a Prior Value of a Field	158
Calculate the Percentage Difference Between the Current and a Prior Value of a Field	159
PCT_INCREASE: Calculating the Percent Increase Between the Current and a Prior Value of a Field	160
PREVIOUS: Retrieving a Prior Value of a Field	161
Retrieve a Prior Value of a Field	162
Retrieving a Prior Value of a Field	162
RUNNING_AVE: Calculating an Average Over a Group of Rows	164
Calculate Running Average Between the Current and a Prior Value of a Field	164
Calculating a Running Average	165
RUNNING_MAX: Calculating a Maximum Over a Group of Rows	166
Calculate Running Maximum Between the Current and a Prior Value of a Field ...	167
Calculating a Running Maximum	167
RUNNING_MIN: Calculating a Minimum Over a Group of Rows	169
Calculate Running Minimum Between the Current and a Prior Value of a Field	170
Calculating a Running Minimum	170
RUNNING_SUM: Calculating a Sum Over a Group of Rows	172
Calculate Running Sum Between the Current and a Prior Value of a Field	173
Calculating a Running Sum	173
Simplified Character Functions	176
CHAR_LENGTH: Returning the Length in Characters of a String	176
Return the Length of a String in Characters	176
Returning the Length of a String	177
CONCAT: Concatenating Strings	178
Concatenate Strings	178
Concatenating Strings	178
DIFFERENCE: Measuring the Phonetic Similarity Between Character Strings	180
Measure the Phonetic Similarity Between Character String	180
Measuring the Phonetic Similarity Between Character Strings	180

DIGITS: Converting a Number to a Character String	182
Convert a Number to a Character String	182
Converting a Number to a Character String	182
Usage Notes for DIGITS	185
GET_TOKEN: Extracting a Token Based on a String of Delimiters	185
Extract a Token Based on a String of Delimiters	185
Extracting a Token Based on a String of Delimiters	186
INITCAP: Capitalizing the First Letter of Each Word in a String	187
Capitalize the First Letter of Each Word in a String	187
Capitalizing the First Letter of Each Word in a String	187
LAST_NONBLANK: Retrieving the Last Field Value That is Neither Blank nor Missing	188
Return the Last Value That is Neither Blank nor Missing	188
Retrieving the Last Non-Blank Value	189
LEFT: Returning Characters From the Left of a Character String	190
Return Characters From the Left of a Character String	190
Returning Characters From the Left of a Character String	191
LOWER: Returning a String With All Letters Lowercase	192
Return a String With All Letters Lowercase	193
Converting a String to Lowercase	193
LPAD: Left-Padding a Character String	194
Pad a Character String on the Left	194
Left-Padding a String	194
Usage Notes for LPAD	195
LTRIM: Removing Blanks From the Left End of a String	196
Remove Blanks From the Left End of a String	196
Removing Blanks From the Left End of a String	196
OVERLAY: Replacing Characters in a String	197
Replace Characters in a String	197
Replacing Characters in a String	198
PATTERNS: Returning a Pattern That Represents the Structure of the Input	199

String	
Return a String That Represents the Pattern Profile of the Input Argument	200
Returning a Pattern Representing an Input String	200
POSITION: Returning the First Position of a Substring in a Source String	201
Return the First Position of a Substring in a Source String	202
Returning the First Position of a Substring	202
POSITION: Returning the Position of a Search String in a Source String	203
Return the Position of a Search String in a Source String	203
Returning the Position of a Search String in a Source String	204
Regular Expression Functions	205
Using Regular Expressions on z/OS	206
REGEX: Matching a String to a Regular Expression	207
Match a String to a Regular Expression	207
REGEXP_COUNT: Counting the Number of Matches to a Pattern in a String	210
Count the Number of Matches to a Pattern in a String	210
REGEXP_INSTR: Returning the First Position of a Pattern in a String	214
Return the Position of a Pattern in a String	214
REGEXP_REPLACE: Replacing All Matches to a Pattern in a String	217
Replace Matches to a Pattern in a String	218
REGEXP_SUBSTR: Returning the First Match to a Pattern in a String	220
Returning the First Match to a Pattern in a String	220
REPEAT: Repeating a String a Given Number of Times	223
Repeat a Character String a Given Number of Times	223
Repeating a String a Given Number of Times	224
REPLACE: Replacing a String	225
Replace all Instances of a String	225
Replacing a String	225
Replacing All Instances of a String	227
RIGHT: Returning Characters From the Right of a Character String	227
Return Characters From the Right of a Character String	228
Returning Characters From the Right of a Character String	228

RPAD: Right-Padding a Character String	229
Pad a Character String on the Right	230
Right-Padding a String	230
Usage Notes for RPAD	231
RTRIM: Removing Blanks From the Right End of a String	231
Remove Blanks From the Right End of a String	232
Removing Blanks From the Right End of a String	232
SPACE: Returning a String With a Given Number of Spaces	233
Return a String With a Given Number of Spaces	233
Returning a String With a Given Number of Spaces	233
SPLIT: Extracting an Element From a String	234
Extract an Element From a String	235
Extracting an Element From a String	235
SUBSTRING: Extracting a Substring From a Source String	236
Extract a Substring From a Source String	236
Extracting a Substring From a Source String	237
TOKEN: Extracting a Token From a String	238
Extract a Token From a String	238
Extracting a Token From a String	239
TRIM_: Removing a Leading Character, Trailing Character, or Both From a String	240
Remove a Leading Character, Trailing Character, or Both From a String	241
Trimming a Character From a String	242
Trimming With Trailing Blanks	242
UPPER: Returning a String With All Letters Uppercase	243
Return a String With All Letters Uppercase	243
Converting Letters to Uppercase	244
Character Functions	245
Character Function Notes	245
ARGLEN: Measuring the Length of a String	245
Measure the Length of a Character String	245

Measuring the Length of a Character String	246
ASIS: Distinguishing Between Space and Zero	247
Distinguish Between a Space and a Zero	248
Distinguishing Between a Space and a Zero	248
Usage Notes for ASIS	249
BITSON: Determining If a Bit Is On or Off	250
Determine If a Bit Is On or Off	250
Evaluating a Bit in a Field	251
BITVAL: Evaluating a Bit String as an Integer	251
Evaluate a Bit String	252
Evaluating a Bit String	253
BYTVAL: Translating a Character to Decimal	253
Translate a Character	254
Translating the First Character of a Field	254
Returning the EBCDIC Value With Dialogue Manager	255
CHKFMT: Checking the Format of a String	256
Check the Format of a Character String	256
Checking the Format of a Field	257
CHKNUM: Checking a String for Numeric Format	258
Check the Format of a Character String	258
Checking a String for Numeric Format	259
CTTRAN: Translating One Character to Another	260
Translate One Character to Another	260
Translating Spaces to Underscores on an ASCII Platform	261
Translating Spaces to Underscores on an EBCDIC Platform	262
CTRFLD: Centering a Character String	263
Center a Character String	263
Centering a Field	264
EDIT: Extracting or Adding Characters	265
Extract or Add Characters	265
Extracting and Adding Characters	266

GETTOK: Extracting a Substring (Token)	267
Extract a Substring (Token)	267
Extracting a Token	268
LCWORD: Converting a String to Mixed-Case	269
Convert a Character String to Mixed-Case	269
Converting a Character String to Mixed-Case	270
LCWORD2: Converting a String to Mixed-Case	271
Convert a Character String to Mixed-Case	271
Converting a Character String to Mixed-Case	272
LCWORD3: Converting a String to Mixed-Case	272
Convert a Character String to Mixed-Case Using LCWORD3	273
Converting a Character String to Mixed-Case Using LCWORD3	273
LJUST: Left-Justifying a String	274
Left-Justify a Character String	274
Left-Justifying a String	275
LOCASE: Converting Text to Lowercase	276
Convert Text to Lowercase	276
Converting a String to Lowercase	277
OVLAY: Overlaying a Character String	277
Overlay a Character String	278
Replacing Characters in a Character String	279
PARAG: Dividing Text Into Smaller Lines	280
Divide Text Into Smaller Lines	280
Dividing Text Into Smaller Lines	281
PATTERN: Generating a Pattern From a String	282
Generate a Pattern From an Input String	283
Producing a Pattern From Alphanumeric Data	283
POSIT: Finding the Beginning of a Substring	285
Find the Beginning of a Substring	286
Finding the Position of a Letter	287
REVERSE: Reversing the Characters in a String	287

Reverse the Characters in a String	288
Reversing the Characters in a String	288
RJUST: Right-Justifying a Character String	289
Right-Justify a Character String	290
Right-Justifying a String	290
SOUNDEX: Comparing Character Strings Phonetically	291
Compare Character Strings Phonetically	291
Comparing Character Strings Phonetically	292
SPELLNM: Spelling Out a Dollar Amount	293
Spell Out a Dollar Amount	293
Spelling Out a Dollar Amount	294
SQUEEZ: Reducing Multiple Spaces to a Single Space	295
Reduce Multiple Spaces to a Single Space	295
Reducing Multiple Spaces to a Single Space	296
STRIP: Removing a Character From a String	297
Remove a Character From a String	297
Removing Occurrences of a Character From a String	298
Removing Single Quotation Marks From a String	299
Removing Commas From a String (Maintain)	299
STRREP: Replacing Character Strings	300
Replace Character Strings	300
Usage Note for STRREP Function	301
Replacing Commas and Dollar Signs	301
SUBSTR: Extracting a Substring	302
Extract a Substring	303
Extracting a String	304
TRIM: Removing Leading and Trailing Occurrences	305
Remove Leading and Trailing Occurrences	305
Removing Leading Occurrences	306
Removing Trailing Occurrences	307
UPCASE: Converting Text to Uppercase	308

Convert Text to Uppercase	308
Converting a Mixed-Case String to Uppercase	309
XMLDECOD: Decoding XML-Encoded Characters	310
Decode XML-Encoded Characters	310
Decoding XML-Encoded Characters	311
XMLENCOD: XML-Encoding Characters	312
XML-Encode Characters	313
XML-Encoding Characters	314
Variable Length Character Functions	316
Overview	316
Usage Notes for Using an AnV Field in a Function	316
LENV: Returning the Length of an Alphanumeric Field	317
Find the Length of an Alphanumeric Field	317
Finding the Length of an AnV Field	318
LOCASV: Creating a Variable Length Lowercase String	319
Create a Variable Length Lowercase String	319
Creating a Variable Length Lowercase String	320
POSITV: Finding the Beginning of a Variable Length Substring	320
Find the Beginning of a Variable Length Substring	321
Finding the Starting Position of a Variable Length Pattern	322
SUBSTV: Extracting a Variable Length Substring	323
Extract a Variable Length Substring	323
Extracting a Variable Length Substring	324
TRIMV: Removing Characters From a String	326
Remove Characters From a String	326
Creating an AnV Field by Removing Trailing Blanks	327
UPCASV: Creating a Variable Length Uppercase String	328
Create a Variable Length Uppercase String	328
Creating a Variable Length Uppercase String	329
Character Functions for DBCS Code Pages	331

DCTRAN: Translating A Single-Byte or Double-Byte Character to Another	331
Translate a Single-Byte or Double-Byte Character to Another	331
Using DCTRAN to Translate Double-Byte Characters	332
DEDIT: Extracting or Adding Characters	332
Extract or Add DBCS or SBCS Characters	333
Adding and Extracting DBCS Characters	334
DSTRIP: Removing a Single-Byte or Double-Byte Character From a String	334
Remove a Single-Byte or Double-Byte Character From a String	334
Removing a Double-Byte Character From a String	335
DSUBSTR: Extracting a Substring	335
Extract a Substring	336
Extracting a Substring	337
JPTRANS: Converting Japanese Specific Characters	337
Convert Japanese Specific Characters	337
Using the JPTRANS Function	339
Usage Notes for the JPTRANS Function	341
KKFCUT: Truncating a String	343
Truncate a String	343
Truncating a String	344
SFTDEL: Deleting the Shift Code From DBCS Data	345
Delete the Shift Code From DBCS Data	345
Deleting the Shift Code From a String	346
SFTINS: Inserting the Shift Code Into DBCS Data	346
Insert the Shift Code Into DBCS Data	347
SFTINS: Inserting the Shift Code Into a String	347
Maintain-specific Character Functions	349
CHAR2INT: Translating a Character Into an Integer Value	349
Translate a Character Into an Integer Value	349
Translating a Character Into an Integer Value	349
INT2CHAR: Translating an Integer Value Into a Character	350

Translate an Integer Value Into a Character	350
Translating an Integer Value Into a Character	350
LCWORD and LCWORD2: Converting a Character String to Mixed-Case	351
Convert a Character String to Mixed-Case	351
Converting a Character String to Mixed-Case	352
LENGTH: Determining the Length of a Character String	352
Determine the Length of a Character String	352
Determining the Length of a Character String	353
LJUST: Left-Justifying a Character String (Maintain)	353
Left-Justify a Character String	353
LOWER: Converting a Character String to Lowercase	354
Convert a Character String to Lowercase	354
MASK: Extracting or Adding Characters	354
Extract or Add Characters	355
Extracting a Character From a Field	355
Adding Dashes to a Field	356
MNTGETTOK: Extracting Tokens From a String Function	356
Extract a Substring (Token)	357
Extracting Tokens From a String	357
Extracting the Zip Code From an Address	358
NLSCHR: Converting Characters From the Native English Code Page	360
Convert Characters From the Native English Code Page	360
Converting Characters From the Native English Code Page	360
OVERLAY: Overlaying a Character String (Maintain)	361
Overlay a Character String	361
Overlaying a Character String	361
POSIT: Finding the Beginning of a Substring (Maintain)	362
Find the Beginning of a Substring	363
Finding the Beginning of a Substring	363
RJUST: Right-Justifying a Character String (Maintain)	364
Right-Justify a Character String	364

SELECTS: Decoding a Value From a Stack	365
Decode a Value From a Stack	365
Decoding Values With SELECTS	365
Decoding a Value From a Stack	366
STRAN: Substituting One Substring for Another	367
Substitute a Substring	367
Substituting One String for Another	367
STRCMP: Comparing Character Strings	368
Compare Character Strings	369
Comparing Character Strings	369
STRICMP: Comparing Character Strings and Ignoring Case	370
Compare Character Strings and Ignore Case	370
STRNCMP: Comparing Character Substrings	371
Compare Character Substrings	371
STRTOKEN: Extracting a Substring Based on Delimiters	372
Extract a Substring	372
Extracting a Substring	372
SUBSTR: Extracting a Substring (Maintain)	373
Extract a Substring	373
Extracting the First Character of a String in Maintain	374
TRIM: Removing Trailing Occurrences (Maintain)	375
Remove Trailing Occurrences	375
TRIMLEN: Determining the Length of a String Excluding Trailing Spaces	375
Determine the Length of a String Excluding Trailing Spaces	375
Determining the Length of a String Excluding Trailing Spaces	376
UPCASE: Converting Text to Uppercase (Maintain)	376
Convert Text to Uppercase	377
Data Source and Decoding Functions	378
CHECKMD5: Computing an MD5 Hash Check Value	378
Compute an MD5 Hash Check Value	378

Calculating an MD5 Hash Check Value	379
CHECKSUM: Computing a Hash Sum	380
Compute a CHECKSUM Hash Value	380
Calculating a CHECKSUM Hash Value	380
COALESCE: Returning the First Non-Missing Value	381
Return the First Non-Missing Value	381
Returning the First Non-Missing Value	382
DB_EXPR: Inserting an SQL Expression Into a Request	384
Insert an SQL Expression Into a Request With DB_EXPR	384
Usage Notes for the DB_EXPR Function	385
Inserting the DB2 BIGINT and CHAR Functions Into a TABLE Request	385
DB_INFILE: Testing Values Against a File or an SQL Subquery	386
Compare Source and Target Field Values With DB_INFILE	388
Usage Notes for DB_INFILE	388
Comparing Source and Target Values Using an SQL Subquery File	389
Comparing Source and Target Values Using a Sequential File	391
Control DB_INFILE Optimization	392
DB_LOOKUP: Retrieving Data Source Values	393
Retrieve a Value From a Lookup Data Source	394
Usage Notes for DB_LOOKUP	394
Retrieving a Value From a Fixed Format Sequential File in a TABLE Request	395
Retrieving a Value From a LOOKUP Table	398
DECODE: Decoding Values	398
Supply Values in the Function	398
Supplying Values Using the DECODE Function	400
Guidelines for Reading Values From a File	400
Reading DECODE Values From a File	401
FIND: Verifying the Existence of a Value in a Data Source	402
Verify the Existence of a Value in a Data Source	403
Verifying the Existence of a Value in Another Data Source (Maintain)	404
Verifying the Existence of a Value in the Same Data Source (Maintain)	405

Verifying the Existence of a Value in an Indexed Field	405
IMPUTE: Replacing Missing Values With Aggregated Values	406
Replace Missing Values With Aggregated Values	406
Replacing Missing Values With Aggregated Values	407
LAST: Retrieving the Preceding Value	410
Retrieve the Preceding Value	411
Retrieving the Preceding Value	411
LOOKUP: Retrieving a Value From a Cross-referenced Data Source	412
Retrieve a Value From a Cross-referenced Data Source	413
Using the LOOKUP Function	414
Using a Value in a Host Segment to Search a Data Source	414
Using the LOOKUP Function With a VALIDATE Command	416
Using the Extended LOOKUP Function	417
Use the Extended LOOKUP Function	417
NULLIF: Returning a Null Value When Parameters Are Equal	418
Return a Null Value for Equal Parameters	418
Testing for Equal Parameters	419
FOCUSPAGES: Finding the size of a FOCUS or XFOCUS file	420
Simplified Date and Date-Time Functions	423
DAYNAME: Returning the Name of the Day From a Date Expression	423
Return the Name of the Day From a Date Expression	424
Returning the Name of the Day From a Date Expression	424
DT_CURRENT_DATE: Returning the Current Date	425
Return the Current Date	425
Returning the Current Date	425
DT_CURRENT_DATETIME: Returning the Current Date and Time	426
Return the Current Date and Time	426
Returning the Current Date and Time	426
DT_CURRENT_TIME: Returning the Current Time	427
Return the Current Time	427

Returning the Current Time	428
DT_TOLocal: Converting Universal Coordinated Time to Local Time	429
Convert UTC Time to Local Time	430
Converting UTC Time to Local Time	431
DT_TOUTC: Converting Local Time to Universal Coordinated Time	431
Convert Local Time to UTC Time	433
Converting Local Time to UTC Time	433
Sorting by UTC Time	434
DTADD: Incrementing a Date or Date-Time Component	435
Increment a Date or Date-Time Component	435
Incrementing the DAY Component of a Date	436
Usage Notes for DTADD	437
DTDIFF: Returning the Number of Component Boundaries Between Date or Date-Time Values	438
Return the Number of Component Boundaries	438
Returning the Number of Years Between Two Dates	439
DTIME: Extracting Time Components From a Date-Time Value	440
Extract a Time Component From a Date-Time Value	440
Extracting Time Components	441
DTPART: Returning a Date or Date-Time Component in Integer Format	442
Return a Date or Date-Time Component in Integer Format	443
Extracting the Quarter Component as an Integer	444
DTRUNC: Returning the Start of a Date Period for a Given Date	444
Return the First or Last Date of a Date Period	445
Returning the First Date in a Date Period	446
Using the Start of Week Parameter for DTRUNC	447
Returning the Date of the First and Last Days of a Week	448
Returning a Date Using the Extend Argument	448
MONTHNAME: Returning the Name of the Month From a Date Expression	450
Return the Name of the Month From a Date Expression	450
Returning the Name of the Month From a Date Expression	450

Date Functions	452
Overview of Date Functions	452
Using Standard Date Functions	453
Specifying Work Days	454
Specifying Business Days	454
Set Business Days	454
Setting Business Days to Reflect Your Work Week	455
View the Current Setting of Business Days	455
Specifying Holidays	455
Rules for Creating a Holiday File	456
Create a Holiday File	456
Select a Holiday File	457
Creating and Selecting a Holiday File	457
FILEDEF or DYNAM the Holiday File	458
Defining a Holiday File	459
Allocating the Holiday File to a Sequential File on z/OS Under PDS Deployment	460
Allocating the Holiday File to a PDS Member on z/OS Under PDS Deployment	461
Enabling Leading Zeros For Date and Time Functions in Dialogue Manager	462
Set the Display of Leading Zeros	463
Displaying Leading Zeros	463
DATEADD: Adding or Subtracting a Date Unit to or From a Date	464
Add or Subtract a Date Unit to or From a Date	465
Adding or Subtracting a Date Unit to or From a Date	466
Truncation With DATEADD	466
Using the Weekday Unit	467
Adding Weekdays to a Date (Reporting)	467
Determining If a Date Is a Work Day (Reporting)	468
Adding Months to a Date (Maintain)	468
DATECVT: Converting the Format of a Date	469
Convert a Date Format	469
Converting the Format of a Date	470

Converting a YYMD Date to DMY	470
Converting a Legacy Date to Date Format (Reporting)	471
DATEDIF: Finding the Difference Between Two Dates	471
Find the Difference Between Two Dates	472
Finding the Difference Between Two Dates	473
Truncation With DATEDIF	474
Using Month Calculations	474
Finding the Number of Weekdays Between Two Dates (Reporting)	475
Finding the Number of Years Between Two Dates (Maintain)	475
DATEMOV: Moving a Date to a Significant Point	476
Move a Date to a Significant Point	477
Moving a Date to a Significant Point	478
Returning the Next Business Day	479
Using a DEFINE FUNCTION to Move a Date to the Beginning of the Week	480
Determining Significant Points for a Date (Reporting)	482
Determining the End of the Week (Reporting)	483
Determining the End of the Week (Maintain)	484
DATETRAN: Formatting Dates in International Formats	484
Format Dates in International Formats	484
Usage Notes for the DATETRAN Function	493
Using the DATETRAN Function	493
DPART: Extracting a Component From a Date	501
Extract a Date Component and Return It in Integer Format	501
Extracting Date Components in Integer Format	502
FIQTR: Obtaining the Financial Quarter	503
Obtain the Financial Quarter	503
Obtaining the Financial Quarter	505
FIYR: Obtaining the Financial Year	506
Obtain the Financial Year	506
Obtaining the Financial Year	508
FIYYQ: Converting a Calendar Date to a Financial Date	509

Convert a Calendar Date to a Financial Date	509
Converting a Calendar Date to a Financial Date	511
TODAY: Returning the Current Date	512
Retrieve the Current Date	512
Retrieving the Current Date	513
Using Legacy Date Functions	514
Using Old Versions of Legacy Date Functions	514
Using Dates With Two- and Four-Digit Years	514
Using Four-Digit Years	515
Using Two-Digit Years	515
AYM: Adding or Subtracting Months	516
Add or Subtract Months to or From a Date	517
Adding Months to a Date	517
AYMD: Adding or Subtracting Days	518
Add or Subtract Days to or From a Date	518
Adding Days to a Date	519
CHGDAT: Changing How a Date String Displays	520
Short to Long Conversion	521
Change the Date Display String	522
Converting the Date Display From YMD to MDYYX	523
DA Functions: Converting a Legacy Date to an Integer	524
Convert a Date to an Integer	524
Converting Dates and Calculating the Difference Between Them	525
DMY, MDY, YMD: Calculating the Difference Between Two Dates	526
Calculate the Difference Between Two Dates	526
Calculating the Number of Days Between Two Dates	527
DOWK and DOWKL: Finding the Day of the Week	528
Find the Day of the Week	528
Finding the Day of the Week	529
DT Functions: Converting an Integer to a Date	529
Convert an Integer to a Date	530

Converting an Integer to a Date	531
GREGDT: Converting From Julian to Gregorian Format	532
Format Options for GREGDT	532
Convert From Julian to Gregorian Format	532
Converting From Julian to Gregorian Format	533
JULDAT: Converting From Gregorian to Julian Format	534
Format Settings for JULDAT	534
Convert From Gregorian to Julian Format	534
Converting From Gregorian to Julian Format	535
YM: Calculating Elapsed Months	536
Calculate Elapsed Months	536
Calculating Elapsed Months	537
Date-Time Functions	538
Using Date-Time Functions	538
Date-Time Parameters	539
Specifying the Order of Date Components	539
Specify the Order of Date Components in a Date-Time Field	539
Using the DATEFORMAT Parameter	539
Specifying the First Day of the Week for Use in Date-Time Functions	540
Set a Day as the Start of the Week	541
Setting Sunday as the Start of the Week	542
View the Current Setting of WEEKFIRST	542
Controlling Processing of Date-Time Values	542
Enable Strict Processing of Date-Time Values	543
Supplying Arguments for Date-Time Functions	543
Arguments for Use With Date and Time Functions	543
Using Date-Time Formats	545
Numeric String Format	545
Using Numeric String Format	546
Formatted-string Format	546

Using Formatted-string Format	546
Translated-string Format	547
Using Translated-string Format	547
Time Format	547
Using Time Formats	547
Using Universal Date-Time Input Values	548
Assigning Date-Time Values	548
Assign Date-Time Values	549
Assigning Date-Time Literals	550
Assigning a Date-Time Value in a COMPUTE Command	550
Assigning a Date-Time Value in WHERE Criteria	551
Assigning a Date-Time Value in IF Criteria	552
HADD: Incrementing a Date-Time Value	552
Increment a Date-Time Value	553
Incrementing a Date-Time Value	554
Incrementing the Month Component of a Date-Time Field (Reporting)	554
Incrementing the Month Component of a Date-Time Field (Maintain)	555
Converting Unix (Epoch) Time to a Date-Time Value	555
HCNVRT: Converting a Date-Time Value to Alphanumeric Format	556
Convert a Date-Time Value to Alphanumeric Format	556
Converting a Date-Time Value to Alphanumeric Format	557
Converting a Date-Time Field to Alphanumeric Format (Reporting)	558
Converting a Date-Time Field to Alphanumeric Format (Maintain)	558
HDATE: Converting the Date Portion of a Date-Time Value to a Date Format	559
Convert the Date Portion of a Date-Time Value to a Date Format	559
Converting the Date Portion of a Timestamp Value to a Date Format	559
Converting the Date Portion of a Date-Time Field to a Date Format (Reporting)	560
Converting the Date Portion of a Date-Time Field to a Date Format (Maintain)	560
HDIFF: Finding the Number of Units Between Two Date-Time Values	561
Usage Notes for HDIFF	561
Find the Number of Units Between Two Date-Time Values	561

Finding the Number of Units Between Two Date-Time Values	562
Finding the Number of Days Between Two Date-Time Fields (Reporting)	563
Finding the Number of Days Between Two Date-Time Fields (Maintain)	563
HDTTM: Converting a Date Value to a Date-Time Value	564
Convert a Date Value to a Date-Time Value	564
Converting a Date to a Timestamp	565
Converting a Date Field to a Date-Time Field (Reporting)	565
Converting a Date Field to a Date-Time Field (Maintain)	566
HEXTR: Extracting Components of a Date-Time Value and Setting Remaining Components to Zero	566
Extract Multiple Components From a Date-Time Value	566
Extracting Hour and Minute Components Using HEXTR	568
HGETC: Storing the Current Local Date and Time in a Date-Time Field	569
Store the Current Local Date and Time in a Date-Time Field	569
Storing the Current Date and Time as a Timestamp	569
Storing the Current Date and Time in a Date-Time Field (Reporting)	570
Storing the Current Local Date and Time in a Date-Time Field (Maintain)	570
HGETZ: Storing the Current Coordinated Universal Time in a Date-Time Field	571
Store the Current Universal Date and Time in a Date-Time Field	571
Storing the Current Universal Date and Time as a Timestamp	572
Storing the Current Universal Date and Time in a Date-Time Field (Reporting)	572
Calculating the Time Zone	572
HHMMSS: Retrieving the Current Time	573
Retrieve the Current Time	574
Retrieving the Current Time	574
Retrieving the Current Time	574
HHMS: Converting a Date-Time Value to a Time Value	575
Convert a Date-Time Value to a Time Value	575
Converting a Date-Time Value to a Time value	576
HINPUT: Converting an Alphanumeric String to a Date-Time Value	576
Convert an Alphanumeric String to a Date-Time Value	577

Converting an Alphanumeric String to a Timestamp	578
Converting an Alphanumeric String to a Date-Time Value (Reporting)	578
Converting an Alphanumeric String to a Date-Time Value (Maintain)	578
HMIDNT: Setting the Time Portion of a Date-Time Value to Midnight	579
Set the Time Portion of a Date-Time Value to Midnight	579
Setting the Time Portion of a Timestamp to Midnight	580
Setting the Time to Midnight (Reporting)	580
Setting the Time to Midnight (Maintain)	581
HMASK: Extracting Date-Time Components and Preserving Remaining Components	581
Move Multiple Date-Time Components to a Target Date-Time Field	581
Usage Notes for the HMASK Function	583
Changing a Date-Time Field Using HMASK	583
Changing a Date-Time Field Using HMASK	584
HNAME: Retrieving a Date-Time Component in Alphanumeric Format	584
Retrieve a Date-Time Component in Alphanumeric Format	585
Retrieving a Timestamp Date or Time Component as an Alphanumeric Value	586
Retrieving a Timestamp Date or Time Component as an Alphanumeric Value	586
Retrieving the Week Component in Alphanumeric Format (Reporting)	586
Retrieving the Day Component in Alphanumeric Format (Reporting)	587
Retrieving the Day Component in Alphanumeric Format (Maintain)	587
HPART: Retrieving a Date-Time Component as a Numeric Value	588
Retrieve a Date-Time Component in Numeric Format	588
Retrieving a Timestamp Date or Time Component as Numeric Value	589
Retrieving the Day Component in Numeric Format (Reporting)	589
Retrieving the Day Component in Numeric Format (Maintain)	590
HSETPT: Inserting a Component Into a Date-Time Value	590
Insert a Component Into a Date-Time Value	590
Inserting a Component Into a Date-Time Value	592
Inserting the Day Component Into a Date-Time Field (Reporting)	592
Inserting the Day Component Into a Date-Time Field (Maintain)	592

HTIME: Converting the Time Portion of a Date-Time Value to a Number	593
Convert the Time Portion of a Date-Time Value to a Number	593
Converting the Time Portion of a Date-Time Value to a Number	594
Converting the Time Portion of a Date-Time Field to a Number (Reporting)	594
Converting the Time Portion of a Date-Time Field to a Number (Maintain)	595
HTMTOTS or TIMETOTS: Converting a Time to a Timestamp	595
Convert a Time to a Timestamp	596
Converting a Time to a Timestamp	596
Converting a Time to a Timestamp	597
HYYWD: Returning the Year and Week Number From a Date-Time Value	598
Return the Year and Week Number From a Date-Time Value	598
Returning the Year and Week Number From a Date-time Value	599
Returning the Year and Week Number From a Date-Time Value	599
Extracting a Component From a Date Returned by HYYWD	600
Maintain-specific Date and Time Functions	602
Maintain-specific Standard Date and Time Functions	602
HHMMSS: Retrieving the Current Time (Maintain)	602
Retrieve the Current Time	602
Retrieving the Current Time	603
Initial_HHMMSS: Returning the Time the Application Was Started	603
Retrieve the Initial Time	603
Initial_TODAY: Returning the Date the Application Was Started	604
Retrieve the Initial Date	604
TODAY: Retrieving the Current Date (Maintain)	604
Retrieve the Current Date	604
Retrieving the Current Date	605
TODAY2: Returning the Current Date	605
Retrieve the Current Date	605
Retrieving the Current Date	605
ADD: Adding Days to a Date	606

Add Days to a Date	606
Adding Days to a Date	607
DAY: Extracting the Day of the Month From a Date	607
Extract the Day of the Month From a Date	607
Extracting the Day of the Month From a Date	608
JULIAN: Determining How Many Days Have Elapsed in the Year	608
Determine How Many Days Have Elapsed in the Year	608
Determining How Many Days Have Elapsed in the Year	609
MONTH: Extracting the Month From a Date	609
Extract the Month From a Date	609
Extracting the Month From a Date	609
QUARTER: Determining the Quarter	610
Determine the Quarter for a Date	610
Determining the Quarter for a Date	610
SETMDY: Setting the Value to a Date	611
Set a Value to a Date	611
Setting a Value to a Date	612
SUB: Subtracting a Value From a Date	612
Subtract a Value From a Date	612
Subtracting Days From a Date	613
WEEKDAY: Determining the Day of the Week for a Date	613
Determine the Day of the Week for a Date	613
Determining the Day of the Week for a Date	614
YEAR: Extracting the Year From a Date	614
Extract the Year From a Date	614
Extracting a Year From a Date	614
Simplified Conversion Functions	616
CHAR: Returning a Character Based on a Numeric Code	616
Return a Character Based on a Numeric Code	616
Using the CHAR Function to Insert Control Characters Into a String	617

COMPACTFORMAT: Displaying Numbers in an Abbreviated Format	618
Display Numbers in an Abbreviated Format	618
Displaying Numbers in an Abbreviated Format	618
CTRLCHAR: Returning a Non-Printable Control Character	619
Return a Non-Printable Control Character	619
Using the CTRLCHAR Function to Insert Control Characters Into a String	621
DT_FORMAT: Converting a Date or Date-Time Value to an Alphanumeric String ..	622
Convert a Date Value to an Alphanumeric String in a Specified Date Format	622
Converting Date and Date_Time Values to Alphanumeric Format	623
FPRINT: Displaying a Value in a Specified Format	624
Display a Value in a Specified Format	624
Displaying a Value in a Specified Format	624
HEXTYPE: Returning the Hexadecimal View of an Input Value	626
Returning the Hexadecimal View of an Input Value	626
Returning a Hexadecimal View	626
PHONETIC: Returning a Phonetic Key for a String	628
Return a Phonetic Key	628
Generating a Phonetic Key	629
TO_INTEGER: Converting a Character String to an Integer Value	630
Convert a Character String to an Integer	630
Converting a Character String to an Integer Value	630
TO_NUMBER: Converting a Character String to a Numeric Value	631
Convert a Character String to a Number	631
Converting a Character String to a Number	632
Format Conversion Functions	633
ATODBL: Converting an Alphanumeric String to Double-Precision Format	633
Convert an Alphanumeric String to Double-Precision Format	633
Converting an Alphanumeric Field to Double-Precision Format	634
EDIT: Converting the Format of a Field	635
Convert the Format of a Field	636

Converting From Numeric to Alphanumeric Format	636
FPRINT: Converting Fields to Alphanumeric Format	637
Convert Fields Using FPRINT	637
Usage Notes for the FPRINT Function	638
Converting a Numeric Field to Alphanumeric Format	638
Converting Numeric Fields to Alphanumeric Format	638
Converting Alphanumeric and Numeric Date Fields to Alphanumeric Format	639
Converting a Date Field to Alphanumeric Format	640
Converting a Date-Time Field to Alphanumeric Format and Creating a HOLD File	641
FTOA: Converting a Number to Alphanumeric Format	643
Convert a Number to Alphanumeric Format	643
Converting From Numeric to Alphanumeric Format	644
HEXBYT: Converting a Decimal Integer to a Character	645
Convert a Decimal Integer to a Character	645
Converting a Decimal Integer to a Character in ASCII and Unicode	646
Converting a Decimal Integer to a Character	647
ITONUM: Converting a Large Binary IntegerNumber to Double-Precision Format	648
Convert a Large Binary Integer to Double-Precision Format	649
Converting a Large Binary Integer to Double-Precision Format	649
ITOPACK: Converting a Large Binary Integer to Packed-Decimal Format	650
Convert a Large Binary Integer to Packed-Decimal Format	651
Converting a Large Binary Integer to Packed-Decimal Format	651
ITOZ: Converting a Number to Zoned Format	652
Convert a Number to Zoned Format	652
Converting a Number to Zoned Format	653
PCKOUT: Writing a Packed Number of Variable Length	654
Write a Packed Number of Variable Length	654
Writing a Packed Number of Variable Length	655
PTOA: Converting a Packed-Decimal Number to Alphanumeric Format	655
Convert a Packed-Decimal Number to Alphanumeric Format	656
Converting From Packed to Alphanumeric Format	657

TSTOPACK: Converting an MSSQL or Sybase Timestamp Column to Packed Decimal	658
Convert an MSSQL or Sybase Timestamp Column to Packed Decimal	658
Converting a Microsoft SQL Server Timestamp Column to Packed Decimal	659
UFMT: Converting an Alphanumeric String to Hexadecimal	660
Convert an Alphanumeric String to Hexadecimal	661
Converting an Alphanumeric String to Hexadecimal	661
XTPACK: Writing a Packed Number With Up to 31 Significant Digits to an Output File	662
Store Packed Values in an Alphanumeric Field	662
Writing a Long Packed Number to an Output File	663
Maintain-specific Light Update Support Functions	665
IWC.FindAppCGIValue: Retrieving a WebFOCUS Parameter or Variable Value	665
Retrieve a WebFOCUS Parameter or Variable Value	665
Retrieving a WebFOCUS Variable Value From a Launch Form	666
Retrieving Parameterized Data From Excel	666
IWC.GetAppCGIValue: Importing a WebFOCUS Parameter or Variable	667
Import a WebFOCUS Parameter	667
Importing a WebFOCUS Parameter	668
Simplified Numeric Functions	669
ASCII: Returning the ASCII Code for the Leftmost Character in a String	669
Return the ASCII Code for the Leftmost Character in a String	669
Returning the ASCII Code for the Leftmost Character in a String	670
CEILING: Returning the Smallest Integer Value Greater Than or Equal to a Value	671
Return the Smallest Integer Greater Than or Equal to a Number	671
Returning the Ceiling of a Number	671
EXPONENT: Raising e to a Power	672
Raise the Constant e to a Power	673
Raising e to a Power	673
FLOOR: Returning the Largest Integer Less Than or Equal to a Value	674

Return the Largest Integer Less Than or Equal to a Number	674
Returning the Floor of a Number	674
LOG10: Calculating the Base 10 Logarithm	675
Calculate the Base 10 Logarithm	676
Calculating the Base 10 Logarithm	676
MOD: Calculating the Remainder From a Division	677
Calculate the Remainder From a Division	677
Calculating the Remainder From a Division	677
POWER: Raising a Value to a Power	678
Raise a Value to a Power	679
Raising a Base Value to a Power	679
ROUND: Rounding a Number to a Given Number of Decimal Places	680
Round a Number to a Given Number of Decimal Places	680
Rounding a Number to a Given Number of Decimal Places	681
SIGN: Returning the Sign of a Number	682
Return the Sign of a Number	682
Returning the Sign of a Number	682
TRUNCATE: Truncating a Number to a Given Number of Decimal Places	683
Truncate a Number to a Given Number of Decimal Places	683
Truncating a Number to a Given Number of Decimal Places	684
Numeric Functions	685
ABS: Calculating Absolute Value	685
Calculate Absolute Value	685
Calculating Absolute Value	686
ASIS: Distinguishing Between a Blank and a Zero	686
BAR: Producing a Bar Chart	687
Produce a Bar Chart	687
Producing a Bar Chart	688
Creating a Bar Chart With a Scale	689
CHKPCK: Validating a Packed Field	690

Validate a Packed Field	690
Validating Packed Data	691
DMOD, FMOD, and IMOD: Calculating the Remainder From a Division	693
Calculate the Remainder From a Division	693
Calculating the Remainder From a Division	694
EXP: Raising e to the Nth Power	695
Raise e to the Nth Power	695
Raising e to the Nth Power	695
EXPN: Evaluating a Number in Scientific Notation	696
Evaluate a Number in Scientific Notation	696
Evaluating a Number in Scientific Notation	697
FMLCAP: Retrieving FML Hierarchy Captions	697
Retrieve Captions in an FML Request Using the FMLCAP Function	698
Retrieving FML Hierarchy Captions Using FMLCAP	698
FMLFOR: Retrieving FML Tag Values	699
Retrieve FML Tag Values	699
Retrieving FML Tag Values With FMLFOR	700
FMLINFO: Returning FOR Values	700
Retain FOR Values in an FML Request	701
Retrieving FOR Values for FML Hierarchy Rows	701
Using FMLINFO With an OR Phrase	702
FMLLIST: Returning an FML Tag List	703
Retrieve an FML Tag List	704
Retrieving an FML Tag List With FMLLIST	704
INT: Finding the Greatest Integer	705
Find the Greatest Integer	705
Finding the Greatest Integer	705
LOG: Calculating the Natural Logarithm	706
Calculate the Natural Logarithm	706
Calculating the Natural Logarithm	707
MAX and MIN: Finding the Maximum or Minimum Value	707

Find the Maximum or Minimum Value	708
Determining the Minimum Value	708
MIRR: Calculating the Modified Internal Return Rate	709
Calculate the Modified Internal Rate of Return	709
Usage Notes for the MIRR Function	710
Calculating the Modified Internal Rate of Return	711
NORMSDST and NORMSINV: Calculating Normal Distributions	713
NORMSDST: Calculating Standard Cumulative Normal Distribution	713
Characteristics of the Normal Distribution	714
Calculate the Cumulative Standard Normal Distribution Function	715
Using the NORMSDST Function	715
NORMSINV: Calculating Inverse Cumulative Normal Distribution	716
Calculate the Inverse Cumulative Standard Normal Distribution Function	717
Using the NORMSINV Function	717
PRDNOR and PRDUNI: Generating Reproducible Random Numbers	718
Generate Reproducible Random Numbers	719
Generating Reproducible Random Numbers	720
RDNORM and RDUNIF: Generating Random Numbers	721
Generate Random Numbers	722
Generating Random Numbers	723
SQRT: Calculating the Square Root	723
Calculate the Square Root	724
Calculating the Square Root	724
XIRR: Calculating the Modified Internal Return Rate (Periodic or Non-Periodic) ...	725
Calculate the Internal Rate of Return	725
Usage Notes for the XIRR Function	727
Calculating the Internal Rate of Return	727
Maintain-specific Script Functions	729
IWCLink: Displaying a URL in a Browser or Frame	729
Display a URL in a Browser or Frame	729

Displaying a URL in a Frame	730
IWCSwitchToSecure and IWCSwitchToUnsecure: Turning the Secure Sockets Layer On and Off	731
Turn Secure Sockets Layer On	732
Turn Secure Sockets Layer Off	732
IWCTrigger: Calling a Maintain Function From a Script Handler	732
Call a Maintain Function From a Script Handler	733
Retrieve a Parameter From the Called Function	733
Pass the Value of an ActiveX Control Property to a Maintain Function	733
Passing an ActiveX Control Value to a Maintain Function	734
IWC.FindAppCGIValue: Finding a WebFOCUS Parameter or Variable Value	734
Find a WebFOCUS Parameter Value	735
Finding a Variable Value From a Launch Form	735
Finding Parameterized Data From Excel	735
IWC.GetAppCGIValue: Retrieving a WebFOCUS Parameter or Variable	736
Retrieve a WebFOCUS Parameter	737
Retrieving a WebFOCUS Parameter	737
Simplified Statistical Functions	738
Specify the Partition Size for Simplified Statistical Functions	738
CORRELATION: Calculating the Degree of Correlation Between Two Sets of Data	739
Calculate the Correlation Coefficient Between Two Fields	739
Calculating a Correlation	739
KMEANS_CLUSTER: Partitioning Observations Into Clusters Based on the Nearest Mean Value	740
Partition Observations Into Clusters Based on the Nearest Mean Value	741
Partitioning Data Values Into Clusters	742
MULTIREGRESS: Creating a Multivariate Linear Regression Column	743
Create a Multivariate Linear Regression Column	744
Creating a Multivariate Linear Regression Column	744
OUTLIER: Identifying Outliers in Numeric Data	745
Identify Outliers in Numeric Data	746

Identifying Outliers	746
RSERVE: Running an R Script	747
Run an R Script	747
Using RSERVE to Run an R Script	748
STDDEV: Calculating the Standard Deviation for a Set of Data Values	751
Calculate the Standard Deviation in a Set of Data	752
Calculating a Standard Deviation	753
Machine Learning (Python-based) Functions	754
ANOMALY_IF: Detecting Outliers	754
Calculate an Anomaly Score	755
Detecting Outliers Using ANOMALY_IF	756
CLASSIFY_BLR: Binary Logistic Regression	758
Calculate a Binary Logistic Regression	759
Using CLASSIFY_BLR to Predict Number of Doors	760
CLASSIFY_KNN: K-Nearest Neighbors Classification	761
Calculate a K-Nearest Neighbors Classification	762
Predicting Class Assignment Using CLASSIFY_KNN	763
CLASSIFY_RF: Random Forest Classification	764
Calculate a Random Forest Classification	765
Predicting Class Assignment Using CLASSIFY_RF	766
CLASSIFY_XGB: Extreme Gradient Boosting Classification	767
Calculate an Extreme Gradient Boosting Classification	768
Predicting Price Using CLASSIFY_XGB	770
REGRESS_KNN: K-Nearest Neighbors Regression	771
Calculate a K-Nearest Neighbors Regression	772
Predicting Price Using REGRESS_KNN	773
REGRESS_POLY: Polynomial Regression	774
Calculate a Polynomial Regression Column	775
Using REGRESS_POLY to Predict Price	776
REGRESS_RF: Random Forest Regression	777

Calculate a Random Forest Regression	778
Predicting Price Using REGRESS_RF	779
REGRESS_XGB: Extreme Gradient Boosting Regression	780
Calculate an Extreme Gradient Boosting Regression	781
Predicting Price Using REGRESS_XGB	782
RUN_MODEL and RUN_MODEL2: Running a Saved Python Model	784
Save a Python-Based Model	784
Saving a Python Model	784
Run a Saved Python Model	785
Running a Model Using RUN_MODEL	786
Running a Model Using RUN_MODEL2	787
Simplified System Functions	788
EDAPRINT: Inserting a Custom Message in the EDAPRINT Log File	788
Insert a Message in the EDAPRINT Log File	788
Inserting a Custom Message in the EDAPRINT Log File	789
ENCRYPT: Encrypting a Password	789
Encrypt a Password	789
Encrypting a Password	790
GETENV: Retrieving the Value of an Environment Variable	790
Retrieve the Value of an Environment Variable	790
Retrieving the Value of an Environment Variable	791
PUTENV: Assigning a Value to an Environment Variable	791
Assign a Value to an Environment Variable	791
Assigning a Value to the UNIX PS1 Variable	792
SLACK: Posting a Message to a Slack Channel	793
Post a Message to a Slack Channel	793
Sending a Slack Message From a WebFOCUS Request	793
System Functions	796
CHECKPRIVS: Retrieving the Privilege State for the Connected User	796
Retrieve the Privilege State for the Connected User	796

Retrieving the Privilege State for the Connected User	797
CLSDDREC: Closing All Files Opened by the PUTDDREC Function	797
Close All Files Opened by the PUTDDREC Function	798
Closing Files Opened by the PUTDDREC Function	798
FEXERR: Retrieving an Error Message	798
Retrieve an Error Message	799
Retrieving an Error Message	799
FGETENV: Retrieving the Value of an Environment Variable	800
Retrieve the Value of an Environment Variable	800
FINDMEM: Finding a Member of a Partitioned Data Set	801
Find a Member of a Partitioned Data Set	801
Finding a Member of a Partitioned Data Set	802
FPUTENV: Assigning a Value to an Environment Variable	803
Assign a Value to an Environment Variable	803
Assigning a Value to an Environment Variable	804
GETCOOKIE: Retrieving a Browser Cookie Value	804
Retrieve a Cookie Value	805
Retrieving the Value of a Browser Cookie	805
GETHEADER: Retrieving an HTTP Header Variable	806
Retrieve an HTTP Header Variable	806
Retrieving the Value of an HTTP Header Variable	806
GETPDS: Determining If a Member of a Partitioned Data Set Exists	807
Determine If a PDS Member Exists	808
Determining If a PDS Member Exists	808
Displaying the Attributes of a PDS	809
GETUSER: Retrieving a User ID	810
Retrieve a User ID	810
Retrieving a User ID	811
GRPLIST: Retrieving the Group List of the Connected User	812
Retrieve a List of Group Memberships for the Connected User	812
Retrieving the Group List for the Connected User	812

JOBNAME: Retrieving the Current Process Identification String	813
Retrieve the Current Process Identification String	813
Retrieving a Process Identification String	814
MVSDYNAM: Passing a DYNAM Command to the Command Processor	814
Pass a DYNAM Command to the Command Processor	815
PUTCOOKI: Submitting a Value to a Browser Cookie	815
Submit a Cookie Value	816
Submitting a Value to a Browser Cookie	816
PUTDDREC: Writing a Character String as a Record in a Sequential File	816
Write a Character String as a Record in a Sequential File	817
Writing a Character String as a Record in a Sequential File	819
Calling PUTDDREC in a TABLE Request	819
Calling PUTDDREC and CLSDDREC in Dialogue Manager -SET Commands	820
SLEEP: Suspending Execution for a Given Number of Seconds	821
Suspend Execution for a Specified Number of Seconds	821
Suspending Execution for Four Seconds	822
SPAWN: Creating a Subprocess From a Procedure	823
Create a Subprocess From a Procedure	823
Creating a Subprocess From a Procedure on UNIX	824
SYSTEM: Calling a System Program	824
Call a DOS or Windows Program	825
Executing the DIR Command	825
Changing the Default Directory	826
Running the Check Disk Program	826
SYSVAR: Retrieving the Value of a z/OS System Variable	826
Retrieve the Value of a z/OS System Variable	826
Retrieving the Value of the z/OS SYSNAME Variable	827
Simplified Geography Functions	828
Sample Geography Files	828
GIS_DISTANCE: Calculating the Distance Between Geometry Points	834

Calculate the Distance Between Geometry Points	835
Calculating the Distance Between Two Geometry Points	835
GIS_DRIVE_ROUTE: Calculating the Driving Directions Between Geometry Points	836
Calculate the Drive Route Between Geometry Points	837
Calculating the Drive Route Between Two Geometry Points	837
Charting a Driving Route Between Two Geometry Points	839
GIS_GEOCODE_ADDR: Geocoding a Complete Address	840
Geocode a Complete Address	841
Geocoding a Complete Address	841
GIS_GEOCODE_ADDR_CITY: Geocoding an Address Line, City, and State	842
Geocode an Address Line, City, and State	842
Geocoding a Street Address, City, and State	843
GIS_GEOCODE_ADDR_POSTAL: Geocoding an Address Line and Postal Code	844
Geocode an Address Line and Postal Code	844
Geocoding a Street Address and Postal Code	845
GIS_GEOMETRY: Building a JSON Geometry Object	846
Build a JSON Geometry Object	846
Building a JSON Geometry Object	846
Charting a Geometry Object	847
GIS_IN_POLYGON: Determining if a Point is in a Complex Polygon	849
Determine if a Point is in a Complex Polygon	849
Determining if a Point is in a Polygon	850
GIS_LINE: Building a JSON Line	851
Build a JSON Line	851
Building a JSON Line	852
Charting Geometry Lines	853
GIS_POINT: Building a Geometry Point	855
Build a Geometry Point	855
Building a Geometry Point	856
Charting Geometry Points	857
GIS_REVERSE_COORDINATE: Returning a Geographic Component	859

Return a Geographic Component	859
Returning Geographic Components Associated With Coordinates	860
GIS_SERVICE_AREA: Calculating a Geometry Area Around a Given Point	861
Calculate a Geometry Area Around a Point	861
Calculating a Service Area Around a Geometry Point	862
Charting a Geometry Service Area Around a Point	863
GIS_SERV_AREA_XY: Calculating a Service Area Around a Given Coordinate	865
Calculate a Geometry Area Around a Coordinate	866
Calculating a Service Area Around a Coordinate	867
Charting a Geometry Service Area Around a Coordinate	868
SQL Character Functions	871
LOCATE: Returning the Position of a Substring in a String	871
Return the Position of a Substring in a String	871
Returning the Position of a Substring in a String	872
SQL Miscellaneous Functions	874
CHR: Returning the ASCII Character Given a Numeric Code	874
Return the ASCII Character Given a Numeric Code	874
Returning the ASCII Character Given a Numeric Code	875
Trigonometric Functions	876
ACOS: Calculating an Angle Given its Cosine	876
Calculate an Angle Given its Cosine	876
Calculating the Arccosine of a Value	876
ASIN: Calculating an Angle Given its Sine	877
Calculate an Angle Given its Sine	878
Calculating the Arcsine of a Value	878
ATAN: Calculating an Angle Given its Tangent	879
Calculate an Angle Given its Tangent	879
Calculating the Arctangent of a Value	879
ATAN2: Calculating an Angle Given the Coordinates of its Tangent	880

Calculate an Angle Given the Coordinates of its Tangent	881
Calculating the Arctangent of a Set of Coordinates	881
COS: Calculating the Cosine of an Angle	882
Calculate the Cosine of an Angle	882
Calculating the Cosine of an Angle	882
COT: Calculating the Cotangent of an Angle	883
Calculate the Cotangent of an Angle	883
Calculating the Cotangent of an Angle	884
DEGREES: Converting Radians to Degrees	884
Convert Radians to Degrees	885
Converting Radians to Degrees	885
PI: Returning the Constant Pi	886
Returning the Value Pi	886
Returning the Constant Pi	886
RADIANS: Converting Degrees to Radians	887
Convert Degrees to Radians	887
Converting Radians to Degrees	887
SIN: Calculating the Sine of an Angle	888
Calculate the Sine of an Angle	888
Calculating the Sine of an Angle	888
TAN: Calculating the Tangent of an Angle	889
Calculate the Tangent of an Angle	889
Calculating the Tangent of an Angle	890
Creating a Subroutine	891
Writing a Subroutine	891
Naming a Subroutine	893
Creating Arguments	893
Language Considerations	894
Programming a Subroutine	897
Executing a Subroutine at an Entry Point	898

Execute a Subroutine at an Entry Point	898
Executing a Subroutine at an Entry Point	899
Including More Than 200 Arguments in a Subroutine Call	900
Create a Subroutine With Multiple Call Statements	901
Creating a Subroutine Divided Into Segments	902
Compiling and Storing a Subroutine	903
Compiling and Storing a Subroutine on z/OS	903
Compiling and Storing a Subroutine on UNIX	904
Compiling and Storing a Subroutine on Windows	904
Testing the Subroutine	904
Determine the Location of Error	904
Using a Custom Subroutine: The MTHNAM Subroutine	905
Writing the MTHNAM Subroutine	905
MTHNAM Subroutine Written in FORTRAN	906
MTHNAM Subroutine Written in COBOL	907
MTHNAM Subroutine Written in PL/I	908
MTHNAM Subroutine Written in BAL Assembler	909
MTHNAM Subroutine Written in C	911
Calling the MTHNAM Subroutine From a Request	912
Calling the MTHNAM Subroutine	912
Subroutines Written in REXX	913
Storing and Searching for a REXX Subroutine	914
Call a REXX Subroutine	914
Returning the Day of the Week	915
Passing Multiple Arguments to a REXX Subroutine	916
Accepting Multiple Tokens in a Parameter	918
Formats and REXX Subroutines	919
Returning a Result in Alphanumeric Format	920
Returning a Result in Integer Format	921
Passing a Date Value as an Alphanumeric Field With Date Options	922
Passing a Date as a Date Converted to Alphanumeric Format	924

ASCII and EBCDIC Codes	926
ASCII and EBCDIC Code Chart	926
ibi Documentation and Support Services	941
Legal and Third-Party Notices	942

How to Use This Manual

This manual describes the functions supplied with your WebFOCUS product. It is intended for application developers who call these functions from their programs to perform calculations or manipulate data. Other users who access corporate data to produce reports can call these functions.

This manual also explains how to create functions tailored to individual needs (called subroutines) for use with your product.

Available Languages

A function is available in the reporting language, the Maintain language, or both:

- The reporting language includes all commands used to create a report. It is available to users of any WebFOCUS® product.
- The Maintain language includes all commands used to maintain data sources with the Maintain product. It is available only to those who purchased Maintain.

Look in the description of an individual function for the available language, or in the categorized list of functions in [Introducing Functions](#).

Operating Systems

Except in cases noted specifically, all functions run on all server-supported operating systems.

Introducing Functions

The following topics offer an introduction to functions and explain the different types of functions available.

Using Functions

Functions operate on one or more arguments and return a single value. The returned value can be stored in a field, assigned to a Dialogue Manager variable, used in a calculation or other processing, or used in a selection or validation test. Functions provide a convenient way to perform certain calculations and manipulations.

There are three types of functions:

- **Internal functions.** Built into the WebFOCUS language, requiring no extra work to access or use. The following functions are internal functions. You cannot replace any of these internal functions with your own functions of the same name. All other functions are external.
 - ABS
 - ASIS
 - DMY, MDY, and YMD
 - DECODE
 - EDIT
 - FIND
 - LAST
 - LOG
 - LOOKUP
 - MAX and MIN
 - SQRT

- All Maintain-specific functions
- **External functions.** Stored in an external library that must be accessed. When invoking these functions, an argument specifying the output field or format of the result is required. External functions are distributed with WebFOCUS. You can replace these functions with your own functions of the same name. However, in this case, you must set USERFNS=LOCAL.
- **Subroutines.** Written by the user and stored externally. For details, see [Creating a Subroutine](#).

For information on how to use an internal or external function, see [Accessing and Calling a Function](#).

Types of Functions

You can access any of the following types of functions:

- **Simplified analytic functions.** Perform calculations using multiple rows in the internal matrix. For details, see [Types of Functions](#).
- **Simplified character functions.** Character functions with streamlined parameter lists and no output arguments, similar to those used by SQL functions. For details, see [Types of Functions](#).
- **Character functions.** Manipulate alphanumeric fields or character strings. For details, see [Types of Functions](#).
- **Variable length character functions.** Manipulate AnV fields or character strings. For details, see [Types of Functions](#).
- **Character functions for DBCS code pages.** Manipulate alphanumeric fields or character strings on DBCS code pages. For details, see [Types of Functions](#).
- **Maintain-specific character functions.** Manipulate alphanumeric fields or character strings. These functions are available only in Maintain Data. For details, see [Types of Functions](#).
- **Data source and decoding functions.** Search for or retrieve data source records or values, and assign values. For details, see [Types of Functions](#).
- **Simplified date and date-time functions.** Date and date-time functions with streamlined parameter lists and no output arguments, similar to those used by SQL

functions. For details, see [Types of Functions](#).

- **Date functions.** Manipulate dates. For details, see [Types of Functions](#).
- **Date-time functions.** Manipulate date-time values. For details, see [Types of Functions](#).
- **Maintain-specific date and time functions.** Manipulate dates and times. These functions are available only in Maintain Data. For details, see [Types of Functions](#).
- **Simplified conversion functions.** Convert fields from one format to another using streamlined parameter lists. For details, see [Types of Functions](#).
- **Format conversion functions.** Convert fields from one format to another. For details, see [Types of Functions](#).
- **Maintain-specific Light Update Support functions.** Retrieve WebFOCUS variable or parameter data implicitly from within a Maintain procedure. These functions are available only in Maintain Data. For details, see [Types of Functions](#).
- **Simplified numeric functions.** Perform calculations on numeric constants and fields using streamlined parameter lists. For details, see [Types of Functions](#).
- **Numeric functions.** Perform calculations on numeric constants and fields. For details, see [Types of Functions](#).
- **Maintain-specific Script functions.** Integrate JavaScript and VBScripts into your Maintain Data application and perform client-side execution without returning to the WebFOCUS Reporting Server. These functions are available only in Maintain Data. For details, see [Types of Functions](#).
- **Simplified statistical functions.** Perform statistical calculations. For details, see [Types of Functions](#).
- **Machine Learning (Python-based) Functions.** Run Python scripts that perform classification and regression. For details, see [Types of Functions](#).
- **Simplified system functions.** Call the operating system to obtain information about the operating environment or to use a system service, using streamlined parameter lists. For details, see [Types of Functions](#).
- **System functions.** Call the operating system to obtain information about the operating environment or to use a system service. For details, see [Types of Functions](#).
- **Simplified Geography Functions.** Perform location-based calculations and retrieve geocoded points for various types of location data. For details, see [Types of](#)

Functions.

- **Trigonometric functions.** Perform trigonometric calculations, inverse trigonometric calculations, and angle conversion functions For details, see [Trigonometric Functions](#).

ibi WebFOCUS-Specific Functions

Most supplied functions are available in both WebFOCUS and FOCUS. However, some functions are available only in WebFOCUS. They are:

- SPAWN
- SYSTEM

For details on these functions, see the individual topics.

Simplified Analytic Functions

The following functions perform calculations based on multiple rows in the internal matrix. For details, see [Simplified Analytic Functions](#).

FORECAST_MOVAVE

Calculates a simple moving average column.

FORECAST_EXPAVE

Calculates a single exponential smoothing column.

FORECAST_DOUBLEXP

Calculates a double exponential smoothing column.

FORECAST_SEASONAL

Calculates a triple exponential smoothing column.

FORECAST_LINEAR

Calculates a linear regression column.

PARTITION_AGGR

Creates rolling calculations.

PARTITION_REF

Retrieves prior or subsequent fields.

INCREASE

Calculates the difference between a value in the current row and a prior row within a partition.

PCT_INCREASE

Calculates the percent difference between a value in the current row and a prior row within a partition.

PREVIOUS

Retrieves a prior value within a partition.

RUNNING_AVE

Calculate the average over a group of rows within a partition.

RUNNING_MIN

Calculate the minimum over a group of rows within a partition.

RUNNING_MAX

Calculate the maximum over a group of rows within a partition.

RUNNING_SUM

Calculate the sum over a group of rows within a partition.

Simplified Character Functions

The following functions manipulate alphanumeric fields or character strings and have simplified parameter lists. For details, see [Simplified Character Functions](#).

CHAR_LENGTH

Returns the length, in characters, of a string.

Available Languages: reporting

DIGITS

Converts a number to a character string of the specified length.

Available Languages: reporting

GET_TOKEN

Extracts a token (substring) based on a token number and a string listing acceptable delimiter characters.

Available Languages: reporting

INITCAP

Capitalizes the first letter of every word in a string and makes all other letters lowercase, where a word starts at the beginning of the string, after a blank space, or after a special character.

Available Languages: reporting

LAST_NONBLANK

retrieves the last field value that is neither blank nor missing. If all previous values are either blank or missing, returns a missing value.

LOWER

Translates a string to lowercase.

Available Languages: reporting

LPAD

Left-pads a string with a given character.

Available Languages: reporting

LTRIM

Removes all blanks from the left end of a string.

Available Languages: reporting

PATTERNS

Returns a pattern that represents the structure of the source string.

Available Languages: reporting

POSITION

Returns the first position (in characters) of a substring in a source string.

Available Languages: reporting

REGEX

Matches a string to a regular expression and returns true (1) or false (0).

RPAD

Right-pads a string with a given character.

Available Languages: reporting

RTRIM

Removes all blanks from the right end of a string.

Available Languages: reporting

SUBSTRING

Extracts a substring from a source string.

Available Languages: reporting

TOKEN

Extracts a token (substring) based on a token number and a delimiter string.

Available Languages: reporting

TRIM_

Removes all occurrences of a single character from either the beginning or end of a string, or both.

Available Languages: reporting

UPPER

Translates a string to uppercase.

Available Languages: reporting

Character Functions

The following functions manipulate alphanumeric fields or character strings. For details, see [Character Functions](#).

ARGLEN

Measures the length of a character string within a field, excluding trailing blanks.

Available Languages: reporting, Maintain

ASIS

Distinguishes between a blank and a zero in Dialogue Manager.

Available Languages: reporting

BITSON

Evaluates an individual bit within a character string to determine whether it is on or off.

Available Languages: reporting, Maintain

BITVAL

Evaluates a string of bits within a character string and returns its value.

Available Languages: reporting, Maintain

BYTVAL

Translates a character to its corresponding ASCII or EBCDIC decimal value.

Available Languages: reporting, Maintain

CHKFMT

Checks a character string for incorrect characters or character types.

Available Languages: reporting, Maintain

CTRAN

Translates a character within a character string to another character based on its decimal value.

Available Languages: reporting, Maintain

CTRFLD

Centers a character string within a field.

Available Languages: reporting, Maintain

EDIT

Extracts characters from or adds characters to a character string.

Available Languages: reporting

GETTOK

Divides a character string into substrings, called tokens, where a specific character, called a delimiter, occurs in the string.

Available Languages: reporting, Maintain

LCWORD

Converts the letters in a character string to mixed case.

Available Languages: reporting, Maintain

LCWORD2

Converts the letters in a character string to mixed case.

Available Languages: reporting, Maintain

LCWORD3

Converts the letters in a character string to mixed case.

Available Languages: reporting, Maintain

LJUST

Left-justifies a character string within a field.

Available Languages: reporting

LOCASE

Converts alphanumeric text to lowercase.

Available Languages: reporting, Maintain

OVERLAY

Overlays a base character string with a substring.

Available Languages: reporting

PARAG

Divides a line of text into smaller lines by marking them with a delimiter.

Available Languages: reporting, Maintain

POSIT

Finds the starting position of a substring within a larger string.

Available Languages: reporting

REVERSE

Reverses the characters in a character string.

Available Languages: reporting, Maintain

RJUST

Right-justifies a character string.

Available Languages: reporting

SOUNDEX

Searches for a character string phonetically without regard to spelling.

Available Languages: reporting, Maintain

SPELLNM

Takes an alphanumeric string or a numeric value with two decimal places and spells it out with dollars and cents.

Available Languages: reporting, Maintain

SQUEEZ

Reduces multiple contiguous spaces within a character string to a single space.

Available Languages: reporting, Maintain

STRIP

Removes all occurrences of a specific character from a string.

Available Languages: reporting, Maintain

STRREP

Replaces all occurrences of a specific character string.

Available Languages: reporting, Maintain

SUBSTR

Extracts a substring based on where it begins and its length in the parent string.

Available Languages: reporting

TRIM

Removes leading and/or trailing occurrences of a pattern within a character string.

Available Languages: reporting

UPCASE

Converts a character string to uppercase.

Available Languages: reporting

Variable Length Character Functions

The following functions manipulate variable length alphanumeric fields or character strings. For details, see [Variable Length Character Functions](#).

LENV

Returns the actual length of an *AnV* field or the size of an *An* field.

Available Languages: reporting

LOCASV

Converts alphanumeric text to lowercase in an *AnV* field.

Available Languages: reporting

POSITV

Finds the starting position of a substring in an *AnV* field.

Available Languages: reporting

SUBSTV

Extracts a substring based on where it begins and its length in the parent string in an *AnV* field.

Available Languages: reporting

TRIMV

Removes leading and/or trailing occurrences of a pattern within a character string in an *AnV* field.

Available Languages: reporting

UPCASV

Converts a character string to uppercase in an *AnV* field.

Available Languages: reporting

Character Functions for DBCS Code Pages

The following functions manipulate character strings for DBCS code pages. For details, see [Character Functions for DBCS Code Pages](#).

DCTRAN

Translates a single-byte or double-byte character to another character.

DEDIT

Extracts characters from or adds characters to a string.

DSTRIP

Removes a single-byte or double-byte character from a string.

DSUBSTR

Extracts a substring based on its length and position in the source string.

JPTRANS

Converts Japanese specific characters.

Maintain-specific Character Functions

The following functions manipulate alphanumeric fields or character strings. They are available only in the Maintain language. For details, see [Maintain-specific Character Functions](#).

CHAR2INT

Translates an ASCII or EBCDIC character to the integer value it represents, depending on the operating system.

INT2CHAR

Translates an integer into the equivalent ASCII or EBCDIC character, depending on the operating system.

LCWORD and LCWORD2

Converts the letters in a character string to mixed case.

LENGTH

Measures the length of a character string, including trailing blanks.

LJUST

Left-justifies a character string within a field.

LOWER

Converts a character string to lowercase.

MASK

Extracts characters from or adds characters to a character string.

MNTGETTOK

Divides a character string into substrings, called tokens.

NLSCHR

Converts a character from the native English code page to the running code page.

OVERLAY

Overlays a base character string with a substring.

POSIT

Finds the starting position of a substring within a larger string.

RJUST

Right-justifies a character string.

SELECTS

Decodes a value from a stack.

STRAN

Substitutes a substring for another substring in a character string.

STRCMP

Compares two alphanumeric strings using the ASCII or EBCDIC collating sequence.

STRICMP

Compares two alphanumeric strings using the ASCII or EBCDIC collating sequence, but ignoring case differences.

STRNCMP

Compares a specified number of characters in two character strings starting at the beginning of the strings using the EBCDIC or ASCII collating sequence.

SUBSTR

Extracts a substring based on where it begins and its length in the parent string.

TRIM

Removes trailing occurrences of a pattern within a character string.

TRIMLEN

Determines the length of a character string excluding trailing spaces.

UPCASE

Converts a character string to uppercase.

Data Source and Decoding Functions

The following functions search for data source records, retrieve data source records or values, and assign values. For details, see [Data Source and Decoding Functions](#).

COALESCE

Returns the value of the first non-missing argument.

Available Languages: reporting

DB_EXPR

Inserts an SQL expression into the SQL generated for a request against a relational data source.

Available Languages: reporting, MODIFY

DB_INFILE

Compares values in a source file to values in a target file, or if the source file is a relational data source, to values retrieved by a subquery.

Available Languages: reporting, MODIFY

CHECKMD5

Computes an MD5 hash check value of its input parameter.

Available Languages: reporting

CHECKSUM

Computes hash sum of its input parameter.

Available Languages: reporting

DB_LOOKUP

Retrieves a data value from a lookup data source.

Available Languages: reporting, MODIFY

DECODE

Assigns values based on the coded value of an input field.

Available Languages: reporting, Maintain

FIND

Determines if an incoming data value is in an indexed FOCUS data source field.

Available Languages: reporting

LAST

Retrieves the preceding value for a field.

Available Languages: reporting

LOOKUP

Retrieves a data value from a cross-referenced FOCUS data source in a MODIFY request.

Available Languages: MODIFY, Maintain

NULLIF

Returns a missing value when its parameters have equal values.

Available Languages: reporting

FOCUSPAGES

Returns the size of a FOCUS or XFOCUS file as number of pages.

Available Languages: reporting

Simplified Date and Date-Time Functions

The following functions manipulate date and date- time values. For details see [Simplified Date and Date-Time Functions](#).

DT_CURRENT_DATE

Returns the current date.

DT_CURRENT_DATETIME

Returns the current date and time.

DT_CURRENT_TIME

Returns the current time.

DTADD

Returns a new date after adding the specified number of a supported component

Available Languages: reporting, Maintain

DTDIFF

Returns the number of given component boundaries between the two dates.

Available Languages: reporting, Maintain

DTIME

Extracts time components from a date-time value.

DTPART

Returns a component value in integer format.

Available Languages: reporting, Maintain

DTRUNC

Returns the first date within a period

Available Languages: reporting, Maintain

Date Functions

The following functions manipulate dates. For details see [Date Functions](#).

Standard Date Functions

DATEADD

Adds a unit to or subtracts a unit from a date format.

Available Languages: reporting, Maintain

DATECVT

Converts date formats.

Available Languages: reporting, Maintain

DATEDIF

Returns the difference between two dates in units.

Available Languages: reporting, Maintain

DATEMOV

Moves a date to a significant point on the calendar.

Available Languages: reporting, Maintain

DATETRAN

Formats dates in international formats.

Available Languages: reporting, Maintain

DPART

Extracts a component from a date field and returns it in numeric format.

Available Languages: reporting, Maintain

FIYR

Returns the financial year, also known as the fiscal year, corresponding to a given calendar date based on the financial year starting date and the financial year numbering convention.

Available Languages: reporting, Maintain

FIQTR

Returns the financial quarter corresponding to a given calendar date based on the financial year starting date and the financial year numbering convention.

Available Languages: reporting, Maintain

FIYYQ

Returns a financial date containing both the financial year and quarter that corresponds to a given calendar date.

Available Languages: reporting, Maintain

HMASK

Extracts components from a date-time value and moves them to a target date-time field with all other components of the target field preserved.

Available Languages: reporting, Maintain

TODAY

Retrieves the current date from the system.

Available Languages: reporting, Maintain

Legacy Date Functions

AYM

Adds or subtracts months from dates that are in year-month format.

Available Languages: reporting, Maintain

AYMD

Adds or subtracts days from dates that are in year-month-day format.

Available Languages: reporting, Maintain

CHGDAT

Rearranges the year, month, and day portions of alphanumeric dates, and converts dates between long and short date formats.

Available Languages: reporting, Maintain

DA

Convert dates to the corresponding number of days elapsed since December 31, 1899.

DADMY converts dates in day-month-year format.

DADYM converts dates in day-year-month format.

DAMDY converts dates in month-day-year format.

DAMYD converts dates in month-year-day format.

DAYDM converts dates in year-day-month format.

DAYMD converts dates in year-month-day format.

Available Languages: reporting, Maintain

DMY, MDY, and YMD

Calculate the difference between two dates.

Available Languages: reporting, Maintain

DOWK and DOWKL

Find the day of the week that corresponds to a date.

Available Languages: reporting, Maintain

DT

Converts the number of days elapsed since December 31, 1899 to the corresponding date.

DTDMY converts numbers to day-month-year dates.

DTDYM converts numbers to day-year-month dates.

DTMDY converts numbers to month-day-year dates.

DTMYD converts numbers to month-year-day dates.

DTYDM converts numbers to year-day-month dates.

DTYMD converts numbers to year-month-day dates.

Available Languages: reporting, Maintain

GREGDT

Converts dates in Julian format to year-month-day format.

Available Languages: reporting, Maintain

JULDAT

Converts dates from year-month-day format to Julian (year-day format).

Available Languages: reporting, Maintain

YM

Calculates the number of months that elapse between two dates. The dates must be in year-month format.

Available Languages: reporting, Maintain

Date-Time Functions

The following functions manipulate date-time values. For details see [Date-Time Functions](#).

CVTSTIME (OpenVMS Only)

Converts the retrieved 64-bit DEC Date/Time formatted field to a printable character string or internal natural date value offset.

GETSTIME (OpenVMS Only)

Extracts the current 64-bit DEC Date/Time value from the system.

HADD

Increments a date-time field by a given number of units.

Available Languages: reporting, Maintain

HCNVRT

Converts a date-time field to a character string.

Available Languages: reporting, Maintain

HDATE

Extracts the date portion of a date-time field, converts it to a date format, and returns the result in the format YYMD.

Available Languages: reporting, Maintain

HDIFF

Calculates the number of units between two date-time values.

Available Languages: reporting, Maintain

HDTTM

Converts a date field to a date-time field. The time portion is set to midnight.

Available Languages: reporting, Maintain

HEXTR

Extracts components from a date-time value and moves them to a target date-time field with all other components set to zero.

Available Languages: reporting, Maintain

HGETC

Stores the current date and time in a date-time field.

Available Languages: reporting, Maintain

HMASK

Extracts components from a date-time value and moves them to a target date-time field with all other components of the target field preserved.

Available Languages: reporting, Maintain

HHMMSS

Retrieves the current time from the system.

Available Languages: reporting

HINPUT

Converts an alphanumeric string to a date-time value.

Available Languages: reporting, Maintain

HMIDNT

Changes the time portion of a date-time field to midnight (all zeros).

Available Languages: reporting, Maintain

HNAME

Extracts a specified component from a date-time field and returns it in alphanumeric format.

Available Languages: reporting, Maintain

HPART

Extracts a specified component from a date-time field and returns it in numeric format.

Available Languages: reporting, Maintain

HSETPT

Inserts the numeric value of a specified component into a date-time field.

Available Languages: reporting, Maintain

HTIME

Converts the time portion of a date-time field to the number of milliseconds or microseconds.

Available Languages: reporting, Maintain

HTMTOTS/TIMETOTS

Converts a time to a timestamp.

Available Languages: reporting, Maintain

Maintain-specific Date and Time Functions

The following functions manipulate dates and times. They are available only in the Maintain language. For details, see [Maintain-specific Date and Time Functions](#).

Maintain-specific Standard Date and Time Functions

HHMMSS

Retrieves the current time from the system.

Initial_HHMMSS

Retrieves the time that the Maintain module was started.

Initial_TODAY

Retrieves the date that the Maintain module was started.

TODAY

Retrieves the current date from the system.

TODAY2

Retrieves the current date from the system.

Maintain-specific Legacy Date Functions

ADD

Adds a given number of days to a date.

DAY

Extracts the day of the month from a date.

JULIAN

Determines the number of days that have elapsed so far in the year up to a given date.

MONTH

Extracts the month from a date.

QUARTER

Determines the quarter of the year in which a date resides.

SETMDY

Sets a value to a date.

SUB

Subtracts a given number of days from a date.

WEEKDAY

Determines the day of the week for a date.

YEAR

Extracts the year from a date.

Simplified Conversion Functions

The following functions convert fields from one format to another, using streamlined parameter lists. For details, see [Simplified Conversion Functions](#).

CHAR

Returns a character based on a numeric code.

COMPACTFORMAT

Converts a numeric value to an alphanumeric value that represents the number in an abbreviated format, using the characters K, M, B, and T to represent the abbreviation.

Available Languages: reporting

CTRLCHAR

Returns a non-printable control character.

FPRINT

Converts a numeric, date, or date-time value to a character string.

HEXTYPE

Returns the hexadecimal view of an input value.

PHONETIC

Returns a phonetic key.

Format Conversion Functions

The following functions convert fields from one format to another. For details, see [Format Conversion Functions](#).

ATODBL

Converts a number in alphanumeric format to double-precision format.

Available Languages: reporting, Maintain

EDIT

Converts an alphanumeric field that contains numeric characters to numeric format or converts a numeric field to alphanumeric format.

Available Languages: reporting

FPRINT

Converts a field to alphanumeric format.

Available Languages: reporting

FTOA

Converts a number in a numeric format to alphanumeric format.

Available Languages: reporting, Maintain

HEXBYT

Obtains the ASCII or EBCDIC character equivalent of a decimal integer value.

Available Languages: reporting, Maintain

ITONUM

Converts a large binary integer in a non-FOCUS data source to double-precision format.

Available Languages: reporting, Maintain

ITOPACK

Converts a large binary integer in a non-FOCUS data source to packed-decimal format.

Available Languages: reporting, Maintain

ITOZ

Converts a number in numeric format to zoned format.

Available Languages: reporting, Maintain

PCKOUT

Writes a packed number of variable length to an extract file.

Available Languages: reporting, Maintain

PTOA

Converts a packed decimal number from numeric format to alphanumeric format.

Available Languages: reporting, Maintain

TSTOPACK

Converts a Microsoft SQL Server or Sybase TIMESTAMP column (which contains an incremented counter) to packed decimal.

Available Languages: reporting

UFMT

Converts characters in alphanumeric field values to hexadecimal representation.

Available Languages: reporting, Maintain

XTPACK

Stores a packed number with up to 31 significant digits in an alphanumeric field, retaining decimal data.

Maintain-specific Light Update Support Functions

The following functions retrieve WebFOCUS variable or parameter data implicitly from within a Maintain procedure. These functions are available only in Maintain Data. For details, see [Maintain-specific Light Update Support Functions](#).

IWC.GetAppCGIValue

Imports the value of a WebFOCUS parameter or variable into a Maintain Data variable.

IWC.FindAppCGIValue

Retrieves WebFOCUS parameter or variable values.

Simplified Numeric Functions

The following functions perform calculations on numeric constants or fields, using streamlined parameter lists. For details, see [Simplified Numeric Functions](#).

CEILING

Returns the smallest integer value greater than or equal to a value.

EXPONENT

Raises e to a power.

FLOOR

Returns the largest integer value less than or equal to a value.

MOD

Calculates the remainder from a division.

POWER

Raises a value to a power.

Numeric Functions

The following functions perform calculations on numeric constants or fields. For details, see [Numeric Functions](#).

ABS

Returns the absolute value of a number.

Available Languages: reporting, Maintain

ASIS

Distinguishes between a blank and a zero in Dialogue Manager.

Available Languages: reporting

BAR

Produces a horizontal bar chart.

Available Languages: reporting, Maintain

CHKPCK

Validates the data in a field described as packed format.

Available Languages: reporting, Maintain

DMOD, FMOD, and IMOD

Calculate the remainder from a division.

Available Languages: reporting, Maintain

EXP

Raises the number "e" to a specified power.

Available Languages: reporting, Maintain

EXPN

Is an operator that evaluates a number expressed in scientific notation. For information, see *Using Expressions* in the *Creating Reports With ibi™ WebFOCUS® Language* manual.

FMLINFO

Returns the FOR value associated with each row in an FML report.

Available Languages: reporting

FMLLIST

Returns a string containing the complete tag list for each row in an FML request.

Available Languages: reporting

FMLFOR

Retrieves the tag value associated with each row in an FML request.

Available Languages: reporting

FMLCAP

Returns the caption value for each row in an FML hierarchy request.

Available Languages: reporting

INT

Returns the integer component of a number.

Available Languages: reporting, Maintain

LOG

Returns the natural logarithm of a number.

Available Languages: reporting, Maintain

MAX and MIN

Return the maximum or minimum value, respectively, from a list of values.

Available Languages: reporting, Maintain

MIRR

Calculates the modified internal rate of return for a series of periodic cash flows.

Available Languages: reporting

NORMSDST and NORMSINV

Perform calculations on a standard normal distribution curve.

Available Languages: reporting

PRDNOR and PRDUNI

Generate reproducible random numbers.

Available Languages: reporting, Maintain

RDNORM and RDUNIF

Generate random numbers.

Available Languages: reporting, Maintain

SQRT

Calculates the square root of a number.

Available Languages: reporting, Maintain

XIRR

Calculates the internal rate of return for a series of cash flows that can be periodic or non-periodic.

Available Languages: reporting

Maintain-specific Script Functions

Script functions integrate JavaScript and VBScripts into your Maintain Data applications and perform client-side execution without returning to the WebFOCUS Reporting Server. These functions are available only in Maintain Data. For details, see [Maintain-specific Script Functions](#).

IWCLink

Executes external procedures.

IWCSwitchToSecure and IWCSwitchToUnsecure

Turns the Secure Sockets layer on and off, respectively.

IWCTrigger

Returns control from the script to your application.

Simplified Statistical Functions

The following functions perform statistical functions. For details, see [Simplified Statistical Functions](#).

CORRELATION

Calculates the degree of correlation between two independent sets of data.

KMEANS_CLUSTER

Partitions observations into clusters based on the nearest mean value.

MULTIREGRESS

Calculates a linear regression column based on multiple fields.

RSERVE

Runs an R script.

STDDEV

Calculates the standard deviation in a set of data values.

Machine Learning (Python-based) Functions

The following functions run Python scripts to perform classification and regression. For details, see [Machine Learning \(Python-based\) Functions](#).

CLASSIFY_BLR

Finds the best linear separation between two classes in the space spanned by the predictors, and returns either a class assignment (0 or 1) or the probability of belonging to class 1.

CLASSIFY_KNN

Assigns a class membership to a data point by assigning the class most common among its k nearest neighbors.

CLASSIFY_RF

Creates a random forest (ensemble of decision trees), and returns the prediction that is the average of the individual predictions.

REGRESS_KNN

Predicts a target value for a data point by assigning the average of the target values of its k nearest neighbors.

REGRESS_POLY

Fits the target column to a polynomial expression of the predictor columns.

REGRESS_RF

Creates a random forest (ensemble of decision trees), and returns the prediction that is the majority vote of the individual classification predictions.

Simplified System Functions

The following functions call the operating system to obtain information about the operating environment or to use a system service, using streamlined parameter lists. For details, see [Simplified System Functions](#).

EDAPRINT

Inserts a custom message in the EDAPRINT log file.

ENCRYPT

Encrypts a password.

GETENV

Retrieves the value of an environment variable.

PUTENV

Assigns a value to an environment variable.

SLACK

Posts a message to a Slack channel from a WebFOCUS request.

System Functions

The following functions call the operating system to obtain information about the operating environment or to use a system service. For details, see [System Functions](#).

CLSDDREC

Closes a file and frees the memory used to store information about open files.

Available Languages: reporting, Maintain

FEXERR

Retrieves a WebFOCUS error message.

Available Languages: reporting, Maintain

FINDMEM

Determines if a specific member of a partitioned data set (PDS) exists in batch processing.

Available Operating Systems: z/OS

Available Languages: reporting, Maintain

GETCOOKI

Retrieves the value of a browser cookie.

Available Languages: reporting, Maintain

GETHEADR

Retrieves the value of an HTTP Header variable.

Available Languages: reporting, Maintain

GETPDS

Determines if a specific member of a partitioned data set (PDS) exists, and if it does, returns the PDS name.

Available Operating Systems: z/OS

Available Languages: reporting, Maintain

GETUSER

Retrieves the ID of the connected user.

Available Languages: reporting, Maintain

MVSDYNAM

Transfers a FOCUS DYNAM command to the DYNAM command processor.

Available Operating Systems: z/OS

Available Languages: reporting, Maintain

PUTCOOKI

Submits a value to a browser cookie.

Available Languages: reporting, Maintain

PUTDDREC

Writes a character string as a record in a sequential file. Opens the file if it is closed.

Available Languages: reporting, Maintain

SLEEP

Suspends execution for a specified number of seconds.

Available Languages: reporting

SPAWN

Spawns a child process to execute system commands without terminating the current procedure. After the child process terminates, control returns to the parent process. This function is available only for WebFOCUS.

Available Operating Systems: UNIX

Available Languages: reporting

SYSTEM

Calls a DOS program, a DOS batch program, or a Windows application. This function is available only for WebFOCUS.

Available Operating Systems: Windows

Available Languages: reporting

SYSVAR

Retrieves the value of a z/OS system variable.

Available Operating Systems: z/OS

Available Languages: reporting

Simplified Geography Functions

These functions perform location-based calculations and retrieve geocoded points for various types of location data. For details, see [Simplified Geography Functions](#).

GIS_DISTANCE

Calculates the distance between geography points.

GIS_DRIVE_ROUTE

Calculates the driving directions between geography points.

GIS_POINT

Builds a geometry point.

GIS_GEOCODE_ADDR

Geocodes a complete address.

GIS_GEOCODE_ADDR_CITY

Geocodes an address line, city, and state.

GIS_GEOCODE_ADDR_POSTAL

Geocodes an address line and postal code.

GIS_GEOMETRY

Builds a JSON geometry object.

GIS_IN_POLYGON

Determines whether a point is in a complex polygon.

GIS_LINE

Builds a JSON line.

GIS_REVERSE_COORDINATE

Given a longitude, latitude, and component name, returns the applicable geographic component.

GIS_SERVICE_AREA

Calculates a geometry area around a given point.

GIS_SERV_AREA_XY

Calculates a geometry area around a given coordinate.

Trigonometric Functions

The trigonometric functions provide trigonometric calculations, inverse trigonometric calculations, and angle conversion functions. For details, see [Trigonometric Functions](#).

ACOS

Given the cosine of an angle in radians, ACOS (arccosine) returns an angle between 0 (zero) and π radians.

ASIN

Given the sine of an angle in radians, ASIN (arcsine) returns an angle between $-(\pi/2)$ and $\pi/2$ radians.

ATAN

Given the tangent of an angle in radians, ATAN (arctangent) returns an angle between $-(\pi/2)$ and $\pi/2$ radians.

ATAN2

Given the coordinates of the tangent of an angle in radians, ATAN2 (arctangent2) returns an angle between $-\pi$ and π radians.

COS

Given an angle in radians, COS calculates the cosine of the angle.

COT

Given an angle in radians, COT calculates the cotangent of the angle.

DEGREES

Converts an angle in radians to an angle in degrees.

PI

Returns the constant π as a floating-point number.

RADIANS

Converts an angle in degrees to an angle in radians.

SIN

Given an angle in radians, SIN calculates the sine of the angle.

TAN

Given an angle in radians, TAN calculates the tangent of the angle.

Character Chart for ASCII and EBCDIC

This chart shows the primary printable characters in the ASCII and EBCDIC character sets and their decimal equivalents. Extended ASCII codes (above 127) are not included

Decimal	ASCII		EBCDIC	
33	!	exclamation point		
34	"	quotation mark		
35	#	number sign		
36	\$	dollar sign		
37	%	percent		
38	&	ampersand		
39	'	apostrophe		
40	(	left parenthesis		
41	)	right parenthesis		
42	*	asterisk		
43	+	plus sign		
44	,	comma		
45	-	hyphen		
46	.	period		

Decimal	ASCII		EBCDIC	
47	/	slash		
48	0	0		
49	1	1		
50	2	2		
51	3	3		
52	4	4		
53	5	5		
54	6	6		
55	7	7		
56	8	8		
57	9	9		
58	:	colon		
59	;	semicolon		
60	<	less-than sign		
61	=	equal sign		
62	>	greater-than sign		
63	?	question mark		
64	@	at sign		
65	A	A		

Decimal	ASCII		EBCDIC	
66	B	B		
67	C	C		
68	D	D		
69	E	E		
70	F	F		
71	G	G		
72	H	H		
73	I	I		
74	J	J	¢	cent sign
75	K	K	.	period
76	L	L	<	less-than sign
77	M	M	(	left parenthesis
78	N	N	+	plus sign
79	O	O		logical or
80	P	P	&	ampersand
81	Q	Q		
82	R	R		
83	S	S		
84	T	T		

Decimal	ASCII		EBCDIC	
85	U	U		
86	V	V		
87	W	W		
88	X	X		
89	Y	Y		
90	Z	Z	!	exclamation point
91	[	opening bracket	\$	dollar sign
92	\	back slant	*	asterisk
93	]	closing bracket	)	right parenthesis
94	^	caret	;	semicolon
95	_	underscore	¬	logical not
96	`	grave accent	-	hyphen
97	a	a	/	slash
98	b	b		
99	c	c		
100	d	d		
101	e	e		
102	f	f		
103	g	g		

Decimal	ASCII		EBCDIC	
104	h	h		
105	i	i		
106	j	j		
107	k	k	,	comma
108	l	l	%	percent
109	m	m	_	underscore
110	n	n	>	greater-than sign
111	o	o	?	question mark
112	p	p		
113	q	q		
114	r	r		
115	s	s		
116	t	t		
117	u	u		
118	v	v		
119	w	w		
120	x	x		
121	y	y		
122	z	z	:	colon

Decimal	ASCII		EBCDIC	
123	{	opening brace	#	number sign
124		vertical line	@	at sign
125	}	closing brace	'	apostrophe
126	~	tilde	=	equal sign
127			"	quotation mark
129			a	a
130			b	b
131			c	c
132			d	d
133			e	e
134			f	f
135			g	g
136			h	h
137			i	i
145			j	j
146			k	k
147			l	l
148			m	m
149			n	n

Decimal	ASCII		EBCDIC	
150			o	o
151			p	p
152			q	q
153			r	r
162			s	s
163			t	t
164			u	u
165			v	v
166			w	w
167			x	x
168			y	y
169			z	z
185			`	grave accent
193			A	A
194			B	B
195			C	C
196			D	D
197			E	E
198			F	F

Decimal	ASCII		EBCDIC	
199			G	G
200			H	H
201			I	I
209			J	J
210			K	K
211			L	L
212			M	M
213			N	N
214			O	O
215			P	P
216			Q	Q
217			R	R
226			S	S
227			T	T
228			U	U
229			V	V
230			W	W
231			X	X
232			Y	Y

Decimal	ASCII		EBCDIC	
233			Z	Z
240			0	0
241			1	1
242			2	2
243			3	3
244			4	4
245			5	5
246			6	6
247			7	7
248			8	8
249			9	9

Accessing and Calling a Function

The following topics describe the considerations for supplying arguments in a function, and explain how to use a function in a command and access functions stored externally.

Calling a Function

You can call a function from a COMPUTE, DEFINE, or VALIDATE command. You can also call functions from a Dialogue Manager command, a Financial Modeling Language (FML) command, or a Maintain command. A function is called with the function name, arguments, and, for external functions, an output field.

For more information on external functions, see [Types of Functions](#).

Some Maintain-specific functions require that the MNTUWS function library be retrieved when calling the function. For functions that require this, it is specified in the detailed information for that function. For more information on retrieving the MNTUWS library, see [Calling a Function](#).

Call a Function

```
function(arg1, arg2, ... [outfield])
```

where:

function

Is the name of the function.

arg1, arg2, ...

Are the arguments.

outfield

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. This argument is required only for external functions.

In Dialogue Manager, you must specify the format. In Maintain Data, you must specify the name of the field.

Store Output in a Field

```
COMPUTE field/fmt = function(input1, input2,... [outfield]);
```

or

```
DEFINE FILE file  
field/fmt = function(input1, input2,... [outfield]);
```

or

```
-SET &var = function(input1, input2,... [outfield]);
```

where:

DEFINE

Creates a virtual field that may be used in a request as though it is a real data source field.

COMPUTE

Calculates one or more temporary fields in a request. The field is calculated after all records have been selected, sorted, and summed.

field

Is the field that contains the result.

file

Is the file in which the virtual field is created.

var

Is the variable that contains the result.

fmt

Is the format of the field that contains the result.

function

Is the name of the function, up to eight characters long.

input1, input2,...

Are the input arguments, which are data values or fields used in function processing. For more information about arguments, see [Supplying an Argument in a Function](#).

outfield

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. This argument is required only for external functions.

In Dialogue Manager, you must specify the format. In Maintain Data, you must specify the name of the field.

Access the Maintain MNTUWS Function Library

Place the following statement directly after the MAINTAIN command at the top of your procedure:

```
MODULE IMPORT (MNTUWS);
```

Supplying an Argument in a Function

When supplying an argument in a function, you must understand which types of arguments are acceptable, the formats and lengths for these arguments, and the number and order of these arguments.

Argument Types

The following are acceptable arguments for a function:

- Numeric constant, such as 6 or 15.
- Date constant, such as 022802.
- Date in alphanumeric, numeric, date, or AnV format.
- Alphanumeric literal, such as STEVENS or NEW YORK NY. A literal must be enclosed in single quotation marks.
- Number in alphanumeric format.
- Field name, such as FIRST_NAME or HIRE_DATE. A field can be a data source field or a temporary field. The field name can be up to 66 characters long or a qualified field name, unique truncation, or alias.
- Expression, such as a numeric, date, or alphanumeric expression. An expression can use arithmetic operators and the concatenation sign (||). For example, the following are valid expressions:

```
CURR_SAL * 1.03
```

and

```
FN || LN
```

- Dialogue Manager variable, such as &CODE or &DDNAME.
- Format of the output value enclosed in single quotation marks.
- Another function.
- Label or other row or column reference (such as R or E), or name of another RECAP calculation, when the function is called in an FML RECAP command.

Argument Formats

Depending on the function, an argument can be in alphanumeric, numeric, or date format. If you supply an argument in the wrong format, you will cause an error or the function will not return the correct data. The following are the types of argument formats:

- **Alphanumeric argument.** An alphanumeric argument is stored internally as one character per byte. An alphanumeric argument can be a literal, an alphanumeric field, a number or date stored in alphanumeric format, an alphanumeric expression, or the format of an alphanumeric field. A literal is enclosed in single quotation marks, except when specified in operating systems that support Dialogue Manager RUN commands (for example, -MVS RUN).
- **Numeric argument.** A numeric argument is stored internally as a binary or packed number. A numeric argument includes integer (I), floating-point single-precision (F), floating-point double-precision (D), and packed decimal (P) formats. A numeric argument can be a numeric constant, field, or expression, or the format of a numeric field.

All numeric arguments are converted to floating-point double-precision format when used with a function, but results are returned in the format specified for the output field.

i Note: With CDN ON, numeric arguments must be delimited by a comma followed by a space.

- **Date argument.** A date argument can be in either alphanumeric, numeric, or date format. The list of arguments for the individual function will specify what type of format the function accepts. A date argument can be a date in alphanumeric, numeric, or date format; a date field or expression; or the format of a date field.

If you supply an argument with a two-digit year, the function assigns a century based on the YRTHRESH and DEFCENT parameter settings.

Argument Length

An argument is passed to a function by reference, meaning that the memory location of the argument is passed. No indication of the length of the argument is given.

You must supply the argument length for alphanumeric strings. Some functions require a length for the input and output arguments (for example, SUBSTR), and others use one length for both arguments (for example, UPCASE).

Be careful to ensure that all lengths are correct. Providing an incorrect length can cause incorrect results:

- If the specified length is shorter than the actual length, a subset of the string is used.

For example, passing the argument 'ABCDEF' and specifying a length of 3 causes the function to process a string of 'ABC'.

- If the specified length is too long, whatever is in memory up to that length is included. For example, passing an argument of 'ABC' and specifying a length of 6 causes the function to process a string beginning with 'ABC' plus the three characters in the next three positions of memory. Depending on memory utilization, the extra three characters could be anything.

Some operating system routines are very sensitive to incorrectly specified lengths and read them into incorrectly formatted memory areas.

Number and Order of Arguments

The number of arguments required varies according to each function. Supplied functions may require up to six arguments. User-written subroutines may require a maximum of 200 arguments including the output argument. If a function requires more than 200 arguments, you must use two or more calls to pass the arguments to the function.

Arguments must be specified in the order shown in the syntax of each function. The required order varies according to the function.

Verifying Function Parameters

The USERFCHK setting controls the level of verification applied to DEFINE FUNCTION and supplied function arguments. It does not affect verification of the number of parameters; the correct number must always be supplied.

USERFCHK is not supported from Maintain Data.

Functions typically expect parameters to be a specific type or have a length that depends on the value of another parameter. It is possible in some situations to enforce these rules by truncating the length of a parameter and, therefore, avoid generating an error at run time.

The level of verification and possible conversion to a valid format performed depends on the specific function. The following two situations can usually be converted satisfactorily:

- If a numeric parameter specifies a maximum size for an alphanumeric parameter, but

the alphanumeric string supplied is longer than the specified size, the string can be truncated.

- If a parameter supplied as a numeric literal specifies a value larger than the maximum size for a parameter, it can be reduced to the proper value.

Enable Parameter Verification

Parameter verification can be enabled only for DEFINE FUNCTIONS and supplied functions. If your site has a locally written function with the same name as a supplied function, the USERFNS setting determines which function is used.

```
SET USERFNS= {SYSTEM|LOCAL}
```

where:

SYSTEM

Gives precedence to supplied functions. SYSTEM is the default value. This setting is required in order to enable parameter verification.

LOCAL

Gives precedence to locally written functions. Parameter verification is not performed with this setting in effect.



Note: When USERFNS is set to LOCAL, DT functions only display a six-digit date.

Control Function Parameter Verification

Issue the following command in FOCPARM, FOCPROF, on the command line, in a FOCEXEC, or in an ON TABLE command. Note that the USERFNS=SYSTEM setting must be in effect.

```
SET USERFCHK = setting
```

where:

setting

Can be one of the following:

- **ON** is the default value. Verifies parameters in requests, but does not verify parameters for functions used in Master File DEFINES. If a parameter has an incorrect length, an attempt is made to fix the problem. If such a problem cannot be fixed, an error message is generated and the evaluation of the affected expression is terminated.

Because parameters are not verified for functions specified in a Master File, no errors are reported for those functions until the DEFINE field is used in a subsequent request when, if a problem occurs, the following message is generated:

```
(FOC003) THE FIELDNAME IS NOT RECOGNIZED
```

- **OFF** does not verify parameters except in the following cases:
 - If a parameter that is too long would overwrite the memory area in which the computational code is stored, the size is automatically reduced without issuing a message.
 - If an alphanumeric parameter is too short, it is padded with blanks to the correct length.



Note:

- The OFF setting will be deprecated in a future release.
- We strongly recommend that you not use the OFF setting, as disabling parameter checking can lead to unexpected issues.

- **FULL** is the same as ON, but also verifies parameters for functions used in Master File DEFINES.
- **ALERT** verifies parameters in a request without halting execution when a problem is detected. It does not verify parameters for functions used in Master File DEFINES. If a parameter has an incorrect length and an attempt is made to fix the problem behind the scenes, the problem is corrected with no message. If such a problem cannot be fixed, a warning message is generated. Execution then continues as though the setting were OFF, but the results may be incorrect.

**Note:**

- If a parameter provided is the incorrect type, verification fails and processing terminates.
- Errors encountered during subroutine processing, unless fatal at the system level, are communicated to the calling routine through the return of an unchanged return parameter, which is the last parameter in the subroutine call. This is always communicated as spaces for alphanumeric outputs.

Verifying Parameters With Correctable Errors

The following request uses SUBSTR to extract the substring that starts in position 6 and ends in position 14 of the TITLE field. The fifth argument specifies a substring length (500) that is too long (it should be no longer than 9).

```
SET USERFCHK = ON
TABLE FILE MOVIES
PRINT TITLE
COMPUTE
  NEWTITLE/A9 = SUBSTR(39, TITLE, 6 ,14, 500, NEWTITLE);
WHERE CATEGORY EQ 'CHILDREN'
END
```

When the request is executed with USERFCHK=ON or OFF, the incorrect length is corrected and the request continues processing:

TITLE	NEWTITLE
-----	-----
SMURFS, THE	S, THE
SHAGGY DOG, THE	Y DOG, TH
SCOOBY-DOO-A DOG IN THE RUFF	Y-DOO-A D
ALICE IN WONDERLAND	IN WONDE
SESAME STREET-BEDTIME STORIES AND SONGS	E STREET-
ROMPER ROOM-ASK MISS MOLLY	R ROOM-AS
SLEEPING BEAUTY	ING BEAUT
BAMBI	

Verifying Parameters With Uncorrectable Errors

The following request has an incorrect data type in the last argument to SUBSTR. This parameter should specify an alphanumeric field or format for the extracted substring:

```
SET USERFCHK = ON
TABLE FILE MOVIES
PRINT TITLE
COMPUTE
  NEWTITLE/F9 = SUBSTR(39, TITLE, 6 ,14, 500, 'F9');
WHERE CATEGORY EQ 'CHILDREN'
END
```

- When the request is executed with USERFCHK=ON, a message is produced and the request terminates:

```
ERROR AT OR NEAR LINE      5  IN PROCEDURE USERFC3 FOCEXEC
(FOC279) NUMERIC ARGUMENTS IN PLACE WHERE ALPHA ARE CALLED FOR
(FOC009) INCOMPLETE REQUEST STATEMENT
UNKNOWN FOCUS COMMAND  WHERE
      BYPASSING TO END OF COMMAND
```

- When the request is executed with USERFCHK=OFF, no verification is done and no message is produced. The request executes and produces incorrect results. In some environments, this type of error may cause abnormal termination of the application:

DIRECTOR	TITLE	NEWTITLE
-----	-----	-----
	SMURFS, THE	*****
BARTON C.	SHAGGY DOG, THE	*****
	SCOOBY-DOO-A DOG IN THE RUFF	*****
GEROMINI	ALICE IN WONDERLAND	1
	SESAME STREET-BEDTIME STORIES AND SONGS	-265774
	ROMPER ROOM-ASK MISS MOLLY	*****
DISNEY W.	SLEEPING BEAUTY	*****
DISNEY W.	BAMBI	0

Calling a Function From a DEFINE, COMPUTE, or VALIDATE Command

You can call a function from a DEFINE command or Master File attribute, a COMPUTE command, or a VALIDATE command.

Call a Function From a COMPUTE, DEFINE, or VALIDATE Command

```
DEFINE [FILE filename]
tempfield[/format] = function(input1, input2, input3, ... [outfield]);
COMPUTE
tempfield[/format] = function(input1, input2, input3, ... [outfield]);
VALIDATE
tempfield[/format] = function(input1, input2, input3, ... [outfield]);
```

where:

filename

Is the data source being used.

tempfield

Is the temporary field created by the DEFINE or COMPUTE command. This is the same field specified in the *outfield*. If the function call supplies the format of the output value in *outfield*, the format of the temporary field must match the *outfield* argument.

format

Is the format of the temporary field. The format is required if it is the first time the field is created; otherwise, it is optional. The default value is D12.2.

function

Is the name of the function.

input1, input2, input3...

Are the arguments.

outfield

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. This is required only for external functions.

In Dialogue Manager, you must specify the format. In Maintain Data, you must specify the name of the field.

Calling a Function From a Dialogue Manager Command

You can call a function with Dialogue Manager in the following ways:

- From a -SET command, storing the result of a function in a variable. For more information, see [Calling a Function From a Dialogue Manager Command](#).
- From an -IF command. For more information, see [Calling a Function in WHERE or IF Criteria](#).
- From an operating system -RUN command. For more information, see [Calling a Function From a Dialogue Manager Command](#).

Dialogue Manager converts a numeric argument to double-precision format. This occurs when the value of the argument is numeric; this is not affected by the format expected by the function. This means you must be careful when supplying arguments for a function in Dialogue Manager.

If the function expects an alphanumeric string and the input is a numeric string, incorrect results will occur because of conversion to floating-point double-precision. To resolve this problem, append a non-numeric character to the end of the string, but do not count this extra character in the length of the argument.

Dialogue Manager date variables such as &YYMD return alphanumeric legacy dates, not a date format (an offset from a base date). If a function requires a date offset rather than a legacy date, you must convert any date variable to a date offset (using the DATECVT function) before using it as an argument. You can then convert the result back to a legacy date, again with the DATECVT function. For example:

```
-SET &TODAY_OFFSET=DATECVT(&YYMD , 'I8YYMD' , 'YYMD');
-SET &BEG_CUR_YR=DATEMOV(&TODAY_OFFSET.EVAL , 'BOY');
-SET &CLOSE_DTBOY=DATECVT(&BEG_CUR_YR.EVAL , 'YYMD' , 'I8YYMD');
```

Assigning the Result of a Function to a Variable

You can store the result of a function in a variable with the -SET command.

A Dialogue Manager variable contains only alphanumeric data. If a function returns a numeric value to a Dialogue Manager variable, the value is truncated to an integer and converted to alphanumeric format before being stored in the variable.

Assign the Result of a Function to a Variable

```
-SET &variable = function(arg1, arg2[.LENGTH],..., 'format');
```

where:

variable

Is the variable to which the result will be assigned.

function

Is the function.

arg1, arg2

Are the function's arguments.

.LENGTH

Returns the length of the variable. If a function requires the length of a character string as an input argument, you can prompt for the character string and determine the length with the .LENGTH suffix.

format

Is the format of the result enclosed in single quotation marks. You cannot specify a Dialogue Manager variable for the output argument unless you use the .EVAL suffix; however, you can specify a variable for an input argument.

Calling a Function From a -SET Command

AYMD adds 14 days to the value of &INDATE. The &INDATE variable is previously set in the procedure in the six-digit year-month-day format.

```
-SET &OUTDATE = AYMD(&INDATE, 14, 'I6');
```

The format of the output date is a six-digit integer (I6). Although the format indicates that the output is an integer, it is stored in the &OUTDATE variable as a character string. For this reason, if you display the value of &OUTDATE, you will not see slashes separating the year, month, and day.

Branching Based on the Result of a Function

You can branch based on the result of a function by calling a function from a Dialogue Manager -IF command.

If a branching command spans more than one line, continue it on the next line by placing a dash (-) in the first column.

Branch Based on the Result of a Function

```
-IF function(args) relation expression GOTO label1 [ELSE GOTO label2];
```

where:

function

Is the function.

args

Are the arguments.

relation

Is an operator that determines the relationship between the function and expression, for example, EQ or LE.

expression

Is a value, logical expression, or function. Do not enclose a literal in single quotation marks unless it contains a comma or embedded blank.

label1, label2

Are user-defined names up to 12 characters long. Do not use embedded blanks or the name of any other Dialogue Manager command except -QUIT or -EXIT. Do not use a word that can be confused with a function, or an arithmetic or logical operation.

The *label* text can precede or follow the -IF criteria in the procedure.

ELSE GOTO

Passes control to *label2* when the -IF test fails.

Branching Based on the Function's Result

The result of the AYMD function provides a condition for a -IF test. One of two requests is executed, depending on the function's result:

```

-LOOP
1. -IF &INDATE EQ 0 GOTO EXIT;
2. -SET &WEEKDAY = DOWK(&INDATE, 'A4');
3. -TYPE START DATE IS &WEEKDAY &INDATE
4. -IF AYMD(&INDATE, &DAYS, 'I6YMD') LT 960101 GOTO EARLY;
5. -TYPE LONG PROJECT
   -*EX LONGPROJ
   -RUN
   -GOTO EXIT
6. -EARLY
   -TYPE SHORT PROJECT
   -*EX SHRTPROJ
   -RUN
   -EXIT

```

The procedure processes as follows:

1. If you enter a 0, it passes control to -EXIT which terminates execution.
2. The DOWK function obtains the day of the week for the start date.
3. The -TYPE command displays the day of the week and start date of the project.

4. The AYMD function calculates the date that the project will finish. If this date is before January 1, 1996, the -IF command branches to the label EARLY.
5. If the project will finish on or after January 1, 1996, the TYPE command displays the words LONG PROJECT and exits.
6. If the procedure branches to the label EARLY, the TYPE command displays the words SHORT PROJECT and exits.

Calling a Function From an Operating System RUN Command

You can call a function that contains only alphanumeric arguments from a Dialogue Manager -TSO RUN or -MVS RUN command. This type of function performs a specific task but typically does not return a value.

If a function requires an argument in numeric format, you must first convert it to floating-point double-precision format using the ATODBL function because, unlike the -SET command, an operating system RUN command does not automatically convert a numeric argument to double-precision.

Call a Function From an Operating System - RUN Command

```
{-TSO|-MVS} RUN function, input1, input2, ... [,&output]
```

where:

-TSO|-MVS

Is the operating system.

function

Is the name of the function.

input1, input2,...

Are the arguments. Separate the function name and each argument with a comma. Do not enclose an alphanumeric literal in single quotation marks. If a function requires the length of a character string as an argument, you can prompt for the character string, then use the .LENGTH suffix to test the length.

&output

Is a Dialogue Manager variable. Include this argument if the function returns a value; otherwise, omit it. If you specify an output variable, you must pre-define its length using a -SET command.

For example, if the function returns a value that is eight bytes long, define the variable with eight characters enclosed in single quotation marks before the function call:

```
-SET &output = '12345678';
```

Calling a Function From an Operating System -RUN Command

The following example calls the CHGDAT function from a -MVS RUN command:

```
-SET &RESULT = '12345678901234567';
-MVS RUN CHGDAT, YYMD., MXDYY, &YYMD, &RESULT
-TYPE &RESULT
```

Calling a Function From Another Function

A function can be an argument for another function.

Call a Function From Another Function

```
field = function([arguments,] function2[arguments2,] arguments);
```


where:

field

Is the field that contains the result of the function.

function

Is a function.

arguments

Are arguments for a *function*.

function2

Is the function that is an argument for a *function*.

arguments2

Are arguments for *function2*.

Calling a Function From Another Function

In the following example, the AYMD function is an argument for the YMD function:

```
-SET &DIFF = YMD(&YYMD, AYMD(&YYMD, 4, 'I8'));
```

Calling a Function in WHERE or IF Criteria

You can call a function in WHERE or IF criteria. When you do this, the output value of the function is compared against a test value.

Call a Function in WHERE Criteria

```
WHERE function relation expression
```

where:

function

Is a function.

relation

Is an operator that determines the relationship between the function and expression, for example, EQ or LE.

expression

Is a constant, field, or function. A literal must be enclosed in single quotation marks.

Call a Function in IF Criteria

```
IF function relation value
```

where:

function

Is a function.

relation

Is an operator that determines the relationship between the function and expression, for example, EQ or LE.

value

Is a constant. In a DEFINE or COMPUTE command, the value must be enclosed in single quotation marks.

Calling a Function in WHERE Criteria

The SUBSTR function extracts the first two characters of LAST_NAME as a substring, and the request prints an employee's name and salary if the substring is MC.

```
TABLE FILE EMPLOYEE  
PRINT FIRST_NAME LAST_NAME CURR_SAL
```

```
WHERE SUBSTR(15, LAST_NAME, 1, 2, 2, 'A2') IS 'MC';
END
```

The output is:

FIRST_NAME	LAST_NAME	CURR_SAL
-----	-----	-----
JOHN	MCCOY	\$18,480.00
ROGER	MCKNIGHT	\$16,100.00

Using a Calculation or Compound IF Command

You must specify the format of the output value in a calculation or compound IF command. There are two ways to do this:

- Pre-define the format within a separate command. In the following example, the AMOUNT field is pre-defined with the format D8.2 and the function returns a value to the output field AMOUNT. The IF command tests the value of AMOUNT and stores the result in the calculated value, AMOUNT_FLAG.

```
COMPUTE
AMOUNT/D8.2 =;
AMOUNT_FLAG/A5 = IF function(input1, input2, AMOUNT) GE 500
    THEN 'LARGE' ELSE 'SMALL';
```

- Supply the format as the last argument in the function call. In the following example, the command tests the returned value directly. This is possible because the function defines the format of the returned value (D8.2).

```
DEFINE
AMOUNT_FLAG/A5 = IF function(input1, input2, 'D8.2') GE 500
    THEN 'LARGE' ELSE 'SMALL';
```

Calling a Function in WHEN Criteria

You can call a function in the WHEN criteria as part of a Boolean expression.

Call a Function in WHEN Criteria

```
WHEN({function|value} relation {function|value});
```

or

```
WHEN NOT(function)
```

where:

function

Is a function.

value

Is a value or logical expression.

relation

Is an operator that determines the relationship between the value and function, for example, LE or GT.

Calling a Function in WHEN Criteria

This request checks the values in LAST_NAME against the result of the CHKFMT function. When a match occurs, the request prints a sort footing.

```
TABLE FILE EMPLOYEE
PRINT DEPARTMENT BY LAST_NAME
ON LAST_NAME SUBFOOT
"*** LAST NAME <LAST_NAME DOES MATCH MASK"
WHEN NOT CHKFMT(15, LAST_NAME, 'SMITH      ', 'I6');
END
```

The output is:

LAST_NAME -----	DEPARTMENT -----
BANNING	PRODUCTION
BLACKWOOD	MIS

CROSS	MIS
GREENSPAN	MIS
IRVING	PRODUCTION
JONES	MIS
MCCOY	MIS
MCKNIGHT	PRODUCTION
ROMANS	PRODUCTION
SMITH	MIS
	PRODUCTION
*** LAST NAME SMITH DOES MATCH MASK	
STEVENS	PRODUCTION

Calling a Function From a RECAP Command

You can call a function from an FML RECAP command.

Call a Function From a RECAP Command

```
RECAP name[(n)|(n,m)|(n,m,i)][/format1] =
function(input1,...,['format2']);
```

where:

name

Is the name of the calculation.

n

Displays the value in the column number specified by *n*. If you omit the column number, the value appears in all columns.

n,m

Displays the value in all columns beginning with the column number specified by *n* and ending with the column number specified by *m*.

n,m,i

Displays the value in the columns beginning with the column number specified by *n* and ending with the column number specified by *m* by the interval specified by *i*. For example, if *n* is 1, *m* is 5, and *i* is 2, the value displays in columns 1, 3, and 5.

format1

Is the format of the calculation. The default value is the format of the report column.

function

Is the function.

input1,...

Are the input arguments, which can include numeric constants, alphanumeric literals, row and column references (R notation, E notation, or labels), and names of other RECAP calculations.

format2

Is the format of the output value enclosed in single quotation marks. If the calculation's format is larger than the column width, the value appears in that column as asterisks.

Calling a Function in a RECAP Command

This request sums the AMOUNT field for account 1010 using the label CASH, account 1020 using the label DEMAND, and account 1030 using the label TIME. The MAX function displays the maximum value of these accounts.

```
TABLE FILE LEDGER
SUM AMOUNT FOR ACCOUNT
1010 AS 'CASH ON HAND'      LABEL CASH    OVER
1020 AS 'DEMAND DEPOSITS'   LABEL DEMAND OVER
1030 AS 'TIME DEPOSITS'     LABEL TIME    OVER
BAR                          OVER
RECAP MAXCASH = MAX(CASH, DEMAND, TIME); AS 'MAX CASH'
END
```

The output is:

	AMOUNT

CASH ON HAND	8,784
DEMAND DEPOSITS	4,494
TIME DEPOSITS	7,961

MAX CASH	8,784

Storing and Accessing an External Function

Internal functions are built in and do not require additional work to access. External functions are stored in load libraries from which they must be retrieved. The way these external functions are accessed is determined by your platform. These techniques may not have to be used every time a function is accessed. Access to a load library may be set only once at the time of installation.

You can also access private user-written subroutines. If you have a private collection of subroutines (that is, you created your own or use customized subroutines), do not store them in the function library. Store them separately to avoid overwriting them whenever your site installs a new release. For more information on creating a subroutine, see [Creating a Subroutine](#).

Storing and Accessing a Function on z/OS

On z/OS, load libraries are partitioned data sets containing link-edited modules. These libraries are stored as EDALIB.LOAD or FUSELIB.LOAD. In addition, your site may have private subroutine collections stored in separate load libraries. If so, you must allocate those libraries.

Allocate a Load Library in z/OS Batch

To use a function stored as a load library, allocate the load library to ddname USERLIB in your JCL or CLIST.

The search order is USERLIB, STEPLIB, JOBLIB, link pack area, and linklist.

The WebFOCUS Reporting Server also adds the TASKLIB keyword to the search for non-APF authorized libraries. For more information, see the *Server Installation, Configuration and Operations for MVS* manual.

Allocating the Load Library BIGLIB.LOAD in z/OS Batch (JCL)

```
//USERLIB DD DISP=SHR,DSN=BIGLIB.LOAD
```

Allocate a Load Library in TSO

Allocate the load library to ddname USERLIB using the ALLOCATE command. You can issue the ALLOCATE command:

- In TSO before entering a FOCUS session.
- Before executing a request in a FOCUS session.
- In your PROFILE FOCEXEC.

If you are in a FOCUS session, you can also use the DYNAM ALLOCATE command.

Result

If you are in a FOCUS session, you can also use the DYNAM ALLOCATE command.

Allocate a Load Library

```
DYNAM ALLOC FILE USERLIB DA lib SHR
```

where:

USERLIB

Is the ddname to which you allocate a load library.

lib1 lib2 lib3...

Are the names of the load libraries, concatenated to ddname USERLIB.

Allocating the FUSELIB.LOAD Load Library

```
DYNAM ALLOC FILE USERLIB DA MVS.FUSELIB.LOAD SHR
```

Concatenating a Load Library to USERLIB In TSO

Suppose a report request calls two functions: BENEFIT stored in library SUBLIB.LOAD, and EXCHANGE stored in library BIGLIB.LOAD. To concatenate the BIGLIB and SUBLIB load libraries in the allocation for ddname USERLIB, issue the following commands:

```
DYNAM ALLOC FILE USERLIB DA SUBLIB.LOAD SHR
DYNAM ALLOC FILE BIGLIB DA BIGLIB.LOAD SHR
DYNAM CONCAT FILE USERLIB BIGLIB
```

The load libraries are searched in the order in which they are specified in the ALLOCATE command.

Concatenating a Load Library to STEPLIB in Batch (JCL)

Concatenate the load library to the ddname STEPLIB in your JCL:

```
//FOCUS EXEC PGM=FOCUS
//STEPLIB DD DSN=FOCUS.FOCLIB.LOAD,DISP=SHR
// DD DSN=FOCUS.FUSELIB.LOAD,DISP=SHR
      .
      .
      .
```

Storing and Accessing a Function on UNIX

No extra work is required.

Storing and Accessing a Function on Windows

No extra work is required.

Simplified Analytic Functions

The analytic functions enable you to perform calculations and retrievals using multiple rows in the internal matrix.

FORECAST_MOVAVE: Using a Simple Moving Average

A simple moving average is a series of arithmetic means calculated with a specified number of values from a field. Each new mean in the series is calculated by dropping the first value used in the prior calculation, and adding the next data value to the calculation.

Simple moving averages are sometimes used to analyze trends in stock prices over time. In this scenario, the average is calculated using a specified number of periods of stock prices. A disadvantage to this indicator is that because it drops the oldest values from the calculation as it moves on, it loses its memory over time. Also, mean values are distorted by extreme highs and lows, since this method gives equal weight to each point.

Predicted values beyond the range of the data values are calculated using a moving average that treats the calculated trend values as new data points.

The first complete moving average occurs at the n^{th} data point because the calculation requires n values. This is called the lag. The moving average values for the lag rows are calculated as follows: the first value in the moving average column is equal to the first data value, the second value in the moving average column is the average of the first two data values, and so on until the n^{th} row, at which point there are enough values to calculate the moving average with the number of values specified.

Calculate a Simple Moving Average Column

```
FORECAST_MOVAVE(display, infield, interval,  
                npredict, npoint1)
```

where:

display

Keyword

Specifies which values to display for rows of output that represent existing data. Valid values are:

- **INPUT_FIELD.** This displays the original field values for rows that represent existing data.
- **MODEL_DATA.** This displays the calculated values for rows that represent existing data.



Note: You can show both types of output for any field by creating two independent COMPUTE commands in the same request, each with a different display option.

infield

Is any numeric field. It can be the same field as the result field, or a different field. It cannot be a date-time field or a numeric field with date display options.

interval

Is the increment to add to each sort field value (after the last data point) to create the next value. This must be a positive integer. To sort in descending order, use the BY HIGHEST phrase. The result of adding this number to the sort field values is converted to the same format as the sort field.

For date fields, the minimal component in the format determines how the number is interpreted. For example, if the format is YMD, MDY, or DMY, an interval value of 2 is interpreted as meaning two days. If the format is YM, the 2 is interpreted as meaning two months.

npredict

Is the number of predictions for FORECAST to calculate. It must be an integer greater than or equal to zero. Zero indicates that you do not want predictions, and is only supported with a non-recursive FORECAST.

npoint1

Is the number of values to average for the MOVAVE method.

Calculating a New Simple Moving Average Column

This request defines an integer value named PERIOD to use as the independent variable for the moving average. It predicts three periods of values beyond the range of the retrieved data. The MOVAVE column on the report output shows the calculated moving average numbers for existing data points.

```
DEFINE FILE GGSALES
SDATE/YYM = DATE;
SYEAR/Y = SDATE;
SMONTH/M = SDATE;
PERIOD/I2 = SMONTH;
END
TABLE FILE GGSALES
SUM UNITS DOLLARS
COMPUTE MOVAVE/D10.1= FORECAST_MOVAVE(MODEL_DATA, DOLLARS,1,3,3);
BY CATEGORY BY PERIOD
WHERE SYEAR EQ 97 AND CATEGORY NE 'Gifts'
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is:

<u>Category</u>	<u>PERIOD</u>	<u>Unit Sales</u>	<u>Dollar Sales</u>	<u>MOVAVE</u>
Coffee	1	61666	801123	801,123.0
	2	54870	682340	741,731.5
	3	61608	765078	749,513.7
	4	57050	691274	712,897.3
	5	59229	720444	725,598.7
	6	58466	742457	718,058.3
	7	60771	747253	736,718.0
	8	54633	655896	715,202.0
	9	57829	730317	711,155.3
	10	57012	724412	703,541.7
	11	51110	620264	691,664.3
	12	58981	762328	702,334.7
	13	0	0	694,975.6
	14	0	0	719,879.4
	15	0	0	705,729.9
Food	1	54394	672727	672,727.0
	2	54894	699073	685,900.0
	3	52713	642802	671,534.0
	4	58026	718514	686,796.3
	5	53289	660740	674,018.7
	6	58742	734705	704,653.0
	7	60127	760586	718,677.0
	8	55622	695235	730,175.3
	9	55787	683140	712,987.0
	10	57340	713768	697,381.0
	11	57459	710138	702,348.7
	12	57290	705315	709,740.3
	13	0	0	708,397.8
	14	0	0	707,817.7
	15	0	0	708,651.9

In the report, the number of values to use in the average is 3 and there are no UNITS or DOLLARS values for the generated PERIOD values.

Each average (MOVAVE value) is computed using DOLLARS values where they exist. The calculation of the moving average begins in the following way:

- The first MOVAVE value (801,123.0) is equal to the first DOLLARS value.
- The second MOVAVE value (741,731.5) is the mean of DOLLARS values one and two: $(801,123 + 682,340) / 2$.
- The third MOVAVE value (749,513.7) is the mean of DOLLARS values one through three: $(801,123 + 682,340 + 765,078) / 3$.
- The fourth MOVAVE value (712,897.3) is the mean of DOLLARS values two through four: $(682,340 + 765,078 + 691,274) / 3$.

For predicted values beyond the supplied values, the calculated MOVAVE values are used as new data points to continue the moving average. The predicted MOVAVE values (starting with 694,975.6 for PERIOD 13) are calculated using the previous MOVAVE values as new data points. For example, the first predicted value (694,975.6) is the average of the data points from periods 11 and 12 (620,264 and 762,328) and the moving average for period 12 (702,334.7). The calculation is: $694,975 = (620,264 + 762,328 + 702,334.7)/3$.

Displaying Original Field Values in a Simple Moving Average Column

This request defines an integer value named PERIOD to use as the independent variable for the moving average. It predicts three periods of values beyond the range of the retrieved data. It uses the keyword INPUT_FIELD as the first argument in the FORECAST parameter list. The trend values do not display in the report. The actual data values for DOLLARS are followed by the predicted values in the report column.

```
DEFINE FILE GGSales
  SDATE/YYM = DATE;
  SYEAR/Y = SDATE;
  SMONTH/M = SDATE;
  PERIOD/I2 = SMONTH;
END
TABLE FILE GGSales
  SUM UNITS DOLLARS
  COMPUTE MOVAVE/D10.1 = FORECAST_MOVAVE(INPUT_FIELD,DOLLARS,1,3,3);
  BY CATEGORY BY PERIOD
  WHERE SYEAR EQ 97 AND CATEGORY NE 'Gifts'
  ON TABLE SET STYLE *
  GRID=OFF,$
  ENDSTYLE
END
```

The output is shown in the following image:

<u>Category</u>	<u>PERIOD</u>	<u>Unit Sales</u>	<u>Dollar Sales</u>	<u>MOVAVE</u>
Coffee	1	61666	801123	801,123.0
	2	54870	682340	682,340.0
	3	61608	765078	765,078.0
	4	57050	691274	691,274.0
	5	59229	720444	720,444.0
	6	58466	742457	742,457.0
	7	60771	747253	747,253.0
	8	54633	655896	655,896.0
	9	57829	730317	730,317.0
	10	57012	724412	724,412.0
	11	51110	620264	620,264.0
	12	58981	762328	762,328.0
	13	0	0	694,975.6
	14	0	0	719,879.4
	15	0	0	705,729.9
Food	1	54394	672727	672,727.0
	2	54894	699073	699,073.0
	3	52713	642802	642,802.0
	4	58026	718514	718,514.0
	5	53289	660740	660,740.0
	6	58742	734705	734,705.0
	7	60127	760586	760,586.0
	8	55622	695235	695,235.0
	9	55787	683140	683,140.0
	10	57340	713768	713,768.0
	11	57459	710138	710,138.0
	12	57290	705315	705,315.0
	13	0	0	708,397.8
	14	0	0	707,817.7
	15	0	0	708,651.9

FORECAST_EXPAVE: Using Single Exponential Smoothing

The single exponential smoothing method calculates an average that allows you to choose weights to apply to newer and older values.

The following formula determines the weight given to the newest value.

$$k = 2 / (1+n)$$

where:

k

Is the newest value.

n

Is an integer greater than one. Increasing n increases the weight assigned to the earlier observations (or data instances), as compared to the later ones.

The next calculation of the exponential moving average (EMA) value is derived by the following formula:

$$\text{EMA} = (\text{EMA} * (1-k)) + (\text{datavalue} * k)$$

This means that the newest value from the data source is multiplied by the factor k and the current moving average is multiplied by the factor $(1-k)$. These quantities are then summed to generate the new EMA.



Note: When the data values are exhausted, the last data value in the sort group is used as the next data value.

Calculate a Single Exponential Smoothing Column

```
FORECAST_EXPAVE(display, infield, interval,
  npredict, npoint1)
```

where:

display

Keyword

Specifies which values to display for rows of output that represent existing data. Valid values are:

- **INPUT_FIELD.** This displays the original field values for rows that represent

existing data.

- **MODEL_DATA.** This displays the calculated values for rows that represent existing data.

i Note: You can show both types of output for any field by creating two independent COMPUTE commands in the same request, each with a different display option.

infield

Is any numeric field. It can be the same field as the result field, or a different field. It cannot be a date-time field or a numeric field with date display options.

interval

Is the increment to add to each sort field value (after the last data point) to create the next value. This must be a positive integer. To sort in descending order, use the BY HIGHEST phrase. The result of adding this number to the sort field values is converted to the same format as the sort field.

For date fields, the minimal component in the format determines how the number is interpreted. For example, if the format is YMD, MDY, or DMY, an interval value of 2 is interpreted as meaning two days. If the format is YM, the 2 is interpreted as meaning two months.

npredict

Is the number of predictions for FORECAST to calculate. It must be an integer greater than or equal to zero. Zero indicates that you do not want predictions, and is only supported with a non-recursive FORECAST.

npoint1

For EXPAVE, this number is used to calculate the weights for each component in the average. This value must be a positive whole number. The weight, k , is calculated by the following formula:

$$k=2/(1+npoint1)$$

Calculating a Single Exponential Smoothing Column

The following defines an integer value named PERIOD to use as the independent variable for the moving average. It predicts three periods of values beyond the range of retrieved data.

```

DEFINE FILE GGSales
  SDATE/YYM = DATE;
  SYEAR/Y = SDATE;
  SMONTH/M = SDATE;
  PERIOD/I2 = SMONTH;
END
TABLE FILE GGSales
  SUM UNITS DOLLARS
  COMPUTE EXPAVE/D10.1= FORECAST_EXPAVE(MODEL_DATA,DOLLARS,1,3,3);
  BY CATEGORY BY PERIOD
  WHERE SYEAR EQ 97 AND CATEGORY NE 'Gifts'
  ON TABLE SET STYLE *
  GRID=OFF,$
  ENDSTYLE
END

```

The output is shown in the following image:

Category	PERIOD	Unit Sales	Dollar Sales	EXPAVE
-----	-----	-----	-----	-----
Coffee	1	61666	801123	801,123.0
	2	54870	682340	741,731.5
	3	61608	765078	753,404.8
	4	57050	691274	722,339.4
	5	59229	720444	721,391.7
	6	58466	742457	731,924.3
	7	60771	747253	739,588.7
	8	54633	655896	697,742.3
	9	57829	730317	714,029.7
	10	57012	724412	719,220.8
	11	51110	620264	669,742.4
	12	58981	762328	716,035.2
	13	0	0	739,181.6
	14	0	0	750,754.8
	15	0	0	756,541.4
Food	1	54394	672727	672,727.0
	2	54894	699073	685,900.0

3	52713	642802	664,351.0
4	58026	718514	691,432.5
5	53289	660740	676,086.3
6	58742	734705	705,395.6
7	60127	760586	732,990.8
8	55622	695235	714,112.9
9	55787	683140	698,626.5
10	57340	713768	706,197.2
11	57459	710138	708,167.6
12	57290	705315	706,741.3
13	0	0	706,028.2
14	0	0	705,671.6
15	0	0	705,493.3

In the report, three predicted values of EXPAVE are calculated within each value of CATEGORY. For values outside the range of the data, new PERIOD values are generated by adding the interval value (1) to the prior PERIOD value.

Each average (EXPAVE value) is computed using DOLLARS values where they exist. The calculation of the moving average begins in the following way:

- The first EXPAVE value (801,123.0) is the same as the first DOLLARS value.
- The second EXPAVE value (741,731.5) is calculated as follows. Note that because of rounding and the number of decimal places used, the value derived in this sample calculation varies slightly from the one displayed in the report output:

$n=3$ (number used to calculate weights)

$$k = 2/(1+n) = 2/4 = 0.5$$

$$\text{EXPAVE} = (\text{EXPAVE} \times (1-k)) + (\text{new-DOLLARS} \times k) = (801123 \times 0.5) + (682340 \times 0.50) = 400561.5 + 341170 = 741731.5$$

- The third EXPAVE value (753,404.8) is calculated as follows:

$$\text{EXPAVE} = (\text{EXPAVE} \times (1-k)) + (\text{new-DOLLARS} \times k) = (741731.5 \times 0.5) + (765078 \times 0.50) = 370865.75 + 382539 = 753404.75$$

FORECAST_DOUBLEXP: Using Double Exponential Smoothing

Double exponential smoothing produces an exponential moving average that takes into account the tendency of data to either increase or decrease over time without repeating. This is accomplished by using two equations with two constants.

- The first equation accounts for the current time period and is a weighted average of the current data value and the prior average, with an added component (b) that represents the trend for the previous period. The weight constant is k:

$$\text{DOUBLEXP}(t) = k * \text{datavalue}(t) + (1-k) * ((\text{DOUBLEXP}(t-1) + b(t-1)))$$

- The second equation is the calculated trend value, and is a weighted average of the difference between the current and previous average and the trend for the previous time period. b(t) represents the average trend. The weight constant is g:

$$b(t) = g * (\text{DOUBLEXP}(t) - \text{DOUBLEXP}(t-1)) + (1 - g) * (b(t-1))$$

These two equations are solved to derive the smoothed average. The first smoothed average is set to the first data value. The first trend component is set to zero. For choosing the two constants, the best results are usually obtained by minimizing the mean-squared error (MSE) between the data values and the calculated averages. You may need to use nonlinear optimization techniques to find the optimal constants.

The equation used for forecasting beyond the data points with double exponential smoothing is

$$\text{forecast}(t+m) = \text{DOUBLEXP}(t) + m * b(t)$$

where:

m

Is the number of time periods ahead for the forecast.

Calculate a Double Exponential Smoothing Column

```
FORECAST_DOUBLEXP(display, infield,  
interval, npredict, npoint1, npoint2)
```

where:

display

Keyword

Specifies which values to display for rows of output that represent existing data. Valid values are:

- **INPUT_FIELD.** This displays the original field values for rows that represent existing data.
- **MODEL_DATA.** This displays the calculated values for rows that represent existing data.

i Note: You can show both types of output for any field by creating two independent COMPUTE commands in the same request, each with a different display option.

infield

Is any numeric field. It can be the same field as the result field, or a different field. It cannot be a date-time field or a numeric field with date display options.

interval

Is the increment to add to each sort field value (after the last data point) to create the next value. This must be a positive integer. To sort in descending order, use the BY HIGHEST phrase. The result of adding this number to the sort field values is converted to the same format as the sort field.

For date fields, the minimal component in the format determines how the number is interpreted. For example, if the format is YMD, MDY, or DMY, an interval value of 2 is interpreted as meaning two days. If the format is YM, the 2 is interpreted as meaning two months.

npredict

Is the number of predictions for FORECAST to calculate. It must be an integer greater than or equal to zero. Zero indicates that you do not want predictions, and is only supported with a non-recursive FORECAST.

npoint1

For DOUBLEXP, this number is used to calculate the weights for each component in the average. This value must be a positive whole number. The weight, k , is calculated by the following formula:

$$k=2/(1+npoint1)$$

npoint2

For DOUBLEXP, this positive whole number is used to calculate the weights for each term in the trend. The weight, g , is calculated by the following formula:

$$g=2/(1+npoint2)$$

Calculating a Double Exponential Smoothing Column

The following sums the TRANSTOT field of the VIDEOTRK data source by TRANSDATE, and calculates a single exponential and double exponential moving average. The report columns show the calculated values for existing data points.

```
TABLE FILE VIDEOTRK
SUM TRANSTOT
COMPUTE EXP/D15.1 = FORECAST_EXP(AVE(MODEL_DATA,TRANSTOT,1,0,3));
DOUBLEXP/D15.1 = FORECAST_DOUBLEXP(MODEL_DATA,TRANSTOT,1,0,3,3);
BY TRANSDATE
WHERE TRANSDATE NE '19910617'
ON TABLE SET STYLE *
GRID=OFF,$
END
```

The output is shown in the following image:

<u>TRANSDATE</u>	<u>TRANSTOT</u>	<u>EXP</u>	<u>DOUBLEXP</u>
91/06/18	21.25	21.3	21.3
91/06/19	38.17	29.7	35.0
91/06/20	14.23	22.0	30.7
91/06/21	44.72	33.3	39.7
91/06/24	126.28	79.8	86.2
91/06/25	47.74	63.8	80.2
91/06/26	40.97	52.4	65.7
91/06/27	60.24	56.3	61.9
91/06/28	31.00	43.7	45.0

FORECAST_SEASONAL: Using Triple Exponential Smoothing

Triple exponential smoothing produces an exponential moving average that takes into account the tendency of data to repeat itself in intervals over time. For example, sales data that is growing and in which 25% of sales always occur during December contains both trend and seasonality. Triple exponential smoothing takes both the trend and seasonality into account by using three equations with three constants.

For triple exponential smoothing you, need to know the number of data points in each time period (designated as L in the following equations). To account for the seasonality, a seasonal index is calculated. The data is divided by the prior season index and then used in calculating the smoothed average.

- The first equation accounts for the current time period, and is a weighted average of the current data value divided by the seasonal factor and the prior average adjusted for the trend for the previous period. The weight constant is k:

$$\text{SEASONAL}(t) = k * (\text{datavalue}(t)/I(t-L)) + (1-k) * (\text{SEASONAL}(t-1) + b(t-1))$$

- The second equation is the calculated trend value, and is a weighted average of the difference between the current and previous average and the trend for the previous time period. $b(t)$ represents the average trend. The weight constant is g:

$$b(t) = g * (SEASONAL(t) - SEASONAL(t-1)) + (1-g) * (b(t-1))$$

- The third equation is the calculated seasonal index, and is a weighted average of the current data value divided by the current average and the seasonal index for the previous season. $I(t)$ represents the average seasonal coefficient. The weight constant is p :

$$I(t) = p * (datavalue(t)/SEASONAL(t)) + (1 - p) * I(t-L)$$

These equations are solved to derive the triple smoothed average. The first smoothed average is set to the first data value. Initial values for the seasonality factors are calculated based on the maximum number of full periods of data in the data source, while the initial trend is calculated based on two periods of data. These values are calculated with the following steps:

1. The initial trend factor is calculated by the following formula:

$$b(0) = (1/L) ((y(L+1)-y(1))/L + (y(L+2)-y(2))/L + \dots + (y(2L) - y(L))/L)$$

2. The calculation of the initial seasonality factor is based on the average of the data values within each period, $A(j)$ ($1 \leq j \leq N$):

$$A(j) = (y((j-1)L+1) + y((j-1)L+2) + \dots + y(jL)) / L$$

3. Then, the initial periodicity factor is given by the following formula, where N is the number of full periods available in the data, L is the number of points per period and n is a point within the period ($1 \leq n \leq L$):

$$I(n) = (y(n)/A(1) + y(L+n)/A(2) + \dots + y((N-1)L+n)/A(N)) / N$$

The three constants must be chosen carefully. The best results are usually obtained by choosing the constants to minimize the mean-squared error (MSE) between the data values and the calculated averages. Varying the values of $npoint1$ and $npoint2$ affect the results, and some values may produce a better approximation. To search for a better approximation, you may want to find values that minimize the MSE.

The equation used to forecast beyond the last data point with triple exponential smoothing is:

```
forecast(t+m) = (SEASONAL(t) + m * b(t)) / I(t-L+MOD(m/L))
```

where:

m

Is the number of periods ahead for the forecast.

Calculate a Triple Exponential Smoothing Column

```
FORECAST_SEASONAL(display, infield,
interval, npredict, nperiod, npoint1, npoint2, npoint3)
```

where:

display

Keyword

Specifies which values to display for rows of output that represent existing data. Valid values are:

- **INPUT_FIELD.** This displays the original field values for rows that represent existing data.
- **MODEL_DATA.** This displays the calculated values for rows that represent existing data.

i Note: You can show both types of output for any field by creating two independent COMPUTE commands in the same request, each with a different display option.

infield

Is any numeric field. It can be the same field as the result field, or a different field. It cannot be a date-time field or a numeric field with date display options.

interval

Is the increment to add to each sort field value (after the last data point) to create the next value. This must be a positive integer. To sort in descending order, use the BY HIGHEST phrase. The result of adding this number to the sort field values is converted to the same format as the sort field.

For date fields, the minimal component in the format determines how the number is interpreted. For example, if the format is YMD, MDY, or DMY, an interval value of 2 is interpreted as meaning two days. If the format is YM, the 2 is interpreted as meaning two months.

npredict

Is the number of predictions for FORECAST to calculate. It must be an integer greater than or equal to zero. Zero indicates that you do not want predictions, and is only supported with a non-recursive FORECAST. For the SEASONAL method, npredict is the number of *periods* to calculate. The number of *points* generated is:

$$\text{nperiod} * \text{npredict}$$

nperiod

For the SEASONAL method, is a positive whole number that specifies the number of data points in a period.

npoint1

For SEASONAL, this number is used to calculate the weights for each component in the average. This value must be a positive whole number. The weight, k , is calculated by the following formula:

$$k = 2 / (1 + \text{npoint1})$$

npoint2

For SEASONAL, this positive whole number is used to calculate the weights for each term in the trend. The weight, g , is calculated by the following formula:

$$g = 2 / (1 + \text{npoint2})$$

npoint3

For SEASONAL, this positive whole number is used to calculate the weights for each term in the seasonal adjustment. The weight, p , is calculated by the following formula:

$$p=2/(1+npoint3)$$

Calculating a Triple Exponential Smoothing Column

In the following, the data has seasonality but no trend. Therefore, *npoint2* is set high (1000) to make the trend factor negligible in the calculation:

```
TABLE FILE VIDEOTRK
SUM TRANSTOT
COMPUTE SEASONAL/D10.1 = FORECAST_SEASONAL(MODEL_
DATA,TRANSTOT,1,3,3,3,1000,1);
BY TRANSDATE
WHERE TRANSDATE NE '19910617'
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

In the output, *npredict* is 3. Therefore, three periods (nine points, *nperiod* * *npredict*) are generated.

TRANSDATE	TRANSTOT	SEASONAL
91/06/18	21.25	21.3
91/06/19	38.17	31.0
91/06/20	14.23	34.6
91/06/21	44.72	53.2
91/06/24	126.28	75.3
91/06/25	47.74	82.7
91/06/26	40.97	73.7
91/06/27	60.24	62.9
91/06/28	31.00	66.3
91/06/29		45.7
91/06/30		94.1
91/07/01		53.4
91/07/02		72.3
91/07/03		140.0
91/07/04		75.8
91/07/05		98.9
91/07/06		185.8
91/07/07		98.2

FORECAST_LINEAR: Using a Linear Regression Equation

The linear regression equation estimates values by assuming that the dependent variable (the new calculated values) and the independent variable (the sort field values) are related by a function that represents a straight line:

$$y = mx + b$$

where:

y

Is the dependent variable.

x

Is the independent variable.

m

Is the slope of the line.

b

Is the y-intercept.

FORECAST_LINEAR uses a technique called Ordinary Least Squares to calculate values for m and b that minimize the sum of the squared differences between the data and the resulting line.

The following formulas show how m and b are calculated.

$$m = \frac{(\sum xy - (\sum x \cdot \sum y)/n)}{(\sum x^2 - (\sum x)^2/n)}$$

$$b = (\sum y)/n - (m \cdot (\sum x)/n)$$

where:

n

Is the number of data points.

y

Is the data values (dependent variables).

x

Is the sort field values (independent variables).

Trend values, as well as predicted values, are calculated using the regression line equation.

Calculate a Linear Regression Column

```
FORECAST_LINEAR(display, infield, interval,
  npredict)
```

where:

display

Keyword

Specifies which values to display for rows of output that represent existing data. Valid values are:

- **INPUT_FIELD.** This displays the original field values for rows that represent existing data.
- **MODEL_DATA.** This displays the calculated values for rows that represent existing data.

 **Note:** You can show both types of output for any field by creating two independent COMPUTE commands in the same request, each with a different display option.

infield

Is any numeric field. It can be the same field as the result field, or a different field. It cannot be a date-time field or a numeric field with date display options.

interval

Is the increment to add to each sort field value (after the last data point) to create the next value. This must be a positive integer. To sort in descending order, use the BY HIGHEST phrase. The result of adding this number to the sort field values is converted to the same format as the sort field.

For date fields, the minimal component in the format determines how the number is interpreted. For example, if the format is YMD, MDY, or DMY, an interval value of 2 is interpreted as meaning two days. If the format is YM, the 2 is interpreted as meaning two months.

npredict

Is the number of predictions for FORECAST to calculate. It must be an integer greater than or equal to zero. Zero indicates that you do not want predictions, and is only supported with a non-recursive FORECAST.

Calculating a New Linear Regression Field

The following request calculates a regression line using the VIDEOTRK data source of QUANTITY by TRANSDATE. The interval is one day, and three predicted values are calculated.

```
TABLE FILE VIDEOTRK
SUM QUANTITY
COMPUTE FORTOT=FORECAST_LINEAR(MODEL_DATA,QUANTITY,1,3);
BY TRANSDATE
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image:

<u>TRANSDATE</u>	<u>QUANTITY</u>	<u>FORTOT</u>
06/17/91	12	6.63
06/18/91	2	6.57
06/19/91	5	6.51
06/20/91	3	6.45
06/21/91	7	6.39
06/24/91	12	6.21
06/25/91	8	6.15
06/26/91	2	6.09
06/27/91	9	6.03
06/28/91	3	5.97
06/29/91		5.91
06/30/91		5.85
07/01/91		5.79

Note:


- Three predicted values of FORTOT are calculated. For values outside the range of the data, new TRANSDATE values are generated by adding the interval value (1) to the prior TRANSDATE value.
- There are no QUANTITY values for the generated FORTOT values.
- Each FORTOT value is computed using a regression line, calculated using all of the actual data values for QUANTITY.

TRANSDATE is the independent variable (x) and QUANTITY is the dependent variable (y). The equation is used to calculate QUANTITY FORECAST trend and predicted values.

The following version of the request charts the data values and the regression line.

```
GRAPH FILE VIDEOTRK
SUM QUANTITY
COMPUTE FORTOT=FORECAST_LINEAR(MODEL_DATA,QUANTITY,1,3);
BY TRANSDATE
ON GRAPH PCHOLD FORMAT JSCHART
ON GRAPH SET LOOKGRAPH VLINE
END
```

The output is shown in the following image.

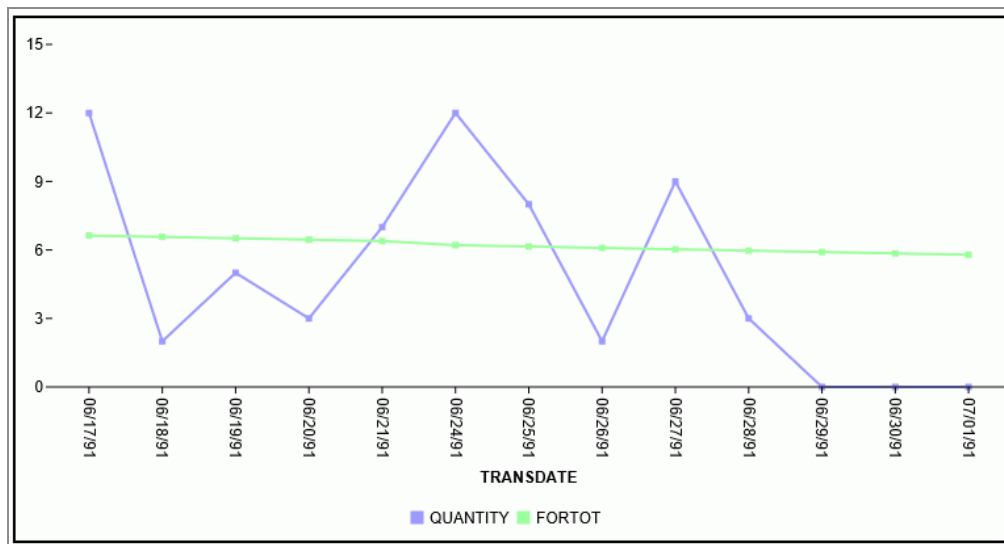

PARTITION_AGGR: Creating Rolling Calculations

Using the `PARTITION_AGGR` function, you can generate rolling calculations based on a block of rows from the internal matrix of a `TABLE` request. In order to determine the limits of the rolling calculations, you specify a partition of the data based on either a sort field or the entire `TABLE`. Within either type of break, you can start calculating from the beginning of the break or a number of rows prior to or subsequent to the current row. You can stop the rolling calculation at the current row, a row past the start point, or the end of the partition.

By default, the field values used in the calculations are the summed values of a measure in the request. Certain prefix operators can be used to add a column to the internal matrix and use that column in the rolling calculations. The rolling calculation can be `SUM`, `AVE`, `CNT`, `MIN`, `MAX`, `FST`, or `LST`.

Generate Rolling Calculations Using PARTITION_AGGR

```
PARTITION_AGGR([prefix.]measure,reset_key,lower,upper,operation)
```

where:

prefix.

Defines an aggregation operator to apply to the measure before using it in the rolling calculation. Valid operators are:

- **SUM.** which calculates the sum of the measure field values. `SUM` is the default operator.
- **CNT.** which calculates a count of the measure field values.
- **AVE.** which calculates the average of the measure field values.
- **MIN.** which calculates the minimum of the measure field values.
- **MAX.** which calculates the maximum of the measure field values.
- **FST.** which retrieves the first value of the measure field.

- **LST.** which retrieves the last value of the measure field.
- **STDP.** which calculates the population standard deviation.
- **STDS.** which calculates the sample standard deviation.

i Note: The operators PCT., RPCT., TOT., MDN., and DST. are not supported. COMPUTEs that reference those unsupported operators are also not supported.

measure

Is the measure field to be aggregated. It can be a real field in the request or a calculated value generated with the COMPUTE command, as long as the COMPUTE does not reference an unsupported prefix operator.

reset_key

Identifies the point at which the calculation restarts. Valid values are:

- The name of a sort field in the request.
- PRESET, which uses the value of the PARTITION_ON parameter, as described in [Specify the Partition Size for Simplified Statistical Functions](#).
- TABLE, which indicates that there is no break on a sort field.

The sort field may use BY HIGHEST to indicate a HIGH-TO-LOW sort. ACROSS COLUMNS AND is supported. BY ROWS OVER and FOR are not supported.

lower

Identifies the starting point for the rolling calculation. Valid values are:

- **n, -n**, which starts the calculation *n* rows forward or back from the current row.
- **B**, which starts the calculation at the beginning of the current sort break (the first line with the same sort field value as the current line).

upper

Identifies the ending point of the rolling calculation. The *lower* row value must precede the *upper* row value.

Valid values are:

- **C**, which ends the rolling calculation at the current row in the internal matrix.
- **n**, **-n**, which ends the calculation *n* rows forward or back from the current row.
- **E**, which ends the rolling calculation at the end of the sort break (the last line with the same sort value as the current row.)

i Note: The values used in the calculations depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

operation

Specifies the rolling calculation used on the values in the internal matrix. Supported operations are:

- **SUM**, which calculates a rolling sum.
- **AVE**, which calculates a rolling average.
- **CNT**, which counts the rows in the partition.
- **MEDIAN**.
- **MIN**, which returns the minimum value in the partition.
- **MAX**, which returns the maximum value in the partition.
- **MEDIAN**, which returns the median value in the partition.
- **MODE**, which returns the mode value in the partition.
- **FST**, which returns the first value in the partition.
- **LST**, which returns the last value in the partition.
- **STDP**, which returns the population standard deviation in the partition. Requires using the verb PRINT to avoid duplicate aggregation.
- **STDS**, which returns the sample standard deviation in the partition. Requires using the verb PRINT to avoid duplicate aggregation.

The calculation is performed prior to any WHERE TOTAL tests, but after any WHERE_GROUPED tests.

Calculating a Rolling Average

The following request calculates a rolling average of the current line and the previous line in the internal matrix, within the quarter.

```
TABLE FILE WF_RETAIL_LITE
SUM COGS_US
COMPUTE AVE1/D12.2M = PARTITION_AGGR(COGS_US, TIME_QTR, -1, C, AVE);
BY BUSINESS_REGION
BY TIME_QTR
BY TIME_MTH
WHERE BUSINESS_REGION EQ 'North America' OR 'South America'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. Within each quarter, the first average is just the value from Q1, as going back 1 would cross a boundary. The second average is calculated using the first two rows within that quarter, and the third average is calculated using rows 2 and 3 within the quarter.

<u>Customer Business Region</u>	<u>Sale Quarter</u>	<u>Sale Month</u>	<u>Cost of Goods</u>	<u>AVE1</u>
North America	1	1	\$26,361,956.00	\$26,361,956.00
		2	\$24,348,729.00	\$25,355,342.50
		3	\$26,118,420.00	\$25,233,574.50
	2	4	\$23,776,352.00	\$23,776,352.00
		5	\$24,717,633.00	\$24,246,992.50
		6	\$24,284,736.00	\$24,501,184.50
	3	7	\$25,317,633.00	\$25,317,633.00
		8	\$25,916,286.00	\$25,616,959.50
		9	\$24,968,297.00	\$25,442,291.50
	4	10	\$30,717,478.00	\$30,717,478.00
		11	\$30,055,782.00	\$30,386,630.00
		12	\$32,225,143.00	\$31,140,462.50
South America	1	1	\$3,216,999.00	\$3,216,999.00
		2	\$2,745,677.00	\$2,981,338.00
		3	\$3,163,526.00	\$2,954,601.50
	2	4	\$2,852,809.00	\$2,852,809.00
		5	\$2,952,020.00	\$2,902,414.50
		6	\$2,918,017.00	\$2,935,018.50
	3	7	\$2,961,406.00	\$2,961,406.00
		8	\$3,077,824.00	\$3,019,615.00
		9	\$2,895,280.00	\$2,986,552.00
	4	10	\$3,642,505.00	\$3,642,505.00
		11	\$3,482,327.00	\$3,562,416.00
		12	\$3,517,651.00	\$3,499,989.00

The following changes the rolling average to start from the beginning of the sort break.

```
COMPUTE AVE1/D12.2M = PARTITION_AGGR(COGS_US, TIME_QTR ,B, C, AVE);
```

The output is shown in the following image. Within each quarter, the first average is just the value from Q1, as going back would cross a boundary. The second average is calculated using the first two rows within that quarter, and the third average is calculated using rows 1 through 3 within the quarter.

<u>Customer Business Region</u>	<u>Sale Quarter</u>	<u>Sale Month</u>	<u>Cost of Goods</u>	<u>AVE1</u>
North America	1	1	\$26,361,956.00	\$26,361,956.00
		2	\$24,348,729.00	\$25,355,342.50
		3	\$26,118,420.00	\$25,609,701.67
	2	4	\$23,776,352.00	\$23,776,352.00
		5	\$24,717,633.00	\$24,246,992.50
		6	\$24,284,736.00	\$24,259,573.67
	3	7	\$25,317,633.00	\$25,317,633.00
		8	\$25,916,286.00	\$25,616,959.50
		9	\$24,968,297.00	\$25,400,738.67
	4	10	\$30,717,478.00	\$30,717,478.00
		11	\$30,055,782.00	\$30,386,630.00
		12	\$32,225,143.00	\$30,999,467.67
South America	1	1	\$3,216,999.00	\$3,216,999.00
		2	\$2,745,677.00	\$2,981,338.00
		3	\$3,163,526.00	\$3,042,067.33
	2	4	\$2,852,809.00	\$2,852,809.00
		5	\$2,952,020.00	\$2,902,414.50
		6	\$2,918,017.00	\$2,907,615.33
	3	7	\$2,961,406.00	\$2,961,406.00
		8	\$3,077,824.00	\$3,019,615.00
		9	\$2,895,280.00	\$2,978,170.00
	4	10	\$3,642,505.00	\$3,642,505.00
		11	\$3,482,327.00	\$3,562,416.00
		12	\$3,517,651.00	\$3,547,494.33

The following command uses the partition boundary TABLE.

```
COMPUTE AVE1/D12.2M = PARTITION_AGGR(COGS_US, TABLE, B, C, AVE);
```

The output is shown in the following image. The rolling average keeps adding the next row to the average with no sort field break.

<u>Customer Business Region</u>	<u>Sale Quarter</u>	<u>Sale Month</u>	<u>Cost of Goods</u>	<u>AVE1</u>
North America	1	1	\$26,361,956.00	\$26,361,956.00
		2	\$24,348,729.00	\$25,355,342.50
		3	\$26,118,420.00	\$25,609,701.67
	2	4	\$23,776,352.00	\$25,151,364.25
		5	\$24,717,633.00	\$25,064,618.00
		6	\$24,284,736.00	\$24,934,637.67
	3	7	\$25,317,633.00	\$24,989,351.29
		8	\$25,916,286.00	\$25,105,218.13
		9	\$24,968,297.00	\$25,090,004.67
	4	10	\$30,717,478.00	\$25,652,752.00
		11	\$30,055,782.00	\$26,053,027.45
		12	\$32,225,143.00	\$26,567,370.42
South America	1	1	\$3,216,999.00	\$24,771,188.00
		2	\$2,745,677.00	\$23,197,937.21
		3	\$3,163,526.00	\$21,862,309.80
	2	4	\$2,852,809.00	\$20,674,216.00
		5	\$2,952,020.00	\$19,631,733.88
		6	\$2,918,017.00	\$18,703,194.06
	3	7	\$2,961,406.00	\$17,874,678.89
		8	\$3,077,824.00	\$17,134,836.15
		9	\$2,895,280.00	\$16,456,762.05
	4	10	\$3,642,505.00	\$15,874,295.82
		11	\$3,482,327.00	\$15,335,514.57
		12	\$3,517,651.00	\$14,843,103.58

Usage Notes for PARTITION_AGGR

- Fields referenced in the PARTITION_AGGR parameters but not previously mentioned in the request will *not* be counted in column notation or propagated to HOLD files.
- Using the WITHIN phrase for a sum is the same as computing PARTITION_AGGR on the WITHIN sort field from B (beginning of sort break) to E (end of sort break) using SUM, as in the following example.

```
TABLE FILE WF_RETAIL_LITE
SUM COGS_US WITHIN TIME_QTR AS 'WITHIN Qtr'
COMPUTE PART_WITHIN_QTR/D12.2M = PARTITION_AGGR(COGS_US, TIME_QTR,
```



```

B, E, SUM);
BY BUSINESS_REGION AS Region
BY TIME_QTR
BY TIME_MTH
WHERE BUSINESS_REGION EQ 'North America' OR 'South America'
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Region</u>	<u>Sale Quarter</u>	<u>Sale Month</u>	<u>WITHIN Qtr</u>	<u>PART_WITHIN_QTR</u>
North America	1	1	\$76,829,105.00	\$76,829,105.00
		2	\$76,829,105.00	\$76,829,105.00
		3	\$76,829,105.00	\$76,829,105.00
	2	4	\$72,778,721.00	\$72,778,721.00
		5	\$72,778,721.00	\$72,778,721.00
		6	\$72,778,721.00	\$72,778,721.00
	3	7	\$76,202,216.00	\$76,202,216.00
		8	\$76,202,216.00	\$76,202,216.00
		9	\$76,202,216.00	\$76,202,216.00
	4	10	\$92,998,403.00	\$92,998,403.00
		11	\$92,998,403.00	\$92,998,403.00
		12	\$92,998,403.00	\$92,998,403.00
South America	1	1	\$9,126,202.00	\$9,126,202.00
		2	\$9,126,202.00	\$9,126,202.00
		3	\$9,126,202.00	\$9,126,202.00
	2	4	\$8,722,846.00	\$8,722,846.00
		5	\$8,722,846.00	\$8,722,846.00
		6	\$8,722,846.00	\$8,722,846.00
	3	7	\$8,934,510.00	\$8,934,510.00
		8	\$8,934,510.00	\$8,934,510.00
		9	\$8,934,510.00	\$8,934,510.00
	4	10	\$10,642,483.00	\$10,642,483.00
		11	\$10,642,483.00	\$10,642,483.00
		12	\$10,642,483.00	\$10,642,483.00

With other types of calculations, the results are not the same. For example, the following request calculates the average within a quarter using the WITHIN phrase and the average within quarter using PARTITION_AGGR.

```

TABLE FILE WF_RETAIL_LITE
SUM  COGS_US AS Cost
CNT.COGS_US AS Count AVE.COGS_US WITHIN TIME_QTR AS 'Ave Within'
COMPUTE PART_WITHIN_QTR/D12.2M = PARTITION_AGGR(COGS_US, TIME_QTR,
B, E, AVE);
BY BUSINESS_REGION AS Region
BY TIME_QTR
ON TIME_QTR SUBTOTAL COGS_US CNT.COGS_US
BY TIME_MTH
WHERE BUSINESS_REGION EQ 'North America'
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image. The average using the WITHIN phrase divides the total cost for the quarter by the total count of instances for the quarter (for example, \$76,829,105.00/ 252850 = \$303.85), while PARTITION_AGGR divides the total cost for the quarter by the number of report rows in the quarter (for example, \$76,829,105.00/3 = \$25,609,701.67).

Region	Sale Quarter	Sale Month	Cost	Count	Ave Within	PART_WITHIN_QTR
North America	1	1	\$26,361,956.00	86369	\$303.85	\$25,609,701.67
		2	\$24,348,729.00	79791	\$303.85	\$25,609,701.67
		3	\$26,118,420.00	86690	\$303.85	\$25,609,701.67
*TOTAL TIME_QTR 1			\$76,829,105.00	252850		
	2	4	\$23,776,352.00	79093	\$303.40	\$24,259,573.67
		5	\$24,717,633.00	81317	\$303.40	\$24,259,573.67
		6	\$24,284,736.00	79469	\$303.40	\$24,259,573.67
*TOTAL TIME_QTR 2			\$72,778,721.00	239879		
	3	7	\$25,317,633.00	82158	\$308.06	\$25,400,738.67
		8	\$25,916,286.00	83941	\$308.06	\$25,400,738.67
		9	\$24,968,297.00	81262	\$308.06	\$25,400,738.67
*TOTAL TIME_QTR 3			\$76,202,216.00	247361		
	4	10	\$30,717,478.00	99572	\$309.47	\$30,999,467.67
		11	\$30,055,782.00	97042	\$309.47	\$30,999,467.67
		12	\$32,225,143.00	103898	\$309.47	\$30,999,467.67
*TOTAL TIME_QTR 4			\$92,998,403.00	300512		
TOTAL			\$318,808,445.00	1040602		

- If you use PARTITION_AGGR to perform operations for specific time periods using an

offset, for example, an operation on the quarters for different years, you must make sure that every quarter is represented. If some quarters are missing for some years, the offset will not access the correct data. In this case, generate a HOLD file that has every quarter represented for every year (you can use BY QUARTER ROWS OVER 1 OVER 2 OVER 3 OVER 4) and use PARTITION_AGGR on the HOLD file.

PARTITION_REF: Using Prior or Subsequent Field Values in Calculations

Use of LAST in a calculation retrieves the LAST value of the specified field the last time this calculation was performed. In contrast, the PARTITION_REF function enables you to specify both how many rows back or forward to go in the output in order to retrieve a value, and a sort break within which the retrieval will be contained.

Retrieve Prior or Subsequent Field Values for Use in a Calculation

```
PARTITION_REF([prefix.]field, reset_key, offset)
```

where:

prefix

Is optional. If used, it can be one of the following aggregation operators:

- **AVE.** Average
- **MAX.** Maximum
- **MIN.** Minimum
- **CNT.** Count
- **SUM.** Sum

field

Is the field whose value is to be retrieved.

reset_key

Identifies the point at which the retrieval break restarts. Valid values are:

- The name of a sort field in the request.
- PRESET, which uses the value of the PARTITION_ON parameter, as described in [Specify the Partition Size for Simplified Statistical Functions](#).
- TABLE, which indicates that there is no break on a sort field.

The sort field may use BY HIGHEST to indicate a HIGH-TO-LOW sort. ACROSS COLUMNS AND is supported. BY ROWS OVER and FOR are not supported.

i Note: The values used in the retrieval depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

offset

Is the integer number of records to go forward (for a positive offset) or backward (for a negative offset) to retrieve the value.

If the offset is prior to the partition boundary sort value, the return will be the default value for the field. The calculation is performed prior to any WHERE TOTAL tests, but after WHERE_GROUPED tests.

Retrieving a Previous Record With PARTITION_REF

The following request retrieves the previous record within the sort field PRODUCT_CATEGORY.

```
TABLE FILE WF_RETAIL_LITE
SUM DAYSDELAYED
COMPUTE NEWDAYS/I5=PARTITION_REF(DAYSDELAYED, PRODUCT_CATEGORY, -1);
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. The first value within each sort break is zero because there is no prior record to retrieve.

<u>Product Category</u>	<u>Product Subcategory</u>	<u>Days Delayed</u>	<u>NEWDAYS</u>
Accessories	Charger	12,301	0
	Headphones	26,670	12301
	Universal Remote Controls	20,832	26670
Camcorder	Handheld	29,446	0
	Professional	1,531	29446
	Standard	22,248	1531
Computers	Smartphone	24,113	0
	Tablet	21,293	24113
Media Player	Blu Ray	78,989	0
	DVD Players	31	78989
	Streaming	8,153	31
Stereo Systems	Home Theater Systems	47,214	0
	Receivers	17,999	47214
	Speaker Kits	28,468	17999
	iPod Docking Station	37,556	28468
Televisions	Flat Panel TV	10,941	0
Video Production	Video Editing	23,553	0

The following request retrieves the average cost of goods from two records prior to the current record within the PRODUCT_CATEGORY sort field.

```
TABLE FILE WF_RETAIL_LITE
SUM COGS_US AVE.COGS_US AS Average
COMPUTE PartitionAve/D12.2M=PARTITION_REF(AVE.COGS_US, PRODUCT_CATEGORY,
-2);
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Product Category</u>	<u>Product Subcategory</u>	<u>Cost of Goods</u>	<u>Average</u>	<u>PartitionAve</u>
Accessories	Charger	\$2,052,711.00	\$27.48	\$0.00
	Headphones	\$51,663,564.00	\$319.05	\$0.00
	Universal Remote Controls	\$36,037,623.00	\$285.21	\$27.48
Camcorder	Handheld	\$20,576,916.00	\$116.02	\$0.00
	Professional	\$35,218,308.00	\$3,897.56	\$0.00
	Standard	\$49,071,633.00	\$359.54	\$116.02
Computers	Smartphone	\$44,035,774.00	\$302.01	\$0.00
	Tablet	\$25,771,890.00	\$247.89	\$0.00
Media Player	Blu Ray	\$181,112,921.00	\$376.11	\$0.00
	DVD Players	\$3,756,254.00	\$281.45	\$0.00
	DVD Players - Portable	\$306,576.00	\$77.01	\$376.11
	Streaming	\$5,064,730.00	\$104.99	\$281.45
Stereo Systems	Boom Box	\$840,373.00	\$125.67	\$0.00
	Home Theater Systems	\$56,428,589.00	\$199.38	\$0.00
	Receivers	\$40,329,668.00	\$377.67	\$125.67
	Speaker Kits	\$81,396,140.00	\$471.02	\$199.38
	iPod Docking Station	\$26,119,093.00	\$118.66	\$377.67
Televisions	CRT TV	\$1,928,416.00	\$590.09	\$0.00
	Flat Panel TV	\$59,077,345.00	\$900.19	\$0.00
	Portable TV	\$545,348.00	\$95.74	\$590.09
Video Production	Video Editing	\$40,105,657.00	\$283.23	\$0.00

Replacing the function call with the following syntax changes the partition boundary to TABLE.

```
COMPUTE PartitionAve/D12.2M=PARTITION_REF(AVE.COGS_US, TABLE, -2);
```

The output is shown in the following image.

Product Category	Product Subcategory	Cost of Goods	Average	PartitionAve
Accessories	Charger	\$2,052,711.00	\$27.48	\$0.00
	Headphones	\$51,663,564.00	\$319.05	\$0.00
	Universal Remote Controls	\$36,037,623.00	\$285.21	\$27.48
Camcorder	Handheld	\$20,576,916.00	\$116.02	\$319.05
	Professional	\$35,218,308.00	\$3,897.56	\$285.21
	Standard	\$49,071,633.00	\$359.54	\$116.02
Computers	Smartphone	\$44,035,774.00	\$302.01	\$3,897.56
	Tablet	\$25,771,890.00	\$247.89	\$359.54
Media Player	Blu Ray	\$181,112,921.00	\$376.11	\$302.01
	DVD Players	\$3,756,254.00	\$281.45	\$247.89
	DVD Players - Portable	\$306,576.00	\$77.01	\$376.11
	Streaming	\$5,064,730.00	\$104.99	\$281.45
Stereo Systems	Boom Box	\$840,373.00	\$125.67	\$77.01
	Home Theater Systems	\$56,428,589.00	\$199.38	\$104.99
	Receivers	\$40,329,668.00	\$377.67	\$125.67
	Speaker Kits	\$81,396,140.00	\$471.02	\$199.38
	iPod Docking Station	\$26,119,093.00	\$118.66	\$377.67
Televisions	CRT TV	\$1,928,416.00	\$590.09	\$471.02
	Flat Panel TV	\$59,077,345.00	\$900.19	\$118.66
	Portable TV	\$545,348.00	\$95.74	\$590.09
Video Production	Video Editing	\$40,105,657.00	\$283.23	\$900.19

Usage Notes for PARTITION_REF

- Fields referenced in the PARTITION_REF parameters but not previously mentioned in the request, will *not* be counted in column notation or propagated to HOLD files.

INCREASE: Calculating the Difference Between the Current and a Prior Value of a Field

Given an aggregated input field and a negative offset, INCREASE calculates the difference between the value in the current row of the report output and one or more prior rows, within a sort break or the entire table. The reset point for the calculation is determined by the value of the PARTITION_ON parameter described in [Specify the Partition Size for Simplified Statistical Functions](#).

i Note: The values used in the calculations depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

Calculate the Difference Between the Current and a Prior Value of a Field

```
INCREASE([prefix.]field, offset)
```

where:

prefix

Is one of the following optional aggregation operators to apply to the field before using it in the calculation:

- **SUM.** which calculates the sum of the field values. SUM is the default value.
- **CNT.** which calculates a count of the field values.
- **AVE.** which calculates the average of the field values.
- **MIN.** which calculates the minimum of the field values.
- **MAX.** which calculates the maximum of the field values.
- **FST.** which retrieves the first value of the field.
- **LST.** which retrieves the last value of the field.

field

Numeric

Is the field to be used in the calculation.

offset

Numeric

Is a negative number indicating the number of rows back from the current row to use for the calculation.

Calculating the Increase Between the Current and a Prior Value of a Field

The following request uses the default value of SET PARTITION_ON (PENULTIMATE) to calculate the increase within the PRODUCT_CATEGORY sort field between the current row and the previous row.

```
SET PARTITION_ON=PENULTIMATE
TABLE FILE wf_retail_lite
SUM QUANTITY_SOLD
COMPUTE INC = INCREASE(QUANTITY_SOLD,-1);
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. The first value for INC is the value in the Accessories category for Quantity Sold, as there is no prior value. The second value for INC is the difference between the values for Headphones and Charger, the third is the difference between Universal Remote Controls and Headphones. Then, the calculations start over for Camcorder, which is the reset point.

<u>Product Category</u>	<u>Product Subcategory</u>	<u>Quantity Sold</u>	<u>INC</u>
Accessories	Charger	105,257	105,257.00
	Headphones	228,349	123,092.00
	Universal Remote Controls	178,061	-50,288.00
Camcorder	Handheld	250,167	250,167.00
	Professional	12,872	-237,295.00
	Standard	192,205	179,333.00
Computers	Smartphone	205,049	205,049.00
	Tablet	146,728	-58,321.00
Media Player	Blu Ray	679,495	679,495.00
	DVD Players	18,835	-660,660.00
	DVD Players - Portable	5,694	-13,141.00
	Streaming	67,910	62,216.00
Stereo Systems	Boom Box	9,370	9,370.00
	Home Theater Systems	399,092	389,722.00
	Receivers	150,568	-248,524.00
	Speaker Kits	244,199	93,631.00
	iPod Docking Station	311,103	66,904.00
Televisions	CRT TV	4,638	4,638.00
	Flat Panel TV	92,501	87,863.00
	Portable TV	8,049	-84,452.00
Video Production	Video Editing	199,749	199,749.00

PCT_INCREASE: Calculating the Percentage Difference Between the Current and a Prior Value of a Field

Given an aggregated input field and a negative offset, PCT_INCREASE calculates the percentage difference between the value in the current row of the report output and one or more prior rows, within a sort break or the entire table. The reset point for the calculation is determined by the value of the PARTITION_ON parameter described in [Specify the Partition Size for Simplified Statistical Functions](#).

The percentage increase is calculated using the following formula:

```
(current_value - prior_value) / prior_value
```

i Note: The values used in the calculations depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

Calculate the Percentage Difference Between the Current and a Prior Value of a Field

```
PCT_INCREASE([prefix.]field, offset)
```

where:

prefix

Is one of the following optional aggregation operators to apply to the field before using it in the calculation:

- **SUM.** which calculates the sum of the field values. SUM is the default value.
- **CNT.** which calculates a count of the field values.
- **AVE.** which calculates the average of the field values.
- **MIN.** which calculates the minimum of the field values.
- **MAX.** which calculates the maximum of the field values.
- **FST.** which retrieves the first value of the field.
- **LST.** which retrieves the last value of the field.

field

Numeric

The field to be used in the calculation.

offset

Numeric

Is a negative number indicating the number of rows back from the current row to use for the calculation.

PCT_INCREASE: Calculating the Percent Increase Between the Current and a Prior Value of a Field

The following request uses the default value of SET PARTITION_ON (PENULTIMATE) to calculate the percent increase within the PRODUCT_CATEGORY sort field between the current row and the previous row.

```
SET PARTITION_ON=PENULTIMATE
TABLE FILE wf_retail_lite
SUM QUANTITY_SOLD
COMPUTE PCTINC/D8.2p = PCT_INCREASE(QUANTITY_SOLD,-1);
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. The first value for PCTINC is zero percent, as there is no prior value. The second value for PCTINC is the percent difference between the values for Headphones and Charger, the third is the percent difference between Universal Remote Controls and Headphones. Then, the calculations start over for Camcorder, which is the reset point.

Product Category	Product Subcategory	Quantity Sold	PCTINC
Accessories	Charger	105,257	.00%
	Headphones	228,349	116.94%
	Universal Remote Controls	178,061	-22.02%
Camcorder	Handheld	250,167	.00%
	Professional	12,872	-94.85%
	Standard	192,205	1,393.20%
Computers	Smartphone	205,049	.00%
	Tablet	146,728	-28.44%
Media Player	Blu Ray	679,495	.00%
	DVD Players	18,835	-97.23%
	DVD Players - Portable	5,694	-69.77%
	Streaming	67,910	1,092.66%
Stereo Systems	Boom Box	9,370	.00%
	Home Theater Systems	399,092	4,159.25%
	Receivers	150,568	-62.27%
	Speaker Kits	244,199	62.19%
	iPod Docking Station	311,103	27.40%
Televisions	CRT TV	4,638	.00%
	Flat Panel TV	92,501	1,894.42%
	Portable TV	8,049	-91.30%
Video Production	Video Editing	199,749	.00%

PREVIOUS: Retrieving a Prior Value of a Field

Given an aggregated input field and a negative offset, PREVIOUS retrieves the value in a prior row, within a sort break or the entire table. The reset point for the calculation is determined by the value of the PARTITION_ON parameter described in [Specify the Partition Size for Simplified Statistical Functions](#).

i Note: The values used in the retrieval depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

Retrieve a Prior Value of a Field

```
PREVIOUS([prefix.]field, offset)
```

where:

prefix

Is one of the following optional aggregation operators to apply to the field before using it in the calculation:

- **SUM.** which calculates the sum of the field values. SUM is the default value.
- **CNT.** which calculates a count of the field values.
- **AVE.** which calculates the average of the field values.
- **MIN.** which calculates the minimum of the field values.
- **MAX.** which calculates the maximum of the field values.
- **FST.** which retrieves the first value of the field.
- **LST.** which retrieves the last value of the field.

field

Numeric or an alphanumeric field that contains all numeric digits.

The field to be used in the calculation.

offset

Numeric

Is a negative number indicating the number of rows back from the current row to use for the retrieval.

Retrieving a Prior Value of a Field

The following request sets the PARITITON_ON parameter to TABLE and retrieves the value of the QUANTITIY_SOLD field two rows back from the current row.

```

SET PARTITION_ON=TABLE
TABLE FILE wf_retail_lite
SUM QUANTITY_SOLD
COMPUTE PREV = PREVIOUS(QUANTITY_SOLD,-2);
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image. The value of PREV in the first two rows is zero, as there are no prior rows for retrieval. From then on, each value of PREV is from the QUANTITY_SOLD value from two rows prior, with no reset points.

<u>Product Category</u>	<u>Product Subcategory</u>	<u>Quantity Sold</u>	<u>PREV</u>
Accessories	Charger	105,257	.00
	Headphones	228,349	.00
	Universal Remote Controls	178,061	105,257.00
Camcorder	Handheld	250,167	228,349.00
	Professional	12,872	178,061.00
	Standard	192,205	250,167.00
Computers	Smartphone	205,049	12,872.00
	Tablet	146,728	192,205.00
Media Player	Blu Ray	679,495	205,049.00
	DVD Players	18,835	146,728.00
	DVD Players - Portable	5,694	679,495.00
	Streaming	67,910	18,835.00
Stereo Systems	Boom Box	9,370	5,694.00
	Home Theater Systems	399,092	67,910.00
	Receivers	150,568	9,370.00
	Speaker Kits	244,199	399,092.00
	iPod Docking Station	311,103	150,568.00
Televisions	CRT TV	4,638	244,199.00
	Flat Panel TV	92,501	311,103.00
	Portable TV	8,049	4,638.00
Video Production	Video Editing	199,749	92,501.00

RUNNING_AVE: Calculating an Average Over a Group of Rows

Given an aggregated input field and a negative offset, `RUNNING_AVE` calculates the average of the values between the current row of the report output and one or more prior rows, within a sort break or the entire table. The reset point for the calculation is determined by the sort field specified, the entire table, or the value of the `PARTITION_ON` parameter described in [Specify the Partition Size for Simplified Statistical Functions](#).

Calculate Running Average Between the Current and a Prior Value of a Field

```
RUNNING_AVE(field, reset_key, lower)
```

where:

field

Numeric

The field to be used in the calculation.

reset_key

Identifies the point at which the running average restarts. Valid values are:

- The name of a sort field in the request.
- `PRESET`, which uses the value of the `PARTITION_ON` parameter, as described in [Specify the Partition Size for Simplified Statistical Functions](#).
- `TABLE`, which indicates that there is no break on a sort field.



Note: The values used in the calculations depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

lower

Is the starting point in the partition for the running average. Valid values are:

- A negative number, which identifies the offset from the current row.
- B, which specifies the beginning of the sort group.

Calculating a Running Average

The following request calculates a running average of QUANTITY_SOLD within the PRODUCT_CATEGORY sort field, always starting from the beginning of the sort break.

```
TABLE FILE wf_retail_lite
SUM QUANTITY_SOLD
COMPUTE RAVE = RUNNING_AVE(QUANTITY_SOLD,PRODUCT_CATEGORY,B) ;
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. The first value for RAVE is the value in the Accessories category for Quantity Sold, as there is no prior value. The second value for RAVE is the average of the values for Headphones and Charger, the third is the average of the values for Headphones, Charger, and Universal Remote Controls. Then, the calculations start over for Camcorder, which is the reset point.

<u>Product Category</u>	<u>Product Subcategory</u>	<u>Quantity Sold</u>	<u>RAVE</u>
Accessories	Charger	105,257	105,257.00
	Headphones	228,349	166,803.00
	Universal Remote Controls	178,061	170,555.00
Camcorder	Handheld	250,167	250,167.00
	Professional	12,872	131,519.00
	Standard	192,205	151,748.00
Computers	Smartphone	205,049	205,049.00
	Tablet	146,728	175,888.00
Media Player	Blu Ray	679,495	679,495.00
	DVD Players	18,835	349,165.00
	DVD Players - Portable	5,694	234,674.00
	Streaming	67,910	192,983.00
Stereo Systems	Boom Box	9,370	9,370.00
	Home Theater Systems	399,092	204,231.00
	Receivers	150,568	186,343.00
	Speaker Kits	244,199	200,807.00
	iPod Docking Station	311,103	222,866.00
Televisions	CRT TV	4,638	4,638.00
	Flat Panel TV	92,501	48,569.00
	Portable TV	8,049	35,062.00
Video Production	Video Editing	199,749	199,749.00

RUNNING_MAX: Calculating a Maximum Over a Group of Rows

Given an aggregated input field and an offset, RUNNING_MAX calculates the maximum of the values between the current row of the report output and one or more prior rows, within a sort break or the entire table. The reset point for the calculation is determined by the sort field specified, the entire table, or the value of the PARTITION_ON parameter described in [Specify the Partition Size for Simplified Statistical Functions](#).

Calculate Running Maximum Between the Current and a Prior Value of a Field

```
RUNNING_MAX(field, reset_key, lower)
```

where:

field

Numeric or an alphanumeric field that contains all numeric digits.

The field to be used in the calculation.

reset_key

Identifies the point at which the running maximum restarts. Valid values are:

- The name of a sort field in the request.
- PRESET, which uses the value of the PARTITION_ON parameter, as described in [Specify the Partition Size for Simplified Statistical Functions](#).
- TABLE, which indicates that there is no break on a sort field.

i Note: The values used in the calculations depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

lower

Is the starting point in the partition for the running maximum. Valid values are:

- A negative number, which identifies the offset from the current row.
- B, which specifies the beginning of the sort group.

Calculating a Running Maximum

The following request calculates a running maximum for the rows from the beginning of the table to the current value of QUANTITY_SOLD, with no reset point.

```
TABLE FILE wf_retail_lite
SUM QUANTITY_SOLD
COMPUTE RMAX = RUNNING_MAX(QUANTITY_SOLD, TABLE, B) ;
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. The first value for RMAX is the value in the Accessories category for Quantity Sold, as there is no prior value. The second value for RMAX is the value for Headphones, as that value is larger. The third value for RMAX is still the value for Headphones, as that value is larger than the Quantity Sold value in the third row. Since the maximum value in the table occurs for Blu Ray, that value is repeated on all future rows, as there is no reset point.

Product Category	Product Subcategory	Quantity Sold	RMAX
Accessories	Charger	105,257	105,257.00
	Headphones	228,349	228,349.00
	Universal Remote Controls	178,061	228,349.00
Camcorder	Handheld	250,167	250,167.00
	Professional	12,872	250,167.00
	Standard	192,205	250,167.00
Computers	Smartphone	205,049	250,167.00
	Tablet	146,728	250,167.00
Media Player	Blu Ray	679,495	679,495.00
	DVD Players	18,835	679,495.00
	DVD Players - Portable	5,694	679,495.00
	Streaming	67,910	679,495.00
Stereo Systems	Boom Box	9,370	679,495.00
	Home Theater Systems	399,092	679,495.00
	Receivers	150,568	679,495.00
	Speaker Kits	244,199	679,495.00
	iPod Docking Station	311,103	679,495.00
Televisions	CRT TV	4,638	679,495.00
	Flat Panel TV	92,501	679,495.00
	Portable TV	8,049	679,495.00
Video Production	Video Editing	199,749	679,495.00

RUNNING_MIN: Calculating a Minimum Over a Group of Rows

Given an aggregated input field and an offset, RUNNING_MIN calculates the minimum of the values between the current row of the report output and one or more prior rows, within a sort break or the entire table. The reset point for the calculation is determined by the sort field specified, the entire table, or the value of the PARTITION_ON parameter described in [Specify the Partition Size for Simplified Statistical Functions](#).

Calculate Running Minimum Between the Current and a Prior Value of a Field

```
RUNNING_MIN(field, reset_key, lower)
```

where:

field

Numeric or an alphanumeric field that contains all numeric digits.

The field to be used in the calculation.

reset_key

Identifies the point at which the running minimum restarts. Valid values are:

- The name of a sort field in the request.
- PRESET, which uses the value of the PARTITION_ON parameter, as described in [Specify the Partition Size for Simplified Statistical Functions](#).
- TABLE, which indicates that there is no break on a sort field.

i Note: The values used in the calculations depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

lower

Is the starting point in the partition for the running minimum. Valid values are:

- A negative number, which identifies the offset from the current row.
- B, which specifies the beginning of the sort group.

Calculating a Running Minimum

The following request calculates a running minimum of QUANTITY_SOLD within the PRODUCT_CATEGORY sort field (the sort break defined by SET PARTITION_ON =

PENULTIMATE), always starting from the beginning of the sort break.

```
SET PARTITION_ON=PENULTIMATE
TABLE FILE wf_retail_lite
SUM QUANTITY_SOLD
COMPUTE RMIN = RUNNING_MIN(QUANTITY_SOLD,PRESET,B);
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. The first value for RMIN is the value in the Accessories category for Quantity Sold, as there is no prior value. The second value for RMIN is the value from the first row again (Charger), as that is smaller than the value in the second row. The third is the same again, as it is still the smallest. Then, the calculations start over for Camcorder, which is the reset point.

<u>Product Category</u>	<u>Product Subcategory</u>	<u>Quantity Sold</u>	<u>RMIN</u>
Accessories	Charger	105,257	105,257.00
	Headphones	228,349	105,257.00
	Universal Remote Controls	178,061	105,257.00
Camcorder	Handheld	250,167	250,167.00
	Professional	12,872	12,872.00
	Standard	192,205	12,872.00
Computers	Smartphone	205,049	205,049.00
	Tablet	146,728	146,728.00
Media Player	Blu Ray	679,495	679,495.00
	DVD Players	18,835	18,835.00
	DVD Players - Portable	5,694	5,694.00
	Streaming	67,910	5,694.00
Stereo Systems	Boom Box	9,370	9,370.00
	Home Theater Systems	399,092	9,370.00
	Receivers	150,568	9,370.00
	Speaker Kits	244,199	9,370.00
	iPod Docking Station	311,103	9,370.00
Televisions	CRT TV	4,638	4,638.00
	Flat Panel TV	92,501	4,638.00
	Portable TV	8,049	4,638.00
Video Production	Video Editing	199,749	199,749.00

RUNNING_SUM: Calculating a Sum Over a Group of Rows

Given an aggregated input field and an offset, **RUNNING_SUM** calculates the sum of the values between the current row of the report output and one or more prior rows, within a sort break or the entire table. The reset point for the calculation is determined by the sort field specified, the entire table, or the value of the **PARTITION_ON** parameter described in [Specify the Partition Size for Simplified Statistical Functions](#).

Calculate Running Sum Between the Current and a Prior Value of a Field

```
RUNNING_SUM(field, reset_key, lower)
```

where:

field

Numeric

The field to be used in the calculation.

reset_key

Identifies the point at which the running sum restarts. Valid values are:

- The name of a sort field in the request.
- PRESET, which uses the value of the PARTITION_ON parameter, as described in [Specify the Partition Size for Simplified Statistical Functions](#).
- TABLE, which indicates that there is no break on a sort field.

i Note: The values used in the calculations depend on the sort sequence (ascending or descending) specified in the request. Be aware that displaying a date or time dimension in descending order may produce different results than those you may expect.

lower

Is the starting point in the partition for the running sum. Valid values are:

- A negative number, which identifies the offset from the current row.
- B, which specifies the beginning of the sort group.

Calculating a Running Sum

The following request calculates a running sum of the current value and previous value of QUANTITY_SOLD within the reset point set by the PARTITION_ON parameter, which is the

sort field PRODUCT_CATEGORY.

```
SET PARTITION_ON=PENULTIMATE
TABLE FILE wf_retail_lite
SUM QUANTITY_SOLD
COMPUTE RSUM = RUNNING_SUM(QUANTITY_SOLD,PRESET,-1);
BY PRODUCT_CATEGORY
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. The first value for RSUM is the value in the Accessories category for Quantity Sold, as there is no prior value. The second value for RSUM is the sum of the values for Headphones and Charger, the third is the sum of the values for Headphones and Universal Remote Controls. Then, the calculations start over for Camcorder, which is the reset point.

<u>Product Category</u>	<u>Product Subcategory</u>	<u>Quantity Sold</u>	<u>RSUM</u>
Accessories	Charger	105,257	105,257.00
	Headphones	228,349	333,606.00
	Universal Remote Controls	178,061	406,410.00
Camcorder	Handheld	250,167	250,167.00
	Professional	12,872	263,039.00
	Standard	192,205	205,077.00
Computers	Smartphone	205,049	205,049.00
	Tablet	146,728	351,777.00
Media Player	Blu Ray	679,495	679,495.00
	DVD Players	18,835	698,330.00
	DVD Players - Portable	5,694	24,529.00
	Streaming	67,910	73,604.00
Stereo Systems	Boom Box	9,370	9,370.00
	Home Theater Systems	399,092	408,462.00
	Receivers	150,568	549,660.00
	Speaker Kits	244,199	394,767.00
	iPod Docking Station	311,103	555,302.00
Televisions	CRT TV	4,638	4,638.00
	Flat Panel TV	92,501	97,139.00
	Portable TV	8,049	100,550.00
Video Production	Video Editing	199,749	199,749.00

Simplified Character Functions

Simplified character functions have streamlined parameter lists, similar to those used by SQL functions. In some cases, these simplified functions provide slightly different functionality than previous versions of similar functions.

The simplified functions do not have an output argument. Each function returns a value that has a specific data type.

When used in a request against a relational data source, these functions are optimized (passed to the RDBMS for processing).



Note: The simplified character functions are not supported in Maintain Data.

CHAR_LENGTH: Returning the Length in Characters of a String

The CHAR_LENGTH function returns the length, in characters, of a string. In Unicode environments, this function uses character semantics, so that the length in characters may not be the same as the length in bytes. If the string includes trailing blanks, these are counted in the returned length. Therefore, if the format source string is type **An**, the returned value will always be **n**.

Return the Length of a String in Characters

```
CHAR_LENGTH(string)
```

where:

string

Alphanumeric

Is the string whose length is returned.

The data type of the returned length value is Integer.

Returning the Length of a String

The following request against the EMPLOYEE data source creates a virtual field named LASTNAME of type A15V that contains the LAST_NAME with the trailing blanks removed. It then uses CHAR_LENGTH to return the number of characters.

```
DEFINE FILE EMPLOYEE
  LASTNAME/A15V = RTRIM(LAST_NAME);
END
TABLE FILE EMPLOYEE
  SUM LAST_NAME NOPRINT AND COMPUTE
  NAME_LEN/I3 = CHAR_LENGTH(LASTNAME);
  BY LAST_NAME
ON TABLE SET PAGE NOPAGE
END
```

The output is:

LAST_NAME	NAME_LEN
-----	-----
BANNING	7
BLACKWOOD	9
CROSS	5
GREENSPAN	9
IRVING	6
JONES	5
MCCOY	5
MCKNIGHT	8
ROMANS	6
SMITH	5
STEVENS	7

LASTNAME has the format A15V and contains the last name with trailing blanks removed. CHAR_LENGTH returns the number of characters:

```
CHAR_LENGTH(LASTNAME)
```

For SMITH, the result is 5.

CONCAT: Concatenating Strings

CONCAT concatenates two strings. The output is returned as a variable length alphanumeric.

Concatenate Strings

```
CONCAT(string1, string2)
```

where:

string2

Alphanumeric

Is a string to be concatenated.

string1

Alphanumeric

Is a string to be concatenated.

Concatenating Strings

The following request concatenates city names with state names. Note that the city and state names are converted to fixed length alphanumeric fields before concatenation.

```
DEFINE FILE WF_RETAIL_LITE
CITY/A50 = CITY_NAME;
STATE/A50 = STATE_PROV_NAME;
CONCAT_CS/A100 = CONCAT(CITY,STATE);
```

END

```
TABLE FILE WF_RETAIL_LITE
SUM CITY AS City STATE AS State CONCAT_CS AS Concatenation
BY STATE_PROV_NAME NOPRINT
WHERE COUNTRY_NAME EQ 'United States'
WHERE STATE LE 'Louisiana'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>City</u>	<u>State</u>	<u>Concatenation</u>
Montgomery	Alabama	Montgomery Alabama
Anchorage	Alaska	Anchorage Alaska
Phoenix	Arizona	Phoenix Arizona
Little Rock	Arkansas	Little Rock Arkansas
Saratoga	California	Saratoga California
Colorado Springs	Colorado	Colorado Springs Colorado
Old Lyme	Connecticut	Old Lyme Connecticut
Wyoming	Delaware	Wyoming Delaware
Washington	District of Columbia	Washington District of Columbia
Orlando	Florida	Orlando Florida
Atlanta	Georgia	Atlanta Georgia
Honolulu	Hawaii	Honolulu Hawaii
Boise	Idaho	Boise Idaho
Chicago	Illinois	Chicago Illinois
Indianapolis	Indiana	Indianapolis Indiana
Dubuque	Iowa	Dubuque Iowa
Wichita	Kansas	Wichita Kansas
Lexington	Kentucky	Lexington Kentucky
New Orleans	Louisiana	New Orleans Louisiana

CONCAT concatenates CITY and STATE.

```
CONCAT(CITY,STATE)
```

For Montgomery Alabama, the result is Montgomery Alabama.

DIFFERENCE: Measuring the Phonetic Similarity Between Character Strings

DIFFERENCE returns an integer value measuring the difference between the SOUNDEX or METAPHONE values of two character expressions.

Measure the Phonetic Similarity Between Character String

```
DIFFERENCE(chrexp1, chrexp2)
```

where:

chrexp1, chrexp2

Alphanumeric

Are the character strings to be compared.

Zero (0) represents the least similarity. For SOUNDEX, 4 represents the most similarity, and for METAPHONE, 16 represents the most similarity.

The use of SOUNDEX or METAPHONE depends on the PHONETIC_ALGORITHM setting. METAPHONE is the default algorithm.

Measuring the Phonetic Similarity Between Character Strings

The following request uses DIFFERENCE with the default phonetic algorithm (METAPHONE) to compare first names in the data source with the names JOHN and MARY.

```
TABLE FILE VIDEOTRK
PRINT FIRSTNAME
COMPUTE
JOHN_DIFF/I5 = DIFFERENCE(FIRSTNAME,'JOHN') ;
```



```

MARY_DIFF/I5 = DIFFERENCE(FIRSTNAME, 'MARY');
BY LASTNAME NOPRINT
WHERE RECORDLIMIT EQ 30
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image. Note that the names JOANN and JOHN have the highest scores for matching with JOHN, and that MARCIA, MICHAEL, and MARTHA have the highest scores for matching with MARY.

<u>FIRSTNAME</u>	<u>JOHN_DIFF</u>	<u>MARY_DIFF</u>
NATALIA	3	5
MARCIA	3	10
IVY	0	0
JASON	6	6
JANET	10	6
JOANN	16	4
JOHN	16	4
WESTON	0	3
GEORGIA	6	6
EVAN	0	0
JESSICA	5	5
MICHAEL	3	10
JAMES	6	6
CHERYL	3	10
DAVID	3	6
JOSHUA	8	8
JOHN	16	4
CATHERINE	2	4
PATRICK	3	3
DONALD	5	5
GLENDA	0	0
RICHARD	3	5
MICHAEL	3	10
LESLIE	3	3
TOM	5	4
MICHAEL	3	10
PATRICIA	2	2
KENNETH	6	6
KELLY	4	8
MARTHA	3	10

DIFFERENCE compares the character strings *Green* and *Greene*.

```
DIFFERENCE('Green', 'Greene')
```

For the phonetic algorithm METAPHONE (the default), the result is 16.

DIGITS: Converting a Number to a Character String

Given a number, DIGITS converts it to a character string of the specified length. The format of the field that contains the number must be Integer.

Convert a Number to a Character String

```
DIGITS(number, length)
```

where:

number

Integer

Is the number to be converted, stored in a field with the data type Integer.

length

Integer between 1 and 10

Is the length of the returned character string. If the *length* is longer than the number of digits in the number being converted, the returned value is padded on the left with zeros. If the *length* is shorter than the number of digits in the number being converted, the returned value is truncated on the left.

Converting a Number to a Character String

The following request against the WF_RETAIL_LITE data source converts -123.45 and ID_PRODUCT to character strings:

```
DEFINE FILE WF_RETAIL_LITE
MEAS1/I8=-123.45;
DIG1/A6=DIGITS(MEAS1,6) ;
DIG2/A6=DIGITS(ID_PRODUCT,6) ;
END
TABLE FILE WF_RETAIL_LITE
PRINT MEAS1 DIG1
      ID_PRODUCT DIG2
BY PRODUCT_SUBCATEG
WHERE PRODUCT_SUBCATEG EQ 'Flat Panel TV'
ON TABLE SET PAGE NOPAGE
END
```

The output is:

Product Subcategory	MEAS1	DIG1	ID Product	DIG2
Flat Panel TV	-123	000123	4012	004012
	-123	000123	4017	004017
	-123	000123	4018	004018
	-123	000123	4017	004017
	-123	000123	4017	004017
	-123	000123	4018	004018
	-123	000123	4018	004018
	-123	000123	4017	004017
	-123	000123	4014	004014
	-123	000123	4016	004016
	-123	000123	4016	004016
	-123	000123	4018	004018
	-123	000123	4017	004017
	-123	000123	4018	004018
	-123	000123	4018	004018
	-123	000123	4017	004017
	-123	000123	4016	004016
	-123	000123	4018	004018
	-123	000123	4016	004016
	-123	000123	4018	004018
	-123	000123	4017	004017
	-123	000123	4018	004018
	-123	000123	4017	004017
	-123	000123	4017	004017
	-123	000123	4014	004014
	-123	000123	4018	004018

DIGITS converts the integer expression ID_PRODUCT+1 to a six-character string:

```
DIGITS(ID_PRODUCT,6)
```

For the number 1106, the result is the character string '001106'.

Usage Notes for DIGITS

- Only I format numbers will be converted. D, P, and F formats generate error messages and should be converted to I before using the DIGITS function. The limit for the number that can be converted is 2 GB.
- Negative integers are turned into positive integers.
- Integer formats with decimal places are truncated.
- DIGITS is not supported in Dialogue Manager.

GET_TOKEN: Extracting a Token Based on a String of Delimiters

GET_TOKEN extracts a token (substring) based on a string that can contain multiple characters, each of which represents a single-character delimiter.

Extract a Token Based on a String of Delimiters

```
GET_TOKEN(string, delimiter_string, occurrence)
```

where:

string

Alphanumeric

Is the input string from which the token will be extracted. This can be an alphanumeric field or constant.

delimiter_string

Alphanumeric constant

Is a string that contains the list of delimiter characters. For example, ';' contains three delimiter characters, semi-colon, blank space, and comma.

occurrence

Integer constant

Is a positive integer that specifies the token to be extracted. A negative integer will be accepted in the syntax, but will not extract a token. The value zero (0) is not supported.

Extracting a Token Based on a String of Delimiters

The following request defines an input string and two tokens based on a list of delimiters that contains the characters comma (,), semicolon (;), and slash (/).

```
DEFINE FILE EMPLOYEE
InputString/A20 = 'ABC,DEF;GHI/JKL';
FirstToken/A20 WITH DEPARTMENT = GET_TOKEN(InputString, ',;/', 1);
FourthToken/A20 WITH DEPARTMENT = GET_TOKEN(InputString, ',;/', 4);
END
TABLE FILE EMPLOYEE
PRINT InputString FirstToken FourthToken
WHERE READLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID = OFF,$
END
```

The output is shown in the following image. The first token was extracted using the comma (,) as the delimiter. The fourth token was extracted using the slash (/) as the delimiter.

<u>InputString</u>	<u>FirstToken</u>	<u>FourthToken</u>
ABC,DEF;GHI/JKL	ABC	JKL

GET_TOKEN extracts a token based on a string of delimiters.

```
GET_TOKEN(InputString, ',;/', 4)
```

For input string 'ABC,DEF;GHI/JKL', the result is JKL.

INITCAP: Capitalizing the First Letter of Each Word in a String

INITCAP capitalizes the first letter of each word in an input string and makes all other letters lowercase. A word starts at the beginning of the string, after a blank space, or after a special character.

Capitalize the First Letter of Each Word in a String

```
INITCAP(input_string)
```

where:

input_string

Alphanumeric

Is the string to capitalize.

Capitalizing the First Letter of Each Word in a String

The following request changes the last names in the EMPLOYEE data source to initial caps and capitalizes the first letter after each blank or special character in the NewName field.

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
Caps1/A30 = INITCAP(LAST_NAME);
NewName/A30 = 'abc,def!ghi'jkl mno';
Caps2/A30 = INITCAP(NewName);
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>LAST_NAME</u>	<u>Caps1</u>	<u>NewName</u>	<u>Caps2</u>
STEVENS	Stevens	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
SMITH	Smith	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
JONES	Jones	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
SMITH	Smith	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
BANNING	Banning	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
IRVING	Irving	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
ROMANS	Romans	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
MCCOY	Mccoy	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
BLACKWOOD	Blackwood	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
MCKNIGHT	Mcknight	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
GREENSPAN	Greenspan	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno
CROSS	Cross	abc,def!ghi'jKL MNO	Abc,Def!Ghi'Jkl Mno

INITCAP capitalizes the first letter of each word.

```
INITCAP(NewName)
```

For the string abc,def!ghi'jKL MNO, the result is Abc,Def!Ghi'Jkl Mno.

For MCKNIGHT, the result is Mcknight.

LAST_NONBLANK: Retrieving the Last Field Value That is Neither Blank nor Missing

LAST_NONBLANK retrieves the last field value that is neither blank nor missing. If all previous values are either blank or missing, LAST_NONBLANK returns a missing value.

Return the Last Value That is Neither Blank nor Missing

```
LAST_NONBLANK(field)
```


where:

field

Is the field name whose last non-blank value is to be retrieved. If the current value is not blank or missing, the current value is returned.

i Note: LAST_NONBLANK cannot be used in a compound expression, for example, as part of an IF condition.

Retrieving the Last Non-Blank Value

Consider the following delimited file named input1.csv that has two fields named FIELD_1 and FIELD_2.

```
,
A,
,
,
B,
C,
```

The input1 Master File follows.

```
FILENAME=INPUT1, SUFFIX=DFIX      ,
DATASET=baseapp/input1.csv(LRECL 15 RECFM V, BV_NAMESPACE=OFF, $
SEGMENT=INPUT1, SEGTYPE=S0, $
  FIELDNAME=FIELD_1, ALIAS=E01, USAGE=A1V, ACTUAL=A1V,
  MISSING=ON, $
  FIELDNAME=FIELD_2, ALIAS=E02, USAGE=A1V, ACTUAL=A1V,
  MISSING=ON, $
```

The input1 Access File follows.

```
SEGNAME=INPUT1,
DELIMITER=',',
HEADER=NO,
PRESERVE SPACE=NO,
CDN=COMMAS_DOT,
CONNECTION=<local>, $
```

The following request displays the FIELD_1 values and computes the last non-blank value for each FIELD_1 value.

```
TABLE FILE baseapp/INPUT1
PRINT FIELD_1 AS Input
COMPUTE
Last_NonBlank/A1 MISSING ON = LAST_NONBLANK(FIELD_1);
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Input</u>	<u>Last NonBlank</u>
.	.
A	A
.	A
	A
B	B
C	C

LEFT: Returning Characters From the Left of a Character String

Given a source character string, or an expression that can be converted to varchar (variable-length alphanumeric), and an integer number, LEFT returns that number of characters from the left end of the string.

Return Characters From the Left of a Character String

```
LEFT(chr_exp, int_exp)
```

where:

chr_exp

Alphanumeric or an expression that can be converted to variable-length alphanumeric.

Is the source character string.

int_exp

Integer

Is the number of characters to be returned.

Returning Characters From the Left of a Character String

The following request computes the length of the first name in the FULLNAME field and returns that number of characters to FIRST.

```
TABLE FILE WF_RETAIL_EMPLOYEE
PRINT FULLNAME AND
COMPUTE LEN/I5 = ARGLEN(54, GET_TOKEN(FULLNAME, ' ', 1), LEN); NOPRINT
COMPUTE FIRST/A20 = LEFT(FULLNAME, LEN);
WHERE RECORDLIMIT EQ 20
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Full Name</u>	<u>FIRST</u>
Steven Wagoner	Steven
Adan Geoghegan	Adan
Candace Aguilar	Candace
Dianna Turpin	Dianna
John Blankinship	John
John Chang	John
John Mackey	John
Elaine Duran	Elaine
Douglas Sanders	Douglas
Linda Whitlow	Linda
Phyllis Carey	Phyllis
Alfred Amerson	Alfred
Jeremy Maness	Jeremy
David Christopher	David
Alice Flemming	Alice
Delia Tennison	Delia
Diane Eads	Diane
Wilfredo Delacruz	Wilfredo
Dorothy Newman	Dorothy
Delia Tennison	Delia

LEFT returns the two leftmost characters from SOURCE:

```
LEFT(SOURCE,2)
```

For 'abcdefg', the result is *ab*.

LOWER: Returning a String With All Letters Lowercase

The LOWER function takes a source string and returns a string of the same data type with all letters translated to lowercase.

Return a String With All Letters Lowercase

```
LOWER(string)
```

where:

string

Alphanumeric

Is the string to convert to lowercase.

The returned string is the same data type and length as the source string.

Converting a String to Lowercase

In the following request against the EMPLOYEE data source, LOWER converts the LAST_NAME field to lowercase and stores the result in LOWER_NAME:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
  LOWER_NAME/A15 = LOWER(LAST_NAME);
ON TABLE SET PAGE NOPAGE
END
```

The output is:

LAST_NAME	LOWER_NAME
-----	-----
STEVENS	stevens
SMITH	smith
JONES	jones
SMITH	smith
BANNING	banning
IRVING	irving
ROMANS	romans
MCCOY	mccoy
BLACKWOOD	blackwood
MCKNIGHT	mcknight
GREENSPAN	greenspan
CROSS	cross

LOWER converts LAST_NAME to lowercase.

```
LOWER(LAST_NAME)
```

For STEVENS, the result is stevens.

LPAD: Left-Padding a Character String

LPAD uses a specified character and output length to return a character string padded on the left with that character.

Pad a Character String on the Left

```
LPAD(string, out_length, pad_character)
```

where:

string

Fixed length alphanumeric

Is a string to pad on the left side.

out_length

Integer

Is the length of the output string after padding.

pad_character

Fixed length alphanumeric

Is a single character to use for padding.

Left-Padding a String

In the following request against the WF_RETAIL data source, LPAD left-pads the PRODUCT_CATEGORY column with @ symbols:

```

DEFINE FILE WF_RETAIL
LPAD1/A25 = LPAD(PRODUCT_CATEGORY,25,'@');
DIG1/A4 = DIGITS(ID_PRODUCT,4);
END
TABLE FILE WF_RETAIL
SUM DIG1 LPAD1
BY PRODUCT_CATEGORY
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
TYPE=DATA, FONT=COURIER, SIZE=11, COLOR=BLUE, $
END

```

The output is:

Product Category	DIG1	LPAD1
Accessories	5005	@@@@@@@@@@@@@@@@Accessories
Camcorder	3006	@@@@@@@@@@@@@@@@Camcorder
Computers	6016	@@@@@@@@@@@@@@@@Computers
Media Player	1003	@@@@@@@@@@@@@@@@Media Player
Stereo Systems	2155	@@@@@@@@@@@@@@@@Stereo Systems
Televisions	4018	@@@@@@@@@@@@@@@@Televisions
Video Production	7005	@@@@@@@@@@@@Video Production

LPAD left-pads the PRODUCT_CATEGORY column with @ symbols:

```
LPAD(PRODUCT_CATEGORY,25,'@')
```

For *Stereo Systems*, the output is @@@@@@@@@@@@@@Stereo Systems.

Usage Notes for LPAD

- To use the single quotation mark (') as the padding character, you must double it and enclose the two single quotation marks within single quotation marks (LPAD(COUNTRY, 20, "'"). You can use an amper variable in quotation marks for this

parameter, but you cannot use a field, virtual or real.

- Input can be fixed or variable length alphanumeric.
- Output, when optimized to SQL, will always be data type VARCHAR.
- If the output is specified as shorter than the original input, the original data will be truncated, leaving only the padding characters. The output length can be specified as a positive integer or an unquoted &variable (indicating a numeric).

LTRIM: Removing Blanks From the Left End of a String

The LTRIM function removes all blanks from the left end of a string.

Remove Blanks From the Left End of a String

```
LTRIM(string)
```

where:

string

Alphanumeric

Is the string to trim on the left.

The data type of the returned string is AnV, with the same maximum length as the source string.

Removing Blanks From the Left End of a String

In the following request against the MOVIES data source, the DIRECTOR field is right-justified and stored in the RDIRECTOR virtual field. Then LTRIM removes leading blanks from the RDIRECTOR field:


```

DEFINE FILE MOVIES
RDIRECTOR/A17 = RJUST(17, DIRECTOR, 'A17');
END
TABLE FILE MOVIES
PRINT RDIRECTOR AND
COMPUTE
TRIMDIR/A17 = LTRIM(RDIRECTOR);
WHERE DIRECTOR CONTAINS 'BR'
ON TABLE SET PAGE NOPAGE
END

```

The output is:

RDIRECTOR -----	TRIMDIR -----
ABRAHAMS J.	ABRAHAMS J.
BROOKS R.	BROOKS R.
BROOKS J.L.	BROOKS J.L.

RDIRECTOR has the director name right justified. LTRIM removes the leading blanks.

```
LTRIM(RDIRECTOR)
```

For BROOKS R. the result is BROOKS R.

OVERLAY: Replacing Characters in a String

Given a starting position, length, source string, and insertion string, OVERLAY replaces the number of characters defined by *length* in the source string with the insertion string, starting from the starting position.

Replace Characters in a String

```
OVERLAY(src, ins, start, len)
```

where:

src

Alphanumeric

Is the source string whose characters will be replaced.

ins

Alphanumeric

Is the insertion string with the replacement characters.

start

Numeric

Is the starting position for the replacement in the source string.

len

Numeric

Is the number of characters to replace in the source string with the entire insertion string.

Replacing Characters in a String

The following request replaces the first three characters in the last name with the first four characters of the first name.

```
TABLE FILE EMPLOYEE
PRINT
COMPUTE FIRST4/A4 = LEFT(FIRST_NAME,4);
NEWNAME/A20 = OVERLAY(LAST_NAME, FIRST4, 1, 3);
BY LAST_NAME
BY FIRST_NAME
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>LAST_NAME</u>	<u>FIRST_NAME</u>	<u>FIRST4</u>	<u>NEWNAME</u>
BANNING	JOHN	JOHN	JOHNNING
BLACKWOOD	ROSEMARIE	ROSE	ROSECKWOOD
CROSS	BARBARA	BARB	BARBSS
GREENSPAN	MARY	MARY	MARYENSPAN
IRVING	JOAN	JOAN	JOANING
JONES	DIANE	DIAN	DIANES
MCCOY	JOHN	JOHN	JOHNOY
MCKNIGHT	ROGER	ROGE	ROGENIGHT
ROMANS	ANTHONY	ANTH	ANTHANS
SMITH	MARY	MARY	MARYTH
	RICHARD	RICH	RICHTH
STEVENS	ALFRED	ALFR	ALFRVENS

OVERLAY replaces the first three characters in 'ENGLAND' with the characters 'SCOT'.

```
OVERLAY('ENGLAND', 'SCOT', 1, 3)
```

The result is 'SCOTLAND'.

PATTERNS: Returning a Pattern That Represents the Structure of the Input String

PATTERNS returns a string that represents the structure of the input argument. The returned pattern includes the following characters:

- **A** is returned for any position in the input string that has an uppercase letter.
- **a** is returned for any position in the input string that has a lowercase letter.
- **9** is returned for any position in the input string that has a digit.

Note that special characters (for example, +/=%) are returned exactly as they were in the input string.

The output is returned as a variable length alphanumeric.

Return a String That Represents the Pattern Profile of the Input Argument

```
PATTERNS(string)
```

where:

string

Alphanumeric

Is a string whose pattern will be returned.

Returning a Pattern Representing an Input String

The following request returns patterns that represent customer addresses.

```
DEFINE FILE WF_RETAIL_LITE
Address_Pattern/A40V = PATTERNS(ADDRESS_LINE_1);
END

TABLE FILE WF_RETAIL_LITE
PRINT FST.ADDRESS_LINE_1 OVER
Address_Pattern
BY ADDRESS_LINE_1 NOPRINT SKIP-LINE
WHERE COUNTRY_NAME EQ 'United States'
WHERE CITY_NAME EQ 'Houston' OR 'Indianapolis' OR 'Chapel Hill' OR
'Bronx'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The partial output is shown in the following image. Note that the special characters (#,-) in an address are represented in the pattern as is.

FST Customer Address Line 1	1010 Milam St # Ifp-2352
Address_Pattern	9999 Aaaaa Aa # Aaa-9999
FST Customer Address Line 1	10700 Richmond Ave
Address_Pattern	99999 Aaaaaaaaa Aaa
FST Customer Address Line 1	10777 North Fwy
Address_Pattern	99999 Aaaaa Aaa
FST Customer Address Line 1	11 E Greenway Plz Ste 100
Address_Pattern	99 A Aaaaaaaaa Aaa Aaa 999
FST Customer Address Line 1	111 Monument Cir
Address_Pattern	999 Aaaaaaaaa Aaa
FST Customer Address Line 1	111 Monument Circle - Ste 2100
Address_Pattern	999 Aaaaaaaaa Aaaaaa - Aaa 9999
FST Customer Address Line 1	1205 Dart St, Rm 219
Address_Pattern	9999 Aaaa Aa, Aa 999

PATTERNS returns the pattern representing the field ADDRESS_LINE_1.

```
PATTERNS(ADDRESS_LINE_1)
```

For 1010 Milam St # Ifp-2352

The result is 9999 Aaaaa Aa # Aaa-9999.

POSITION: Returning the First Position of a Substring in a Source String

The POSITION function returns the first position (in characters) of a substring in a source string.

Return the First Position of a Substring in a Source String

```
POSITION(pattern, string)
```

where:

pattern

Alphanumeric

Is the substring whose position you want to locate. The string can be as short as a single character, including a single blank.

string

Alphanumeric

Is the string in which to find the pattern.

The data type of the returned value is Integer.

Returning the First Position of a Substring

In the following request against the EMPLOYEE data source, POSITION determines the position of the first capital letter I in LAST_NAME and stores the result in I_IN_NAME:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
I_IN_NAME/I2 = POSITION('I', LAST_NAME);
ON TABLE SET PAGE NOPAGE
END
```

The output is:

LAST_NAME -----	I_IN_NAME -----
STEVENS	0
SMITH	3
JONES	0

SMITH	3
BANNING	5
IRVING	1
ROMANS	0
MCCOY	0
BLACKWOOD	0
MCKNIGHT	5
GREENSPAN	0
CROSS	0

POSITION determines the position of the first capital letter I in LAST_NAME.

```
POSITION('I', LAST_NAME)
```

For STEVENS, the result is 0.

For SMITH, the result is 3.

POSITION: Returning the Position of a Search String in a Source String

Given a search string, a source string, and a starting position, POSITION returns the position of the search string within the source string. The search starts at the given starting position and searches from left to right. If the string is not found, POSITION returns zero (0). The search is case-sensitive.

Return the Position of a Search String in a Source String

```
POSITION(search, source, start)
```

where:

search

Alphanumeric

Is the search string.

source

Alphanumeric

Is the source string.

start

Numeric

Is the starting position in the source string for the search.

Returning the Position of a Search String in a Source String

The following request uses POSITION twice, once to find the first occurrence of the character *A* after starting position 3 in FULLNAME, and once to find the first occurrence of the character *a* after starting position 3 in FULLNAME.

```
TABLE FILE WF_RETAIL_CUSTOMER
PRINT FULLNAME
COMPUTE POS1/I5 = POSITION('A', FULLNAME, 3) ;
POS2/I5 = POSITION('a', FULLNAME, 3) ;
WHERE RECORDLIMIT EQ 5
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

Full Name	POS1	POS2
Joshua Hines	0	6
Sandra Arzola	8	6
Rebecca Smith	0	7
John Nichols	0	0
Hector Briganti	0	12

POSITION finds the first instance of the uppercase letter A in CustomerName after position 3.

```
POSITION('A', CustomerName, 3)
```

For *Sandra Arzola*, the result is 8.

Regular Expression Functions

A regular expression is a sequence of special meta-characters and literal characters that you can combine to form a search pattern.

i Note: You can search online for information about the symbols used to create a regular expression pattern. For example, Wikipedia has a good introduction at:

https://en.wikipedia.org/wiki/Regular_expression

The following list summarizes common meta-characters used in regular expressions.

- . represents any single character
- * represents zero or more occurrences
- + represents one or more occurrences
- ? represents zero or one occurrence
- ^ represents beginning of line
- \$ represents the end of the line
- [] represents any one character in the set listed within the brackets

- `[^]` represents any one character not in the set listed within the brackets
- `|` represents the Or operator
- `\` is the Escape Special Character
- `()` contains a character sequence

For example, the regular expression `'^Ste(v|ph)en$'` matches values starting with *Ste* followed by either *ph* or *v*, and ending with *en*.

Using Regular Expressions on z/OS

On z/OS, depending on the code page you are using, some of the meta-characters used to create a regular expression may not be interpreted correctly when inserted directly from a Windows keyboard.

If you are using the Unicode code page 65002, the meta-characters will be interpreted correctly. In this environment, you need to be sure the files you are referencing, such as FOCUS data sources, have been built using this code page.

If you are not using a Unicode code page, you can use the CHAR function to return the correct meta-characters, based on the decimal code for the EBCDIC character. For example, to insert:

- The circumflex (^) meta-character, use CHAR(95).
- The left bracket ([) meta-character, use CHAR(173).
- The right bracket (]) meta-character, use CHAR(189).
- The left brace ({) meta-character, use CHAR(192).
- The right brace (}) meta-character, use CHAR(208).

Create a Dialogue Manager variable that contains the pattern. To insert the meta-characters, use the CHAR function, and then use that variable as the argument in the regular expression function. For example, to generate the regular expression `'[AEIOUaeiou]'`, which matches all uppercase and lowercase vowels, issue a -SET command similar to the following, which creates a variable named &VCWSTRING:

```
-SET &VCWSTRING=CHAR(173) || 'AEIOUaeiou' || CHAR(189);
```

Then use the `&VCWSTRING` variable as the regular expression argument in the function call. For example:

```
VowelCnt/I5=REGEXP_COUNT(PRODUCT, '&VCWSTRING');
```

REGEX: Matching a String to a Regular Expression

The REGEX function matches a string to a regular expression and returns true (1) if it matches and false (0) if it does not match.

A regular expression is a sequence of special characters and literal characters that you can combine to form a search pattern.

Many references for regular expressions exist on the web.

For a basic summary, see the section *Summary of Regular Expressions* in Chapter 2, *Security*, of the *ibi™ WebFOCUS® Reporting Server Administration* manual.

Match a String to a Regular Expression

```
REGEX(string, regular_expression)
```

where:

string

Alphanumeric

Is the character string to match.

regular_expression

Alphanumeric

Is a regular expression, enclosed in single quotation marks, constructed using literals and meta-characters. The following meta-characters are supported

- `.` represents any single character
- `*` represents zero or more occurrences

- + represents one or more occurrences
- ? represents zero or one occurrence
- ^ represents beginning of line
- \$ represents the end of the line
- [] represents any one character in the set listed within the brackets
- [^] represents any one character not in the set listed within the brackets
- | represents the Or operator
- \ is the Escape Special Character
- () contains a character sequence

For example, the regular expression '^Ste(v|ph)en\$' matches values starting with *Ste* followed by either *ph* or *v*, and ending with *en*.

i Note: The output value is numeric.

Matching a String Against a Regular Expression

The following request matches the FIRSTNAME field against the regular expression 'PATRIC [(I?)K]', which matches PATRICIA or PATRICK:

```
DEFINE FILE VIDEOTRK
PNAME/I5=REGEX(FIRSTNAME,'PATRIC[(I?)K]');
END
TABLE FILE VIDEOTRK
PRINT FIRSTNAME PNAME
BY LASTNAME
WHERE LASTNAME GE 'M'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>LASTNAME</u>	<u>FIRSTNAME</u>	<u>PNAME</u>
MCMAHON	JOHN	0
MONROE	CATHERINE	0
	PATRICK	1
NON-MEMBER		0
O'BRIEN	DONALD	0
PARKER	GLENDA	0
	RICHARD	0
RATHER	MICHAEL	0
RIESLER	LESLIE	0
SPIVEY	TOM	0
STANDLER	MICHAEL	0
STEWART	MAUDE	0
WHITE	PATRICIA	1
WILLIAMS	KENNETH	0
WILSON	KELLY	0
WU	MARTHA	0

The following version of the request runs on z/OS. The variable &REG1 contains the regular expression string with the circumflex character (^) inserted as CHAR(95), the left bracket character ([) inserted as CHAR(173), and the right bracket character (]) inserted as CHAR(189). The other meta-characters are interpreted correctly.

```
-SET &REG1 = CHAR(95) || 'PATRIC' || CHAR(173) ||
- '(I?)K' || CHAR(189);
DEFINE FILE VIDEOTRK
PNAME/I5 = REGEX(FIRSTNAME, '&REG1') ;
END
TABLE FILE VIDEOTRK
PRINT FIRSTNAME PNAME
BY LASTNAME
WHERE LASTNAME GE 'M'
ON TABLE SET PAGE NOLEAD
END
```

The output follows.

LASTNAME	FIRSTNAME	PNAME
-----	-----	-----
MCMAHON	JOHN	0
MONROE	CATHERINE	0
	PATRICK	1
NON-MEMBER		0
O'BRIEN	DONALD	0

PARKER	GLENDA	0
	RICHARD	0
RATHER	MICHAEL	0
RIESLER	LESLIE	0
SPIVEY	TOM	0
STANDLER	MICHAEL	0
STEWART	MAUDE	0
WHITE	PATRICIA	1
WILLIAMS	KENNETH	0
WILSON	KELLY	0
WU	MARTHA	0

REGEX matches the FIRSTNAME field against the regular expression '^Sara(h?)\$', which matches Sara or Sarah:

```
REGEX(FIRSTNAME, '^Sara(h?)$')
```

For Sara, the result is 1.

For Amber, the result is 0.

REGEXP_COUNT: Counting the Number of Matches to a Pattern in a String

REGEXP_COUNT returns the integer count of matches to a specified regular expression pattern within a source string.

Count the Number of Matches to a Pattern in a String

```
REGEXP_COUNT(string, pattern)
```

where:

string

Alphanumeric

Is the input string to be searched.

pattern

Alphanumeric

Is a regular expression, enclosed in single quotation marks, constructed using literals and meta-characters. The following meta-characters are supported

- . represents any single character
- * represents zero or more occurrences
- + represents one or more occurrences
- ? represents zero or one occurrence
- ^ represents beginning of line
- \$ represents the end of the line
- [] represents any one character in the set listed within the brackets
- [^] represents any one character not in the set listed within the brackets
- | represents the Or operator
- \ is the Escape Special Character
- () contains a character sequence

Counting the Number of Matches to a Pattern in a String

The following examples use example uses the following Regular Expression symbols.

- \$, which searches for a specified expression that occurs at the end of a string.
- ^, which searches for a specified expression that occurs at the beginning of a string.
- \s*, which matches any number of whitespace characters, such as blank characters.
- [T,t], which matches the characters 'T' and 't'.

REGEXP_COUNT counts the number of occurrences of the characters 'umpty' that occur at the end of the string 'Humpty Dumpty'.

```
REGEXP_COUNT('Humpty Dumpty', 'umpty$')
```

The result is 1.

REGEXP_COUNT counts the number of occurrences of the characters 'umpty' that occur at the beginning of the string 'Humpty Dumpty'.

```
REGEXP_COUNT('Humpty Dumpty', '^umpty')
```

The result is 0.

In the following request, REG1 is the number of occurrences of the expression 'iscotti', with any number of following whitespace characters, that occur the end of the PRODUCT field. REG2 is the number of occurrences of the characters 'T' and 't' in the PRODUCT field.

```
TABLE FILE GGSales
SUM DOLLARS AND COMPUTE
REG1/I5 = REGEXP_COUNT(PRODUCT, 'iscotti\s*$');
REG2/I5 = REGEXP_COUNT(PRODUCT, '[T,t]');
BY PRODUCT
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Product</u>	<u>Dollar Sales</u>	<u>REG1</u>	<u>REG2</u>
Biscotti	5263317	1	2
Capuccino	2381590	0	0
Coffee Grinder	2337567	0	0
Coffee Pot	2449585	0	1
Croissant	7749902	0	1
Espresso	3906243	0	0
Latte	10943622	0	2
Mug	4522521	0	0
Scone	4216114	0	0
Thermos	2385829	0	1

Using REGEXP_COUNT on Windows and z/OS

The following request uses REGEXP_COUNT to return the number of vowels and number of consonants in each product name, on Windows. VowelCnt is the count of vowels, and ConsonantCnt is the count of non-vowels.


```

DEFINE FILE GGSales
VowelCnt/I5=REGEXP_COUNT(PRODUCT,'[AEIOUaeiou]');
ConsonantCnt/I5=REGEXP_COUNT(PRODUCT,'^[AEIOUaeiou]');
END
TABLE FILE GGSales
SUM MAX.VowelCnt AS 'Vowels'
      MAX.ConsonantCnt AS 'Consonants'
BY PRODUCT
END

```

Note:

- Brackets are used to enclose a list of characters that will match the regular expression pattern.
- When the circumflex character (^) prefaces the list of characters within the brackets, the regular expression matches any character not on the list.

The output is shown in the following image.

<u>Product</u>	<u>Vowels</u>	<u>Consonants</u>
Biscotti	3	5
Capuccino	4	5
Coffee Grinder	5	8
Coffee Pot	4	5
Croissant	3	6
Espresso	3	5
Latte	2	3
Mug	1	2
Scone	2	3
Thermos	2	5

The following version of the request uses REGEXP_COUNT to return the number of vowels and number of consonants in each product name, on z/OS. The -SET commands create the regular expressions by using the CHAR function to insert the meta-characters into the expressions. VowelCnt is the count of vowels, and ConsonantCnt is the count of non-vowels.

```

-SET &VCWSTRING=CHAR(173) || 'AEIOUaeiou' || CHAR(189);
-SET &CONSTRING=CHAR(173) || CHAR(95) || 'AEIOU aeiou' || CHAR(189);
DEFINE FILE GGSales
VowelCnt/I5=REGEXP_COUNT(PRODUCT, '&VCWSTRING');

```

```

ConsonantCnt/I5=REGEXP_COUNT(PRODUCT, '&CONSTRING' );
END
TABLE FILE GGSales
SUM MAX.VowelCnt AS 'Vowels'
    MAX.ConsonantCnt AS 'Consonants'
BY PRODUCT
ON TABLE SET PAGE NOLEAD
END

```

The output follows.

Product	Vowels	Consonants
-----	-----	-----
Biscotti	3	5
Capuccino	4	5
Coffee Grinder	5	8
Coffee Pot	4	5
Croissant	3	6
Espresso	3	5
Latte	2	3
Mug	1	2
Scone	2	3
Thermos	2	5

REGEXP_INSTR: Returning the First Position of a Pattern in a String

REGEXP_INSTR returns the integer position of the first match to a specified regular expression pattern within a source string. The first character position in a string is indicated by the value 1. If there is no match within the source string, the value 0 is returned.

Return the Position of a Pattern in a String

```
REGEXP_INSTR(string, pattern)
```

where:

string

Alphanumeric

Is the input string to be searched.

pattern

Alphanumeric

Is a regular expression, enclosed in single quotation marks, constructed using literals and meta-characters. The following meta-characters are supported

- . represents any single character
- * represents zero or more occurrences
- + represents one or more occurrences
- ? represents zero or one occurrence
- ^ represents beginning of line
- \$ represents end of line
- [] represents any one character in the set listed within the brackets
- [^] represents any one character not in the set listed within the brackets
- | represents the Or operator
- \ is the Escape Special Character
- () contains a character sequence

Finding the Position of a Pattern in a String

The following examples use example uses the following Regular Expression symbols.

- \$, which searches for a specified expression that occurs at the end of a string.
- ^, which searches for a specified expression that occurs at the beginning of a string.
- \s*, which matches any number of whitespace characters, such as blank characters.
- [B,C,S], which matches the uppercase letters B, C, and S.

REGEXP_INSTR finds the position of the characters 'umpty' that occur at the end of the string 'Humpty Dumpty'.

```
REGEXP_INSTR('Humpty Dumpty', 'umpty$')
```

The result is 9.

REGEXP_INSTR finds the position of the characters 'umpty' that occur at the beginning of the string 'Humpty Dumpty'.

```
REGEXP_INSTR('Humpty Dumpty', '^umpty')
```

The result is 0.

In the following request, REG1 is the position of the expression 'iscotti', with any number of following whitespace characters, that occur the end of the PRODUCT field value. REG2 is the position of the characters 'B', 'C', or 'S' that occur at the beginning of the PRODUCT field value.

```
TABLE FILE GGSales
SUM DOLLARS AND COMPUTE
REG1/I5 = REGEXP_INSTR(PRODUCT, 'iscotti\s*$');
REG2/I5 = REGEXP_INSTR(PRODUCT, '^[B,C,S]');
BY PRODUCT
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Product</u>	<u>Dollar Sales</u>	<u>REG1</u>	<u>REG2</u>
Biscotti	5263317	2	1
Capuccino	2381590	0	1
Coffee Grinder	2337567	0	1
Coffee Pot	2449585	0	1
Croissant	7749902	0	1
Espresso	3906243	0	0
Latte	10943622	0	0
Mug	4522521	0	0
Scone	4216114	0	1
Thermos	2385829	0	0

The following version of the request runs on z/OS. The first regular expression can be input directly because the characters used are interpreted correctly. For the second regular

expression, a variable is created to contain the pattern. This variable is then used in the function call.

```
-SET &REG2STR=CHAR(95) || CHAR(173) || 'B,C,S' || CHAR(189);
TABLE FILE GGSales
SUM DOLLARS AND COMPUTE
REG1/I5 = REGEXP_INSTR(PRODUCT, 'iscotti\s*$');
REG2/I5 = REGEXP_INSTR(PRODUCT, '&REG2STR');
BY PRODUCT
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output follows.

Product	Dollar Sales	REG1	REG2
-----	-----	----	----
Biscotti	5263317	2	1
Capuccino	2381590	0	1
Coffee Grinder	2337567	0	1
Coffee Pot	2449585	0	1
Croissant	7749902	0	1
Espresso	3906243	0	0
Latte	10943622	0	0
Mug	4522521	0	0
Scone	4216114	0	1
Thermos	2385829	0	0

REGEXP_REPLACE: Replacing All Matches to a Pattern in a String

REGEXP_REPLACE returns a string generated by replacing all matches to a regular expression pattern in the source string with the given replacement string. The replacement string can be a null string.

Replace Matches to a Pattern in a String

```
REGEXP_REPLACE(string, pattern, replacement)
```

where:

string

Alphanumeric

Is the input string to be searched.

pattern

Alphanumeric

Is a regular expression, enclosed in single quotation marks, constructed using literals and meta-characters. The following meta-characters are supported

- . represents any single character
- * represents zero or more occurrences
- + represents one or more occurrences
- ? represents zero or one occurrence
- ^ represents beginning of line
- \$ represents the end of the line
- [] represents any one character in the set listed within the brackets
- [^] represents any one character not in the set listed within the brackets
- | represents the Or operator
- \ is the Escape Special Character
- () contains a character sequence

replacement

Alphanumeric

Is the replacement string.

Replacing Matches to a Pattern in a String

The following example uses the following Regular Expression symbol.

- ^, which searches for a specified expression that occurs at the beginning of a string.

REGEXP_REPLACE replaces the characters 'ENG' at the beginning of the field COUNTRY with the replacement string 'SCOT'.

```
REGEXP_REPLACE(COUNTRY, '^ENG', 'SCOT')
```

For 'ENGLAND', the result is 'SCOTLAND'.

In the following request REG1 replaces the string 'North' at the beginning of the REGION field value with the string 'South', and REG2 replaces the string 'Mid' at the beginning of the REGION field value with a null string.

```
TABLE FILE GGSales
SUM DOLLARS NOPRINT AND COMPUTE
REG1/A25 = REGEXP_REPLACE(REGION, '^North', 'South');
REG2/A25 = REGEXP_REPLACE(REGION, '^Mid', '');
BY REGION
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Region</u>	<u>REG1</u>	<u>REG2</u>
Midwest	Midwest	west
Northeast	Southeast	Northeast
Southeast	Southeast	Southeast
West	West	West

The following version of the request runs on z/OS. The regular expression string is created in a variable using a -SET command. The circumflex meta-character (^) is inserted as CHAR (95).

```

-SET &REGSTRING1= CHAR(95) || 'North' ;
-SET &REGSTRING2= CHAR(95) || 'Mid' ;
TABLE FILE GGSales
SUM DOLLARS NOPRINT AND COMPUTE
REG1/A25 = REGEXP_REPLACE(REGION, '&REGSTRING1', 'South');
REG2/A25 = REGEXP_REPLACE(REGION, '&REGSTRING2', '');
BY REGION
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output follows.

Region	REG1	REG2
-----	----	----
Midwest	Midwest	west
Northeast	Southeast	Northeast
Southeast	Southeast	Southeast
West	West	West

REGEXP_SUBSTR: Returning the First Match to a Pattern in a String

REGEXP_SUBSTR returns a string that contains the first match to a specified regular expression pattern within a source string. If there is no match within the source string, a null string is returned.

Returning the First Match to a Pattern in a String

```
REGEXP_SUBSTR(string, pattern)
```

where:

string

Alphanumeric

Is the input string to be searched.

pattern

Alphanumeric

Is a regular expression, enclosed in single quotation marks, constructed using literals and meta-characters. The following meta-characters are supported

- `.` represents any single character
- `*` represents zero or more occurrences
- `+` represents one or more occurrences
- `?` represents zero or one occurrence
- `^` represents beginning of line
- `$` represents the end of the line
- `[]` represents any one character in the set listed within the brackets
- `[^]` represents any one character not in the set listed within the brackets
- `|` represents the Or operator
- `\` is the Escape Special Character
- `()` contains a character sequence

Returning the First Match of a Pattern in a String

The following example uses the following Regular Expression symbols.

- `[A-Z]`, which matches any uppercase letter.
- `[a-z]`, which matches any lowercase letter.
- `$`, which searches for a specified expression that occurs at the end of a string.

REGEXP_SUBSTR searches for a string with any uppercase letter followed by the characters 'umpty' at the end of the string 'Humpty Dumpty'.

```
REGEXP_SUBSTR('Humpty Dumpty', '[A-Z]umpty$')
```

The result is 'Dumpty'.

In the following request, REG1 contains the first instance of a string within the REGION field value that starts with an uppercase letter, followed by any number of lowercase letters, followed by the characters 'west'. REG2 contains the first instance of a string within the REGION field value that starts with an uppercase letter, followed by any number of lowercase letters, followed by the characters 'east'.

```
TABLE FILE GGSALES
SUM DOLLARS NOPRINT AND COMPUTE
REG1/A25 = REGEXP_SUBSTR(REGION, '[A-Z][a-z]*west');
REG2/A25 = REGEXP_SUBSTR(REGION, '[A-Z][a-z]*east');
BY REGION
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Region</u>	<u>REG1</u>	<u>REG2</u>
Midwest	Midwest	
Northeast		Northeast
Southeast		Southeast
West		

The following version of the request runs on z/OS, where the regular expression is generated as a variable, using the CHAR function to insert the meta-characters. Note that the asterisk meta-character (*) needs to be represented as CHAR(92).

```
-SET &REG1=CHAR(173) || 'A-Z' || CHAR(189) || CHAR(173) || 'a-z'
- || CHAR(189) || CHAR(92) || 'west' ;
-SET &REG2=CHAR(173) || 'A-Z' || CHAR(189) || CHAR(173) || 'a-z'
- || CHAR(189) || '*east';
TABLE FILE GGSALES
SUM DOLLARS NOPRINT AND COMPUTE
REG1/A25 = REGEXP_SUBSTR(REGION, '&REG1');
REG2/A25 = REGEXP_SUBSTR(REGION, '&REG2');
BY REGION
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
```

```
ENDSTYLE
END
```

The output follows.

Region	REG1	REG2
-----	----	----
Midwest	Midwest	
Northeast		Northeast
Southeast		Southeast
West		

REPEAT: Repeating a String a Given Number of Times

Given a source string and an integer number, REPEAT returns a string with the source string repeated that number of times. The string containing the repeated strings must be large enough to fit the repetitions or it will contain a truncated value.

Repeat a Character String a Given Number of Times

```
REPEAT(source_str, number)
```

where:

source_str

Alphanumeric

Is the source string to be repeated. If *source_str* is a field, the entire field, including blanks, will be repeated.

number

Numeric

Is the number of times to repeat the source string.

Repeating a String a Given Number of Times

The following request returns a string with FIRST_NAME repeated three times.

```
TABLE FILE EMPLOYEE
PRINT FIRST_NAME
COMPUTE REPEAT3/A25 = REPEAT(FIRST_NAME,3);
ON TABLE SET PAGE NOLEAD
ON TABLE PCHOLD FORMAT PDF
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The PDF output is shown in the following image.

<u>FIRST_NAME</u>	<u>REPEAT3</u>		
ALFRED	ALFRED	ALFRED	ALFRE
MARY	MARY	MARY	MARY
DIANE	DIANE	DIANE	DIANE
RICHARD	RICHARD	RICHARD	RICHA
JOHN	JOHN	JOHN	JOHN
JOAN	JOAN	JOAN	JOAN
ANTHONY	ANTHONY	ANTHONY	ANTHO
JOHN	JOHN	JOHN	JOHN
ROSEMARIE	ROSEMARIE	ROSEMARIE	ROSEM
ROGER	ROGER	ROGER	ROGER
MARY	MARY	MARY	MARY
BARBARA	BARBARA	BARBARA	BARBA

REPEAT returns a string with FIRST_NAME repeated three times.

```
REPEAT(FIRST_NAME, 3)
```

For MARY, the result is *MARY MARY MARY*.

REPLACE: Replacing a String

REPLACE replaces all instances of a search string in an input string with the given replacement string. The output is always variable length alphanumeric with a length determined by the input parameters.

Replace all Instances of a String

```
REPLACE(input_string , search_string , replacement)
```

where:

input_string

Alphanumeric or text (An, AnV, TX)

Is the input string.

search_string

Alphanumeric or text (An, AnV, TX)

Is the string to search for within the input string.

replacement

Alphanumeric or text (An, AnV, TX)

Is the replacement string to be substituted for the search string. It can be a null string ('').

Replacing a String

REPLACE replaces the string 'South' in the Country Name with the string 'S.'

```
SET TRACEUSER = ON
SET TRACEON = STMTRACE//CLIENT
SET TRACESTAMP=OFF
DEFINE FILE WF_RETAIL_LITE
NEWNAME/A20 = REPLACE(COUNTRY_NAME, 'SOUTH', 'S.');
```

```

END
TABLE FILE WF_RETAIL_LITE
SUM COUNTRY_NAME
BY NEWNAME AS 'New,Name'
WHERE COUNTRY_NAME LIKE 'S%'
ON TABLE SET PAGE NOLEAD
END

```

```
REPLACE(COUNTRY_NAME, 'SOUTH', 'S.');
```

For South Africa, the result is S. Africa.

The generated SQL passes the REPLACE function to the DBMS REPLACE function.

```

SELECT
REPLACE(T3."COUNTRY_NAME",'SOUTH','S. '),
MAX(T3."COUNTRY_NAME")
FROM
wrд_wf_retail_geography T3
WHERE
(T3."COUNTRY_NAME" LIKE 'S%')
GROUP BY
REPLACE(T3."COUNTRY_NAME",'SOUTH','S. ')
ORDER BY
REPLACE(T3."COUNTRY_NAME",'SOUTH','S. ');

```

The output is shown in the following image.

New Name	Customer Country
S. Africa	South Africa
S. Korea	South Korea
Singapore	Singapore
Spain	Spain
Sweden	Sweden
Switzerland	Switzerland

Replacing All Instances of a String

In the following request, the virtual field DAYNAME1 is the string DAY1 with all instances of the string 'DAY' replaced with the string 'day'. The virtual field DAYNAME2 has all instances of the string 'DAY' removed.

```
DEFINE FILE WF_RETAIL
DAY1/A30 = 'SUNDAY MONDAY TUESDAY';
DAYNAME1/A30 = REPLACE(DAY1, 'DAY', 'day' );
DAYNAME2/A30 = REPLACE(DAY1, 'DAY', ' ');
END
TABLE FILE WF_RETAIL
PRINT DAY1 OVER
DAYNAME1 OVER
DAYNAME2
WHERE EMPLOYEE_NUMBER EQ 'AH118'
ON TABLE SET PAGE NOPAGE
END
```

The output is:

DAY1	SUNDAY MONDAY TUESDAY
DAYNAME1	SUNday MONday TUESday
DAYNAME2	SUN MON TUES

REPLACE removes the characters 'DAY' from the string DAY1:

```
REPLACE(DAY1, 'DAY', ' ' )
```

For 'SUNDAY MONDAY TUESDAY', the result is 'SUN MON TUES'.

RIGHT: Returning Characters From the Right of a Character String

Given a source character string, or an expression that can be converted to varchar (variable-length alphanumeric), and an integer number, RIGHT returns that number of characters from the right end of the string.

Return Characters From the Right of a Character String

```
RIGHT(chr_exp, int_exp)
```

where:

chr_exp

Alphanumeric or an expression that can be converted to variable-length alphanumeric.

Is the source character string.

int_exp

Integer

Is the number of characters to be returned.

Returning Characters From the Right of a Character String

The following request computes the length of the last name in the FULLNAME field and returns that number of characters to LAST.

```
TABLE FILE WF_RETAIL_EMPLOYEE
PRINT FULLNAME AND
COMPUTE LEN/I5 = ARGLEN(54, GET_TOKEN(FULLNAME, ' ', 2), LEN); NOPRINT
COMPUTE LAST/A20 = RIGHT(FULLNAME, LEN);
WHERE RECORDLIMIT EQ 20
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Full Name</u>	<u>LAST</u>
Steven Wagoner	Wagoner
Adan Geoghegan	Geoghegan
Candace Aguilar	Aguilar
Dianna Turpin	Turpin
John Blankinship	Blankinship
John Chang	Chang
John Mackey	Mackey
Elaine Duran	Duran
Douglas Sanders	Sanders
Linda Whitlow	Whitlow
Phyllis Carey	Carey
Alfred Amerson	Amerson
Jeremy Maness	Maness
David Christopher	Christopher
Alice Flemming	Flemming
Delia Tennison	Tennison
Diane Eads	Eads
Wilfredo Delacruz	Delacruz
Dorothy Newman	Newman
Delia Tennison	Tennison

RIGHT returns the two rightmost characters from SOURCE:

```
RIGHT (SOURCE, 2)
```

For 'abcdefg', the result is *fg*.

RPAD: Right-Padding a Character String

RPAD uses a specified character and output length to return a character string padded on the right with that character.

Pad a Character String on the Right

```
RPAD(string, out_length, pad_character)
```

where:

string

Alphanumeric

Is a string to pad on the right side.

out_length

Integer

Is the length of the output string after padding.

pad_character

Alphanumeric

Is a single character to use for padding.

Right-Padding a String

In the following request against the WF_RETAIL data source, RPAD right-pads the PRODUCT_CATEGORY column with @ symbols:

```
DEFINE FILE WF_RETAIL
  RPAD1/A25 = RPAD(PRODUCT_CATEGORY,25,'@');
  DIG1/A4 = DIGITS(ID_PRODUCT,4);
END
TABLE FILE WF_RETAIL
  SUM DIG1 RPAD1
  BY PRODUCT_CATEGORY
  ON TABLE SET PAGE NOPAGE
  ON TABLE SET STYLE *
  TYPE=DATA, FONT=COURIER, SIZE=11, COLOR=BLUE, $
END
```

The output is:

Product Category	DIG1	RPAD1
Accessories	5005	Accessories@@@@@@@@@@@@@@
Camcorder	3006	Camcorder@@@@@@@@@@@@@@
Computers	6016	Computers@@@@@@@@@@@@@@
Media Player	1003	Media Player@@@@@@@@@@@@
Stereo Systems	2155	Stereo Systems@@@@@@@@@@
Televisions	4018	Televisions@@@@@@@@@@@@
Video Production	7005	Video Production@@@@@@@@

RPAD right-pads the PRODUCT_CATEGORY column with @ symbols:

```
RPAD(PRODUCT_CATEGORY,25,'@')
```

For *Stereo Systems*, the output is *Stereo Systems@@@@@@@@@@@@@*.

Usage Notes for RPAD

- The input string can be data type AnV, VARCHAR, TX, and An.
- Output can only be AnV or An.
- When working with relational VARCHAR columns, there is no need to trim trailing spaces from the field if they are not desired. However, with An and AnV fields derived from An fields, the trailing spaces are part of the data and will be included in the output, with the padding being placed to the right of these positions. You can use TRIM or TRIMV to remove these trailing spaces prior to applying the RPAD function.

RTRIM: Removing Blanks From the Right End of a String

The RTRIM function removes all blanks from the right end of a string.

Remove Blanks From the Right End of a String

```
RTRIM(string)
```

where:

string

Alphanumeric

Is the string to trim on the right.

The data type of the returned string is AnV, with the same maximum length as the source string.

Removing Blanks From the Right End of a String

The following request against the MOVIES data source creates the field DIRSLASH, that contains a slash at the end of the DIRECTOR field. Then it creates the TRIMDIR field, which trims the trailing blanks from the DIRECTOR field and places a slash at the end of that field:

```
TABLE FILE MOVIES
PRINT DIRECTOR NOPRINT AND
COMPUTE
DIRSLASH/A18 = DIRECTOR|' /';
TRIMDIR/A17V = RTRIM(DIRECTOR)|' /';
WHERE DIRECTOR CONTAINS 'BR'
ON TABLE SET PAGE NOPAGE
END
```

On the output, the slashes show that the trailing blanks in the DIRECTOR field were removed in the TRIMDIR field:

DIRSLASH		TRIMDIR
-----		-----
ABRAHAMS J.	/	ABRAHAMS J./
BROOKS R.	/	BROOKS R./
BROOKS J.L.	/	BROOKS J.L./

RTRIM removes trailing blanks from DIRECTOR.

```
RTRIM(DIRECTOR)
```

For BROOKS R. , the result is BROOKS R.

SPACE: Returning a String With a Given Number of Spaces

Given an integer count, SPACE returns a string consisting of that number of spaces.



Note: To retain the spaces in HTML report output, the SHOWBLANKS parameter must be set to ON.

Return a String With a Given Number of Spaces

```
SPACE(count)
```

where:

count

Numeric

Is the number of spaces to return.

Returning a String With a Given Number of Spaces

The following request inserts 20 spaces between the DOLLARS and UNITS values converted to alphanumeric values. The font used is Courier because it is monospaced and shows the 20 blanks without making them proportional.

```
SET SHOWBLANKS = ON
TABLE FILE GGSALES
SUM DOLLARS NOPRINT UNITS NOPRINT AND
```

```

COMPUTE ALPHADOLL/A8 = EDIT(DOLLARS); NOPRINT
COMPUTE ALPHAUNIT/A8 = EDIT(UNITS); NOPRINT
COMPUTE Dollars_And_Units_With_Spaces/A60 = ALPHADOLL | SPACE(20) |
ALPHAUNIT;
BY CATEGORY
ON TABLE SET PAGE NOLEAD
ON TABLE PCHOLD FORMAT PDF
ON TABLE SET STYLE *
GRID=OFF, FONT=COURIER, $
ENDSTYLE
END

```

The output is shown in the following image.

<u>Category</u>	<u>Dollars</u>	<u>And</u>	<u>Units</u>	<u>With</u>	<u>Spaces</u>
Coffee	17231455		01376266		
Food	17229333		01384845		
Gifts	11695502		00927880		

SPACE adds 20 blank spaces between the words 'Dollars' and 'Units' using the monospaced Courier font.

```

SET SHOWBLANKS = ON
SQL
SELECT
('Dollars' || SPACE(20) || 'Units') AS LINE_WITH_SPACES ;
TABLE
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF, FONT=COURIER, $
ENDSTYLE
END

```

The output is shown in the following image.

<u>LINE_WITH_SPACES</u>
Dollars Units

SPLIT: Extracting an Element From a String

The SPLIT function returns a specific type of element from a string. The output is returned as a variable length alphanumeric.

Extract an Element From a String

```
SPLIT(element, string)
```

where:

element

Can be one of the following keywords:

- **EMAIL_DOMAIN.** Is the domain name portion of an email address in the string.
- **EMAIL_USERID.** Is the user ID portion of an email address in the string.
- **URL_PROTOCOL.** Is the URL protocol for a URL in the string.
- **URL_HOST.** Is the host name of the URL in the string.
- **URL_PORT.** Is the port number of the URL in the string.
- **URL_PATH.** Is the URL path for a URL in the string.
- **NAME_FIRST.** Is the first token (group of characters) in the string. Tokens are delimited by blanks.
- **NAME_LAST.** Is the last token (group of characters) in the string. Tokens are delimited by blanks.

string

Alphanumeric

Is the string from which the element will be extracted.

Extracting an Element From a String

The following request defines strings and extracts elements from them.

```
DEFINE FILE WF_RETAIL_LITE
STRING1/A50 WITH COUNTRY_NAME= 'http://www.informationbuilders.com';
STRING2/A20 = 'user1@ibi.com';
STRING3/A20 = 'Louisa May Alcott';
Protocol/A20 = SPLIT(URL_PROTOCOL, STRING1);
Path/A50 = SPLIT(URL_PATH, STRING1);
```

```

Domain/A20 = SPLIT(EMAIL_DOMAIN, STRING2);
User/A20 = SPLIT(EMAIL_USERID, STRING2);
First/A10 = SPLIT(NAME_FIRST, STRING3);
Last/A10 = SPLIT(NAME_LAST, STRING3);
END
TABLE FILE WF_RETAIL_LITE
SUM Protocol Path User Domain First Last
ON TABLE SET PAGE NOLEAD
END

```

The output is shown in the following image.

Protocol	Path	User	Domain	First	Last
http	http://www.informationbuilders.com	user1	ibi.com	Louisa	Alcott

SPLIT extracts the URL protocol from the string STRING1.

```
SPLIT(URL_PROTOCOL, STRING1)
```

For the URL '*http://www.informationbuilders.com*' in STRING1, the result is *http*.

SUBSTRING: Extracting a Substring From a Source String

The SUBSTRING function extracts a substring from a source string. If the ending position you specify for the substring is past the end of the source string, the position of the last character of the source string becomes the ending position of the substring.

Extract a Substring From a Source String

```
SUBSTRING(string, position, length)
```

where:

string

Alphanumeric

Is the string from which to extract the substring. It can be a field, a literal in single quotation marks ('), or a variable.

position

Positive Integer

Is the starting position of the substring in **string**.

length

Integer

Is the limit for the length of the substring. The ending position of the substring is calculated as **position + length - 1**. If the calculated position beyond the end of the source string, the position of the last character of **string** becomes the ending position.

The data type of the returned substring is AnV.

Extracting a Substring From a Source String

In the following request, POSITION determines the position of the first letter I in LAST_NAME and stores the result in I_IN_NAME. SUBSTRING, then extracts three characters beginning with the letter I from LAST_NAME and stores the results in I_SUBSTR.

```
TABLE FILE EMPLOYEE
PRINT
COMPUTE
I_IN_NAME/I2 = POSITION('I', LAST_NAME); AND
COMPUTE
I_SUBSTR/A3 =
SUBSTRING(LAST_NAME, I_IN_NAME, I_IN_NAME+2);
BY LAST_NAME
ON TABLE SET PAGE NOPAGE
END
```

The output is:

LAST_NAME	I_IN_NAME	I_SUBSTR
-----	-----	-----

BANNING	5	ING
BLACKWOOD	0	BL
CROSS	0	CR
GREENSPAN	0	GR
IRVING	1	IRV
JONES	0	JO
MCCOY	0	MC
MCKNIGHT	5	IGH
ROMANS	0	RO
SMITH	3	ITH
	3	ITH
STEVENS	0	ST

POSITION determines the position of the first letter I in LAST_NAME.

```
SUBSTRING(LAST_NAME, I_IN_NAME, I_IN_NAME+2)
```

For BANNING, the result is 5.

TOKEN: Extracting a Token From a String

The token function extracts a token (substring) from a string of characters. The tokens are separated by a delimiter consisting of one or more characters and specified by a token number reflecting the position of the token in the string.

Extract a Token From a String

```
TOKEN(string, delimiter, number)
```

where:

string

Fixed length alphanumeric

Is the character string from which to extract the token.

delimiter

Fixed length alphanumeric

Is a delimiter consisting of one or more characters.

number

Integer

Is the token number to extract.

Extracting a Token From a String

TOKEN extracts the second token from the PRODUCT_SUBCATEG column, where the delimiter is the letter P:

```
DEFINE FILE WF_RETAIL_LITE
TOK1/A20 = TOKEN(PRODUCT_SUBCATEG, 'P', 2);
END
TABLE FILE WF_RETAIL_LITE
SUM TOK1 AS Token
BY PRODUCT_SUBCATEG
ON TABLE SET PAGE NOPAGE
END
```

The output is:

Product Subcategory	Token
Blu Ray	
Boom Box	
CRT TV	
Charger	
DVD Players	layers
DVD Players - Portable	layers -
Flat Panel TV	anel TV
Handheld	
Headphones	hones
Home Theater Systems	
Portable TV	ortable TV
Professional	rofessional
Receivers	
Smartphone	hone
Speaker Kits	eaker Kits
Standard	
Streaming	
Tablet	
Universal Remote Controls	
Video Editing	
iPod Docking Station	od Docking Station

TOKEN extracts the second token from the PRODUCT_SUBCATEG column, where the delimiter is a blank:

```
TOKEN(PRODUCT_SUBCATEG, ' ', 2)
```

For *iPod Docking Station*, the result is *Docking*.

TRIM_: Removing a Leading Character, Trailing Character, or Both From a String

The TRIM_ function removes all occurrences of a single character from either the beginning or end of a string, or both.

i Note:

- Leading and trailing blanks count as characters. If the character you want to remove is preceded (for leading) or followed (for trailing) by a blank, the character will not be removed. Alphanumeric fields that are longer than the number of characters stored within them are padded with trailing blanks.
- The function will be optimized when run against a relational DBMS that supports trimming the character and location specified.

Remove a Leading Character, Trailing Character, or Both From a String

```
TRIM_(where, pattern, string)
```

where:

where

Keyword

Defines where to trim the source string. Valid values are:

- **LEADING**, which removes leading occurrences.
- **TRAILING**, which removes trailing occurrences.
- **BOTH**, which removes leading and trailing occurrences.

pattern

Alphanumeric

Is a single character, enclosed in single quotation marks ('), whose occurrences are to be removed from **string**. For example, the character can be a single blank (' ').

string

Alphanumeric

Is the string to be trimmed.

The data type of the returned string is AnV.

Trimming a Character From a String

In the following request, TRIM_ removes leading occurrences of the character 'B' from the DIRECTOR field:

```
TABLE FILE MOVIES
PRINT DIRECTOR AND
COMPUTE
TRIMDIR/A17 = TRIM_(LEADING, 'B', DIRECTOR);
WHERE DIRECTOR CONTAINS 'BR'
ON TABLE SET PAGE NOPAGE
END
```

The output is:

DIRECTOR -----	TRIMDIR -----
ABRAHAMS J.	ABRAHAMS J.
BROOKS R.	ROOKS R.
BROOKS J.L.	ROOKS J.L.

TRIM_ removes leading occurrences of the character 'B' from DIRECTOR.

```
TRIM_(LEADING, 'B', DIRECTOR)
```

For BROOKS R., the result is ROOKS R.

Trimming With Trailing Blanks

The following request trims a trailing period (.) from the director name. The field DIRECTOR has format A17, so there are trailing blanks in most of the instances of the field. To create a field (DIRECTORV) without trailing blanks, SQUEEZ converts the trailing blanks in DIRECTOR to a single blank, then TRIMV removes the remaining trailing blank and stores it with format A17V, so the length of the actual characters is known. Then TRIM_ is called against DIRECTOR and DIRECTORV, creating the fields TRIMDIR (trimmed DIRECTOR) and TRIMDIRV (trimmed DIRECTORV) :

```

DEFINE FILE MOVIES
DIRECTORV/A17V = TRIMV('T', SQUEEZ(17, DIRECTOR, 'A17V'), 17, ' ', 1,
DIRECTORV) ;
TRIMDIR/A17 = TRIM_(TRAILING, '.', DIRECTOR);
TRIMDIRV/A17V = TRIM_(TRAILING, '.', DIRECTORV);
END
TABLE FILE MOVIES
PRINT DIRECTOR TRIMDIR DIRECTORV TRIMDIRV
ON TABLE SET PAGE NOPAGE
END

```

The partial output shows that the trimmed DIRECTOR field still has the trailing periods because the period is not the last character in the field. In the trimmed DIRECTORV field, the trailing periods have been removed:

DIRECTOR -----	TRIMDIR -----	DIRECTORV -----	TRIMDIRV -----
SPIELBERG S.	SPIELBERG S.	SPIELBERG S.	SPIELBERG S
KAZAN E.	KAZAN E.	KAZAN E.	KAZAN E
WELLES O.	WELLES O.	WELLES O.	WELLES O
LUMET S.	LUMET S.	LUMET S.	LUMET S

UPPER: Returning a String With All Letters Uppercase

The UPPER function takes a source string and returns a string of the same data type with all letters translated to uppercase.

Return a String With All Letters Uppercase

```
UPPER(string)
```

where:

string

Alphanumeric

Is the string to convert to uppercase.

The returned string is the same data type and length as the source string.

Converting Letters to Uppercase

In the following request, LCWORD converts LAST_NAME to a mixed case. Then UPPER converts the LAST_NAME_MIXED field to uppercase:

```
DEFINE FILE EMPLOYEE
  LAST_NAME_MIXED/A15=LCWORD(15, LAST_NAME, 'A15');
  LAST_NAME_UPPER/A15=UPPER(LAST_NAME_MIXED) ;
END
TABLE FILE EMPLOYEE
PRINT LAST_NAME_UPPER AND FIRST_NAME
BY LAST_NAME_MIXED
WHERE CURR_JOBCODE EQ 'B02' OR 'A17' OR 'B04';
ON TABLE SET PAGE NOPAGE
END
```

The output is:

LAST_NAME_MIXED	LAST_NAME_UPPER	FIRST_NAME
-----	-----	-----
Banning	BANNING	JOHN
Blackwood	BLACKWOOD	ROSEMARIE
Cross	CROSS	BARBARA
Mccoy	MCCOY	JOHN
Mcknight	MCKNIGHT	ROGER
Romans	ROMANS	ANTHONY

LAST_NAME_MIXED has the last name in mixed case. UPPER converts LAST_NAME_MIXED to uppercase.

```
UPPER(LAST_NAME_MIXED)
```

For Banning , the result is BANNING.

Character Functions

Character functions manipulate alphanumeric fields and character strings.

Character Function Notes

In addition to the functions discussed in this topic, there are character functions that are available only in the Maintain language. For information on these functions, see [Maintain-specific Character Functions](#).

For many functions, the *output* argument can be supplied either as a field name or as a format enclosed in single quotation marks. However, if a function is called from a Dialogue Manager command, this argument must always be supplied as a format, and if a function is called from a Maintain Data procedure, this argument must always be supplied as a field name. For detailed information about calling a function and supplying arguments, see [Accessing and Calling a Function](#).

ARGLEN: Measuring the Length of a String

Available Languages: reporting, Maintain

The ARGLEN function measures the length of a character string within a field, excluding trailing spaces. The field format in a Master File specifies the length of a field, including trailing spaces.

In Dialogue Manager, you can measure the length of a supplied character string using the .LENGTH suffix.

Measure the Length of a Character String

```
ARGLEN(length, source_string, output)
```

where:

length

Integer

Is the length of the field containing the character string, or a field that contains the length.

source_string

Alphanumeric

Is the name of the field containing the character string.

output

Integer

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

Measuring the Length of a Character String

ARGLEN determines the length of the character string in LAST_NAME and stores the result in NAME_LEN:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
NAME_LEN/I3 = ARGLEN(15, LAST_NAME, NAME_LEN);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	NAME_LEN
-----	-----

SMITH	5
JONES	5
MCCOY	5
BLACKWOOD	9
GREENSPAN	9
CROSS	5

ARGLEN determines the length of the character string in LAST_NAME and stores the result in a column with the format I3:

```
ARGLEN(15, LAST_NAME, 'I3')
```

For SMITH, the result is 5.

For BLACKWOOD, the result is 9.

ASIS: Distinguishing Between Space and Zero

Available Languages: reporting

The ASIS function distinguishes between a space and a zero in Dialogue Manager. It differentiates between a numeric string, a constant or variable defined as a numeric string (number within single quotation marks), and a field defined simply as numeric. ASIS forces a variable to be evaluated as it is entered rather than be converted to a number. It is used in Dialogue Manager equality expressions only.

Distinguish Between a Space and a Zero

ASIS(argument)

where:

argument

Alphanumeric

Is the value to be evaluated. Supply the actual value, the name of a field that contains the value, or an expression that returns the value. An expression can call a function.

If you specify an alphanumeric literal, enclose it in single quotation marks. If you specify an expression, use parentheses, as needed, to ensure the correct order of evaluation.

Distinguishing Between a Space and a Zero

The first request does not use ASIS. No difference is detected between variables defined as a space and 0.

```
-SET &VAR1 = ' ';
-SET &VAR2 = 0;
-IF &VAR2 EQ &VAR1 GOTO ONE;
-TYPE VAR1 &VAR1 EQ VAR2 &VAR2 NOT TRUE
-QUIT
-ONE
-TYPE VAR1 &VAR1 EQ VAR2 &VAR2 TRUE
```

The output is:

```
VAR1 EQ VAR2 0 TRUE
```

The next request uses ASIS to distinguish between the two variables.

```
-SET &VAR1 = ' ';
-SET &VAR2 = 0;
-IF &VAR2 EQ ASIS(&VAR1) GOTO ONE;
-TYPE VAR1 &VAR1 EQ VAR2 &VAR2 NOT TRUE
-QUIT
```

```
-ONE
-TYPE VAR1 &VAR1 EQ VAR2 &VAR2 TRUE
```

The output is:

```
VAR1 EQ VAR2 0 NOT TRUE
```

Usage Notes for ASIS

In general, Dialogue Manager variables are treated as alphanumeric values. However, a Dialogue Manager variable with the value of '.' may be treated as an alphanumeric value ('.') or a number (0) depending on the context used.

- If the Dialogue Manager variable '.' is used in a mathematical expression, its value will be treated as a number. For example, in the following request, &DMVAR1 is used in an arithmetic expression and is evaluated as zero (0).

```
-SET &DMVAR1='.';
-SET &DMVAR2=10 + &DMVAR1;
-TYPE DMVAR2 = &DMVAR2
```

The output is;

```
DMVAR2 = 10
```

- If the Dialogue Manager variable value '.' is used in an IF test and is compared to the values ' ', '0', or '.', the result will be TRUE even if ASIS is used, as shown in the following example. The following IF tests all evaluate to TRUE.

```
-SET &DMVAR1='.';
-SET &DMVAR2=IF &DMVAR1 EQ ' ' THEN 'TRUE' ELSE 'FALSE';
-SET &DMVAR3=IF &DMVAR1 EQ '.' THEN 'TRUE' ELSE 'FALSE';
-SET &DMVAR4=IF &DMVAR1 EQ '0' THEN 'TRUE' ELSE 'FALSE';
```

- If the Dialogue Manager variable is used with ASIS, the result of the ASIS function will be always be considered alphanumeric and will distinguish between the space (' '), zero ('0'), or period ('.'), as in the following example. The following IF tests all evaluate to TRUE.

```
-SET &DMVAR2=IF ASIS('.') EQ '.' THEN 'TRUE' ELSE 'FALSE';
-SET &DMVAR3=IF ASIS(' ') EQ ' ' THEN 'TRUE' ELSE 'FALSE';
-SET &DMVAR4=IF ASIS('0') EQ '0' THEN 'TRUE' ELSE 'FALSE';
```

- Comparing ASIS('0') to ' ' and ASIS(' ') to '0' always evaluates to FALSE.

BITSON: Determining If a Bit Is On or Off

Available Languages: reporting, Maintain

The BITSON function evaluates an individual bit within a character string to determine whether it is on or off. If the bit is on, BITSON returns a value of 1. If the bit is off, it returns a value of 0. This function is useful in interpreting multi-punch data, where each punch conveys an item of information.

Determine If a Bit Is On or Off

```
BITSON(bitnumber, source_string, output)
```

where:

bitnumber

Integer

Is the number of the bit to be evaluated, counted from the left-most bit in the character string.

source_string

Alphanumeric

Is the character string to be evaluated, enclosed in single quotation marks, or a field or variable that contains the character string. The character string is in multiple eight-bit blocks.

output

Integer

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Evaluating a Bit in a Field

BITSON evaluates the 24th bit of LAST_NAME and stores the result in BIT_24:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
BIT_24/I1 = BITSON(24, LAST_NAME, BIT_24);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	BIT_24
-----	-----
SMITH	1
JONES	1
MCCOY	1
BLACKWOOD	1
GREENSPAN	1
CROSS	0

```
BITSON(24, LAST_NAME, 'I1')
```

For SMITH, the result is 1.

For CROSS, the result is 0.

BITVAL: Evaluating a Bit String as an Integer

Available Languages: reporting, Maintain

The BITVAL function evaluates a string of bits within a character string. The bit string can be any group of bits within the character string and can cross byte and word boundaries. The function evaluates the subset of bits in the string as an integer value.

If the number of bits is:

- Less than 1, the returned value is 0.
- Between 1 and 31 (the recommended range), the returned value is a zero or positive number representing the bits specified, extended with high-order zeroes for a total of 32 bits.
- Exactly 32, the returned value is the positive, zero, or the complement value of negative two, of the specified 32 bits.
- Greater than 32 (33 or more), the returned value is the positive, zero, or the complement value of negative two, of the rightmost 32 bits specified.

Evaluate a Bit String

```
BITVAL(source_string, startbit, number, output)
```

where:

source_string

Alphanumeric

Is the character string to be evaluated, enclosed in single quotation marks, or a field or variable that contains the character string.

startbit

Integer

Is the number of the first bit in the bit string, counting from the left-most bit in the character string. If this argument is less than or equal to 0, the function returns a value of zero.

number

Integer

Is the number of bits in the subset of bits. If this argument is less than or equal to 0, the function returns a value of zero.

output

Integer

Is the name of the field that contains the binary integer equivalent, or the format of the output value enclosed in single quotation marks.

Evaluating a Bit String

BITVAL evaluates the bits 12 through 20 of LAST_NAME and stores the result in a fieldcolumn with the format I5:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
STRING_VAL/I5 = BITVAL(LAST_NAME, 12, 9, 'I5');
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	STRING_VAL
-----	-----
SMITH	332
JONES	365
MCCOY	60
BLACKWOOD	316
GREENSPAN	412
CROSS	413

```
BITVAL(LAST_NAME, 12, 9, 'I5')
```

For SMITH, the result is 332.

For JONES, the result is 365.

BYTVAL: Translating a Character to Decimal

Available Languages: reporting, Maintain

The BYTVAL function translates a character to the ASCII, EBCDIC, or Unicode decimal value that represents it, depending on the operating system.

Translate a Character

```
BYTVAL(character, output)
```

where:

character

Alphanumeric

Is the character to be translated. You can specify a field or variable that contains the character, or the character itself enclosed in single quotation marks. If you supply more than one character, the function evaluates the first.

output

Integer

Is the name of the field that contains the corresponding decimal value, or the format of the output value enclosed in single quotation marks.

Translating the First Character of a Field

BYTVAL translates the first character of LAST_NAME into its ASCII or EBCDIC decimal value and stores the result in LAST_INIT_CODE. Since the input string has more than one character, BYTVAL evaluates the first one.

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND
COMPUTE LAST_INIT_CODE/I3 = BYTVAL(LAST_NAME, 'I3');
WHERE DEPARTMENT EQ 'MIS';
END
```

The output on an ASCII platform is:

LAST_NAME	LAST_INIT_CODE
-----	-----
SMITH	83
JONES	74
MCCOY	77
BLACKWOOD	66

GREENSPAN	71
CROSS	67

The output on an EBCDIC platform is:

LAST_NAME	LAST_INIT_CODE
-----	-----
SMITH	226
JONES	209
MCCOY	212
BLACKWOOD	194
GREENSPAN	199
CROSS	195

BYTVAL translates the first character of LAST_NAME into its ASCII decimal value and stores the result in a column with the format I3.

```
BYTVAL(LAST_NAME, 'I3')
```

For SMITH, the result is 83.

For JONES the result is 74.

Returning the EBCDIC Value With Dialogue Manager

This Dialogue Manager request prompts for a character, then returns the corresponding number. The following reflects the results on the Windows platform.

```
-SET &CODE = BYTVAL(&CHAR, 'I3');
-HTMLFORM BEGIN
<HTML>
<BODY>
THE EQUIVALENT VALUE IS &CODE
</BODY>
</HTML>
-HTMLFORM END
```

Assume the value entered for &CHAR is an exclamation point (!). The output is:

```
THE EQUIVALENT VALUE IS 33
```

CHKFMT: Checking the Format of a String

Available Languages: reporting, Maintain

The CHKFMT function checks a character string for incorrect characters or character types. It compares each character string to a second string, called a mask, by comparing each character in the first string to the corresponding character in the mask. If all characters in the character string match the characters or character types in the mask, CHKFMT returns the value 0. Otherwise, CHKFMT returns a value equal to the position of the first character in the character string not matching the mask.

If the mask is shorter than the character string, the function checks only the portion of the character string corresponding to the mask. For example, if you are using a four-character mask to test a nine-character string, only the first four characters in the string are checked; the rest are returned as a no match with CHKFMT giving the first non-matching position as the result.

Check the Format of a Character String

```
CHKFMT(numchar, source_string, 'mask', output)
```

where:

numchar

Integer

Is the number of characters being compared to the mask.

string

Alphanumeric

Is the character string to be checked enclosed in single quotation marks, or a field or variable that contains the character string.

'mask'

Alphanumeric

Is the mask, which contains the comparison characters enclosed in single quotation marks.

Some characters in the mask are generic and represent character types. If a character in the string is compared to one of these characters and is the same type, it matches.

Generic characters are:

A is any letter between A and Z (uppercase or lowercase).

9 is any digit between 0–9.

x is any letter between A–Z or any digit between 0-9.

\$ is any character.

Any other character in the mask represents only that character. For example, if the third character in the mask is B, the third character in the string must be B to match.

output

Integer

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Checking the Format of a Field

CHKFMT examines EMP_ID for nine numeric characters starting with 11 and stores the result in CHK_ID:

```
TABLE FILE EMPLOYEE
PRINT EMP_ID AND LAST_NAME AND
COMPUTE CHK_ID/I3 = CHKFMT(9, EMP_ID, '119999999', CHK_ID);
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

EMP_ID	LAST_NAME	CHK_ID
-----	-----	-----
071382660	STEVENS	1
119265415	SMITH	0
119329144	BANNING	0
123764317	IRVING	2
126724188	ROMANS	2
451123478	MCKNIGHT	1

CHKFMT examines EMP_ID for nine numeric characters starting with 11 and stores the result in a column with the format I3.

```
CHKFMT(9, EMP_ID, '119999999', 'I3')
```

For 071382660, the result is 1.

For 119265415, the result is 0.

For 23764317, the result is 2.

CHKNUM: Checking a String for Numeric Format

The CHKNUM function checks a character string for numeric format. If the string contains a valid numeric format, CHKNUM returns the value 1. If the string contains characters that are not valid in a number, CHKNUM returns zero (0).

Check the Format of a Character String

```
CHKNUM(numchar, source_string, output)
```

where:

numchar

Integer

Is the number of characters in the string.

string

Alphanumeric

Is the character string to be checked enclosed in single quotation marks, or a field or variable that contains the character string.

output

Numeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Checking a String for Numeric Format

CHKNUM examines the strings STR1, STR2, and STR3 for numeric format.

```

DEFINE FILE WF_RETAIL_LITE
STR1/A8 = '12345E01';
STR2/A8 = 'ABCDEFGF';
STR3/A8 = '1234.567';
CHK1/I1= CHKNUM(8,STR1,CHK1);
CHK2/I1= CHKNUM(8,STR2,CHK2);
CHK3/I1= CHKNUM(8,STR3,CHK3);
END
TABLE FILE WF_RETAIL_LITE
PRINT STR1 IN 20 CHK1 STR2 CHK2 STR3 CHK3
BY PRODUCT_CATEGORY
WHERE PRODUCT_CATEGORY EQ 'Video Production'
ON TABLE SET PAGE NOPAGE
ON TABLE PCHOLD FORMAT WP
END

```

The output is:

Product						
Category	STR1	CHK1	STR2	CHK2	STR3	CHK3
-----	----	----	----	----	----	----
Video Production	12345E01	1	ABCDEFGF	0	1234.567	1
	12345E01	1	ABCDEFGF	0	1234.567	1
	12345E01	1	ABCDEFGF	0	1234.567	1
	12345E01	1	ABCDEFGF	0	1234.567	1
	12345E01	1	ABCDEFGF	0	1234.567	1
	12345E01	1	ABCDEFGF	0	1234.567	1

CHKNUM examines STR1 for numeric format.

```
CHKNUM(8, str1, 'I1')
```

For 12345E01, the result is 1.

For ABCDEFG, the result is 0.

CTRAN: Translating One Character to Another

Available Languages: reporting, Maintain

The CTRAN function translates a character within a character string to another character based on its decimal value. This function is especially useful for changing replacement characters to unavailable characters, or to characters that are difficult to input or unavailable on your keyboard. It can also be used for inputting characters that are difficult to enter when responding to a Dialogue Manager -PROMPT command, such as a comma or apostrophe. It eliminates the need to enclose entries in single quotation marks (').

To use CTRAN, you must know the decimal equivalent of the characters in internal machine representation. Note that the coding chart for conversion is platform-dependent, hence your platform and configuration option determines whether ASCII, EBCDIC, or Unicode coding is used.

In Unicode configurations, this function uses values in the range:

- 0 to 255 for 1-byte characters.
- 256 to 65535 for 2-byte characters.
- 65536 to 16777215 for 3-byte characters.
- 16777216 to 4294967295 for 4-byte characters (primarily for EBCDIC).

Translate One Character to Another

```
CTRAN(length, source_string, decimal, decvalue, output)
```

where:

length

Integer

Is the number of characters in the source string, or a field that contains the length.

source_string

Alphanumeric

Is the character string to be translated enclosed in single quotation marks ('), or the field or variable that contains the character string.

decimal

Integer

Is the ASCII or EBCDIC decimal value of the character to be translated.

decvalue

Integer

Is the ASCII or EBCDIC decimal value of the character to be used as a substitute for *decimal*.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Translating Spaces to Underscores on an ASCII Platform

CTRAN translates the spaces in ADDRESS_LN3 (ASCII decimal value 32) to underscores (ASCII decimal value 95), and stores the result in ALT_ADDR:

```
TABLE FILE EMPLOYEE
PRINT ADDRESS_LN3 AND COMPUTE
ALT_ADDR/A20 = CTRAN(20, ADDRESS_LN3, 32, 95, ALT_ADDR);
BY EMP_ID
```

```
WHERE TYPE EQ 'HSM';
END
```

The output is:

EMP_ID	ADDRESS_LN3	ALT_ADDR
-----	-----	-----
117593129	RUTHERFORD NJ 07073	RUTHERFORD_NJ_07073_
119265415	NEW YORK NY 10039	NEW_YORK_NY_10039__
119329144	FREEPORT NY 11520	FREEPORT_NY_11520__
123764317	NEW YORK NY 10001	NEW_YORK_NY_10001__
126724188	FREEPORT NY 11520	FREEPORT_NY_11520__
451123478	ROSELAND NJ 07068	ROSELAND_NJ_07068__
543729165	JERSEY CITY NJ 07300	JERSEY_CITY_NJ_07300
818692173	FLUSHING NY 11354	FLUSHING_NY_11354

CTRAN translates the spaces in ADDRESS_LN3 (ASCII decimal value of 32) to underscores (ASCII decimal value of 95) and stores the result in a column with the format A20.

```
CTRAN(20, PRODNAME, 32, 95, 'A20')
```

For RUTHERFORD NJ 07073, the result is RUTHERFORD_NJ_07073_.

For NEW YORK NY 10039, the result is NEW_YORK_NY_10039__.

Translating Spaces to Underscores on an EBCDIC Platform

CTRAN translates the spaces in ADDRESS_LN3 (EBCDIC decimal value 64) to underscores (EBCDIC decimal value 109) and stores the result in ALT_ADDR:

```
TABLE FILE EMPLOYEE
PRINT ADDRESS_LN3 AND COMPUTE
ALT_ADDR/A20 = CTRAN(20, ADDRESS_LN3, 64, 109, ALT_ADDR);
BY EMP_ID
WHERE TYPE EQ 'HSM'
END
```

The output is:

EMP_ID	ADDRESS_LN3	ALT_ADDR
-----	-----	-----
117593129	RUTHERFORD NJ 07073	RUTHERFORD_NJ_07073_
119265415	NEW YORK NY 10039	NEW_YORK_NY_10039___
119329144	FREEPORT NY 11520	FREEPORT_NY_11520___
123764317	NEW YORK NY 10001	NEW_YORK_NY_10001___
126724188	FREEPORT NY 11520	FREEPORT_NY_11520___
451123478	ROSELAND NJ 07068	ROSELAND_NJ_07068___
543729165	JERSEY CITY NJ 07300	JERSEY_CITY_NJ_07300
818692173	FLUSHING NY 11354	FLUSHING_NY_11354___

CTRFLD: Centering a Character String

Available Languages: reporting, Maintain

The CTRFLD function centers a character string within a field. The number of leading spaces is equal to or one less than the number of trailing spaces.

CTRFLD is useful for centering the contents of a field and its report column, or a heading that consists only of an embedded field. HEADING CENTER centers each field value including trailing spaces. To center the field value without the trailing spaces, first center the value within the field using CTRFLD.

Limit: Using CTRFLD in a styled report (StyleSheets feature) generally negates the effect of CTRFLD unless the item is also styled as a centered element. Also, if you are using CTRFLD on a platform for which the default font is proportional, either use a non-proportional font, or issue SET STYLE=OFF before running the request.

Center a Character String

```
CTRFLD(source_string, length, output)
```

where:

source_string

Alphanumeric

Is the character string enclosed in single quotation marks, or a field or variable that contains the character string.

length

Integer

Is the number of characters in **source_string** and **output**, or a field that contains the length. This argument must be greater than 0. A length less than 0 can cause unpredictable results.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Centering a Field

CTRFLD centers LAST_NAME and stores the result in CENTER_NAME:

```
SET STYLE=OFF
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
CENTER_NAME/A12 = CTRFLD(LAST_NAME, 12, 'A12');
WHERE DEPARTMENT EQ 'MIS'
END
```

The output is:

LAST_NAME -----	CENTER_NAME -----
SMITH	SMITH
JONES	JONES
MCCOY	MCCOY
BLACKWOOD	BLACKWOOD
GREENSPAN	GREENSPAN
CROSS	CROSS

CTRFLD centers LAST_NAME and stores the result in a column with the format A12:

```
CTRFLD(LAST_NAME, 12, 'A12')
```

EDIT: Extracting or Adding Characters

Available Languages: reporting

The EDIT function extracts characters from the source string and adds characters to the output string, according to the mask. It can extract a substring from different parts of the source string. It can also insert characters from the source string into an output string. For example, it can extract the first two characters and the last two characters of a string to form a single output string.

EDIT compares the characters in a mask to the characters in a source string. When it encounters a nine (9) in the mask, EDIT copies the corresponding character from the source field to the output string. When it encounters a dollar sign (\$) in the mask, EDIT ignores the corresponding character in the source string. When it encounters any other character in the mask, EDIT copies that character to the corresponding position in the output string. This process ends when the mask is exhausted.



Note:

- EDIT does not require an output argument because the result is alphanumeric and its size is determined from the mask value.
- EDIT can also convert the format of a field. For information on converting a field with EDIT, see [EDIT: Converting the Format of a Field](#).

Extract or Add Characters

```
EDIT(source_string, 'mask');
```

where:

source_string

Alphanumeric

Is a character string from which to pick characters. Each 9 in the mask represents one digit, so the size of **source_string** must be at least as large as the number of 9's in the mask.

mask

Alphanumeric

Is a string of mask characters enclosed in single quotation marks or a field containing the character string enclosed in single quotation marks. The length of the mask, excluding characters other than 9 and \$, determines the length of the output field.

Extracting and Adding Characters

EDIT extracts the first initial from the FIRST_NAME field and stores the result in FIRST_INIT. EDIT also adds dashes to the EMP_ID field and stores the result in EMPIDEDIT. The mask used to extract the first initial is stored in the virtual field named MASK1:

```
DEFINE FILE EMPLOYEE
MASK1/A10 = '9$$$$$$$$$'
END
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
FIRST_INIT/A1 = EDIT(FIRST_NAME, MASK1);
EMPIDEDIT/A11 = EDIT(EMP_ID, '999-99-9999');
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_INIT	EMPIDEDIT
-----	-----	-----
SMITH	M	112-84-7612
JONES	D	117-59-3129
MCCOY	J	219-98-4371
BLACKWOOD	R	326-17-9357
GREENSPAN	M	543-72-9165
CROSS	B	818-69-2173

EDIT extracts the first initials from the FNAME column.

```
EDIT(FNAME, '9$$$$$$$$$')
```

For GREGORY, the result is G.

For STEVEN, the result is S.

GETTOK: Extracting a Substring (Token)

Available Languages: reporting, Maintain

The GETTOK function divides a character string into substrings, called tokens. The data must have a specific character, called a delimiter, that occurs in the string and separates the string into tokens. GETTOK returns the token specified by the **token_number** argument. GETTOK ignores leading and trailing blanks in the source character string.

For example, suppose you want to extract the fourth word from a sentence. In this case, use the space character for a delimiter and the number 4 for **token_number**. GETTOK divides the sentence into words using this delimiter, then extracts the fourth word. If the string is not divided by the delimiter, use the PARAG function for this purpose. See [PARAG: Dividing Text Into Smaller Lines](#).

Extract a Substring (Token)

```
GETTOK(source_string, inlen, token_number, 'delim', outlen, output)
```

where:

source_string

Alphanumeric

Is the source string from which to extract the token.

inlen

Integer

Is the number of characters in **source_string**. If this argument is less than or equal to 0, the function returns spaces.

token_number

Integer

Is the number of the token to extract. If this argument is positive, the tokens are counted from left to right. If this argument is negative, the tokens are counted from right to left. For example, -2 extracts the second token from the right. If this argument is 0, the function returns spaces. Leading and trailing null tokens are ignored.

'delim'

Alphanumeric

Is the delimiter in the source string enclosed in single quotation marks. If you specify more than one character, only the first character is used.

i Note: In Dialogue Manager, to prevent the conversion of a delimiter space character (' ') to a double precision zero, include a non-numeric character after the space (for example, '%'). GETTOK uses only the first character (the space) as a delimiter, while the extra character (%) prevents conversion to double precision.

outlen

Integer

Is the size of the token extracted. If this argument is less than or equal to 0, the function returns spaces. If the token is longer than this argument, it is truncated; if it is shorter, it is padded with trailing spaces.

output

Alphanumeric

Is the name of the field that contains the token, or the format of the output value enclosed in single quotation marks. The delimiter is not included in the token.

Note that the delimiter is not included in the extracted token.

Extracting a Token

GETTOK extracts the last token from ADDRESS_LN3 and stores the result in LAST_TOKEN.

The delimiter is a space:

```
TABLE FILE EMPLOYEE
PRINT ADDRESS_LN3 AND COMPUTE
LAST_TOKEN/A10 = GETTOK(ADDRESS_LN3, 20, -1, ' ', 10, LAST_TOKEN);
AS 'LAST TOKEN,(ZIP CODE)'
WHERE TYPE EQ 'HSM';
END
```

The output is:

ADDRESS_LN3 -----	LAST TOKEN (ZIP CODE) -----
RUTHERFORD NJ 07073	07073
NEW YORK NY 10039	10039
FREEPORT NY 11520	11520
NEW YORK NY 10001	10001
FREEPORT NY 11520	11520
ROSELAND NJ 07068	07068
JERSEY CITY NJ 07300	07300
FLUSHING NY 11354	11354

GETTOK extracts the last token from ADDRESS_LN3 and stores the result in a column with the format A10:

```
GETTOK(ADDRESS_LN3, 20, -1, ' ', 10, 'A10')
```

In this case, the last token will be the ZIP code.

For RUTHERFORD NJ 07073, the result is 07073.

For NEW YORK NY 10039, the result is 10039.

LCWORD: Converting a String to Mixed-Case

Available Languages: reporting, Maintain

The LCWORD function converts the letters in a character string to mixed-case. It converts every alphanumeric character to lowercase except the first letter of each new word and the first letter after a single or double quotation mark, which it converts to uppercase. For example, O'CONNOR is converted to O'Connor and JACK'S to Jack'S.

LCWORD skips numeric and special characters in the source string and continues to convert the following alphabetic characters. The result of LCWORD is a string in which the initial uppercase characters of all words are followed by lowercase characters.

Convert a Character String to Mixed-Case

```
LCWORD(length, source_string, output)
```

where:

length

Integer

Is the number of characters in **source_string** and **output**.

string

Alphanumeric

Is the character string to be converted enclosed in single quotation marks, or a field or variable containing the character string.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The length must be greater than or equal to *length*.

Converting a Character String to Mixed-Case

LCWORD converts the LAST_NAME field to mixed-case and stores the result in MIXED_CASE.

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
MIXED_CASE/A15 = LCWORD(15, LAST_NAME, MIXED_CASE);
WHERE DEPARTMENT EQ 'PRODUCTION'
END
```

The output is:

LAST_NAME -----	MIXED_CASE -----
STEVENS	Stevens
SMITH	Smith
BANNING	Banning
IRVING	Irving
ROMANS	Romans
MCKNIGHT	Mcknight

LCWORD converts LAST_NAME to mixed-case and stores the result in a column with the format A15:

```
LCWORD(15, LAST_NAME, 'A15')
```

For STEVENS, the result is Stevens.

For SMITH, the result is Smith.

LCWORD2: Converting a String to Mixed-Case

Available Languages: reporting, Maintain

The LCWORD2 function converts the letters in a character string to mixed-case by converting the first letter of each word to uppercase and converting every other letter to lowercase. In addition, a double quotation mark or a space indicates that the next letter should be converted to uppercase.

For example, "SMITH" would be changed to "Smith" and "JACK S" would be changed to "Jack S".

Convert a Character String to Mixed-Case

```
LCWORD2(length, string, output)
```

where:

length

Integer

Is the length, in characters, of the character string or field to be converted, or a field that contains the length.

string

Alphanumeric

Is the character string to be converted, or a temporary field that contains the string.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The length must be greater than or equal to *length*.

Converting a Character String to Mixed-Case

LCWORD2 converts the string O'CONNOR's to mixed-case:

```
DEFINE FILE EMPLOYEE
MYVAL1/A10='O'CONNOR'S';
LC2/A10 = LCWORD2(10, MYVAL1, 'A10');
END
TABLE FILE EMPLOYEE
SUM LAST_NAME NOPRINT MYVAL1 LC2
END
```

The output is:

MYVAL1	LC2
-----	---
O'CONNOR'S	O'Connor's

The value returned is O'Connor's.

LCWORD3: Converting a String to Mixed-Case

The LCWORD3 function converts the letters in a character string to mixed-case by converting the first letter of each word to uppercase and converting every other letter to lowercase. In addition, a single quotation mark indicates that the next letter should be converted to uppercase, as long as it is neither followed by a blank nor the last character in the input string.

For example, 'SMITH' would be changed to 'Smith' and JACK'S would be changed to Jack's.

Convert a Character String to Mixed-Case Using LCWORD3

```
LCWORD3(length, string, output)
```

where:

length

Integer

Is the length, in characters, of the character string or field to be converted, or a field that contains the length.

string

Alphanumeric

Is the character string to be converted, or a field that contains the string.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The length must be greater than or equal to *length*.

Converting a Character String to Mixed-Case Using LCWORD3

LCWORD3 converts the strings O'CONNOR's and o'connor's to mixed-case:

```
DEFINE FILE EMPLOYEE  
MYVAL1/A10='O'CONNOR'S';  
MYVAL2/A10='o'connor's';  
LC1/A10 = LCWORD3(10, MYVAL1, 'A10');  
LC2/A10 = LCWORD3(10, MYVAL2, 'A10');  
END  
TABLE FILE EMPLOYEE
```

```
SUM LAST_NAME NOPRINT MYVAL1 LC1 MYVAL2 LC2
END
```

On the output, the letter **C** after the first single quotation mark is in uppercase because it is not followed by a blank and is not the final letter in the input string. The letter **s** after the second single quotation mark (') is in lowercase because it is the last character in the input string:

MYVAL1	LC1	MYVAL2	LC2
-----	---	-----	---
O'CONNOR'S	O' Connor's	o'connor's	O' Connor's

For the string O'CONNOR's, LCWORD3 returns O' Connor's.

For the string o'connor's, LCWORD3 also returns O' Connor's.

LJUST: Left-Justifying a String

Available Languages: reporting

LJUST left-justifies a character string within a field. All leading spaces become trailing spaces.

LJUST will not have any visible effect in a report that uses StyleSheets (SET STYLE=ON) unless you center the item.

There is a version of the LJUST function that is available only in the Maintain language. For information on this function, see [LJUST: Left-Justifying a Character String \(Maintain\)](#).

Left-Justify a Character String

```
LJUST(length, source_string, output)
```

where:

length

Integer

Is the number of characters in *source_string* and *output*, or a field that contains the length.

source_string

Alphanumeric

Is the character string to be justified, or a field or variable that contains the string.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Left-Justifying a String

The following request creates the XNAME field in which the last names are not left-justified. Then, LJUST left-justifies the XNAME field and stores the result in YNAME.

```
SET STYLE=OFF
DEFINE FILE EMPLOYEE
XNAME/A25=IF LAST_NAME EQ 'BLACKWOOD' THEN '      ' | LAST_NAME ELSE
' ' | LAST_NAME;
YNAME/A25=LJUST(15, XNAME, 'A25');
END

TABLE FILE EMPLOYEE
PRINT LAST_NAME XNAME YNAME
END
```

The output is:

LAST_NAME -----	XNAME -----	YNAME -----
STEVENS	STEVENS	STEVENS
SMITH	SMITH	SMITH
JONES	JONES	JONES
SMITH	SMITH	SMITH
BANNING	BANNING	BANNING
IRVING	IRVING	IRVING
ROMANS	ROMANS	ROMANS
MCCOY	MCCOY	MCCOY

BLACKWOOD
MCKNIGHT
GREENSPAN
CROSS

BLACKWOOD
MCKNIGHT
GREENSPAN
CROSS

BLACKWOOD
MCKNIGHT
GREENSPAN
CROSS

LJUST left-justifies FNAME and stores the result in a column with the format A25:

```
LJUST(15, FNAME, 'A25')
```

LOCASE: Converting Text to Lowercase

Available Languages: reporting, Maintain

The LOCASE function converts alphanumeric text to lowercase.

Convert Text to Lowercase

```
LOCASE(length, source_string, output)
```

where:

length

Integer

Is the number of characters in *source_string* and *output*, or a field that contains the length. The length must be greater than 0 and the same for both arguments; otherwise, an error occurs.

source_string

Alphanumeric

Is the character string to convert in single quotation marks, or a field or variable that contains the string.

output

Alphanumeric

Is the name of the field in which to store the result, or the format of the output value enclosed in single quotation marks. The field name can be the same as *source_string*.

Converting a String to Lowercase

LOCASE converts the LAST_NAME field to lowercase and stores the result in LOWER_NAME:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
LOWER_NAME/A15 = LOCASE(15, LAST_NAME, LOWER_NAME);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME -----	LOWER_NAME -----
SMITH	smith
JONES	jones
MCCOY	mccoy
BLACKWOOD	blackwood
GREENSPAN	greenspan
CROSS	cross

LOCASE converts LAST_NAME to lowercase and stores the result in a column with the format A15:

```
LOCASE(15, LAST_NAME, 'A15')
```

For SMITH, the result is smith.

For JONES, the result is jones.

OVERLAY: Overlaying a Character String

Available Languages: reporting

The OVERLAY function overlays a base character string with a substring. The function enables you to edit part of an alphanumeric field without replacing the entire field.

There is a version of the OVLAY function that is available only in the Maintain language. For information on this function, see [OVLAY: Overlaying a Character String \(Maintain\)](#).

Overlay a Character String

```
OVLAY(source_string, length, substring, sublen, position, output)
```

where:

source_string

Alphanumeric

Is the base character string.

stringlen

Integer

Is the number of characters in *source_string* and *output*, or a field that contains the length. If this argument is less than or equal to 0, unpredictable results occur.

substring

Alphanumeric

Is the substring that will overlay **source_string**.

sublen

Integer

Is the number of characters in **substring**, or a field that contains the length. If this argument is less than or equal to 0, the function returns spaces.

position

Integer

Is the position in **source_string** at which the overlay begins. If this argument is less than or equal to 0, the function returns spaces. If this argument is larger than *stringlen*, the function returns the source string.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. If the overlaid string is longer than the output field, the string is truncated to fit the field.

Note that if the overlaid string is longer than the output field, the string is truncated to fit the field.

Replacing Characters in a Character String

OVERLAY replaces the last three characters of EMP_ID with CURR_JOBCODE to create a new security identification code and stores the result in NEW_ID:

```
TABLE FILE EMPLOYEE
PRINT EMP_ID AND CURR_JOBCODE AND COMPUTE
NEW_ID/A9 = OVERLAY(EMP_ID, 9, CURR_JOBCODE, 3, 7, NEW_ID);
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_NAME	EMP_ID	CURR_JOBCODE	NEW_ID
-----	-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	326179357	B04	326179B04
CROSS	BARBARA	818692173	A17	818692A17
GREENSPAN	MARY	543729165	A07	543729A07
JONES	DIANE	117593129	B03	117593B03
MCCOY	JOHN	219984371	B02	219984B02
SMITH	MARY	112847612	B14	112847B14

OVERLAY replaces the last three characters of EMP_ID with CURR_JOBCODE to create a new identification code and stores the result in a column with the format A9:

```
OVERLAY(EMP_ID, 9, CURR_JOBCODE, 3, 7, 'A9')
```

For EMP_ID of 326179357 with CURR_JOBCODE of B04, the result is 326179B04.

For EMP_ID of 818692173 with CURR_JOBCODE of A17, the result is 818692A17.

PARAG: Dividing Text Into Smaller Lines

Available Languages: reporting, Maintain

The PARAG function divides a character string into substrings by marking them with a delimiter. It scans a specific number of characters from the beginning of the string and replaces the last space in the group scanned with the delimiter, thus creating a first substring, also known as a token. It then scans the next group of characters in the line, starting from the delimiter, and replaces its last space with a second delimiter, creating a second token. It repeats this process until it reaches the end of the line.

Once each token is marked off by the delimiter, you can use the function GETTOK to place the tokens into different fields (see [GETTOK: Extracting a Substring \(Token\)](#)). If PARAG does not find any spaces in the group it scans, it replaces the first character after the group with the delimiter. Therefore, make sure that any group of characters has at least one space. The number of characters scanned is provided as the maximum token size.

For example, if you have a field called 'subtitle' which contains a large amount of text consisting of words separated by spaces, you can cut the field into roughly equal substrings by specifying a maximum token size to divide the field. If the field is 350 characters long, divide it into three substrings by specifying a maximum token size of 120 characters. This technique enables you to print lines of text in paragraph form.

✔ **Tip:** If you divide the lines evenly, you may create more sub-lines than you intend. For example, suppose you divide 120-character text lines into two lines of 60 characters maximum, but one line is divided so that the first sub-line is 50 characters and the second is 55. This leaves room for a third sub-line of 15 characters. To correct this, insert a space (using weak concatenation) at the beginning of the extra sub-line, then append this sub-line (using strong concatenation) to the end of the one before it. Note that the sub-line will be longer than 60 characters.

Divide Text Into Smaller Lines

```
PARAG(length, source_string, 'delimiter', max_token_size, output)
```

where:

length

Integer

Is the number of characters in *source_string* and *output*, or a field that contains the length.

source_string

Alphanumeric

Is a string to divide into tokens enclosed in single quotation marks, or a field or variable that contains the text.

delimiter

Alphanumeric

Is the delimiter enclosed in single quotation marks. Choose a character that does not appear in the text.

max_token_size

Integer

Is the upper limit for the size of each token.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Dividing Text Into Smaller Lines

PARAG divides ADDRESS_LN2 into smaller lines of not more than ten characters using a comma as the delimiter. It then stores the result in PARA_ADDR:

```
TABLE FILE EMPLOYEE
PRINT ADDRESS_LN2 AND COMPUTE
PARA_ADDR/A20 = PARAG(20, ADDRESS_LN2, ',', 10, PARA_ADDR);
BY LAST_NAME
WHERE TYPE EQ 'HSM';
END
```

The output is:

LAST_NAME	ADDRESS_LN2	PARA_ADDR
-----	-----	-----
BANNING	APT 4C	APT 4C ,
CROSS	147-15 NORTHERN BLD	147-15,NORTHERN,BLD
GREENSPAN	13 LINDEN AVE.	13 LINDEN,AVE.
IRVING	123 E 32 ST.	123 E 32,ST. ,
JONES	235 MURRAY HIL PKWY	235 MURRAY,HIL PKWY
MCKNIGHT	117 HARRISON AVE.	117,HARRISON,AVE.
ROMANS	271 PRESIDENT ST.	271,PRESIDENT,ST.
SMITH	136 E 161 ST.	136 E 161,ST.

PARAG divides ADDRESS_LN2 into smaller lines of not more than ten characters, using a comma as the delimiter. The result is stored in a column with the format A20:

```
PARAG(20, ADDRESS_LN2, ',', 10, 'A20')
```

For 147-15 NORTHERN BLD, the result is 147-15,NORTHERN,BLD.

For 13 LINDEN AVE., the result is 13 LINDEN,AVE.

PATTERN: Generating a Pattern From a String

The PATTERN function examines a source string and produces a pattern that indicates the sequence of numbers, uppercase letters, and lowercase letters in the source string. This function is useful for examining data to make sure that it follows a standard pattern.

In the output pattern:

- Any character from the input that represents a single-byte digit becomes the character **9**.
- Any character that represents an uppercase letter becomes **A**, and any character that represents a lowercase letter becomes **a**. For European NLS mode (Western Europe, Central Europe), **A** and **a** are extended to apply to accented alphabets.
- For Japanese, double-byte characters and Hankaku-katakana become **C** (uppercase). Note that double-byte includes Hiragana, Katakana, Kanji, full-width alphabets, full-width numbers, and full-width symbols. This means that all double-byte letters such as Chinese and Korean are also represented as **C**.

- Special characters remain unchanged.
- An unprintable character becomes the character **X**.

Generate a Pattern From an Input String

```
PATTERN (length, source_string, output)
```

where:

length

Numeric

Is the length of *source_string*.

source_string

Alphanumeric

Is the source string enclosed in single quotation marks, or a field containing the source string.

output

Alphanumeric

Is the name of the field to contain the result or the format of the field enclosed in single quotation marks.

Producing a Pattern From Alphanumeric Data

The following 19 records are stored in a fixed-format sequential file (with LRECL 14) named TESTFILE:

```
212-736-6250  
212 736 4433  
123-45-6789  
800-969-INFO  
10121-2898  
10121
```

```

2 Penn Plaza
917-339-6380
917-339-4350
(212) 736-6250
(212) 736-4433
212-736-6250
212-736-6250
212-736-6250
(212) 736 5533
(212) 736 5533
(212) 736 5533
10121 Æ
800-969-INFO

```

The Master File is:

```

FILENAME=TESTFILE, SUFFIX=FIX      ,
  SEGMENT=TESTFILE, SEGTYPE=S0, $
    FIELDNAME=TESTFLD, USAGE=A14, ACTUAL=A14, $

```

The following request generates a pattern for each instance of TESTFLD and displays them by the pattern that was generated. It shows the count of each pattern and its percentage of the total count. The PRINT command shows which values of TESTFLD generated each pattern.

```

FILEDEF TESTFILE DISK testfile.ftmDEFINE FILE TESTFILE
  PATTERN/A14 = PATTERN (14, TESTFLD, 'A14' ) ;
END
TABLE FILE TESTFILE
  SUM CNT.PATTERN AS 'COUNT' PCT.CNT.PATTERN AS 'PERCENT'
  BY PATTERN
  PRINT TESTFLD
  BY PATTERN
ON TABLE COLUMN-TOTAL
END

```

Note that the next to the last line produced a pattern from an input string that contained an unprintable character, so that character was changed to X. Otherwise, each numeric digit generated a 9 in the output string, each uppercase letter generated the character 'A', and each lowercase letter generated the character 'a'. The output is:

PATTERN	COUNT	PERCENT	TESTFLD
-----	-----	-----	-----
(999) 999 9999	3	15.79	(212) 736 5533 (212) 736 5533 (212) 736 5533
(999) 999-9999	2	10.53	(212) 736-6250 (212) 736-4433
9 Aaaa Aaaaa	1	5.26	2 Penn Plaza
999 999 9999	1	5.26	212 736 4433
999-99-9999	1	5.26	123-45-6789
999-999-AAAA	2	10.53	800-969-INFO 800-969-INFO
999-999-9999	6	31.58	212-736-6250 917-339-6380 917-339-4350 212-736-6250 212-736-6250 212-736-6250
99999	1	5.26	10121
99999 X	1	5.26	10121 Æ
99999-9999	1	5.26	10121-2898
TOTAL	19	100.00	

PATTERN generates a pattern for each instance of TESTFLD. The result is stored in a column with the format A14:

```
PATTERN (14, TESTFLD, 'A14' )
```

For 212-736-6250, the result is 999-999-9999.

For 800-969-INFO, the result is 1999-999-AAAA.

POSIT: Finding the Beginning of a Substring

Available Languages: reporting

The POSIT function finds the starting position of a substring within a source string. For example, the starting position of the substring DUCT in the string PRODUCTION is 4. If the substring is not in the parent string, the function returns the value 0.

There is a version of the POSIT function that is available only in the Maintain language. For information on this function, see [POSIT: Finding the Beginning of a Substring \(Maintain\)](#).

Find the Beginning of a Substring

```
POSIT(source_string, length, substring, sublength, output)
```

where:

source_string

Alphanumeric

Is the string to parse enclosed in single quotation marks, or a field or variable that contains the source character string.

length

Integer

Is the number of characters in the source string, or a field that contains the length. If this argument is less than or equal to 0, the function returns a 0.

substring

Alphanumeric

Is the substring whose position you want to find. This can be the substring enclosed in single quotation marks, or the field that contains the string.

sublength

Integer

Is the number of characters in *substring*. If this argument is less than or equal to 0, or if it is greater than *length*, the function returns a 0.

output

Integer

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Finding the Position of a Letter

POSIT determines the position of the first capital letter I in LAST_NAME and stores the result in I_IN_NAME:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
I_IN_NAME/I2 = POSIT(LAST_NAME, 15, 'I', 1, 'I2');
WHERE DEPARTMENT EQ 'PRODUCTION'
END
```

The output is:

LAST_NAME	I_IN_NAME
-----	-----
STEVENS	0
SMITH	3
BANNING	5
IRVING	1
ROMANS	0
MCKNIGHT	5

POSIT determines the position of the first capital letter I in LAST_NAME and stores the result in a column with the format I2:

```
POSIT(LAST_NAME, 15, 'I', 1, 'I2')
```

For STEVENS, the result is 0.

For SMITH, the result is 3.

For IRVING, the result is 1.

REVERSE: Reversing the Characters in a String

The REVERSE function reverses the characters in a string. This reversal includes all trailing blanks, which then become leading blanks. However, in an HTML report with SET SHOWBLANKS=OFF (the default value), the leading blanks are not visible.

Reverse the Characters in a String

```
REVERSE(length, source_string, output)
```

where:

length

Integer

Is the number of characters in **source_string** and **output**, or a field that contains the length.

source_string

Alphanumeric

Is the character string to reverse enclosed in single quotation marks, or a field that contains the character string.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Reversing the Characters in a String

In the following request against the EMPLOYEE data source, the REVERSE function is used to reverse the characters in the LAST_NAME field to produce the field named REVERSE_LAST. In this field, the trailing blanks from LAST_NAME have become leading blanks. The TRIM function is used to strip the leading blanks from REVERSE_LAST to produce the field named TRIM_REVERSE:

```
DEFINE FILE EMPLOYEE
  REVERSE_LAST/A15 = REVERSE(15, LAST_NAME, REVERSE_LAST);
  TRIM_REVERSE/A15 = TRIM('L', REVERSE_LAST, 15, ' ', 1, 'A15');
END
TABLE FILE EMPLOYEE
PRINT REVERSE_LAST TRIM_REVERSE
```

```
BY LAST_NAME
END
```

The output is:

LAST_NAME	REVERSE_LAST	TRIM_REVERSE
-----	-----	-----
BANNING	GNINNAB	GNINNAB
BLACKWOOD	DOOWKCALB	DOOWKCALB
CROSS	SSORC	SSORC
GREENSPAN	NAPSNEERG	NAPSNEERG
IRVING	GNIVRI	GNIVRI
JONES	SENOJ	SENOJ
MCCOY	YOCCM	YOCCM
MCKNIGHT	THGINKCM	THGINKCM
ROMANS	SNAMOR	SNAMOR
SMITH	HTIMS	HTIMS
	HTIMS	HTIMS
STEVENS	SNEVETS	SNEVETS

REVERSE reverses the characters in PRODCAT and stores the result in a column with the format A15:

```
REVERSE(15, PRODCAT, 'A15')
```

For VCRs, the result is sRCV.

For DVD, the result is DVD.

RJUST: Right-Justifying a Character String

Available Languages: reporting

The RJUST function right-justifies a character string. All trailing blanks become leading blanks. This is useful when you display alphanumeric fields containing numbers.

RJUST does not have any visible effect in a report that uses StyleSheets (SET STYLE=ON) unless you center the item. Also, if you use RJUST on a platform on which StyleSheets are turned on by default, issue SET STYLE=OFF before running the request.

There is a version of the RJUST function that is available only in the Maintain language. For information on this function, see [RJUST: Right-Justifying a Character String \(Maintain\)](#).

Right-Justify a Character String

```
RJUST(length, source_string, output)
```

where:

length

Integer

Is the number of characters in *source_string* and *output*, or a field that contains the length. Their lengths must be the same to avoid justification problems.

source_string

Alphanumeric

Is the character string to right justify, or a field or variable that contains the character string enclosed in single quotation marks.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Right-Justifying a String

RJUST right-justifies the LAST_NAME field and stores the result in RIGHT_NAME:

```
SET STYLE=OFF
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
RIGHT_NAME/A15 = RJUST(15, LAST_NAME, RIGHT_NAME);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	RIGHT_NAME
-----	-----

SMITH	SMITH
JONES	JONES
MCCOY	MCCOY
BLACKWOOD	BLACKWOOD
GREENSPAN	GREENSPAN
CROSS	CROSS

RJUST right-justifies LAST_NAME and stores the result in a column with the format A15:

```
RJUST(15, LAST_NAME, 'A15')
```

SOUNDEX: Comparing Character Strings Phonetically

Available Languages: reporting, Maintain

The SOUNDEX function analyzes a character string phonetically, without regard to spelling. It converts character strings to four character codes. The first character must be the first character in the string. The last three characters represent the next three significant sounds in the source string.

To conduct a phonetic search, do the following:

1. Use SOUNDEX to translate data values from the field you are searching for to the phonetic codes.
2. Use SOUNDEX to translate your best guessed target string to a phonetic code. Remember that the spelling of your target string need be only approximate. However, the first letter must be correct.
3. Use WHERE or IF criteria to compare the temporary fields created in Step 1 to the temporary field created in Step 2.

Compare Character Strings Phonetically

```
SOUNDEX(length, source_string, output)
```

where:

length

Alphanumeric

Is the number of characters in *source_string*, or a field that contains the length. It can be a number enclosed in single quotation marks, or a field containing the number. The number must be from 01 to 99, expressed with two digits (for example '01'); a number larger than 99 causes the function to return asterisks (*) as output.

source_string

Alphanumeric

Is the string to analyze enclosed in single quotation marks, or a field or variable that contains the character string.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Comparing Character Strings Phonetically

The following request creates three fields:

- PHON_NAME contains the phonetic code of employee last names.
- PHON_COY contains the phonetic code of your guess, MICOY.
- PHON_MATCH contains YES if the phonetic codes match, NO if they do not.

The WHERE criteria selects the last name that matches your best guess.

```
DEFINE FILE EMPLOYEE
  PHON_NAME/A4 = SOUNDDEX('15', LAST_NAME, PHON_NAME);
  PHON_COY/A4 WITH LAST_NAME = SOUNDDEX('15', 'MICOY', PHON_COY);
  PHON_MATCH/A3 = IF PHON_NAME IS PHON_COY THEN 'YES' ELSE 'NO';
END
```



```
TABLE FILE EMPLOYEE
PRINT LAST_NAME
IF PHON_MATCH IS 'YES'
END
```

The output is:

```
LAST_NAME
-----
MCCOY
```

SOUNDEX analyzes LAST_NAME phonetically and stores the result in a column with the format A4.

```
SOUNDEX('15', LAST_NAME, 'A4')
```

SPELLNM: Spelling Out a Dollar Amount

Available Languages: reporting, Maintain

The SPELLNM function spells out an alphanumeric string or numeric value containing two decimal places as dollars and cents. For example, the value 32.50 is THIRTY TWO DOLLARS AND FIFTY CENTS.

Spell Out a Dollar Amount

```
SPELLNM(outlength, number, output)
```

where:

outlength

Integer

Is the number of characters in *output* , or a field that contains the length.

If you know the maximum value of the *number*, use the following table to determine the value of *outlength*:

If the number is less than...	...outlength should be
\$10	37
\$100	45
\$1,000	59
\$10,000	74
\$100,000	82
\$1,000,000	96

number

Alphanumeric or Numeric (9.2)

Is the number to be spelled out. This value must contain two decimal places.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Spelling Out a Dollar Amount

SPELLNM spells out the values in CURR_SAL and stores the result in AMT_IN_WORDS:

```
TABLE FILE EMPLOYEE
PRINT CURR_SAL AND COMPUTE
AMT_IN_WORDS/A82 = SPELLNM(82, CURR_SAL, AMT_IN_WORDS);
WHERE DEPARTMENT EQ 'MIS'
END
```

The output is:

CURR_SAL	AMT_IN_WORDS
-----	-----

\$13,200.00	THIRTEEN THOUSAND TWO HUNDRED DOLLARS AND NO CENTS
\$18,480.00	EIGHTEEN THOUSAND FOUR HUNDRED EIGHTY DOLLARS AND NO CENTS
\$18,480.00	EIGHTEEN THOUSAND FOUR HUNDRED EIGHTY DOLLARS AND NO CENTS
\$21,780.00	TWENTY-ONE THOUSAND SEVEN HUNDRED EIGHTY DOLLARS AND NO CENTS
\$9,000.00	NINE THOUSAND DOLLARS AND NO CENTS
\$27,062.00	TWENTY-SEVEN THOUSAND SIXTY-TWO DOLLARS AND NO CENTS

SPELLNM spells out the values in CURR_SAL and stores the result in a column with the format A82:

```
SPELLNM(82, CURR_SAL, 'A82')
```

For \$13,200.00, the result is THIRTEEN THOUSAND TWO HUNDRED DOLLARS AND NO CENTS.

For \$18,480.00, the result is EIGHTEEN THOUSAND FOUR HUNDRED EIGHTY DOLLARS AND NO CENTS.

SQUEEZ: Reducing Multiple Spaces to a Single Space

Available Languages: reporting, Maintain

The SQUEEZ function reduces multiple contiguous spaces within a character string to a single space. The resulting character string has the same length as the original string but is padded on the right with spaces.

Reduce Multiple Spaces to a Single Space

```
SQUEEZ(length, source_string, output)
```

where:

length

Integer

Is the number of characters in *source_string* and *output*, or a field that contains the length.

source_string

Alphanumeric

Is the character string to squeeze enclosed in single quotation marks, or the field that contains the character string.

output

Alphanumeric

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

Reducing Multiple Spaces to a Single Space

SQUEEZ reduces multiple spaces in the NAME field to a single blank and stores the result in a field with the format A30:

```
DEFINE FILE EMPLOYEE
NAME/A30 = FIRST_NAME | LAST_NAME;
END
TABLE FILE EMPLOYEE
PRINT NAME AND COMPUTE
SQNAME/A30 = SQUEEZ(30, NAME, 'A30');
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

NAME		SQNAME
----		-----
MARY	SMITH	MARY SMITH
DIANE	JONES	DIANE JONES
JOHN	MCCOY	JOHN MCCOY
ROSEMARIE	BLACKWOOD	ROSEMARIE BLACKWOOD

MARY	GREENSPAN	MARY GREENSPAN
BARBARA	CROSS	BARBARA CROSS

SQUEEZ reduces multiple spaces in NAME to a single blank and stores the result in a column with the format A30:

```
SQUEEZ(30, NAME, 'A30')
```

For MARY SMITH, the result is MARY SMITH.

For DIANE JONES, the result is DIANE JONES.

For JOHN MCCOY, the result is JOHN MCCOY.

STRIP: Removing a Character From a String

Available Languages: reporting, Maintain

The STRIP function removes all occurrences of a specific character from a string. The resulting character string has the same length as the original string but is padded on the right with spaces.

Remove a Character From a String

```
STRIP(length, source_string, char, output)
```

where:

length

Integer

Is the number of characters in **source_string** and **output**, or a field that contains the number.

source_string

Alphanumeric

Is the string from which the character will be removed, or a field containing the string.

char

Alphanumeric

Is the character to be removed from the string. This can be an alphanumeric literal enclosed in single quotation marks, or a field that contains the character. If more than one character is provided, the left-most character will be used as the strip character.

i Note: To remove single quotation marks, use two consecutive quotation marks. You must then enclose this character combination in single quotation marks.

output

Alphanumeric

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

Removing Occurrences of a Character From a String

STRIP removes all occurrences of a period (.) from the DIRECTOR field and stores the result in a field with the format A17:

```
TABLE FILE MOVIES
PRINT DIRECTOR AND COMPUTE
SDIR/A17 = STRIP(17, DIRECTOR, '.', 'A17');
WHERE CATEGORY EQ 'COMEDY'
END
```

The output is:

DIRECTORS -----	SDIR ----
ZEMECKIS R.	ZEMECKIS R
ABRAHAMS J.	ABRAHAMS J
ALLEN W.	ALLEN W
HALLSTROM L.	HALLSTROM L
MARSHALL P.	MARSHALL P
BROOKS J.L.	BROOKS JL

STRIP removes all occurrences of a period (.) from DIRECTOR and stores the result in a field with the format A17:

```
STRIP(17, DIRECTOR, '.', 'A17')
```

For ZEMECKIS R., the result is ZEMECKIS R.

For BROOKS J.L., the result is BROOKS JL.

Removing Single Quotation Marks From a String

STRIP removes all occurrences of a single quotation mark (') from the TITLE field and stores the result in a field with the format A39:

```
TABLE FILE MOVIES
PRINT TITLE AND COMPUTE
STITLE/A39 = STRIP(39, TITLE, "'", 'A39');
WHERE TITLE CONTAINS "'"
END
```

The output is:

TITLE -----	STITLE -----
BABETTE'S FEAST	BABETTES FEAST
JANE FONDA'S COMPLETE WORKOUT	JANE FONDAS COMPLETE WORKOUT
JANE FONDA'S NEW WORKOUT	JANE FONDAS NEW WORKOUT
MICKEY MANTLE'S BASEBALLTIPS	MICKEY MANTLES BASEBALL TIPS

Removing Commas From a String (Maintain)

STRIP removes all occurrences of a comma from the TITLE field:

```
MAINTAIN FILE MOVIES
FOR 10 NEXT MOVIECODE INTO MOVSTK
  WHERE TITLE CONTAINS ',';
COMPUTE I/I2=1;
REPEAT MOVSTK.FOCINDEX
TYPE "TITLE IS: <MOVSTK(I).TITLE"
```

```

COMPUTE NOCOMMA/A39=STRIP(39,MOVSTK().TITLE, ',',NOCOMMA);
TYPE "NEW TITLE IS: <NOCOMMA";
COMPUTE I=I+1
ENDREPEAT
END

```

The output is:

```
TITLE IS: SMURFS, THE
```

```
NEW TITLE IS: SMURFS THE
```

STRREP: Replacing Character Strings

The STRREP replaces all instances of a specified string within a source string. It also supports replacement by null strings.

Replace Character Strings

```
STRREP (inlength, instring, searchlength, searchstring, replength,
repstring, outlength, output)
```

where:

inlength

Numeric

Is the number of characters in the source string.

instring

Alphanumeric

Is the source string.

searchlength

Numeric

Is the number of characters in the (shorter length) string to be replaced.

searchstring

Alphanumeric

Is the character string to be replaced.

replength

Numeric

Is the number of characters in the replacement string. Must be zero (0) or greater.

repstring

Alphanumeric

Is the replacement string (alphanumeric). Ignored if replength is zero (0).

outlength

Numeric

Is the number of characters in the resulting output string. Must be 1 or greater.

output

Alphanumeric

Is the resulting output string after all replacements and padding.

Usage Note for STRREP Function

The maximum string length is 4095.

Replacing Commas and Dollar Signs

In the following example, STRREP finds and replaces commas and dollar signs that appear in the CS_ALPHA field, first replacing commas with null strings to produce CS_NOCOMMAS

(removing the commas) and then replacing the dollar signs (\$) with (USD) in the right-most CURR_SAL column:

```
TABLE FILE EMPLOYEE
SUM CURR_SAL NOPRINT
COMPUTE CS_ALPHA/A15=FTOA(CURR_SAL,'(D12.2M)',CS_ALPHA);
        CS_NOCOMMAS/A14=STRREP(15,CS_ALPHA,1,',',0,'X',14,CS_NOCOMMAS);
        CS_USD/A17=STRREP(14,CS_NOCOMMAS,1,'$',4,'USD ',17,CS_USD);
        NOPRINT
        CS_USD/R AS CURR_SAL
BY LAST_NAME
END
```

The output is:

LAST_NAME	CS_ALPHA	CS_NOCOMMAS	CURR_SAL
-----	-----	-----	-----
BANNING	\$29,700.00	\$29700.00	USD 29700.00
BLACKWOOD	\$21,780.00	\$21780.00	USD 21780.00
CROSS	\$27,062.00	\$27062.00	USD 27062.00
GREENSPAN	\$9,000.00	\$9000.00	USD 9000.00
IRVING	\$26,862.00	\$26862.00	USD 26862.00
JONES	\$18,480.00	\$18480.00	USD 18480.00
MCCOY	\$18,480.00	\$18480.00	USD 18480.00
MCKNIGHT	\$16,100.00	\$16100.00	USD 16100.00
ROMANS	\$21,120.00	\$21120.00	USD 21120.00
SMITH	\$22,700.00	\$22700.00	USD 22700.00
STEVENS	\$11,000.00	\$11000.00	USD 11000.00

STRREP finds and replaces commas and then dollar signs and stores the result in a field with the format A17:

```
STRREP(15,CS_ALPHA,1,',',0,'X',14,'A14')
STRREP(14,CS_NOCOMMAS,1,'$',4,'USD ',17,'A17')
```

For \$29,700.00, the result is USD 29700.00.

For \$9,000.00, the result is USD 9000.00.

SUBSTR: Extracting a Substring

Available Languages: reporting

The SUBSTR function extracts a substring based on where it begins and its length in the source string. SUBSTR can vary the position of the substring depending on the values of other fields.

There is a version of the SUBSTR function that is available only in the Maintain language. For information on this function, see [SUBSTR: Extracting a Substring \(Maintain\)](#).

Extract a Substring

```
SUBSTR(length, source_string, start, end, sublength, output)
```

where:

length

Integer

Is the number of characters in **source_string**, or a field that contains the length.

source_string

Alphanumeric

Is the string from which to extract a substring enclosed in single quotation marks, or the field containing the parent string.

start

Integer

Is the starting position of the substring in the source string. If **start** is less than one or greater than **length**, the function returns spaces.

end

Integer

Is the ending position of the substring. If this argument is less than *start* or greater than *length*, the function returns spaces.

sublength

Integer

Is the number of characters in the substring (normally $end - start + 1$). If the *sublength* is longer than $end - start + 1$, the substring is padded with trailing spaces. If it is shorter, the substring is truncated. This value should be the declared length of *output*. Only *sublength* characters will be processed.

output

Alphanumeric

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks.

Extracting a String

POSIT determines the position of the first letter I in LAST_NAME and stores the result in I_IN_NAME. SUBSTR then extracts three characters beginning with the letter I from LAST_NAME, and stores the results in I_SUBSTR.

```
TABLE FILE EMPLOYEE
PRINT
COMPUTE
    I_IN_NAME/I2 = POSIT(LAST_NAME, 15, 'I', 1, 'I2'); AND
COMPUTE
    I_SUBSTR/A3 =
        SUBSTR(15, LAST_NAME, I_IN_NAME, I_IN_NAME+2, 3, I_SUBSTR);
BY LAST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION'
END
```

The output is:

LAST_NAME	I_IN_NAME	I_SUBSTR
-----	-----	-----
BANNING	5	ING
IRVING	1	IRV
MCKNIGHT	5	IGH
ROMANS	0	
SMITH	3	ITH
STEVENS	0	

Since Romans and Stevens have no I in their names, SUBSTR extracts a blank string.

SUBSTR extracts the first three characters from LAST_NAME, and stores the results in a column with the format A3:

```
SUBSTR(15, LAST_NAME, 1, 3, 3, 'A3')
```

For BANNING, the result is BAN.

For MCKNIGHT, the result is MCK.

TRIM: Removing Leading and Trailing Occurrences

Available Languages: reporting

The TRIM function removes leading and/or trailing occurrences of a pattern within a character string.

There is a version of the TRIM function that is available only in the Maintain language. For information on this function, see [TRIM: Removing Trailing Occurrences \(Maintain\)](#).

Remove Leading and Trailing Occurrences

```
TRIM(trim_where, source_string, length, pattern, sublength, output)
```

where:

trim_where

Alphanumeric

Is one of the following, which indicates where to remove the pattern:

'L' removes leading occurrences.

'T' removes trailing occurrences.

'B' removes both leading and trailing occurrences.

source_string

Alphanumeric

Is the string to trim enclosed in single quotation marks, or the field containing the string.

string_length

Integer

Is the number of characters in the source string.

pattern

Alphanumeric

Is the character string pattern to remove enclosed in single quotation marks.

sublength

Integer

Is the number of characters in the pattern.

output

Alphanumeric

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks.

Removing Leading Occurrences

TRIM removes leading occurrences of the characters BR from the DIRECTOR field and stores the result in a field with the format A17:

```
TABLE FILE MOVIES
PRINT  DIRECTOR AND
COMPUTE
  TRIMDIR/A17 = TRIM('L', DIRECTOR, 17, 'BR', 2, 'A17');
  WHERE DIRECTOR CONTAINS 'BR'
END
```

The output is:

DIRECTOR -----	TRIMDIR -----
ABRAHAMS J.	ABRAHAMS J.

BROOKS R.	OOKS R.
BROOKS J.L.	OOKS J.L.

TRIM removes leading occurrences of the characters BR from DIRECTOR and stores the result in a column with the format A17:

```
TRIM('L', DIRECTOR, 17, 'BR', 2, 'A17')
```

For BROOKS R., the result is OOKS R.

For ABRAHAMS J., the result is ABRAHAMS J.

Removing Trailing Occurrences

TRIM removes trailing occurrences of the characters ER from the TITLE. In order to remove trailing non-blank characters, trailing spaces must be removed first. The TITLE field has trailing spaces. Therefore, TRIM does not remove the characters ER when creating field the TRIMT. The SHORT field does not have trailing spaces. Therefore, TRIM removes the trailing ER characters when creating field TRIMS:

```
DEFINE FILE MOVIES
  SHORT/A19 = SUBSTR(19, TITLE, 1, 19, 19, SHORT);
END
TABLE FILE MOVIES
  PRINT  TITLE   IN 1  AS 'TITLE: '
        SHORT   IN 40 AS 'SHORT: ' OVER
  COMPUTE
    TRIMT/A39 = TRIM('T', TITLE, 39, 'ER', 2, 'A39'); IN 1 AS 'TRIMT: '
  COMPUTE
    TRIMS/A19 = TRIM('T', SHORT, 19, 'ER', 2, 'A19'); IN 40 AS 'TRIMS: '
  WHERE TITLE LIKE '%ER'
END
```

The output is:

TITLE:	LEARN TO SKI BETTER	SHORT:	LEARN TO SKI BETTER
TRIMT:	LEARN TO SKI BETTER	TRIMS:	LEARN TO SKI BETT
TITLE:	FANNY AND ALEXANDER	SHORT:	FANNY AND ALEXANDER
TRIMT:	FANNY AND ALEXANDER	TRIMS:	FANNY AND ALEXAND

UPCASE: Converting Text to Uppercase

Available Languages: reporting

The UPCASE function converts a character string to uppercase. It is useful for sorting on a field that contains both mixed-case and uppercase values. Sorting on a mixed-case field produces incorrect results because the sorting sequence in EBCDIC always places lowercase letters before uppercase letters, while the ASCII sorting sequence always places uppercase letters before lowercase. To obtain correct results, define a new field with all of the values in uppercase, and sort on that field.

There is a version of the UPCASE function that is available only in the Maintain language. For information on this function, see [UPCASE: Converting Text to Uppercase \(Maintain\)](#).

Convert Text to Uppercase

```
UPCASE(length, source_string, output)
```

where:

length

Integer

Is the number of characters in *source_string* and *output*.

input

Alphanumeric

Is the string to convert enclosed in single quotation marks, or the field containing the character string.

output

Alphanumeric of type *AnV* or *An*

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks.

If the format of the *output_format* is *AnV*, then the length returned is equal to the smaller of the *source_string* length and the *upper_limit* length.

Converting a Mixed-Case String to Uppercase

UPCASE converts the LAST_NAME_MIXED field to uppercase:

```
DEFINE FILE EMPLOYEE
  LAST_NAME_MIXED/A15=IF DEPARTMENT EQ 'MIS' THEN LAST_NAME ELSE
    LCWORD(15, LAST_NAME, 'A15');
  LAST_NAME_UPPER/A15=UPCASE(15, LAST_NAME_MIXED, 'A15') ;
END
```

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME_MIXED AND FIRST_NAME BY LAST_NAME_UPPER
WHERE CURR_JOBCODE EQ 'B02' OR 'A17' OR 'B04';
END
```

Now, when you execute the request, the names are sorted correctly.

The output is:

LAST_NAME_UPPER	LAST_NAME_MIXED	FIRST_NAME
-----	-----	-----
BANNING	Banning	JOHN
BLACKWOOD	BLACKWOOD	ROSEMARIE
CROSS	CROSS	BARBARA
MCCOY	MCCOY	JOHN
MCKNIGHT	Mcknight	ROGER
ROMANS	Romans	ANTHONY

If you do not want to see the field with all uppercase values, you can NOPRINT it.

UPCASE converts LAST_NAME_MIXED to uppercase and stores the result in a column with the format A15:

```
UPCASE(15, LAST_NAME_MIXED, 'A15')
```

For Banning, the result is BANNING.

For McKnight, the result is MCKNIGHT.

XMLDECOD: Decoding XML-Encoded Characters

The XMLDECOD function decodes the following five standard XML-encoded characters when they are encountered in a string:

Character Name	Character	XML-Encoded Representation
ampersand	&	&
greater than symbol	>	>
less than symbol	<	<
double quotation mark	"	"
single quotation mark (apostrophe)	'	'

Decode XML-Encoded Characters

```
XMLDECOD(inlength, source_string, outlength, output)
```

where:

inlength

Integer

Is the length of the field containing the source character string, or a field that contains the length.

source_string

Alphanumeric

Is the name of the field containing the source character string or the string enclosed in single quotation marks (').

outlength

Integer

Is the length of the output character string, or a field that contains the length.

output

Integer

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

Decoding XML-Encoded Characters

The file XMLFUNCS is a .csv file that contains some unencoded characters and some XML-encoded characters. The Master File is:

```
FILE = XMLFUNCS, SUFFIX=COM,$
SEGNAME = SEG01, SEGTYPE=S1,$
FIELD=INSTRING, ALIAS=CHARS, USAGE=A30,ACTUAL=A30,$
```

The contents of the file follow:

```
CHARS: & < > ,,$
ENCODED: &amp; &gt; ,,$
ENCODED: &quot; &apos; ,,$
MIXED: &amp; < &gt; ,,$
```

XMLDECOD decodes any of the supported XML-encoded characters. Note that some viewers automatically decode the encoded values for display, so the output is produced in a plain text format (FORMAT WP):

```
FILEDEF XMLFUNCS DISK xmlfuncs.csv
DEFINE FILE XMLFUNCS
OUTSTRING/A30=XMLDECOD(30,INSTRING,30,'A30');
END
TABLE FILE XMLFUNCS
PRINT INSTRING OUTSTRING
ON TABLE PCHOLD FORMAT WP
ON TABLE SET PAGE NOPAGE
```

In the output string, XML-encoded characters have been decoded, and characters that were not encoded have been left as they were in the input string:

INSTRING	OUTSTRING
-----	-----
CHARS: & < >	CHARS: & < >
ENCODED: & >;	ENCODED: & >
ENCODED: " ';	ENCODED: " '
MIXED: & & < >;	MIXED: & < >

XMLDECOD decodes XML-encoded characters and stores the output in a string with format A30:

```
XMLDECOD(30, INSTRING, 30, 'A30')
```

For &, the result is &.

For >, the result is >.

XMLENCOD: XML-Encoding Characters

The XMLENCOD function encodes the following five standard characters when they are encountered in a string:

Character Name	Character	Encoded Representation
ampersand	&	&
greater than symbol	>	>
less than symbol	<	<
double quotation mark	"	"
single quotation mark (apostrophe)	'	'

XML-Encode Characters

```
XMLENCOD(inlength, source_string, option, outlength, output)
```

where:

inlength

Integer

Is the length of the field containing the source character string, or a field that contains the length.

source_string

Alphanumeric

Is the name of the field containing the source character string or a string enclosed in single quotation marks (').

option

Integer

Is a code that specifies whether to process a string that already contains XML-encoded characters. Valid values are:

- 0, the default, which cancels processing of a string that already contains at least one XML-encoded character.
- 1, which processes a string that contains XML-encoded characters.

outlength

Integer

Is the length of the output character string, or a field that contains the length.



Note: The output length, in the worst case, could be six times the length of the input.

output

Integer

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

XML-Encoding Characters

The file XMLFUNCS is a .csv file that contains some unencoded characters and some XML-encoded characters. The Master File is:

```
FILE = XMLFUNCS, SUFFIX=COM,$
SEGNAME = SEG01, SEGTYPE=S1,$
FIELD=INSTRING, ALIAS=CHARS, USAGE=A30,ACTUAL=A30,$
```

The contents of the file follow:

```
CHARS: & < > ,,$
ENCODED: &amp; &gt; ,,$
ENCODED: &quot; &apos; ,,$
MIXED: &amp; < &gt; ,,$
```

XMLENCOD XML-encodes any of the supported characters to produce OUTSTRING1, and processes every input string regardless of whether it already contains XML-encoded characters. For OUTSTRING2, it only encodes those strings that do not contain any XML-encoded characters. Note that some viewers automatically decode the encoded values for display, so the output is produced in plain text format (FORMAT WP):

```
FILEDEF XMLFUNCS DISK xmlfuncs.csv
DEFINE FILE XMLFUNCS
OUTSTRING1/A30=XMLENCOD(30,INSTRING,1,30,'A30');
OUTSTRING2/A30=XMLENCOD(30,INSTRING,0,30,'A30');
END
TABLE FILE XMLFUNCS
PRINT INSTRING OUTSTRING1 IN 24 OUTSTRING2 IN 48
ON TABLE SET PAGE NOPAGE
ON TABLE PCHOLD FORMAT WP
END
```

In OUTSTRING1, the supported characters have been XML-encoded, and output is produced even if the input string contains encoded characters. OUTSTRING2 is only produced when no XML-encoded characters exist in the input string:

INSTRING -----	OUTSTRING1 -----	OUTSTRING2 -----
CHARS: & < >	CHARS: & < >	CHARS: & < >
ENCODED: & >	ENCODED: & >	
ENCODED: " '	ENCODED: " '	
MIXED: & < >	MIXED: & < >	

XMLENCOD XML-encodes characters and stores the output in a string with format A30:

```
XMLENCOD(30, INSTRING, 30, 1, 'A30')
```

For &, the result is &.

For >, the result is >.

Variable Length Character Functions

The character format *AnV* is supported in synonyms for FOCUS, XFOCUS, and relational data sources. This format is used to represent the VARCHAR (variable length character) data types supported by relational database management systems.

Overview

For relational data sources, *AnV* keeps track of the actual length of a VARCHAR column. This information is especially valuable when the value is used to populate a VARCHAR column in a different RDBMS. It affects whether trailing blanks are retained in string concatenation and, for Oracle, string comparisons (the other relational engines ignore trailing blanks in string comparisons).

In a ibi™ FOCUS® or XFOCUS data source, *AnV* does not provide true variable length character support. It is a fixed-length character field with an extra two leading bytes to contain the actual length of the data stored in the field. This length is stored as a short integer value occupying two bytes. Because of the two bytes of overhead and the additional processing required to strip them, the *AnV* format is *not* recommended for use with non-relational data sources.

AnV fields can be used as arguments to all supplied functions that expect alphanumeric arguments. An *AnV* input parameter is treated as an *An* parameter and is padded with blanks to its declared size (*n*). If the last parameter specifies an *AnV* format, the function result is converted to type *AnV* with the actual length set equal to its size.

The functions described in this topic are designed to work specifically with the *AnV* data type parameters.

Usage Notes for Using an *AnV* Field in a Function

The following affect the use of an *AnV* field in a function:

- When using an *AnV* argument in a function, the input parameter is treated as an *An* parameter and is padded with blanks to its declared size (*n*). If the last parameter specifies an *AnV* format, the function result is converted to type *AnV* with the actual length set equal to its size.
- Many functions require both an alphanumeric string and its length as input arguments. If the supplied string is stored in an *AnV* field, you still must supply a length argument to satisfy the requirements of the function. However, the length that will be used in the function's calculations is the actual length stored as the first two bytes of the *AnV* field.
- In general, any input argument can be a field or a literal. In most cases, numeric input arguments are supplied to these functions as literals, and there is no reason not to supply an integer value. However, if the value is not an integer, it is truncated to an integer value regardless of whether it was supplied as a field or a literal.

LENV: Returning the Length of an Alphanumeric Field

Available Languages: reporting

LENV returns the actual length of an *AnV* field or the size of an *An* field.

Find the Length of an Alphanumeric Field

```
LENV(source_string, output)
```

where:

source_string

Alphanumeric of type *An* or *AnV*

Is the source string or field. If it is an *An* format field, the function returns its size, *n*. For a character string enclosed in quotation marks or a variable, the size of the string or variable is returned. For a field of *AnV* format, its length, taken from the length-in-bytes of the field, is returned.

output

Integer

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks (').

Finding the Length of an *AnV* Field

TRIMV creates an *AnV* field named TITLEV by removing trailing blanks from the TITLE value. Then LENV returns the actual length of each instance of TITLEV to the ALEN field:

```
TABLE FILE MOVIES
PRINT
COMPUTE TITLEV/A39V = TRIMV('T', TITLE, 39, ' ', 1, TITLEV);
      ALEN/I2 = LENV(TITLEV,ALEN);
BY CATEGORY NOPRINT
WHERE CATEGORY EQ 'CHILDREN'
END
```

The output is:

TITLEV -----	ALEN ----
SMURFS, THE	11
SHAGGY DOG, THE	15
SCOOBY-DOO-A DOG IN THE RUFF	28
ALICE IN WONDERLAND	19
SESAME STREET-BEDTIME STORIES AND SONGS	39
ROMPER ROOM-ASK MISS MOLLY	26
SLEEPING BEAUTY	15
BAMBI	5

LENV returns the length of TITLEV and stores the result in a column with the format I2:

```
LENV(TITLEV, 'I2')
```

For ALICE IN WONDERLAND, the result is 19.

For SLEEPING BEAUTY, the result is 15.

LOCASV: Creating a Variable Length Lowercase String

Available Languages: reporting

The LOCASV function converts alphabetic characters in the source string to lowercase and is similar to LOCASE. LOCASV returns AnV output whose actual length is the lesser of the actual length of the AnV source string and the value of the input parameter upper_limit.

Create a Variable Length Lowercase String

```
LOCASV(upper_limit, source_string, output)
```

where:

upper_limit

Integer

Is the limit for the length of the source string.

source_string

Alphanumeric of type An or AnV

Is the string to be converted to lowercase in single quotation marks, or a field or variable that contains the string. If it is a field, it can have An or AnV format. If it is a field of type AnV, its length is taken from the length in bytes stored in the field. If the *upper_limit* is smaller than the actual length, the source string is truncated to this upper limit.

output

Alphanumeric of type An or AnV

Is the name of the field in which to store the result, or the format of the output value enclosed in single quotation marks ('). This value can be for a field that is AnV or An format.

If the output format is AnV, the actual length returned is equal to the smaller of the source string length and the upper limit.

Creating a Variable Length Lowercase String

In this example, LOCASV converts the LAST_NAME field to lowercase and specifies a length limit of five characters. The results are stored in the LOWCV_NAME field:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND COMPUTE
LOWCV_NAME/A15V = LOCASV(5, LAST_NAME, LOWCV_NAME);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME -----	LOWCV_NAME -----
SMITH	smith
JONES	jones
MCCOY	mccoy
BLACKWOOD	black
GREENSPAN	green
CROSS	cross

LOCASV converts LAST_NAME to lowercase and specifies a length limit of five characters. The results are stored in a column with the format A15V:

```
LOCASV(5, LAST_NAME, 'A15V')
```

For SMITH, the result is smith.

For JONES, the result is jones.

POSITV: Finding the Beginning of a Variable Length Substring

Available Languages: reporting

The POSITV function finds the starting position of a substring within a larger string. For example, the starting position of the substring DUCT in the string PRODUCTION is 4. If the substring is not in the parent string, the function returns the value 0. This is similar to

POSIT; however, the lengths of its *AnV* parameters are based on the actual lengths of those parameters in comparison with two other parameters that specify their sizes.

Find the Beginning of a Variable Length Substring

```
POSITV(source_string, upper_limit, substring, sub_limit, output)
```

where:

source_string

Alphanumeric of type *An* or *AnV*

Is the source string that contains the substring whose position you want to find. It can be the string enclosed in single quotation marks ('), or a field or variable that contains the source string. If it is a field of *AnV* format, its length is taken from the length bytes stored in the field. If the *upper_limit* is smaller than the actual length, the source string is truncated to this upper limit.

upper_limit

Integer

Is a limit for the length of the source string.

substring

Alphanumeric of type *An* or *AnV*

Is the substring whose position you want to find. This can be the substring enclosed in single quotation marks ('), or the field that contains the string. If it is a field, it can have *An* or *AnV* format. If it is a field of type *AnV*, its length is taken from the length bytes stored in the field. If the *sub_limit* is smaller than the actual length, the source string is truncated to this limit.

sub_limit

Integer

Is the limit for the length of the substring.

output

Integer

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks (').

Finding the Starting Position of a Variable Length Pattern

POSITV finds the starting position of a trailing definite or indefinite article in a movie title (such as ", THE" in SMURFS, THE). First TRIMV removes the trailing blanks from the title so that the article will be the trailing pattern:

```

DEFINE FILE MOVIES
  TITLEV/A39V = TRIMV('T',TITLE, 39,' ', 1, TITLEV);
  PSTART/I4 = POSITV(TITLEV,LENV(TITLEV,'I4'), ', ', 1,'I4');
  PLEN/I4 = IF PSTART NE 0 THEN LENV(TITLEV,'I4') - PSTART +1
            ELSE 0;
END
TABLE FILE MOVIES
  PRINT TITLE
    PSTART AS 'Pattern,Start' IN 25
    PLEN AS 'Pattern,Length'
  BY CATEGORY NOPRINT
  WHERE PLEN NE 0
END

```

The output is:

TITLE -----	Pattern Start -----	Pattern Length -----
SMURFS, THE	7	5
SHAGGY DOG, THE	11	5
MALTESE FALCON, THE	15	5
PHILADELPHIA STORY, THE	19	5
TIN DRUM, THE	9	5
FAMILY, THE	7	5
CHORUS LINE, A	12	3
MORNING AFTER, THE	14	5

BIRDS, THE	6	5
BOY AND HIS DOG, A	16	3

POSITV finds the starting position of a comma in TITLEV, which would indicate a trailing definite or indefinite article in a movie title (such as ", THE" in SMURFS, THE). LENV is used to determine the length of title. The result is stored in a column with the format I4:

```
POSITV(TITLEV,LENV(TITLEV,'I4'),',',1,'I4')
```

For “SMURFS, THE”, the result is 7.

For “SHAGGY DOG, THE”, the result is 11.

SUBSTV: Extracting a Variable Length Substring

Available Languages: reporting

The SUBSTV function extracts a substring from a string and is similar to SUBSTR. However, the end position for the string is calculated from the starting position and the substring length. Therefore, it has fewer parameters than SUBSTR. Also, the actual length of the output field, if it is an *AnV* field, is determined based on the substring length.

Extract a Variable Length Substring

```
SUBSTV(upper_limit, source_string, start, sub_limit, output)
```

where:

upper_limit

Integer

Is the limit for the length of the source string.

source_string

Alphanumeric of type *An* or *AnV*

Is the character string that contains the substring you want to extract. It can be the string enclosed in single quotation marks ('), or the field containing the string. If it is a field, it can have *An* or *AnV* format. If it is a field of type *AnV*, its length is taken from the length bytes stored in the field. If *upper_limit* is smaller than the actual length, the source string is truncated to the upper limit. The final length value determined by this comparison is referred to as *p_length* (see the description of the *output* parameter for related information).

start

Integer

Is the starting position of the substring in the source string. The starting position can exceed the source string length, which results in spaces being returned.

sub_limit

Integer

Is the length, in characters, of the substring. Note that the ending position can exceed the input string length depending on the provided values for *start* and *sub_limit*.

output

Alphanumeric of type *An* or *AnV*

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks ('). This field can be in *An* or *AnV* format.

If the format of **output** is *AnV*, and assuming *end* is the ending position of the substring, the actual length, *outlen*, is computed as follows from the values for *end*, *start*, and *p_length* (see the *source_string* parameter for related information):

If $end > p\_length$ or $end < start$, then $outlen = 0$. Otherwise, $outlen = end - start + 1$.

Extracting a Variable Length Substring

The following request extracts a trailing definite or indefinite article from a movie title (such as ", THE" in "SMURFS, THE"). First it trims the trailing blanks so that the article is the trailing pattern. Next it finds the starting position and length of the pattern. Then SUBSTV extracts the pattern and TRIMV trims the pattern from the title:


```

DEFINE FILE MOVIES
  TITLEV/A39V = TRIMV('T',TITLE, 39,' ', 1, TITLEV);
  PSTART/I4 = POSITV(TITLEV,LENV(TITLEV,'I4'),' ',1,'I4');
  PLEN/I4 = IF PSTART NE 0 THEN LENV(TITLEV,'I4') - PSTART +1
            ELSE 0;
  PATTERN/A20V= SUBSTV(39, TITLEV, PSTART, PLEN, PATTERN);
  NEWTIT/A39V = TRIMV('T',TITLEV,39,PATTERN,LENV(PATTERN,'I4'), NEWTIT);
END
TABLE FILE MOVIES
  PRINT TITLE
    PSTART AS 'Pattern,Start' IN 25
    PLEN AS 'Pattern,Length'
    NEWTIT AS 'Trimmed,Title' IN 55
  BY CATEGORY NOPRINT
  WHERE PLEN NE 0
END

```

The output is:

TITLE -----	Pattern Start -----	Pattern Length -----	Trimmed Title -----
SMURFS, THE	7	5	SMURFS
SHAGGY DOG, THE	11	5	SHAGGY DOG
MALTESE FALCON, THE	15	5	MALTESE FALCON
PHILADELPHIA STORY, THE	19	5	PHILADELPHIA STORY
TIN DRUM, THE	9	5	TIN DRUM
FAMILY, THE	7	5	FAMILY
CHORUS LINE, A	12	3	CHORUS LINE
MORNING AFTER, THE	14	5	MORNING AFTER
BIRDS, THE	6	5	BIRDS
BOY AND HIS DOG, A	16	3	BOY AND HIS DOG

SUBSTV extracts the first three characters from the TITLEV and stores the result in a column with the format A20V:

```
SUBSTV(39, TITLEV, 1, 3, 'A20V')
```

For SMURFS, the result is SMU.

For SHAGGY DOG, the result is SHA.

TRIMV: Removing Characters From a String

Available Languages: reporting

The TRIMV function removes leading and/or trailing occurrences of a pattern within a character string. TRIMV is similar to TRIM. However, TRIMV allows the source string and the pattern to be removed to have an AnV format.

TRIMV is useful for converting an An field to an AnV field (with the length in bytes containing the actual length of the data up to the last non-blank character).

Remove Characters From a String

```
TRIMV(trim_where, source_string, upper_limit, pattern, pattern_limit,
output)
```

where:

trim_where

Alphanumeric

Is one of the following, which indicates where to remove the pattern:

'L' removes leading occurrences.

'T' removes trailing occurrences.

'B' removes both leading and trailing occurrences.

source_string

Alphanumeric of type An or AnV

Is the source string to be trimmed. It can be the string enclosed in single quotation marks ('), or the field containing the string. If it is a field, it can have An or AnV format. If it is a field of type AnV, its length is taken from the length in bytes stored in the field. If the *upper_limit* is smaller than the actual length, the source string is truncated to this upper limit.

upper_limit

Integer

Is the upper limit for the length of the source string.

pattern

Alphanumeric of type *An* or *AnV*

Is the pattern to remove from the string, enclosed in single quotation marks ('). If it is a field, it can have *An* or *AnV* format. If it is a field of type *AnV*, its length is taken from the length in bytes stored in the field. If the *pattern_limit* is smaller than the actual length, the pattern is truncated to this limit.

plength_limit

Integer

Is the limit for the length of the pattern.

output

Alphanumeric of type *An* or *AnV*

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks ('). The field can be in *AnV* or *An* format.

If the output format is *AnV*, the length is set to the number of characters left after trimming.

Creating an *AnV* Field by Removing Trailing Blanks

TRIMV creates an *AnV* field named TITLEV by removing trailing blanks from the TITLE value:

```
TABLE FILE MOVIES
PRINT DIRECTOR
COMPUTE TITLEV/A39V = TRIMV('T', TITLE, 39, ' ', 1, TITLEV);
BY CATEGORY
END
```

Here are the first 10 lines of the output:

CATEGORY	DIRECTOR	TITLEV
-----	-----	-----
ACTION	SPIELBERG S.	JAWS
	VERHOVEN P.	ROBOCOP
	VERHOVEN P.	TOTAL RECALL

CHILDREN	SCOTT T.	TOP GUN
	MCDONALD P.	RAMBO III
	BARTON C.	SMURFS, THE
	GEROMINI	SHAGGY DOG, THE
		SCOOBY-DOO-A DOG IN THE RUFF
		ALICE IN WONDERLAND
		SESAME STREET-BEDTIME STORIES AND SONGS

TRIMV removes trailing blanks from TITLE and stores the result in a column with the format A39V:

```
TRIMV('T', TITLE, 39, ' ', 1, 'A39V')
```

UPCASV: Creating a Variable Length Uppercase String

Available Languages: reporting

UPCASV converts alphabetic characters to uppercase, and is similar to UPCASE. However, UPCASV can return *AnV* output whose actual length is the lesser of the actual length of the *AnV* source string and an input parameter that specifies the upper limit.

Create a Variable Length Uppercase String

```
UPCASV(upper_limit, source_string, output)
```

where:

upper_limit

Integer

Is the limit for the length of the source string. It can be a positive constant or a field whose integer portion represents the upper limit.

source_string

Alphanumeric of type *An* or *AnV*

is the string to convert to uppercase. It can be the character string enclosed in single quotation marks ('), or the field containing the character string. If it is a field, it can have *An* or *AnV* format. If it is a field of type *AnV*, its length is taken from the length in bytes stored in the field. If the *upper_limit* is smaller than the actual length, the source string is truncated to the upper limit.

output

Alphanumeric of type *An* or *AnV*

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks ('). This can be a field with *AnV* or *An* format.

If the output format is *AnV*, the length returned is equal to the smaller of the source string length and *upper_limit*.

Creating a Variable Length Uppercase String

Suppose you are sorting on a field that contains both uppercase and mixed-case values. The following request defines a field called LAST_NAME_MIXED that contains both uppercase and mixed-case values:

```
DEFINE FILE EMPLOYEE
  LAST_NAME_MIXED/A15=IF DEPARTMENT EQ 'MIS' THEN LAST_NAME ELSE
  LCWORD(15, LAST_NAME, 'A15');
  LAST_NAME_UPCASV/A15V=UPCASV(5, LAST_NAME_MIXED, 'A15') ;
END
```

Suppose you execute a request that sorts by this field:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME_MIXED AND FIRST_NAME BY LAST_NAME_UPCASV
WHERE CURR_JOBCODE EQ 'B02' OR 'A17' OR 'B04';
END
```

The output is:

LAST_NAME_UPCASV -----	LAST_NAME_MIXED -----	FIRST_NAME -----
BANNI	Banning	JOHN
BLACK	BLACKWOOD	ROSEMARIE
CROSS	CROSS	BARBARA
MCCOY	MCCOY	JOHN
MCKNI	Mcknight	ROGER
ROMAN	Romans	ANTHONY

UPCASEV converts LAST_NAME_MIXED to uppercase and stores the result in a column with the format A15V:

```
UPCASEV(15, LAST_NAME_MIXED, 'A15V5')
```

For Banning, the result is BANNING.

For McKnight, the result is MCKNIGHT.

Character Functions for DBCS Code Pages

The functions in this topic manipulate strings of DBCS and SBCS characters when your configuration uses a DBCS code page.

DCTRAN: Translating A Single-Byte or Double-Byte Character to Another

The DCTRAN function translates a single-byte or double-byte character within a character string to another character based on its decimal value. To use DCTRAN, you need to know the decimal equivalent of the characters in internal machine representation.

The DCTRAN function can translate single-byte to double-byte characters and double-byte to single-byte characters, as well as single-byte to single-byte characters and double-byte to double-byte characters.

Translate a Single-Byte or Double-Byte Character to Another

```
DCTRAN(length, source_string, indecimal, outdecimal, output)
```

where:

length

Double

Is the number of characters in **source_string**.

source_string

Alphanumeric

Is the character string to be translated.

indecimal

Double

Is the ASCII or EBCDIC decimal value of the character to be translated.

outdecimal

Double

Is the ASCII or EBCDIC decimal value of the character to be used as a substitute for *indecimal*.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks (').

Using DCTRAN to Translate Double-Byte Characters

In the following:

```
DCTRAN(8, 'A/A本B語', 177, 70, A8)
```

```
For A/A本B語, the result is AFA本B語.
```

DEDIT: Extracting or Adding Characters

If your configuration uses a DBCS code page, you can use the DEDIT function to extract characters from or add characters to a string.

DEDIT works by comparing the characters in a mask to the characters in a source field. When it encounters a nine (9) in the mask, DEDIT copies the corresponding character from the source field to the new field. When it encounters a dollar sign (\$) in the mask, DEDIT ignores the corresponding character in the source field. When it encounters any other character in the mask, DEDIT copies that character to the corresponding position in the new field.

Extract or Add DBCS or SBCS Characters

```
DEDIT(inlength, source_string, mask_length, mask, output)
```

where:

inlength

Integer

Is the number of *bytes* in *source_string*. The string can have a mixture of DBCS and SBCS characters. Therefore, the number of bytes represents the maximum number of characters possible in the source string.

source_string

Alphanumeric

Is the string to edit enclosed in single quotation marks ('), or the field containing the string.

mask_length

Integer

Is the number of *characters* in the mask.

mask

Alphanumeric

Is the string of mask characters.

Each nine (9) in the mask causes the corresponding character from the source field to be copied to the new field.

Each dollar sign (\$) in the mask causes the corresponding character in the source field to be ignored.

Any other character in the mask is copied to the new field.

output

Alphanumeric

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks (').

Adding and Extracting DBCS Characters

The following example copies alternate characters from the source string to the new field, starting with the first character in the source string, and then adds several new characters at the end of the extracted string:

DEDIT(15, 'あいうえお', 16, '9\$9\$9\$9\$9\$-かきくけこ', 'A30')
 The result is あいうえお-かきくけこ.

The following example copies alternate characters from the source string to the new field, starting with the second character in the source string, and then adds several new characters at the end of the extracted string:

DEDIT(15, 'あいうえお', 16, '\$9\$9\$9\$9\$9-ABCDE', 'A20')
 The result is aueo-ABCDE.

DSTRIP: Removing a Single-Byte or Double-Byte Character From a String

The DSTRIP function removes all occurrences of a specific single-byte or double-byte character from a string. The resulting character string has the same length as the original string, but is padded on the right with spaces.

Remove a Single-Byte or Double-Byte Character From a String

```
DSTRIP(length, source_string, char, output)
```

where:

length

Double

Is the number of characters in *source_string* and *outfield*.

source_string

Alphanumeric

Is the string from which the character will be removed.

char

Alphanumeric

Is the character to be removed from the string. If more than one character is provided, the left-most character will be used as the strip character.

i Note: To remove single quotation marks, use two consecutive quotation marks. You must then enclose this character combination in single quotation marks.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks (').

Removing a Double-Byte Character From a String

In the following:

```
DSTRIP(9, 'A日A本B語', '日', A9)
```

```
For A日A本B語, the result is AA本B語.
```

DSUBSTR: Extracting a Substring

If your configuration uses a DBCS code page, you can use the DSUBSTR function to extract a substring based on its length and position in the source string.

Extract a Substring

```
DSUBSTR(inlength, source_string, start, end, sublength, output)
```

where:

inlength

Integer

Is the length of the source string in *bytes*, or a field that contains the length. The string can have a mixture of DBCS and SBCS characters. Therefore, the number of bytes represents the maximum number of characters possible in the source string.

source_string

Alphanumeric

Is the string from which the substring will be extracted enclosed in single quotation marks ('), or the field containing the parent string.

start

Integer

Is the starting position (in number of *characters*) of the substring in the source string. If this argument is less than one or greater than the *end*, the function returns spaces.

end

Integer

Is the ending position (in number of *characters*) of the substring. If this argument is less than *start* or greater than *inlength*, the function returns spaces.

sublength

Integer

Is the length of the substring, in *characters* (normally $end - start + 1$). If the *sublength* is longer than $end - start + 1$, the substring is padded with trailing spaces. If it is shorter, the substring is truncated. This value should be the declared length of *output*. Only *sublength* characters will be processed.

output

Alphanumeric

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks (').

Extracting a Substring

The following example extracts the 3-character substring in positions 4 through 6 from a 15-byte string of characters:

```
DSUBSTR( 15, 'あいいうえお', 4, 6, 3, 'A10')
The result is いう.
```

JPTRANS: Converting Japanese Specific Characters

The JPTRANS function converts Japanese specific characters.

Convert Japanese Specific Characters

```
JPTRANS ('type_of_conversion', length, source_string, 'output_format')
```

where:

type_of_conversion

Is one of the following options indicating the type of conversion you want to apply to Japanese specific characters. The following table shows the single component input types:

Conversion Type	Description
'UPCASE '	Converts Zenkaku (Fullwidth) alphabets to Zenkaku uppercase.
'LOCASE '	Converts Zenkaku alphabets to Zenkaku lowercase.
'HNZNALPHA '	Converts alphanumerics from Hankaku (Halfwidth) to Zenkaku.
'HNZNSIGN '	Converts ASCII symbols from Hankaku to Zenkaku.
'HNZNKANA '	Converts Katakana from Hankaku to Zenkaku.
'HNZNSPACE '	Converts space (blank) from Hankaku to Zenkaku.
'ZHNHALPHA '	Converts alphanumerics from Zenkaku to Hankaku.
'ZHNHSIGN '	Converts ASCII symbols from Zenkaku to Hankaku.
'ZHNHKANA '	Converts Katakana from Zenkaku to Hankaku.
'ZHNHSPACE '	Converts space from Zenkaku to Hankaku.
'HIRAKATA '	Converts Hiragana to Zenkaku Katakana.

Conversion Type	Description
'KATAHIRA'	Converts Zenkaku Katakana to Hiragana.
'930T0939'	Converts codepage from 930 to 939.
'939T0930'	Converts codepage from 939 to 930.

length

Integer

Is the number of characters in the source_string.

source_string

Alphanumeric

Is the string to convert.

output_format

Alphanumeric

Is the name of the field that contains the output, or the format enclosed in single quotation marks (').

Using the JPTRANS Function

```
JPTRANS('UPCASE', 20, Alpha_DBCS_Field, 'A20')
```

```
For a b c , the result is A B C .
```

```
JPTRANS('LOCASE', 20, Alpha_DBCS_Field, 'A20')
```

```
For A B C , the result is a b c .
```

```
JPTRANS('HNZNALPHA', 20, Alpha_SBCS_Field, 'A20')
```

For AaBbCc123, the result is A a B b C c 1 2 3.

```
JPTRANS('HNZNSIGN', 20, Symbol_SBCS_Field, 'A20')
```

For !@\$%.,?, the result is ! @ \$ %、 。 ?

```
JPTRANS('HNZNKANA', 20, Hankaku_Katakana_Field, 'A20')
```

For 「^ -ｽｯ -ﾙ。 」, the result is 「ベースボール。 」

```
JPTRANS('HNZNSPACE', 20, Hankaku_Katakana_Field, 'A20')
```

For ｱｲｳ, the result is ｱ ﾐ ｳ

```
JPTRANS('ZHNHALPHA', 20, Alpha_DBCS_Field, 'A20')
```

For A a B b C c 1 2 3, the result is AaBbCc123.

```
JPTRANS('ZHNHSIGN', 20, Symbol_DBCS_Field, 'A20')
```

For ! @ \$ %、 。 ? , the result is !@\$%、.?

```
JPTRANS('ZHNKANA', 20, Zenkaku_Katakana_Field, 'A20')
```

For 「ベースボール。 」, the result is 「^ -ｽｯ -ﾙ。 」

```
JPTRANS('ZHNSPACE', 20, Zenkaku_Katakana_Field, 'A20')
```

For ｱ ﾐ ｳ, the result is ｱｲｳ


```
JPTRANS('HIRAKATA', 20, Hiragana_Field, 'A20')
```

For あいう, the result is アイウ

```
JPTRANS('KATAHIRA', 20, Zenkaku_Katakana_Field, 'A20')
```

For アイウ, the result is あいう

In the following, codepoints 0x62 0x63 0x64 are converted to 0x81 0x82 0x83, respectively:

```
JPTRANS('930T0939', 20, CP930_Field, 'A20')
```

In the following, codepoints 0x59 0x62 0x63 are converted to 0x81 0x82 0x83, respectively:

```
JPTRANS('939T0930', 20, CP939_Field, 'A20')
```

Usage Notes for the JPTRANS Function

- HNZNSIGN and ZNHNSIGN focus on the conversion of symbols.

Many symbols have a one-to-one relation between Japanese Fullwidth characters and ASCII symbols, whereas some characters have one-to-many relations. For example, the Japanese punctuation character (U+3001) and Fullwidth comma , (U+FF0C) will be converted to the same comma , (U+002C). The following EXTRA rule for those special cases is shown below:

HNZNSIGN:

- Double Quote " (U+0022) -> Fullwidth Right Double Quote ” (U+201D)
- Single Quote ' (U+0027) -> Fullwidth Right Single Quote ’ (U+2019)
- Comma , (U+002C) -> Fullwidth Ideographic Comma (U+3001)
- Full Stop . (U+002E) -> Fullwidth Ideographic Full Stop 。（U+3002）
- Backslash \ (U+005C) -> Fullwidth Backslash \ (U+FF3C)
- Halfwidth Left Corner Bracket (U+FF62) -> Fullwidth Left Corner Bracket

(U+300C)

- Halfwidth Right Corner Bracket (U+FF63) -> Fullwidth Right Corner Bracket (U+300D)
- Halfwidth Katakana Middle Dot ? (U+FF65) -> Fullwidth Middle Dot · (U+30FB)

ZNHNSIGN:

- Fullwidth Right Double Quote ” (U+201D) -> Double Quote " (U+0022)
 - Fullwidth Left Double Quote “ (U+201C) -> Double Quote " (U+0022)
 - Fullwidth Quotation " (U+FF02) -> Double Quote " (U+0022)
 - Fullwidth Right Single Quote ’ (U+2019) -> Single Quote ' (U+0027)
 - Fullwidth Left Single Quote ‘ (U+2018) -> Single Quote ' (U+0027)
 - Fullwidth Single Quote ' (U+FF07) -> Single Quote ' (U+0027)
 - Fullwidth Ideographic Comma (U+3001) -> Comma , (U+002C)
 - Fullwidth Comma , (U+FF0C) -> Comma , (U+002C)
 - Fullwidth Ideographic Full Stop ? (U+3002) -> Full Stop . (U+002E)
 - Fullwidth Full Stop . (U+FF0E) -> Full Stop . (U+002E)
 - Fullwidth Yen Sign ¥ (U+FFE5) -> Yen Sign ¥ (U+00A5)
 - Fullwidth Backslash \ (U+FF3C) -> Backslash \ (U+005C)
 - Fullwidth Left Corner Bracket (U+300C) -> Halfwidth Left Corner Bracket (U+FF62)
 - Fullwidth Right Corner Bracket (U+300D) -> Halfwidth Right Corner Bracket (U+FF63)
 - Fullwidth Middle Dot · (U+30FB) -> Halfwidth Katakana Middle Dot · (U+FF65)
- HNZNKANA and ZHNKANA focus on the conversion of Katakana
- They convert not only letters, but also punctuation symbols on the following list:
- Fullwidth Ideographic Comma (U+3001) <-> Halfwidth Ideographic Comma (U+FF64)
 - Fullwidth Ideographic Full Stop (U+3002) <-> Halfwidth Ideographic Full Stop (U+FF61)

- Fullwidth Left Corner Bracket (U+300C) <-> Halfwidth Left Corner Bracket (U+FF62)
- Fullwidth Right Corner Bracket (U+300D) <-> Halfwidth Right Corner Bracket (U+FF63)
- Fullwidth Middle Dot · (U+30FB) <-> Halfwidth Katakana Middle Dot · (U+FF65)
- Fullwidth Prolonged Sound (U+30FC) <-> Halfwidth Prolonged Sound (U+FF70)
- JPTRANS can be nested for multiple conversions.

For example, text data may contain fullwidth numbers and fullwidth symbols. In some situations, they should be cleaned up for ASCII numbers and symbols.

For バンゴウ# 1 2 3 , the result is バンゴウ#123

```
JPTRANS('ZHNHALPHA', 20, JPTRANS('ZHNHNSIGN', 20, Symbol_DBCS_Field, 'A20'), 'A20')
```

- HNZNSPACE and ZHNHNSPACE focus on the conversion of a space (blank character). Currently only conversion between U+0020 and U+3000 is supported.

KKFCUT: Truncating a String

If your configuration uses a DBCS code page, you can use the KKFCUT function to truncate a string.

Truncate a String

```
KKFCUT(length, source_string, output)
```

where:

length

Integer

Is the length of the source string in *bytes*, or a field that contains the length. The string can have a mixture of DBCS and SBCS characters. Therefore, the number of bytes represents the maximum number of characters possible in the source string.

source_string

Alphanumeric

Is the string that will be truncated enclosed in single quotation marks ('), or the field containing the string.

output

Alphanumeric

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks (').

The string will be truncated to the number of bytes in the output field.

Truncating a String

In the following, KKFCUT truncates the COUNTRY field (up to 10 bytes long) to A4 format:

```
COUNTRY_CUT/A4 = KKFCUT(10, COUNTRY, 'A4');
```

The output in ASCII environments is shown in the following image:

国名	COUNTRY_CUT
-----	-----
イギリス	イギ
日本	日本
イタリア	イタ
ドイツ	ドイ
フランス	フラ

The output in EBCDIC environments is shown in the following image:

国名	COUNTRY_CUT
イギリス	イ
日本	日
イタリア	イ
ドイツ	ド
フランス	フ

SFTDEL: Deleting the Shift Code From DBCS Data

If your configuration uses a DBCS code page, you can use the SFTDEL function to delete the shift code from DBCS data.

Delete the Shift Code From DBCS Data

```
SFTDEL(source_string, length, output)
```

where:

source_string

Alphanumeric

Is the string from which the shift code will be deleted enclosed in single quotation marks ('), or the field containing the string.

length

Integer

Is the length of the source string in *bytes*, or a field that contains the length. The string can have a mixture of DBCS and SBCS characters. Therefore, the number of bytes represents the maximum number of characters possible in the source string.

output

Alphanumeric

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks (').

Deleting the Shift Code From a String

In the following, SFTDEL deleted the shift code from the COUNTRY field (up to 10 bytes long):

```
COUNTRY_DEL/A10 = SFTDEL(COUNTRY, 10, 'A10');
```

The output in ASCII environments is shown in the following image:

国名	COUNTRY_DEL
イギリス	イギリス
日本	日本
イタリア	イタリア
ドイツ	ドイツ
フランス	フランス

The output in EBCDIC environments is shown in the following image:

国名	COUNTRY_DEL
イギリス	「b「A「メ「ヌ
日本	イ、カ
イタリア	「b「j「メ「a
ドイツ	「「b「」
フランス	「ホ「「」「ヌ

SFTINS: Inserting the Shift Code Into DBCS Data

If your configuration uses a DBCS code page, you can use the SFTINS function to insert the shift code into DBCS data.

Insert the Shift Code Into DBCS Data

```
SFTINS(source_string, length, output)
```

where:

source_string

Alphanumeric

Is the string into which the shift code will be inserted enclosed in single quotation marks ('), or the field containing the string.

length

Integer

Is the length of the source string in *bytes*, or a field that contains the length. The string can have a mixture of DBCS and SBCS characters. Therefore, the number of bytes represents the maximum number of characters possible in the source string.

output

Alphanumeric

Is the field to which the result is returned, or the format of the output value enclosed in single quotation marks (').

SFTINS: Inserting the Shift Code Into a String

In the following example, SFTINS inserts the shift code into the COUNTRY_DEL field (which is the COUNTRY field with the shift code deleted):

```
COUNTRY_INS/A10 = SFTINS(COUNTRY_DEL, 10, 'A10');
```

The output displays the original COUNTRY field, the COUNTRY_DEL field with the shift code deleted, and the COUNTRY_INS field with the shift code re-inserted.

The output in ASCII environments, is shown in the following image:

国名	COUNTRY_DEL	COUNTRY_INS
-----	-----	-----
イギリス	イギリス	イギリス
日本	日本	日本
イタリア	イタリア	イタリア
ドイツ	ドイツ	ドイツ
フランス	フランス	フランス

The output in EBCDIC environments is shown in the following image:

国名	COUNTRY_DEL	COUNTRY_INS
-----	-----	-----
イギリス	「b「A「メ「ヌ	イギリス
日本	イ、カ	日本
イタリア	「b「j「メ「a	イタリア
ドイツ	「「b「l	ドイツ
フランス	「ホ「「「「ヌ	フランス

Maintain-specific Character Functions

Character functions manipulate alphanumeric fields or character strings. The functions in this topic are available only in the WebFOCUS Maintain language. There are additional character functions that are available in both the reporting and Maintain languages. For information on these functions, see [Character Functions](#).

CHAR2INT: Translating a Character Into an Integer Value

The CHAR2INT function translates an ASCII or EBCDIC character to the integer value it represents, depending on the operating system.

Translate a Character Into an Integer Value

```
CHAR2INT("character")
```

where:

character

Is the ASCII or EBCDIC character to translate into its integer value.

Translating a Character Into an Integer Value

CHAR2INT translates the character X into its integer equivalent.

```
MAINTAIN  
INT/I3=CHAR2INT("X");  
type "INT IS <INT";  
END
```

On an ASCII platform, the integer value would be 120.

On an EBCDIC platform, the integer value would be 231.

INT2CHAR: Translating an Integer Value Into a Character

The INT2CHAR function translates an integer into the equivalent ASCII or EBCDIC character, depending on the operating system.

Translate an Integer Value Into a Character

```
INT2CHAR(value)
```

where:

value

Is the integer to translate into its equivalent ASCII or EBCDIC character.

Translating an Integer Value Into a Character

INT2CHAR translates the integer value 93 into its character equivalent.

```
MAINTAIN  
CHAR/A1=INT2CHAR(93);  
TYPE "CHAR IS <CHAR";  
END
```

On an ASCII platform, the result would be a right bracket (]). On an EBCDIC platform, the result would be a right parenthesis.)

LCWORD and LCWORD2: Converting a Character String to Mixed-Case

The LCWORD and LCWORD2 functions convert the letters in a character string to mixed-case. These functions convert character strings in the following way:

- **LCWORD.** Converts every alphanumeric character to lowercase except the first letter of each new word and the first letter after a single or double quotation mark. For example, O'CONNOR is converted to O'Connor and JACK'S to Jack'S.

If LCWORD encounters a number in the character string, it treats it as an uppercase character and continues to convert the following alphabetic characters to lowercase.

- **LCWORD2.** Converts every alphanumeric character to lowercase except the first letter of each new word. LCWORD2 leaves any character after a single quotation mark as upper case, except that when there is at least one non-blank character before the quote and just one character followed by either the end of the string or a space immediately after the quote, the next letter is converted to lowercase. For example, 'O'CONNOR' would be changed to 'O'Connor,' and JACK'S would be changed to Jack's.

To use these functions, you must import the function library MNTUWS. For information on importing this library, see [Accessing and Calling a Function](#).

There is also an LCWORD function available for both the reporting and Maintain languages. For information on this function, see [Character Functions](#).

Convert a Character String to Mixed-Case

```
{LCWORD|LCWORD2}(string)
```

where:

string

Alphanumeric

Is the character string to be converted, or a temporary field that contains the string.

Converting a Character String to Mixed-Case

LCWORD and LCWORD2 convert the string O'CONNOR to mixed-case:

```
MAINTAIN FILE CAR
MODULE IMPORT (MNTUWS)
COMPUTE MYVAL1/A10="O'CONNOR";
  COMPUTE LC1/A10 = LCWORD(MYVAL1);
  COMPUTE LC2/A10 = LCWORD2(MYVAL1);
  TYPE "<<MYVAL1 <<LC1 <<LC2"
END
```

The output is:

MYVAL1	LC1	LC2
-----	---	---
O'CONNOR	O' Connor	O'connor

LENGTH: Determining the Length of a Character String

The LENGTH function determines the length of a character string, including trailing spaces.

Determine the Length of a Character String

```
LENGTH(string)
```

where:

string

Alphanumeric

Is the character string whose length is to be found, or a temporary field that contains the string.

Determining the Length of a Character String

LENGTH determines the length of a variable in COUNTRY:

```
MAINTAIN FILE CAR
MODULE IMPORT (MNTUWS)
NEXT COUNTRY INTO STK1
COMPUTE LEN/I3 = LENGTH(STK1(1).COUNTRY);
TYPE "<STK1(1).COUNTRY HAS A LENGTH OF <<LEN"
END
```

The result is:

```
ENGLAND HAS A LENGTH OF 10
```

LJUST: Left-Justifying a Character String (Maintain)

The LJUST function left-justifies a character string within a field. All leading spaces are removed.

LJUST will not have any visible effect in a report that uses StyleSheets (SET STYLE=ON) unless you center the item.

To use this function, you must import the function library MNTUWS. For information on importing this library see [Accessing and Calling a Function](#).

There is also an LJUST function available for the reporting language. For information on this function, see [Character Functions](#).

Left-Justify a Character String

```
LJUST(string)
```

where:

string

Alphanumeric

Is the character string to be justified, or a temporary field that contains the string.

LOWER: Converting a Character String to Lowercase

The LOWER function converts a character string to lowercase.

To use this function, you must import the function library MNTUWS. For more information on importing this library see [Accessing and Calling a Function](#).

Convert a Character String to Lowercase

```
LOWER(string)
```

where:

string

Alphanumeric

Is the character string to be converted, or a temporary field that contains the string.

MASK: Extracting or Adding Characters

The MASK function extracts characters from or adds characters to an alphanumeric string. It can extract a substring from different parts of the parent string, and can insert characters from a parent string into another substring. For example, it can extract the first two characters and the last two characters of a string to form a single substring.

MASK works by comparing the characters in a mask to the characters in a source field. When it encounters a 9 in the mask, MASK copies the corresponding character from the source field to the new field. When it encounters a dollar sign in the mask, MASK ignores

the corresponding character in the source field. When it encounters any other character in the mask, MASK copies that character to the corresponding position in the new field.

MASK replaces the masking functionality of the EDIT function that is available in the reporting language.

Extract or Add Characters

```
MASK(fieldname, 'mask')
```

where:

fieldname

Is the source field.

mask

Is a character string enclosed in single quotation marks, or a temporary field that contains the string.

Extracting a Character From a Field

MASK extracts the first initial from the FIRST_NAME field:

```
MASK(FIRST_NAME, '9$$$$$$$$$')
```

The following are sample values for FIRST_NAME and the values for the result of the MASK function:

FIRST_NAME -----	MASK_FIRST_NAME -----
MARY	M
DIANE	D
JOHN	J
ROSEMARIE	R
MARY	M
BARBARA	B

Adding Dashes to a Field

MASK adds dashes to the EMP_ID field:

```
MASK(EMP_ID, '999-99-9999')
```

The following are sample values for EMP_ID and the values for the result of the MASK function:

EMP_ID	MASK_EMP_ID
112847612	112-84-7612
117593129	117-59-3129
219984371	219-98-4371
326179357	326-17-9357
543729165	543-72-9165
818692173	818-69-2173

MNTGETTOK: Extracting Tokens From a String Function

The Maintain function MNTGETTOK divides a character string into substrings, called tokens. In order to use MNTGETTOK, the data must have a specific character called a delimiter that occurs in the string and separates the string into tokens. MNTGETTOK returns the token specified by the **token_number** argument.

For example, you can use MNTGETTOK to extract individual values from a list separated by semi-colons, by designating the semi-colon as the delimiter.

To use this function, you must import the function library MNTUWS.

Note:

- The Maintain function called strtok() returns only the first token from a string.
- MNTGETTOK can work with variable length character strings (format A0).

Extract a Substring (Token)

```
Module Import(mntuws)
MNTGETTOK(infield,"delim",token_number)
```

where:

infield

Alphanumeric

Is the field containing the original character string or a character string enclosed in single or double quotation marks.

delim

Alphanumeric

Is the delimiter in the parent string enclosed in single or double quotation marks. If you specify more than one character, only the first character is used. The delimiter is not included in the token.

token_number

Integer

Is the number of the token to extract. If this argument is positive, the tokens are counted from left to right. If this argument is negative, the tokens are counted from right to left. For example, -2 extracts the second token from the right. If this argument is 0, the function returns spaces.

Extracting Tokens From a String

MNTGETTOK extracts tokens from the variable length character string SKILLSTRING and stores the result in the variable length character string TOKENX. The delimiter is a blank space. The token number is based on the value of the counter variable i, which increments with each pass through the Repeat loop:

```
MAINTAIN
MODULE IMPORT(MNTUWS)
SKILLSTRING/A0="Typing Steno Filing Bkkping";
COMPUTE i/i2 = 1;
```

```

TYPE "Job skills required are:"
REPEAT 6
COMPUTE TOKENX/A0=MNTGETTOK(SKILLSTRING, ' ', i );
TYPE "<<TOKENX";
COMPUTE i = i+1;
ENDREPEAT
END

```

The output is:

```

Job skills required are:
Typing
Steno
Filing
Bkkiping

```

Extracting the Zip Code From an Address

The following procedure against the EMPLOYEE data source retrieves the EMPINFO segment and the first instance of ADDRESS_LN3 for each employee, then extracts the last token (zip code) from ADDRESS_LN3:

```

MAINTAIN FILE EMPLOYEE
MODULE IMPORT(MNTUWS)
REPEAT ALL;
NEXT EMP_ID INTO ESTACK
IF FOCFETCH NE 0 THEN GOTO EXITREPEAT;
NEXT ADDRESS_LN3 INTO ASTACK
TYPE "<<ESTACK.FIRST_NAME <<ESTACK.LAST_NAME";
TYPE "<<ASTACK.ADDRESS_LN3";
COMPUTE ZIP/A0=MNTGETTOK(ASTACK.ADDRESS_LN3, " ", -1 );
TYPE "ZIP CODE IS: <<ZIP";
TYPE " ";
ENDREPEAT
END

```

The output is:

```

ALFRED      STEVENS
NEW YORK NY 10001
ZIP CODE IS: 10001

```

MARY SMITH
NEW YORK NY 10001
ZIP CODE IS: 10001

DIANE JONES
NEW YORK NY 10001
ZIP CODE IS: 10001

RICHARD SMITH
NEW YORK NY 10001
ZIP CODE IS: 10001

JOHN BANNING
FREEPORT NY 11520
ZIP CODE IS: 11520

JOAN IRVING
NEW YORK NY 10001
ZIP CODE IS: 10001
ANTHONY ROMANS
NEW YORK NY 10001
ZIP CODE IS: 10001

JOHN MCCOY
NEW YORK NY 10001
ZIP CODE IS: 10001

ROSEMARIE BLACKWOOD
NEW YORK NY 10001
ZIP CODE IS: 10001

ROGER MCKNIGHT
NEW YORK NY 10001
ZIP CODE IS: 10001

MARY GREENSPAN
NEW YORK NY 10001
ZIP CODE IS: 10001

BARBARA CROSS
NEW YORK NY 10001
ZIP CODE IS: 10001

NLSCHR: Converting Characters From the Native English Code Page

NLSCHR converts a character from the native English code page to the running code page. This is useful when hosting Web applications on an EBCDIC host with non-English code pages.

Convert Characters From the Native English Code Page

```
NLSCHR("character")
```

where:

character

Is the character being converted from the native English code page.

Converting Characters From the Native English Code Page

NLSCHR forces the dollar sign to appear whenever the variable ADOLLAR is used, regardless of the code page being run.

```
MAINTAIN  
ADOLLAR/A1=NLSCHR("$");  
.  
.  
.  
END
```

OVERLAY: Overlaying a Character String (Maintain)

The OVERLAY function overlays a base character string with a substring.

To use this function, you must import the function library MNTUWS. For information on importing this library, see [Accessing and Calling a Function](#).

There is also an OVERLAY function available for the reporting language. For information on this function, see [Character Functions](#).

Overlay a Character String

```
OVERLAY(string1, string2, position)
```

where:

string1

Alphanumeric

Is the base character string.

string2

Alphanumeric

Is the substring that will overlay *string1*.

position

Integer

Is the position in the base string at which the overlay begins.

Overlaying a Character String

OVERLAY replaces the letters MCA in the MOVIECODE field with MHD:

```

MAINTAIN FILE movies
Module Import (mntuws);
Case Top
Infer moviecode into MCASTK
Compute MCASTK.NEWCODE/A6;
For all next Moviecode into stk1
Stack copy from stk1 into MCASTK
  where moviecode contains 'MCA';
Compute i/i2=1;
Type "Original Code    New Code"
repeat mcastk.Foccount
  Compute MCASTK(i).Newcode = OVRLAY(MCASTK(I).MOVIECODE, 'MHD', 4);
  Type " <<MCASTK(i).moviecode          <<MCASTK(I).NEWCODE"
  Compute i=i+1;
endrepeat
EndCase
END

```

The following are sample values for MOVIECODE and the values for the result of the OVRLAY function:

Original Code	New Code
001MCA	001MHD
081MCA	081MHD
082MCA	082MHD
161MCA	161MHD
196MCA	196MHD
530MCA	530MHD
550MCA	550MHD
883MCA	883MHD

POSIT: Finding the Beginning of a Substring (Maintain)

The POSIT function finds the starting position of a substring within a larger string. For example, the starting position of the substring DUCT in the string PRODUCTION is 4. If the substring is not in the parent string, the function returns the value 0.

To use this function, you must import the function library MNTUWS. For information on importing this library see [Accessing and Calling a Function](#).

There is also a POSIT function available for the reporting language. For information on this function, see [POSIT: Finding the Beginning of a Substring](#).

Find the Beginning of a Substring

```
POSIT(parent, substring)
```

where:

parent

Alphanumeric

Is the parent string.

substring

Alphanumeric

Is the substring for which to find the position.

Finding the Beginning of a Substring

POSIT displays all movie titles containing the word ROOF and the starting position of the ROOF string:

```
MAINTAIN FILE movies
Module Import (mntuws);
Case Top
For all next Moviecode into stk1
  Where Title Contains 'ROOF';
Compute i/i2=1;
type "      Title          Start Position of word ROOF"
repeat stk1.Foccount
  Compute STK1(i).POS/I3 = POSIT(STK1(I).TITLE, 'ROOF');;
  Type "  <STK1(i).Title  <<STK1(I).pos"
  Compute i=i+1;
endrepeat
EndCase
END
```

The following are sample values for MOVIECODE and values for the result of the POSIT function:

Title	Start Position of word ROOF
FIDDLER ON THE ROOF	16
CAT ON A HOT TIN ROOF	18

RJUST: Right-Justifying a Character String (Maintain)

The RJUST function right-justifies a character string. All trailing blanks become leading blanks. This is useful when you display alphanumeric fields containing numbers.

RJUST does not have any visible effect in a report that uses StyleSheets (SET STYLE=ON) unless you center the item. Also, if you use RJUST on a platform on which StyleSheets are turned on by default, issue SET STYLE=OFF before running the request.

There is also an RJUST function available for the reporting language. For information on this function, see [RJUST: Right-Justifying a Character String](#).

Right-Justify a Character String

```
RJUST(string, length, char)
```

where:

string

Is the character string, or a temporary field that contains the string.

length

Is the length, in characters, of the result. If this argument is less than the length of the string, RJUST trims the *string* from right to left. If this argument is zero, RJUST returns a variable length string of length zero.

char

Is the character with which to pad the character string and right-justify it. RJUST uses *char* only when the *length* is greater than the length of the *string*.

SELECTS: Decoding a Value From a Stack

The SELECTS function decodes a value from a stack.

Decode a Value From a Stack

```
target SELECTS (code, result, code, result, ... [ELSE default])
```

where:

target

Is a valid expression. It can be either a field name or a variable that resolves to a single stack cell.

code

Is the value for which SELECTS searches. Once the value is found, the input expression is assigned the corresponding result. The comma between the code and the result is optional.

result

Is the value assigned when the input expression has the corresponding code.

default

Is the value to be assigned if the code is not found among the list of codes. If the default is omitted, a space or zero is assigned to non-matching codes.

Decoding Values With SELECTS

The following computes a user-defined field based on the values in a stack:

```
COMPUTE Square = Stk(Cnt).Number SELECTS (1 1, 2 4, 3 9);
```

Because SELECTS is a binary operator, it can also be used in an expression:

```
COMPUTE Square_Plus = Stk(Cnt).Number SELECTS (1 1, 2 4, 3 9) +1;
```

Decoding a Value From a Stack

The following example uses MASK to extract the first character of the field CURR_JOBCODE in the EMPLOYEE file. Then SELECTS creates a value for the field JOB_CATEGORY:

```
MAINTAIN FILE Employee
Case Top
  FOR ALL NEXT EMPINFO.EMP_ID INTO EmpStack;
  COMPUTE
    DEPX_CODE/A1      = MASK(EmpStack().CURR_JOBCODE, '9$$');
    JOB_CATEGORY/A15 = DEPX_CODE SELECTS (A 'ADMINISTRATIVE'
      B 'DATA PROCESSING') ;
EndCase
END
```

The following table shows sample values for CURR_JOBCODE and the corresponding values for JOB_CATEGORY:

CURR_JOBCODE	JOB_CATEGORY
-----	-----
A01	ADMINISTRATIVE
A07	ADMINISTRATIVE
A15	ADMINISTRATIVE
A17	ADMINISTRATIVE
B02	DATA PROCESSING
B03	DATA PROCESSING
B04	DATA PROCESSING
B14	DATA PROCESSING

STRAN: Substituting One Substring for Another

The STRAN function substitutes a substring for another substring in a character string. STRAN enables you to edit part of a character string without replacing the field entirely.

To use this function, import the function library MNTUWS. For more information on importing this library see [Calling a Function](#).

Substitute a Substring

```
STRAN(string, substr1, substr2)
```

where:

string

Alphanumeric

Is the character string into which you want to substitute one substring for another, or a temporary field that contains the string.

substr1

Alphanumeric

Is the substring to replace.

substr2

Alphanumeric

Is the substring to insert in place of *substr1*.

Substituting One String for Another

STRAN replaces the word DOOR with the word Seater in the MODEL field:

```
MAINTAIN FILE CAR  
MODULE IMPORT (MNTUWS);  
FOR ALL NEXT COUNTRY CAR MODEL INTO XSTK
```

```

WHERE MODEL CONTAINS 'DOOR'
COMPUTE XSTK.NEWMOD/A24;
COMPUTE I/I2=1;
REPEAT XSTK.FOCCOUNT
  COMPUTE XSTK(I).NEWMOD=STRAN(XSTK(I).MODEL, 'DOOR', 'SEATER');
  TYPE "<<XSTK(I).CAR <<XSTK(I).MODEL <<XSTK(I).NEWMOD"
  COMPUTE I=I+1;
ENDREPEAT
END

```

The following are sample values for MODEL and values for the result of the STRAN function:

CAR ---	MODEL -----	STRAN -----
PEUGEOT	504 4 DOOR	504 4 SEATER
ALFA ROMEO	2000 4 DOOR BERLINA	2000 4 SEATER BERLINA
MASERATI	DORA 2 DOOR	DORA 2 SEATER
DATSUN	B210 2 DOOR AUTO	B210 2 SEATER AUTO
TOYOTA	COROLLA 4 DOOR DIX AUTO	COROLLA 4 SEATER DIX AUT
AUDI	100 LS 2 DOOR AUTO	100 LS 2 SEATER AUTO
BMW	2002 2 DOOR	2002 2 SEATER
BMW	2002 2 DOOR AUTO	2002 2 SEATER AUTO
BMW	3.0 SI 4 DOOR	3.0 SI 4 SEATER
BMW	3.0 SI 4 DOOR AUTO	3.0 SI 4 SEATER AUTO
BMW	530I 4 DOOR	530I 4 SEATER
BMW	530I 4 DOOR AUTO	530I 4 SEATER AUTO

STRCMP: Comparing Character Strings

The STRCMP function compares two character strings using the EBCDIC or ASCII collating sequence.

- If the first string is less than the second string, STRCMP returns a negative value.
- If the first string is greater than the second string, STRCMP returns a positive value.
- If the first string is equal to the second string, STRCMP returns zero.

Compare Character Strings

```
STRCMP(string1, string2)
```

where:

string1, string2

Alphanumeric

Are the strings to compare, or temporary fields that contain the strings.

Comparing Character Strings

STRCMP compares the length of two fields:

```
MAINTAIN
COMPUTE STR1/A20 = 'STRING IS LONG';
      STR2/A20 = 'STRING IS LONGER';
COMPUTE DIF/I3= STRCMP(STR1, STR2);
TYPE "STR1 = <<STR1"
TYPE "STR2 = <<STR2"
```

```
IF DIF LT 0 THEN TYPE "STR2 IS GREATER THAN STR1"
ELSE IF DIF GT 0 THEN TYPE "STR2 IS LESS THAN STR1"
ELSE IF DIF EQ 0 THEN TYPE "STR2 EQUALS STR1"
TYPE " "
```

```
COMPUTE STR3/A20 = 'STRING IS LONGEST';
      STR4/A20 = 'STRING IS LONG';
TYPE "STR3 = <<STR3"
TYPE "STR4 = <<STR4"
COMPUTE DIF= STRCMP(STR3, STR4);
IF DIF LT 0 THEN TYPE "STR4 IS GREATER THAN STR3"
ELSE IF DIF GT 0 THEN TYPE "STR4 IS LESS THAN STR3"
ELSE IF DIF EQ 0 THEN TYPE "STR4 EQUALS STR3"
TYPE " "
COMPUTE DIF= STRCMP(STR1, STR4);
IF DIF LT 0 THEN TYPE "STR1 IS GREATER THAN STR4"
ELSE IF DIF GT 0 THEN TYPE "STR1 IS LESS THAN STR4"
```

```
ELSE IF DIF EQ 0 THEN TYPE "STR1 EQUALS STR4"  
END
```

The result is:

```
STR1 = STRING IS LONG  
STR2 = STRING IS LONGER  
STR2 IS GREATER THAN STR1
```

```
STR3 = STRING IS LONGEST  
STR4 = STRING IS LONG  
STR4 IS LESS THAN STR3
```

```
STR1 EQUALS STR4
```

STRICMP: Comparing Character Strings and Ignoring Case

The STRICMP function compares two character strings using the EBCDIC or ASCII collating sequence, but ignores case differences.

- If the first string is less than the second string, STRICMP returns a negative value.
- If the first string is greater than the second string, STRICMP returns a positive value.
- If the first string is equal to the second string, STRICMP returns zero.

Compare Character Strings and Ignore Case

```
STRICMP(string1, string2)
```

where:

string1, string2

Alphanumeric

Are the strings to compare, or temporary fields that contain the strings.

STRNCMP: Comparing Character Substrings

The STRNCMP function compares a specified number of characters in two character strings starting at the beginning of the strings using the EBCDIC or ASCII collating sequence.

- If the first string is less than the second string, STRNCMP returns a negative value.
- If the first string is greater than the second string, STRNCMP returns a positive value.
- If the first string is equal to the second string, STRNCMP returns zero.

Compare Character Substrings

```
STRNCMP(string1, string2, number)
```

where:

string1, string2

Alphanumeric

Are the strings that contain the substrings to compare.

number

Integer

Is the number of characters to compare in *string1* and *string2*.

STRTOKEN: Extracting a Substring Based on Delimiters

The STRTOKEN function returns a substring, consisting of the characters of a string, from the beginning of a string to a specified character, called a delimiter.

To use this function, you must import the function library MNTUWS. For more information on importing this library see [Calling a Function](#).

Extract a Substring

```
STRTOKEN(string, delimiters)
```

where:

string

Alphanumeric

Is the character string, or a variable that contains the string enclosed in double quotation marks (").

delimiters

Alphanumeric

Is a character string, or variable enclosed in double quotation marks (") that contains a list of delimiters. Separate the delimiters with semicolons.

Extracting a Substring

STRTOKEN returns a substring of the first five STREET values in the VIDEOTRK data source based on the delimiters period, space, or asterisk.

```
MAINTAIN FILE VIDEOTRK
MODULE IMPORT (MNTUWS);
FOR ALL NEXT CUSTID INTO CSTACK ;
COMPUTE CNT/I5 = 1;
```



```

TYPE " ";
REPEAT WHILE CNT LE 5;
COMPUTE SUBSTREET/A20 = STRTOKEN(CSTACK(CNT).STREET,".; ,*");
TYPE " STREET =          <CSTACK(CNT).STREET"
TYPE " SUBSTREET =       <SUBSTREET "
COMPUTE CNT = CNT +1;
ENDREPEAT
END

```

The output is:

```

STREET =      86 ELLIOTT AVE.
SUBSTREET =    86
STREET =      7 DAVENPORT LA.
SUBSTREET =    7
STREET =      8 MAGNOLIA LA.
SUBSTREET =    8
STREET =     35 POWELL ST.
SUBSTREET =   35
STREET =     10 COW LA.
SUBSTREET =   10

```

SUBSTR: Extracting a Substring (Maintain)

The SUBSTR function extracts a substring based on where it begins and its length in the parent string. SUBSTR can vary the position of the substring depending on the values of other fields.

There is also a SUBSTR function available for the reporting language. For information on this function, see [SUBSTR: Extracting a Substring](#).

Extract a Substring

```
SUBSTR(string, start, length)
```

where:

string

Alphanumeric

Is the parent string enclosed in single quotation marks, or a field or variable containing the character string.

start

Integer

Is the starting position of the substring in the parent string.

length

Integer

Is the length, in characters, of the substring.

Extracting the First Character of a String in Maintain

SUBSTR extracts the first letter of FIRST_NAME, combines it with LAST_NAME, and stores the result in UID:

```
MAINTAIN FILE EMPLOYEE
CASE TOP
INFER EMP_ID FIRST_NAME LAST_NAME INTO ADDSTACK
COMPUTE UID/A9 = SUBSTR(ADDSTACK().FIRST_NAME,1,1) ||
                  ADDSTACK().LAST_NAME;
ENDCASE
END
```

The following table shows sample values for FIRST_NAME and LAST_NAME, and the corresponding values for UID:

FIRST_NAME	LAST_NAME	UID
JOE	SMITH	JSMITH
SAM	JONES	SJONES
TERRI	WHITE	TWHITE

TRIM: Removing Trailing Occurrences (Maintain)

The TRIM function removes trailing occurrences of a pattern within a character string.

There is also a TRIM function available for the reporting language. For information on this function, see [TRIM: Removing Leading and Trailing Occurrences](#).

Remove Trailing Occurrences

```
TRIM(string)
```

where:

string

Alphanumeric

Is the character string enclosed in single quotation marks, or the field containing the string.

TRIMLEN: Determining the Length of a String Excluding Trailing Spaces

The TRIMLEN function determines the length of a character string excluding trailing spaces.

Determine the Length of a String Excluding Trailing Spaces

```
TRIMLEN (string)
```

where:

string

Alphanumeric

Is the string to be measured.

Determining the Length of a String Excluding Trailing Spaces

TRIMLEN determines the length of a field in COUNTRY excluding trailing blanks:

```
MAINTAIN FILE CAR
MODULE IMPORT (MNTUWS)
NEXT COUNTRY INTO STK1
COMPUTE LEN/I3 = LENGTH(STK1(1).COUNTRY);
COMPUTE LEN2/I3 = TRIMLEN(STK1(1).COUNTRY);
TYPE "<STK1(1).COUNTRY  HAS A LENGTH OF <LEN2  WITHOUT TRAILING BLANKS"
END
```

The result is:

```
ENGLAND HAS A LENGTH OF 7 WITHOUT TRAILING BLANKS
```

UPCASE: Converting Text to Uppercase (Maintain)

The UPCASE function converts a character string to uppercase. It is useful for sorting on a field that contains both mixed-case and uppercase values. Sorting on a mixed-case field produces incorrect results because the sorting sequence in EBCDIC always places lowercase letters before uppercase letters, while the ASCII sorting sequence always places uppercase letters before lowercase. To obtain correct results, define a new field with all of the values in uppercase, and sort on that.

To use this function, you must import the function library MNTUWS. For information on importing this library, see [Calling a Function](#).

There is also an UPCASE function available for the reporting language. For information on this function, see [UPCASE: Converting Text to Uppercase](#).

Convert Text to Uppercase

```
UPCASE(string)
```

where:

string

Alphanumeric

Is the character string to be converted to uppercase.

Data Source and Decoding Functions

Data source and decoding functions search for data source records, retrieve data source records or values, and assign values based on the value of an input field.

The result of a data source function must be stored in a field. The result cannot be stored in a Dialogue Manager variable.

For many functions, the *output* argument can be supplied either as a field name or as a format enclosed in single quotation marks ('). However, if a function is called from a Dialogue Manager command, this argument must always be supplied as a format. If a function is called from a Maintain Data procedure, this argument must always be supplied as a field name. For detailed information about calling a function and supplying arguments, see [Accessing and Calling a Function](#).

CHECKMD5: Computing an MD5 Hash Check Value

CHECKMD5 takes an alphanumeric input value and returns a 128-bit value in a fixed-length alphanumeric string, using the MD5 hash function. A hash function is any function that can be used to map data of arbitrary size to data of fixed size. The values returned by a hash function are called hash values. They can be used for assuring the integrity of transmitted data.

Compute an MD5 Hash Check Value

```
CHECKMD5(buffer)
```

where:

buffer

Is a data buffer whose hash value is to be calculated. It can be a set of data of different types presented as a single field, or a group field in one of the following data type formats: An, AnV, or TXn.

Calculating an MD5 Hash Check Value

The following request calculates an MD5 hash check value and converts it to an alphanumeric hexadecimal value for display.

```
DEFINE FILE WF_RETAIL_LITE
MD5/A32 = HEXTYPE(CHECKMD5(PRODUCT_CATEGORY));
END
TABLE FILE WF_RETAIL_LITE
SUM MD5
BY PRODUCT_CATEGORY
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
TYPE=REPORT, FONT=COURIER, $
  ENDSTYLE
END
```

The output is shown in the following image. The monospaced font shows that although the input values have varying length, the output has a fixed length.

Product Category	MD5
Accessories	98EDB85B00D9527AD5ACEBE451B3FAE6
Camcorder	612A923BDD05C2231F81991B8D12A3A1
Computers	45888A4DA062F16A099A7F7C6CC15EE0
Media Player	D34BEA29F24AF9FDE2E10B3E1D857CF9
Stereo Systems	3AA9FFE9806E269A7EB066A84092F0A3
Televisions	A3B5BC99DD2B42627EF64A4FCAAAB0B2
Video Production	60913E95848330A2C4A5D921E7C8BB14

CHECKMD5 calculates a fixed length MD5 hash check value, and HEXTYPE converts it to a printable hexadecimal string.

```
HEXTYPE (CHECKMD5 (PRODUCT_CATEGORY))
```

For Accessories, the result is 98EDB85B00D9527AD5ACEBE451B3FAE6.

CHECKSUM: Computing a Hash Sum

CHECKSUM computes a hash sum, called the checksum, of its input parameter, as a whole number in format I11. This can be used for equality search of the fields. A checksum is a hash sum used to ensure the integrity of a file after it has been transmitted from one storage device to another.

Compute a CHECKSUM Hash Value

```
CHECKSUM(buffer)
```

where:

buffer

Is a data buffer whose hash index is to be calculated. It can be a set of data of different types presented as a single field, in one of the following data type formats: An, AnV, or TXn.

Calculating a CHECKSUM Hash Value

The following request computes a checksum hash value.

```
DEFINE FILE WF_RETAIL_LITE
CHKSUM/I11 = (CHECKSUM(PRODUCT_CATEGORY));
END
TABLE FILE WF_RETAIL_LITE
PRINT CHKSUM
BY PRODUCT_CATEGORY
WHERE PRODUCT_CATEGORY NE LAST PRODUCT_CATEGORY
```



```
ON TABLE SET PAGE NOLEAD
END
```

The output is shown in the following image.

Product Category	CHKSUM
Accessories	-830549649
Camcorder	-912058982
Computers	-469201037
Media Player	-1760917009
Stereo Systems	-1853215244
Televisions	810407163
Video Production	275494446

CHECKSUM calculates a checksum hash value.

```
CHECKSUM(PRODUCT_CATEGORY)
```

For Accessories, the result is -830549649.

COALESCE: Returning the First Non-Missing Value

Given a list of arguments, COALESCE returns the value of the first argument that is not missing. If all argument values are missing, it returns a missing value if MISSING is ON. Otherwise it returns a default value (zero or blank).

Return the First Non-Missing Value

```
COALESCE(arg1, arg2, ...)
```

where:

arg1, arg2, ...

Any field, expression, or constant. The arguments should all be either numeric or alphanumeric.

Are the input parameters that are tested for missing values.

The output data type is the same as the input data types.

Returning the First Non-Missing Value

This example uses the SALES data source with missing values added. The missing values are added by the following procedure named SALEMISS:

```
MODIFY FILE SALES
  FIXFORM STORE/4 DATE/5 PROD/4
  FIXFORM UNIT/3 RETAIL/5 DELIVER/3
  FIXFORM OPEN/3 RETURNS/C2 DAMAGED/C2
  MATCH STORE
    ON NOMATCH REJECT
    ON MATCH CONTINUE
  MATCH DATE
    ON NOMATCH REJECT
    ON MATCH CONTINUE
  MATCH PROD_CODE
    ON NOMATCH INCLUDE
    ON MATCH REJECT
DATA
14Z 1017 C13 15 1.99 35 30 6
14Z 1017 C14 18 2.05 30 25 4
14Z 1017 E2 33 0.99 45 40
END
```

The following request uses COALESCE to return the first non-missing value:

```
TABLE FILE SALES
PRINT DAMAGED RETURNS RETAIL_PRICE
COMPUTE
COAL1/D12.2 MISSING ON = COALESCE(DAMAGED, RETURNS, RETAIL_PRICE);
BY STORE_CODE
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
```

```
ENDSTYLE
END
```

The output is shown in the following image. The value of DAMAGED is returned, if it is not missing. If DAMAGED is missing, the value of RETURNS is returned, if it is not missing. If they are both missing, the value of RETAIL_PRICE is returned.

<u>STORE CODE</u>	<u>DAMAGED</u>	<u>RETURNS</u>	<u>RETAIL PRICE</u>	<u>COAL1</u>
14B	6	10	\$.95	6.00
	3	3	\$1.29	3.00
	1	2	\$1.89	1.00
	0	3	\$1.99	.00
	4	5	\$2.39	4.00
	0	0	\$2.19	.00
	4	9	\$.99	4.00
	9	8	\$1.09	9.00
14Z	3	2	\$.85	3.00
	1	2	\$1.89	1.00
	1	0	\$1.99	1.00
	6	.	\$1.99	6.00
	.	4	\$2.05	4.00
	0	0	\$2.09	.00
	2	3	\$2.09	2.00
	7	4	\$.89	7.00
	.	.	\$.99	.99
	2	4	\$1.09	2.00
77F	1	1	\$2.09	1.00
	0	0	\$2.49	.00
K1	0	1	\$1.49	.00
	1	1	\$.99	1.00

COALESCE returns the first non-missing value:

```
COALESCE(DAMAGED, RETURNS)
```

The following table shows sample inputs and results.

DAMAGED	RETURNS	RESULT
MISSING	4	4
6	4	6

DB_EXPR: Inserting an SQL Expression Into a Request

The DB_EXPR function inserts a native SQL expression exactly as entered into the native SQL generated for a FOCUS or SQL language request.

The DB_EXPR function can be used in a DEFINE command, a DEFINE in a Master File, a WHERE clause, a FILTER FILE command, a filter in a Master File, or in an SQL statement. It can be used in a COMPUTE command if the request is an aggregate request (uses the SUM, WRITE, or ADD command) and has a single display command. The expression must return a single value.

Insert an SQL Expression Into a Request With DB_EXPR

```
DB_EXPR(native_SQL_expression)
```

where:

native_SQL_expression

Is a partial native SQL string that is valid to insert into the SQL generated by the request. The SQL string must have double quotation marks (") around each field reference, unless the function is used in a DEFINE with a WITH phrase.

Usage Notes for the DB_EXPR Function

- The expression must return a single value.
- Any request that includes one or more DB_EXPR functions must be for a synonym that has a relational SUFFIX.
- Field references in the native SQL expression must be within the current synonym context.
- The native SQL expression must be coded inline. SQL read from a file is not supported.

Inserting the DB2 BIGINT and CHAR Functions Into a TABLE Request

The following TABLE request against the WF_RETAIL data source uses the DB_EXPR function in the COMPUTE command to call two DB2 functions. It calls the BIGINT function to convert the squared revenue to a BIGINT data type, and then uses the CHAR function to convert that value to alphanumeric.

```
TABLE FILE WF_RETAIL
SUM REVENUE NOPRINT
AND COMPUTE BIGREV/A31 = DB_EXPR(CHAR(BIGINT("REVENUE" * "REVENUE") ) )
; AS 'Alpha Square Revenue'
BY REGION
ON TABLE SET PAGE NOPAGE
END
```

WF_RETAIL is a sample data source you can create by right-clicking an application on the Reporting Server browser interface and pointing to **New** and then clicking **Tutorials** from the context menu.

The trace shows that the expression from the DB_EXPR function was inserted into the DB2 SELECT statement:

```
SELECT
T11."REGION",
  SUM(T1."Revenue"),
```

```

    ((CHAR(BIGINT( SUM(T1."Revenue") * SUM(T1."Revenue"))) ) ))
FROM
wrd_fact_sales T1,
wrd_dim_customer T5,
wrd_dim_geography T11
WHERE
(T5."ID_CUSTOMER" = T1."ID_CUSTOMER") AND
(T11."ID_GEOGRAPHY" = T5."ID_GEOGRAPHY")
GROUP BY
T11."REGION "
ORDER BY
T11."REGION "
FOR FETCH ONLY;
END

```

The output is:

Region	Alpha Square Revenue
Central	459024717717929
MidEast	61720506151994
NorthEast	247772056471221
NorthWest	42335175855351
SouthEast	205820846242532
SouthWest	9449541537794
West	164356565757257

DB_INFILE: Testing Values Against a File or an SQL Subquery

The DB_INFILE function compares one or more field values in a source file to values in a target file. The comparison can be based on one or more field values. DB_INFILE returns the value 1 (TRUE) if the set of source fields matches a set of values from the target file. Otherwise, the function returns 0 (zero, FALSE). DB_INFILE can be used where a function is valid in a WebFOCUS® request, such as in a DEFINE or a WHERE phrase.

The target file can be any data source that WebFOCUS can read. Depending on the data sources accessed and the components in the request, either WebFOCUS or an RDBMS will process the comparison of values.

If WebFOCUS processes the comparison, it reads the target data source and dynamically creates a sequential file containing the target data values, along with a synonym describing the data file. It then builds IF or WHERE structures in memory with all combinations of source and target values. If the target data contains characters that WebFOCUS considers wildcard characters, it will treat them as wildcard characters unless the command SET EQTEST = EXACT is in effect.

The following situations exist when a relational data source is the source file:

- **The target values are in a relational data source from the same RDBMS and connection.** In this case, the target file referenced by DB_INFILE can be:

- An SQL file containing a subquery that retrieves the target values. A synonym must exist that describes the target SQL file. The Access File must specify the CONNECTION and DATASET for the target file.

If the subquery results in a SELECT statement supported by the RDBMS, the relational adapter inserts the subquery into the WHERE predicate of the generated SQL.

If the subquery does not result in a valid SELECT statement for the RDBMS, the relational adapter retrieves the target values. It then generates a WHERE predicate, with a list of all combinations of source and target field values.

You can create an SQL file containing a subquery and a corresponding synonym using the HOLD FORMAT SQL_SCRIPT command. For more information, see the *Creating Reports With ibi™ WebFOCUS® Language* manual.

- A relational data source. A synonym must exist that describes the target data source.

If the data source contains only those fields referenced by DB_INFILE as target fields, the relational adapter creates a subquery that retrieves the target values. If the subquery results in a SELECT statement supported by the RDBMS, the relational adapter inserts the subquery into the WHERE predicate of the generated SQL.

If the subquery does not result in a valid SELECT statement for the RDBMS, the relational adapter retrieves a unique list of the target values. It then generates a WHERE predicate with a list of all combinations of source and target field

values.

- **The target values are in a non-relational data source or a relational data source from a different RDBMS or connection.** In this case, the target values are retrieved and passed to WebFOCUS for processing.

Compare Source and Target Field Values With DB_INFILE

```
DB_INFILE(target_file, s1, t1, ... sn, tn)
```

where:

target_file

Is the synonym for the target file.

s1, ..., sn

Are fields from the source file.

t1, ..., tn

Are fields from the target file.

The function returns the value 1 if a set of target values matches the set of source values. Otherwise, the function returns a zero (0).

Usage Notes for DB_INFILE

- If both the source and target data sources have MISSING=ON for a comparison field, then a missing value in both files is considered an equality. If MISSING=OFF in one or both files, a missing value in one or both files results in an inequality.
- Values are not padded or truncated when compared, except when comparing date and date-time values.
 - If the source field is a date field and the target field is a date-time field, the

time component is removed before comparison.

- If the source field is a date-time field and the target field is a date field, a zero time component is added to the target value before comparison.
- If an alphanumeric field is compared to a numeric field, an attempt will be made to convert the alphanumeric value to a number before comparison.
- If WebFOCUS processes the comparison, and the target data contains characters that WebFOCUS considers wildcard characters, it will treat them as wildcard characters unless the command SET EQTEST = EXACT is in effect.

Comparing Source and Target Values Using an SQL Subquery File

This example uses the WF_RETAIL DB2 data source.

WF_RETAIL is a sample data source you can create by right-clicking an application on the WebFOCUS Reporting Server browser interface, selecting **New**, and then **Samples** from the context menu.

The SQL file named retail_subquery.sql contains the following subquery that retrieves specified state codes in the Central and NorthEast regions:

```
SELECT  MAX(T11.REGION), MAX(T11.STATECODE)  FROM wrd_dim_geography T11
WHERE (T11.STATECODE IN('AR', 'IA', 'KS', 'KY', 'WY', 'CT', 'MA', 'NJ',
'NY', 'RI')) AND (T11.REGION IN('Central', 'NorthEast')) GROUP BY
T11.REGION, T11.STATECODE
```

The retail_subquery.mas Master File follows:

```
FILENAME=RETAIL_SUBQUERY, SUFFIX=DB2      , $
SEGMENT=RETAIL_SUBQUERY, SEGTYPE=S0, $
  FIELDNAME=REGION, ALIAS=E01, USAGE=A15V, ACTUAL=A15V,
  MISSING=ON, $
  FIELDNAME=STATECODE, ALIAS=E02, USAGE=A2, ACTUAL=A2,
  MISSING=ON, $
```

The retail_subquery.acx Access File follows:

```
SEGNAME=RETAIL_SUBQUERY, CONNECTION=CON1, DATASET=RETAIL_SUBQUERY.SQL, $
```

i Note: You can create an SQL subquery file, along with a corresponding synonym, using the HOLD FORMAT SQL_SCRIPT command. For more information, see the *Creating Reports With ibi™ WebFOCUS® Language* manual.

The following request uses the DB_INFILE function to compare region names and state codes against the names retrieved by the subquery:

```
TABLE FILE WF_RETAIL
SUM REVENUE
BY REGION
BY STATECODE
WHERE DB_INFILE(RETAIL_SUBQUERY, REGION, REGION, STATECODE, STATECODE)
ON TABLE SET PAGE NOPAGE
END
```

The trace shows that the subquery was inserted into the WHERE predicate in the generated SQL:

```
SELECT
  T11."REGION",
  T11."STATECODE",
  SUM(T1."Revenue")
  FROM
  wrd_fact_sales T1,
  wrd_dim_customer T5,
  wrd_dim_geography T11
  WHERE
    (T5."ID_CUSTOMER" = T1."ID_CUSTOMER") AND
    (T11."ID_GEOGRAPHY" = T5."ID_GEOGRAPHY") AND
    ((T11."REGION", T11."STATECODE") IN (SELECT MAX(T11.REGION),
    MAX(T11.STATECODE) FROM wrd_dim_geography T11 WHERE
    (T11.STATECODE IN('AR', 'IA', 'KS', 'KY', 'WY', 'CT', 'MA',
    'NJ', 'NY', 'RI')) AND (T11.REGION IN('Central', 'NorthEast'))
    GROUP BY T11.REGION, T11.STATECODE))
  GROUP BY
  T11."REGION",
  T11."STATECODE  "
  ORDER BY
  T11."REGION",
  T11."STATECODE  "
  FOR FETCH ONLY;
END
```

The output is:

Region	State Code	Revenue
Central	AR	839,075.22
	IA	1,197,171.09
	KS	1,014,388.99
	KY	1,014,825.22
	WY	182,808.08
NorthEast	CT	1,146,626.05
	MA	2,070,919.74
	NJ	2,148,955.56
	NY	6,360,267.52
	RI	342,972.30

Comparing Source and Target Values Using a Sequential File

The empvalues.ftm sequential file contains the last and first names of employees in the MIS department:

SMITH	MARY	JONES	DIANE	MCCOY
JOHN	BLACKWOOD	ROSEMARIE	GREENSPAN	MARY
CROSS	BARBARA			

The empvalues.mas Master File describes the data in the empvalues.ftm file

```
FILENAME=EMPVALUES, SUFFIX=FIX      , IOTYPE=BINARY, $
SEGMENT=EMPVALUE, SEGTYPE=S0, $
  FIELDNAME=LN, ALIAS=E01, USAGE=A15, ACTUAL=A16, $
  FIELDNAME=FN, ALIAS=E02, USAGE=A10, ACTUAL=A12, $
```

i Note: You can create a sequential file, along with a corresponding synonym, using the HOLD FORMAT SQL_SCRIPT command. For more information, see the *Creating Reports With ibi™ WebFOCUS® Language* manual.

The following request against the FOCUS EMPLOYEE data source uses the DB_INFILE function to compare employee names against the names stored in the empvalues.ftm file:

```
FILEDEF EMPVALUES DISK baseapp/empvalues.ftm
TABLE FILE EMPLOYEE
SUM CURR_SAL
BY LAST_NAME BY FIRST_NAME
WHERE DB_INFILE(EMPVALUES, LAST_NAME, LN, FIRST_NAME, FN)
ON TABLE SET PAGE NOPAGE
END
```

The output is:

LAST_NAME	FIRST_NAME	CURR_SAL
BLACKWOOD	ROSEMARIE	\$21,780.00
CROSS	BARBARA	\$27,062.00
GREENSPAN	MARY	\$9,000.00
JONES	DIANE	\$18,480.00
MCCOY	JOHN	\$18,480.00
SMITH	MARY	\$13,200.00

Control DB_INFILE Optimization

To control whether to prevent optimization of the DB_INFILE expression, issue the following command:

```
SET DB_INFILE = {DEFAULT|EXPAND_ALWAYS|EXPAND_NEVER}
```

In a TABLE request, issue the following command:

```
ON TABLE SET DB_INFILE {DEFAULT|EXPAND_ALWAYS|EXPAND_NEVER}
```

where:

DEFAULT

Enables DB_INFILE to create a subquery if its analysis determines that it is possible. This is the default value.

EXPAND_ALWAYS

Prevents DB_INFILE from creating a subquery. Instead, it expands the expression into IF and WHERE clauses in memory.

EXPAND_NEVER

Prevents DB_INFILE from expanding the expression into IF and WHERE clauses in memory. Instead, it attempts to create a subquery. If this is not possible, a FOC32585 message is generated and processing halts.

DB_LOOKUP: Retrieving Data Source Values

Available Languages: reporting, MODIFY

You can use the DB_LOOKUP function to retrieve a value from one data source when running a request against another data source, without joining or combining the two data sources.

DB_LOOKUP compares pairs of fields from the source and lookup data sources to locate matching records and retrieve the value to return to the request. You can specify as many pairs as needed to get to the lookup record that has the value you want to retrieve. If your field list pairs do not lead to a unique lookup record, the first matching lookup record retrieved is used.

DB_LOOKUP can be called in a DEFINE command, TABLE COMPUTE command, MODIFY COMPUTE command, or ibi Data Migrator flow.

There are no restrictions on the source file. The lookup file can be any non-FOCUS data source that is supported as the cross-referenced file in a cluster join. The lookup fields used to find the matching record are subject to the rules regarding cross-referenced join fields for the lookup data source. A fixed-format sequential file can be the lookup file if it is sorted in the same order as the source file.

Retrieve a Value From a Lookup Data Source

```
DB_LOOKUP(look_mf, srcfld1, lookfld1, srcfld2, lookfld2, ...,
returnfld);
```

where:

look_mf

Is the lookup Master File.

srcfld1, srcfld2 ...

Are fields from the source file used to locate a matching record in the lookup file.

lookfld1, lookfld2 ...

Are columns from the lookup file that share values with the source fields. Only columns in the table or file can be used; columns created with DEFINE cannot be used. For multi-segment synonyms, only columns in the top segment can be used.

returnfld

Is the name of a column in the lookup file whose value is returned from the matching lookup record. Only columns in the table or file can be used; columns created with DEFINE cannot be used.

Usage Notes for DB_LOOKUP

- The maximum number of pairs that can be used to match records is 63.
- If the lookup file is a fixed-format sequential file, it must be sorted and retrieved in the same order as the source file, unless the ENGINE INT SET CACHE ON command is in effect. Having this setting in effect may also improve performance if the values will be looked up more than once. The key field of the sequential file must be the first lookup field specified in the DB_LOOKUP request. If it is not, no records will match.

In addition, if a DB_LOOKUP request against a sequential file is issued in a DEFINE FILE command, you must clear the DEFINE FILE command at the end of the TABLE request that references it, or the lookup file will remain open. It will not be reusable

until closed and may cause problems when you exit. Other types of lookup files can be reused without clearing the DEFINE. They will be cleared automatically when all DEFINE fields are cleared.

- If the lookup field has the MISSING=ON attribute in its Master File and the DEFINE or COMPUTE command specifies MISSING ON, the missing value is returned when the lookup field is missing. Without MISSING ON in both places, the missing value is converted to a default value (blank for an alphanumeric field, zero for a numeric field).
- Source records display on the report output even if they lack a matching record in the lookup file.
- Only real fields in the lookup Master File are valid as lookup and return fields.
- If there are multiple rows in the lookup table where the source field is equal to the lookup field, the first value of the return field is returned.

Retrieving a Value From a Fixed Format Sequential File in a TABLE Request

The following procedure creates a fixed-format sequential file named GSALE from the GGSALES data source. The fields in this file are PRODUCT (product description), CATEGORY (product category), and PCD (product code). The file is sorted on the PCD field:

```
SET ASNAMES = ON
TABLE FILE GGSALES
SUM PRODUCT CATEGORY
BY PCD
ON TABLE HOLD AS GSALE FORMAT ALPHA
END
```

The following Master File is generated as a result of the HOLD command:

```
FILENAME=GSALE, SUFFIX=FIX, $
SEGMENT=GSALE, SEGTYPE=S1, $
  FIELDNAME=PCD, ALIAS=E01, USAGE=A04, ACTUAL=A04, $
  FIELDNAME=PRODUCT, ALIAS=E02, USAGE=A16, ACTUAL=A16, $
  FIELDNAME=CATEGORY, ALIAS=E03, USAGE=A11, ACTUAL=A11, $
```

The following TABLE request against the GGPRODS data source, sorts the report on the field that matches the key field in the lookup file. It retrieves the value of the CATEGORY field from the GSALE lookup file by matching on the product code and product description fields. Note that the DEFINE FILE command is cleared at the end of the request:

```
DEFINE FILE GGPRODS
PCAT/A11 MISSING ON = DB_LOOKUP(GSALE, PRODUCT_ID, PCD,
    PRODUCT_DESCRIPTION, PRODUCT, CATEGORY);
END
TABLE FILE GGPRODS
PRINT PRODUCT_DESCRIPTION PCAT
BY PRODUCT_ID
END
DEFINE FILE GGPRODS CLEAR
END
```

Because the GSALE Master File does not define the CATEGORY field with the MISSING=ON attribute, the PCAT column displays a blank in those rows that have no matching record in the lookup file:

Product Code	Product	PCAT
-----	-----	----
B141	Hazelnut	
B142	French Roast	
B144	Kona	
F101	Scone	Food

F102	Biscotti	Food
F103	Croissant	Food
G100	Mug	Gifts
G104	Thermos	Gifts
G110	Coffee Grinder	Gifts
G121	Coffee Pot	Gifts

If you add the MISSING=ON attribute to the CATEGORY field in the GSALE Master File, the PCAT column displays a missing data symbol in rows that do not have a matching record in the lookup file:

Product Code	Product	PCAT
-----	-----	----
B141	Hazelnut	.
B142	French Roast	.
B144	Kona	.
F101	Scone	Food
F102	Biscotti	Food
F103	Croissant	Food
G100	Mug	Gifts
G104	Thermos	Gifts
G110	Coffee Grinder	Gifts
G121	Coffee Pot	Gifts

Retrieving a Value From a LOOKUP Table

DB_LOOKUP takes the value for STORE_CODE and retrieves the STORENAME associated with it.

```
DB_LOOKUP(dmcomp,STORE_CODE,STORE_CODE,STORENAME)
```

For 1003CA the result is Audio Expert.

For 1004MD the result is City Video For 2010AZ the result is eMart.

DECODE: Decoding Values

Available Languages: reporting, Maintain

The DECODE function assigns values based on the coded value of an input field. DECODE is useful for giving a more meaningful value to a coded value in a field. For example, the field GENDER may have the code F for female employees and M for male employees for efficient storage (for example, one character instead of six for *female*). DECODE expands (decodes) these values to ensure correct interpretation on a report.

You can use DECODE by supplying values directly in the function or by reading values from a separate file.

The use of DECODE with Maintain is limited. For information on decoding values with subscripted stack values, see [SELECTS: Decoding a Value From a Stack](#).

Supply Values in the Function

```
DECODE fieldname(code1 result1 code2 result2...[ELSE default ]);  
DECODE fieldname(filename ...[ELSE default]);
```

where:

fieldname

Alphanumeric or Numeric

Is the name of the input field.

code

Alphanumeric or Numeric

Is the coded value that DECODE compares with the current value of the *fieldname*. If the value has embedded blanks, commas, or other special characters, it must be enclosed in single quotation marks. When DECODE finds the specified value, it returns the corresponding result. When the code is compared to the value of the field name, the code and field name must be in the same format.

result

Alphanumeric or Numeric

Is the returned value that corresponds to the code. If the result has embedded blanks or commas, or contains a negative number, it must be enclosed in single quotation marks. Do not use double quotation marks (").

If the result is presented in alphanumeric format, it must be a non-null, non-blank string. The format of the result must correspond to the data type of the expression.

default

Alphanumeric or Numeric

Is the value returned as a result for non-matching codes. The format must be the same as the format of the *result*. If you omit a default value, DECODE assigns a blank or zero to non-matching codes.

filename

Alphanumeric

Is the name of the file in which code/result pairs are stored. Every record in the file must contain a pair.

You can use up to 40 lines to define the code and result pairs for any given DECODE function, or 39 lines if you also use an ELSE phrase. Use either a comma or blank to separate the code from the result, or one pair from another.

i **Note:** DECODE has no *output* argument.

Supplying Values Using the DECODE Function

EDIT extracts the first character of the CURR_JOBCODE field, then DECODE returns either ADMINISTRATIVE or DATA PROCESSING depending on the value extracted.

```
TABLE FILE EMPLOYEE
PRINT CURR_JOBCODE AND COMPUTE
DEPX_CODE/A1 = EDIT(CURR_JOBCODE, '9$$'); NOPRINT AND COMPUTE
JOB_CATEGORY/A15 = DECODE DEPX_CODE(A 'ADMINISTRATIVE'
                        B 'DATA PROCESSING');
BY LAST_NAME
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	CURR_JOBCODE	JOB_CATEGORY
-----	-----	-----
BLACKWOOD	B04	DATA PROCESSING
CROSS	A17	ADMINISTRATIVE
GREENSPAN	A07	ADMINISTRATIVE
JONES	B03	DATA PROCESSING
MCCOY	B02	DATA PROCESSING
SMITH	B14	DATA PROCESSING

DECODE returns the state abbreviation for PLANT.

```
DECODE PLANT(BOS 'MA' DAL 'TX' LA 'CA')
```

For BOS, the result is MA.

For DAL, the result is TX.

For LA, the result is CA.

Guidelines for Reading Values From a File

- Each record in the file is expected to contain pairs of elements separated by a comma or blank.

- If each record in the file consists of only one element, this element is interpreted as the code, and the result becomes either a blank or zero, as needed.

This makes it possible to use the file to hold screening literals referenced in the screening condition:

```
IF field IS (filename)
```

and as a file of literals for an IF criteria specified in a computational expression. For example:

```
TAKE = DECODE SELECT (filename ELSE 1);  
VALUE = IF TAKE IS 0 THEN... ELSE...;
```

TAKE is 0 for SELECT values found in the literal file and 1 in all other cases. The VALUE computation is carried out as if the expression had been:

```
IF SELECT (filename) THEN... ELSE...;
```

- The file can contain up to 32,767 characters in the file.
- All data is interpreted in ASCII format on UNIX and Windows, or in EBCDIC format on z/OS, and converted to the USAGE format of the DECODE pairs.
- Leading and trailing blanks are ignored.
- The remainder of each record is ignored and can be used for comments or other data. This convention applies in all cases, except when the file name is HOLD. In that case, the file is presumed to have been created by the HOLD command, which writes fields in the internal format, and the DECODE pairs are interpreted accordingly. In this case, extraneous data in the record is ignored.

Reading DECODE Values From a File

The following example has two parts. The first part creates a file with a list of IDs and reads the EDUCFILE data source. The second part reads the EMPLOYEE data source and assigns 0 to those employees who have taken classes and 1 to those employees who have not. The HOLD file contains only one column of values. Therefore, DECODE assigns the value 0 to an employee whose EMP_ID appears in the file and 1 when EMP_ID does not appear in the file.

```
TABLE FILE EDUCFILE
PRINT EMP_ID
ON TABLE HOLD
END
```

```
TABLE FILE EMPLOYEE
PRINT EMP_ID AND LAST_NAME AND FIRST_NAME AND COMPUTE
NOT_IN_LIST/I1 = DECODE EMP_ID(HOLD ELSE 1);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

EMP_ID	LAST_NAME	FIRST_NAME	NOT_IN_LIST
-----	-----	-----	-----
112847612	SMITH	MARY	0
117593129	JONES	DIANE	0
219984371	MCCOY	JOHN	1
326179357	BLACKWOOD	ROSEMARIE	0
543729165	GREENSPAN	MARY	1
818692173	CROSS	BARBARA	0

FIND: Verifying the Existence of a Value in a Data Source

Available Languages: MODIFY, Maintain

The FIND function determines if a data value is in a data source field being searched. The function sets a temporary field to 1 (a non-zero value for MODIFY) if the data value is found in the data source field, and to 0 if it is not. FIND does not change the searched file's current database position. A value greater than zero confirms the presence of the data value, not the number of instances in the data source field.

The FIND function determines if an incoming data value is in an indexed FOCUS data source field. The function sets a temporary field to a non-zero value if the incoming value is in the data source field, and to 0 if it is not. A value greater than zero confirms the presence of the data value, not the number of instances in the data source field.

You can also use FIND in a VALIDATE command to determine if a transaction field value exists in another FOCUS data source. If the field value is not in that data source, the

function returns a value of 0, causing the validation test to fail and the request to reject the transaction.

You can use any number of FINDs in a COMPUTE or VALIDATE command. However, more FINDs increase processing time and require more buffer space in memory.

Limit: FIND does not work on files with different DBA passwords.

The opposite of FIND is NOT FIND. The NOT FIND function sets a temporary field to **1** if the incoming value is not in the data source and to **0** if the incoming value is in the data source.

Verify the Existence of a Value in a Data Source

```
FIND(fieldname [AS dbfield] IN file);
```

where:

fieldname

Is the name of the field that contains the incoming data value.

AS dbfield

Is the name of the data source field whose values are compared to the incoming field values.

This field must be indexed. If the incoming field and the data source field have the same name, omit this phrase.

For Maintain - the AS field is required and the name must be qualified.

file

Is the name of the indexed FOCUS data source.

For Maintain - the IN file is unnecessary since the AS field name is required and must be qualified.

**Note:**

- FIND does not use an *output* argument.
- Do not include a space between FIND and the left parenthesis.

Verifying the Existence of a Value in Another Data Source (Maintain)

In the following example, FIND determines if a data value is found in another data source.

```

MAINTAIN FILE MOVIES AND VIDEOTRK
FOR ALL NEXT MOVIES.MOVIECODE INTO FILMSTK
TYPE "RC SHOULD BE 1 WHERE MOVIECODE EXISTS IN BOTH FILES";
TYPE " "
COMPUTE RC/I1;
COMPUTE I/I1=1;
REPEAT FILMSTK.FOCCOUNT
  COMPUTE RC= FIND(FILMSTK(I).MOVIECODE AS VIDEOTRK.MOVIECODE)
  TYPE "FOR MOVIECODE = <<FILMSTK(I).MOVIECODE , RC = <<RC"
  COMPUTE I=I+1;
ENDREPEAT
END

```

The output is:

```

RC SHOULD BE 1 WHERE MOVIECODE EXISTS IN BOTH FILES
FOR MOVIECODE = 001MCA, RC = 1
.
.
.
FOR MOVIECODE = 387PLA, RC = 0
.
.
.
FOR MOVIECODE = 963CBS, RC = 1
TRANSACTIONS: COMMITS   =    1 ROLLBACKS =    0
SEGMENTS      : INCLUDED =    0 UPDATED   =    0 DELETED   =    0

```


Verifying the Existence of a Value in the Same Data Source (Maintain)

In the following example, FIND determines if a data value is found in the same data source.

```

MAINTAIN FILE CAR
COMPUTE RETAIL_COST=31500;
COMPUTE CHECK/I1;
COMPUTE CHECK= FIND (RETAIL_COST);
  IF CHECK = 1 THEN GOTO FOUND1
    ELSE GOTO NOT1;
CASE FOUND1
TYPE "THERE IS A CAR WITH A RETAIL_COST OF <<RETAIL_COST"
-* ....
ENDCASE
CASE NOT1
TYPE "THERE IS NO CAR WITH A RETAIL_COST OF <<RETAIL_COST"
-* ....
ENDCASE
-* ....
END

```

The output is:

```

THERE IS A CAR WITH A RETAIL_COST OF      31,500
TRANSACTIONS: COMMITS    =      1 ROLLBACKS =      0
SEGMENTS      : INCLUDED =      0 UPDATED   =      0 DELETED   =      0

```

Verifying the Existence of a Value in an Indexed Field

FIND determines if a supplied value in EMP_ID is in the EDUCFILE data source.

```

FIND(EMP_ID IN EDUCFILE)

```

IMPUTE: Replacing Missing Values With Aggregated Values

IMPUTE calculates a value to replace missing numeric data on report output, within a partition.

In place of eliminating data records with missing values from analysis, IMPUTE enables you to substitute a variety of estimates for the missing values, including the mean, the median, the mode, or a numeric constant, all calculated within the data partition specified by the reset key. This function is designed to be used with detail level reports (PRINT or LIST commands), and with calculated values (fields created with the COMPUTE command).

Replace Missing Values With Aggregated Values

```
IMPUTE(field, reset_key, replacement)
```

where:

field

Is the name of the numeric input field that is defined with MISSING ON.

reset_key

Defines the partition for the calculation. Valid values are:

- A sort field name.
- PRESET, which uses the break defined by the SET PARTITION_ON command.
- TABLE, which performs the calculation on the entire table.

replacement

Is a numeric constant or one of the following:

- MEAN
- MEDIAN
- MODE

Replacing Missing Values With Aggregated Values

To run this example, the FOCUS data source SALEMISS must be created. SALEMISS is the SALES data source with some missing values added in the RETURNS and DAMAGED fields. The following is the SALEMISS Master File, which should be added to the IBISAMP application.

```
FILENAME=KSALES, SUFFIX=FOC, REMARKS='Legacy Metadata Sample: sales', $

SEGNAME=STOR_SEG, SEGTYPE=S1,
  FIELDNAME=STORE_CODE, ALIAS=SNO, FORMAT=A3, $
  FIELDNAME=CITY, ALIAS=CTY, FORMAT=A15, $
  FIELDNAME=AREA, ALIAS=LOC, FORMAT=A1, $

SEGNAME=DATE_SEG, PARENT=STOR_SEG, SEGTYPE=SH1,
  FIELDNAME=DATE, ALIAS=DTE, FORMAT=A4MD, $

SEGNAME=PRODUCT, PARENT=DATE_SEG, SEGTYPE=S1,
  FIELDNAME=PROD_CODE, ALIAS=PCODE, FORMAT=A3, FIELDTYPE=I, $
  FIELDNAME=UNIT_SOLD, ALIAS=SOLD, FORMAT=I5, $
  FIELDNAME=RETAIL_PRICE, ALIAS=RP, FORMAT=D5.2M, $
  FIELDNAME=DELIVER_AMT, ALIAS=SHIP, FORMAT=I5, $
  FIELDNAME=OPENING_AMT, ALIAS=INV, FORMAT=I5, $
  FIELDNAME=RETURNS, ALIAS=RTN, FORMAT=I3, MISSING=ON, $
  FIELDNAME=DAMAGED, ALIAS=BAD, FORMAT=I3, MISSING=ON, $
```

The following procedure creates the SALEMISS data source and then adds the missing values to the RETURNS and DAMAGED fields:

```
CREATE FILE ibisamp/SALEMISS
MODIFY FILE ibisamp/SALEMISS
FIXFORM STORE_CODE/3 CITY/15 AREA/1 DATE/4 PROD_CODE/3
FIXFORM UNIT_SOLD/5 RETAIL_PRICE/5 DELIVER_AMT/5
FIXFORM OPENING_AMT/5 RETURNS/3 DAMAGED/3
MATCH STORE_CODE
ON NOMATCH INCLUDE
ON MATCH CONTINUE
MATCH DATE
ON NOMATCH INCLUDE
ON MATCH CONTINUE
MATCH PROD_CODE
ON NOMATCH INCLUDE
```

```

ON MATCH REJECT
DATA
14BSTAMFORD      S1212B10    60   .95   80   65 10  6
14BSTAMFORD      S1212B12    40  1.29   20   50  3  3
14BSTAMFORD      S1212B17    29  1.89   30   30  2  1
14BSTAMFORD      S1212C13    25  1.99   30   40  3  0
14BSTAMFORD      S1212C7     45  2.39   50   49  5  4
14BSTAMFORD      S1212D12    27  2.19   40   35  0  0
14BSTAMFORD      S1212E2     80   .99  100  100  9  4
14BSTAMFORD      S1212E3     70  1.09   80   90  8  9
14ZNEW YORK      U1017B10    30   .85   30   10  2  3
14ZNEW YORK      U1017B17    20  1.89   40   25  2  1
14ZNEW YORK      U1017B20    15  1.99   30    5  0  1
14ZNEW YORK      U1017C17    12  2.09   10   15  0  0
14ZNEW YORK      U1017D12    20  2.09   30   10  3  2
14ZNEW YORK      U1017E1     30   .89   25   45  4  7
14ZNEW YORK      U1017E3     35  1.09   25   45  4  2
77FUNIONDALE     R1018B20    25  2.09   40   25  1  1
77FUNIONDALE     R1018C7     40  2.49   40   40  0  0
K1 NEWARK        U1019B12    29  1.49   30   30  1  0
K1 NEWARK        U1018B10    13   .99   30   15  1  1
END
-RUN

```

```

MODIFY FILE ibisamp/SALEMISS
FIXFORM STORE_CODE/3 DATE/5 PROD_CODE/4
FIXFORM UNIT/3 RETAIL/5 DELIVER/3
FIXFORM OPEN/3 RETURNS/C3 DAMAGED/C3
MATCH STORE_CODE
ON NOMATCH INCLUDE
ON MATCH CONTINUE
MATCH DATE
ON NOMATCH INCLUDE
ON MATCH CONTINUE
MATCH PROD_CODE
ON NOMATCH INCLUDE
ON MATCH REJECT
DATA
14Z1017 C13 15 1.99 35 30      6
14Z1017 C14 18 2.05 30 25 4
14Z1017 E2  33 0.99 45 40
END
-RUN

```

The following request against the SALEMISS data source generates replacement values for the missing values in the RETURNS field, using only the values within the same store.

```

SET PARTITION_ON=FIRST
TABLE FILE SALEMISS
PRINT RETURNS
COMPUTE MEDIAN1 = IMPUTE(RETURNS, PRESET, MEDIAN);
COMPUTE MEAN1 = IMPUTE(RETURNS, PRESET, MEAN);
COMPUTE MODE1 = IMPUTE(RETURNS, PRESET, MODE);
BY STORE_CODE
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
TYPE=REPORT, GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image. The missing values occur in store 14Z, and the replacement values are calculated using only the RETURNS values from that store because PARTITION_ON is set to FIRST.

<u>STORE_CODE</u>	<u>RETURNS</u>	<u>MEDIAN1</u>	<u>MEAN1</u>	<u>MODE1</u>
14B	10	10.00	10.00	10.00
	3	3.00	3.00	3.00
	2	2.00	2.00	2.00
	3	3.00	3.00	3.00
	5	5.00	5.00	5.00
	0	.00	.00	.00
	9	9.00	9.00	9.00
	8	8.00	8.00	8.00
14Z	2	2.00	2.00	2.00
	2	2.00	2.00	2.00
	0	.00	.00	.00
	.	2.00	2.00	4.00
	4	4.00	4.00	4.00
	0	.00	.00	.00
	3	3.00	3.00	3.00
	4	4.00	4.00	4.00
	.	2.00	2.00	4.00
	4	4.00	4.00	4.00
77F	1	1.00	1.00	1.00
	0	.00	.00	.00
K1	1	1.00	1.00	1.00
	1	1.00	1.00	1.00

Changing the PARTITION_ON setting to TABLE produces the following output, in which the replacement values are calculated using all of the rows in the table.

<u>STORE_CODE</u>	<u>RETURNS</u>	<u>MEDIAN1</u>	<u>MEAN1</u>	<u>MODE1</u>
14B	10	10.00	10.00	10.00
	3	3.00	3.00	3.00
	2	2.00	2.00	2.00
	3	3.00	3.00	3.00
	5	5.00	5.00	5.00
	0	.00	.00	.00
	9	9.00	9.00	9.00
	8	8.00	8.00	8.00
	2	2.00	2.00	2.00
14Z	2	2.00	2.00	2.00
	0	.00	.00	.00
	.	2.00	3.00	.00
	4	4.00	4.00	4.00
	0	.00	.00	.00
	3	3.00	3.00	3.00
	4	4.00	4.00	4.00
	.	2.00	3.00	.00
	4	4.00	4.00	4.00
77F	1	1.00	1.00	1.00
	0	.00	.00	.00
	1	1.00	1.00	1.00
K1	1	1.00	1.00	1.00
	1	1.00	1.00	1.00

LAST: Retrieving the Preceding Value

Available Languages: reporting

The LAST function retrieves the preceding value for a field.

The effect of LAST depends on whether it appears in a DEFINE or COMPUTE command:

- In a DEFINE command, the LAST value applies to the previous record retrieved from the data source before sorting takes place.
- In a COMPUTE command, the LAST value applies to the record in the previous line of the internal matrix.

Do not use LAST with the -SET command in Dialogue Manager.

The effect of LAST depends on whether it appears in an extract or load transformation:

- In an extract transformation the LAST value applies to the previous record retrieved from the data source before sorting takes place.
- In a load transformation, the LAST value applies to the record in the previous record loaded.

Retrieve the Preceding Value

LAST fieldname

where:

fieldname

Alphanumeric or Numeric

Is the field name.

 **Note:** LAST does not use an *output* argument.

Retrieving the Preceding Value

LAST retrieves the previous value of the DEPARTMENT field to determine whether to restart the running total of salaries by department. If the previous value equals the current value, CURR_SAL is added to RUN_TOT to generate a running total of salaries within each department.

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME CURR_SAL AND COMPUTE
RUN_TOT/D12.2M = IF DEPARTMENT EQ LAST DEPARTMENT THEN
                (RUN_TOT + CURR_SAL) ELSE CURR_SAL ;
AS 'RUNNING,TOTAL,SALARY'
BY DEPARTMENT SKIP-LINE
END
```

The output is:

DEPARTMENT	LAST_NAME	CURR_SAL	RUNNING TOTAL SALARY
-----	-----	-----	-----
MIS	SMITH	\$13,200.00	\$13,200.00
	JONES	\$18,480.00	\$31,680.00
	MCCOY	\$18,480.00	\$50,160.00
	BLACKWOOD	\$21,780.00	\$71,940.00
	GREENSPAN	\$9,000.00	\$80,940.00
	CROSS	\$27,062.00	\$108,002.00
PRODUCTION	STEVENS	\$11,000.00	\$11,000.00
	SMITH	\$9,500.00	\$20,500.00
	BANNING	\$29,700.00	\$50,200.00
	IRVING	\$26,862.00	\$77,062.00
	ROMANS	\$21,120.00	\$98,182.00
	MCKNIGHT	\$16,100.00	\$114,282.00

LAST retrieves the previous value of DEPARTMENT:

```
LAST DEPARTMENT
```

LOOKUP: Retrieving a Value From a Cross-referenced Data Source

Available Languages: MODIFY

The LOOKUP function retrieves a data value from a cross-referenced FOCUS data source in a MODIFY request. You can retrieve data from a data source cross-referenced statically in a Master Filesynonym or a data source joined dynamically to another by the JOIN command. LOOKUP retrieves a value, but does not activate the field. LOOKUP is required because a MODIFY request, unlike a TABLE request, cannot read cross-referenced data sources freely.

LOOKUP allows a request to use the retrieved data in a computation or message, but it does not allow you to modify a cross-referenced data source.

To modify more than one data source in one request, use the COMBINE command or the Maintain Data facility.

LOOKUP can read a cross-referenced segment that is linked directly to a segment in the host data source (the host segment). This means that the cross-referenced segment must have a segment type of KU, KM, DKU, or DKM (but not KL or KLU) or must contain the

cross-referenced field specified by the JOIN command. Because LOOKUP retrieves a single cross-referenced value, it is best used with unique cross-referenced segments.

The cross-referenced segment contains two fields used by LOOKUP:

- The field containing the retrieved value. Alternatively, you can retrieve all the fields in a segment at one time. The field, or your decision to retrieve all the fields, is specified in LOOKUP.

For example, LOOKUP retrieves all the fields from the segment

```
RTN = LOOKUP(SEG.DATE_ATTEND);
```

- The cross-referenced field. This field shares values with a field in the host segment called the host field. These two fields link the host segment to the cross-referenced segment. LOOKUP uses the cross-referenced field, which is indexed, to locate a specific segment instance.

When using LOOKUP, the MODIFY request reads a transaction value for the host field. It then searches the cross-referenced segment for an instance containing this value in the cross-referenced field:

- If there are no instances of the value, the function sets a return variable to 0. If you use the field specified by LOOKUP in the request, the field assumes a value of blank if alphanumeric and 0 if numeric.
- If there are instances of the value, the function sets the return variable to 1 and retrieves the value of the specified field from the first instance it finds. There can be more than one if the cross-referenced segment type is KM or DKM, or if you specified the ALL keyword in the JOIN command.

Retrieve a Value From a Cross-referenced Data Source

```
LOOKUP(field);
```

where:

field

Is the name of the field to retrieve in the cross-referenced file. If the field name also exists in the host data source, you must qualify it here. Do not include a space between LOOKUP and the left parenthesis.



Note: LOOKUP does not use an *output* argument.

Using the LOOKUP Function

LOOKUP finds the enrollment date from DATE_ENROLL. The result can then be used to validate an expression.

```
LOOKUP (DATE_ENROLL)
```

Using a Value in a Host Segment to Search a Data Source

You can use a field value in a host segment instance to search a cross-referenced segment. Do the following:

- In the MATCH command that selects the host segment instance, activate the host field with the ACTIVATE command.
- In the same MATCH command, code LOOKUP after the ACTIVATE command.

This request displays the employee ID, date of salary increase, employee name, and the employee position after the raise was granted:

- The employee ID and name (EMP_ID) are in the root segment.
- The date of increase (DAT_INC) is in the descendant host segment.
- The job position is in the cross-referenced segment.
- The shared field is JOBCODE. You never enter a job code; the values are stored in the data source.

The request is:

```

MODIFY FILE EMPLOYEE
PROMPT EMP_ID DAT_INC
MATCH EMP_ID
    ON NOMATCH REJECT
    ON MATCH CONTINUE
MATCH DAT_INC
    ON NOMATCH REJECT
    ON MATCH ACTIVATE JOBCODE
    ON MATCH COMPUTE
        RTN = LOOKUP(JOB_DESC);
    ON MATCH TYPE
        "EMPLOYEE ID:           <EMP_ID"
        "DATE INCREASE:        <DAT_INC"
        "NAME:                  <D.FIRST_NAME <D.LAST_NAME"
        "POSITION:              <JOB_DESC"
DATA

```

A sample execution is:

1. The request prompts you for the employee ID and date of pay increase. Enter the employee ID 071382660 and the date 820101 (January 1, 1982).
2. The request locates the instance containing the ID 071382660, then locates the child instance containing the date of increase 820101.
3. This child instance contains the job code A07. The ACTIVATE command makes this value available to LOOKUP.
4. LOOKUP locates the job code A07 in the cross-referenced segment. It returns a 1 the RTN variable and retrieves the corresponding job description SECRETARY.
5. The TYPE command displays the values:

```

EMPLOYEE ID:      071382660
DATE INCREASE:    82/01/01
NAME:             ALFRED STEVENS
POSITION:         SECRETARY

```

Fields retrieved by LOOKUP do not require the D. prefix. FOCUS treats the field values as transaction values.

You may also need to activate the host field if you are using LOOKUP within a NEXT command. This request displays the latest position held by an employee:

```

MODIFY FILE EMPLOYEE
PROMPT EMP_ID
MATCH EMP_ID
    ON NOMATCH REJECT
    ON MATCH CONTINUE
NEXT DAT_INC
    ON NONEXT REJECT
    ON NEXT ACTIVATE JOBCODE
    ON NEXT COMPUTE
        RTN = LOOKUP(JOB_DESC);
    ON MATCH TYPE
        "EMPLOYEE ID:      <EMP_ID"
        "DATE OF POSITION: <DAT_INC"
        "NAME:             <D.FIRST_NAME <D.LAST_NAME"
        "POSITION:         <JOB_DESC"
DATA

```

Using the LOOKUP Function With a VALIDATE Command

When you use LOOKUP, reject transactions containing values for which there is no corresponding instance in the cross-reference segment. To do this, place the function in a VALIDATE command. If the function cannot locate the instance in the cross-referenced segment, it sets the value of the return variable to 0, causing the request to reject the transaction.

The following request updates an employee's classroom hours (ED_HRS). If the employee enrolled in classes on or after January 1, 1982, the request increases the number of classroom hours by 10%. The enrollment dates are stored in a cross-referenced segment (field DATE_ATTEND). The shared field is the employee ID.

The request is as follows:

```

MODIFY FILE EMPLOYEE
PROMPT EMP_ID ED_HRS
VALIDATE
    TEST_DATE = LOOKUP(DATE_ENROLL);
COMPUTE
    ED_HRS = IF DATE_ENROLL GE 820101 THEN ED_HRS * 1.1
            ELSE ED_HRS;
MATCH EMP_ID

```

```
ON MATCH UPDATE ED_HRS
ON NOMATCH REJECT
DATA
```

If an employee record is not found in the cross-referenced segment, that employee never enrolled in a class. The transaction is rejected as an error.

Using the Extended LOOKUP Function

If the LOOKUP function cannot locate a value of the host field in the cross-referenced segment, use extended syntax to locate the next highest or lowest cross-referenced field value in the cross-referenced segment.

To use this feature, create the index with the INDEX parameter set to NEW (the binary tree scheme). To determine the type of index used by a data source, enter the FDT command.

Use the Extended LOOKUP Function

```
COMPUTE
LOOKUP(field action);
```

where:

field

Is the name of the field in the cross-referenced data source, used in a MODIFY computation. If the field name also exists in the host data source, you must qualify it here.

action

Specifies the action the request takes. Valid values are:

EQ causes LOOKUP to take no further action if an exact match is not found. If a match is found, the value of rcode is set to 1; otherwise, it is set to 0. This is the default.

GE causes LOOKUP to locate the instance with the next highest value of the cross-referenced field. The value of rcode is set to 2.

LE causes LOOKUP to locate the instance with the next lowest value of the cross-referenced field. The value of *rcode* is set to -2.

Do not include a space between LOOKUP and the left parenthesis.

The following table shows the value of *rcode*, depending on which instance LOOKUP locates:

Value	Action
1	Exact cross-referenced value located.
2	Next highest cross-referenced value located.
-2	Next lowest cross-referenced value located.
0	Cross-referenced value not located.

NULLIF: Returning a Null Value When Parameters Are Equal

NULLIF returns a null (missing) value when its parameters are equal. If they are not equal, it returns the first value. The field to which the value is returned should have MISSING ON.

Return a Null Value for Equal Parameters

```
NULLIF(arg1,arg2)
```

where:

arg1,arg2

Any type of field, constant, or expression.

Are the input parameters that are tested for equality. They must either both be numeric or both be alphanumeric.

The output data type is the same as the input data types.

Testing for Equal Parameters

The following request uses NULLIF to test the DAMAGED and RETURNS field values for equality.

```
DEFINE FILE SALES
NULL1/I4 MISSING ON = NULLIF(DAMAGED, RETURNS);
END
TABLE FILE SALES
PRINT DAMAGED RETURNS NULL1
BY STORE_CODE
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
END
```

The output is shown in the following image.

<u>STORE CODE</u>	<u>DAMAGED</u>	<u>RETURNS</u>	<u>NULL1</u>
14B	6	10	6
	3	3	.
	1	2	1
	0	3	0
	4	5	4
	0	0	.
	4	9	4
	9	8	9
14Z	3	2	3
	1	2	1
	1	0	1
	0	0	.
	2	3	2
	7	4	7
	2	4	2
77F	1	1	.
	0	0	.
K1	0	1	0
	1	1	.

NULLIF tests the DAMAGED and RETURNS field values for equality.

```
NULLIF(DAMAGED, RETURNS)
```

For DAMAGED=3 and RETURNS = 3, the result is MISSING (.).

For DAMAGED=2 and RETURNS = 3, the result is 2.

FOCUSPAGES: Finding the size of a FOCUS or XFOCUS file

FOCUSPAGES is a portable function that is used to find the size of a FOCUS or XFOCUS file in pages. It returns the same value that is returned by ? FILE (filename). You can store the value returned by this function in an amper variable and use it to determine whether the FOCUS or XFOCUS file has data.

Compute the Number of Pages in a FOCUS or XFOCUS File

```
FOCUSPAGES(filename)
```

where:

filename

Is the name of the FOCUS or XFOCUS file whose size you want to find.

Get the size of a FOCUS or XFOCUS file

The following request gets the size of a FOCUS or XFOCUS file in pages.

```
-SET &S=FOCUSPAGES(GGSALES);
- TYPE GGSALES file has TOTAL &S PAGES
-RUN
? FDT GGSALES
? FILE GGSALES
```

The output is as follows.

```
GGSALES file has TOTAL 205 PAGES
0  DIRECTORY:/port/edaport/R729999D/C/conf/apps/ibisamp/ggsales.foc ON
02/21/2024 AT 13.46.20
    DATE/TIME OF LAST CHANGE: 02/20/2024 21.53.12
0  SEGNAME  LENGTH  PARENT  START    END    PAGES  LINKS  TYPE
1  SALES01   25      1      1      204    111    1
    CATEGORY      2      205    21
    PCD           3      202    16
    REGION        4      200    30
    ST            5      203    12
    STCD          6      191    15
0  STATUS OF FOCUS FILE:
/port/edaport/R729999D/C/conf/apps/ibisamp/ggsales.foc ON 02/21/2024 AT
13.46.20
0  ACTIVE  DELETED  DATE OF  TIME OF  LAST TRANS
   SEGNAME  COUNT   COUNT   LAST CHG  LAST CHG  NUMBER
   SALES01  4317
*INDEXES*
   CATEGORY      02/20/2024  21.53.12  4317
   PCD           02/20/2024  21.53.12  4317
   REGION        02/20/2024  21.53.12  4317
   ST            02/20/2024  21.53.12  4317
```

STCD		02/20/2024	21.53.12	4317
0 TOTAL SEGS	4317			
TOTAL CHAR	414432			
TOTAL PAGES	205			
LAST CHANGE		02/20/2024	21.53.12	4317

The value returned by the FOCUSPAGES function is stored in the amper variable &S. The output also shows the size of the file GGSALES as 205 pages.

Simplified Date and Date-Time Functions

Simplified date and date-time functions have streamlined parameter lists, similar to those used by SQL functions. In some cases, these simplified functions provide slightly different functionality than previous versions of similar functions.

The simplified functions do not have an output argument. Each function returns a value that has a specific data type.

When used in a request against a relational data source, these functions are optimized (passed to the RDBMS for processing).

Standard date and date-time formats refer to YYMD and HYYMD syntax (dates that are not stored in alphanumeric or numeric fields). Dates not in these formats must be converted before they can be used in the simplified functions. Input date and date-time parameters must provide full component dates. Literal date-time values can be used with the DT function.

All arguments can be either literals, field names, or amper variables.



Note: The simplified date and date-time functions are not supported in Maintain Data.

DAYNAME: Returning the Name of the Day From a Date Expression

DAYNAME returns a character string that contains the data-source-specific name of the day for the day part of a date expression.

Return the Name of the Day From a Date Expression

```
DAYNAME(date_exp)
```

where:

date_exp

Is a date or date-time expression.

Returning the Name of the Day From a Date Expression

The following request returns the name of the day from the TIME_DATE field.

```
TABLE FILE WF_RETAIL_TIME
PRINT TIME_DATE
COMPUTE DAYNAME1/A12 = DAYNAME(TIME_DATE);
WHERE RECORDLIMIT EQ 5
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Date</u>	<u>DAYNAME1</u>
2009/01/01	Thursday
2009/01/02	Friday
2009/01/03	Saturday
2009/01/04	Sunday
2009/01/05	Monday

DAYNAME returns the name of the day.

```
DAYNAME (TIME_DATE)
```

For January 1, 2009, the result is Thursday.

DT_CURRENT_DATE: Returning the Current Date

The DT_CURRENT_DATE function returns the current date-time provided by the running operating environment in date-time format. The time portion of the date-time is set to zero.

Return the Current Date

```
DT_CURRENT_DATE()
```

Returning the Current Date

The following request returns the current date.

```
DEFINE FILE WF_RETAIL_LITE
CURRDATE/YYMD WITH COUNTRY_NAME = DT_CURRENT_DATE();
END
TABLE FILE WF_RETAIL_LITE
SUM CURRDATE
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

CURRDATE
2016/09/08

DT_CURRENT_DATE returns the current date.

```
DT_CURRENT_DATE()
```

For September 8, 2016 (returning to a YYMD field), the result is 2016/09/08.

DT_CURRENT_DATETIME: Returning the Current Date and Time

DT_CURRENT_DATETIME returns the current date and time provided by the running operating environment in date-time format, with a specified time precision.

Return the Current Date and Time

```
DT_CURRENT_DATETIME(component)
```

where:

component

Is one of the following time precisions.

- SECOND.
- MILLISECOND.
- MICROSECOND.



Note: The field to which the value is returned must have a format that supports the time precision requested.

Returning the Current Date and Time

The following request returns the current date and time, with the time specified in microseconds.

```

DEFINE FILE WF_RETAIL_LITE
CURRDATE/HYYMDm WITH COUNTRY_NAME = DT_CURRENT_DATETIME(MICROSECOND);
END
TABLE FILE WF_RETAIL_LITE
SUM CURRDATE
ON TABLE SET PAGE NOPAGE
END

```

The output is shown in the following image.

CURRDATE
2016/09/08 17:10:31.605718

DT_CURRENT_DATETIME returns the current date and time to microsecond precision.

```
DT_CURRENT_DATETIME(MICROSECOND)
```

For September 8, 2106 at 5:10:31.605718 p.m. (returned to a field with format HYYMDm), the result is 2016/09/08 17:10:31.605718.

DT_CURRENT_TIME: Returning the Current Time

The DT_CURRENT_TIME function returns the current time provided by the running operating environment in date-time format, with a specified time precision. The date portion of the returned date-time value is set to zero.

Return the Current Time

```
DT_CURRENT_TIME(component)
```

where:

component

Is one of the following time precisions.

- SECOND.
- MILLISECOND.
- MICROSECOND.

i Note: The field to which the value is returned must have a format that supports the time precision requested.

Returning the Current Time

The following request returns the current time, with the time precision set to milliseconds.

```
DEFINE FILE WF_RETAIL_LITE
CURRTIME/HHISs WITH COUNTRY_NAME = DT_CURRENT_TIME(MILLISECOND);
END
TABLE FILE WF_RETAIL_LITE
SUM CURRTIME
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

CURRTIME
17:23:13.098

DT_CURRENT_TIME returns the current time in milliseconds.

```
DT_CURRENT_TIME(MILLISECOND)
```

For 5:23:13.098 p.m. (returned to a field with format HHISs), the result is 17:23:13.098.

DT_TOLOCAL: Converting Universal Coordinated Time to Local Time

Coordinated Universal Time (UTC) is the time standard commonly used around the world. To convert UTC time to a local time, a certain number of hours must be added to or subtracted from the UTC time, depending on the number of time zones between the locality and Greenwich, England (GMT).

DT_TOLOCAL converts UTC time to local time.

Converting timestamp values from different localities to a common standard time enables you to sort events into the actual event sequence.

This function requires an IANA (Internet-Assigned Numbers Authority) time zone database names (expressed as 'Area/Location') as a parameter. You can find a table of IANA TZ database names on Wikipedia at https://en.wikipedia.org/wiki/List_of_tz_database_time_zones, as shown in the following image.

Legend [\[edit \]](#)

UTC offsets (columns 6 and 7) are positive east of UTC and negative west of UTC. The UTC DST offset is different from the UTC offset for zones where daylight saving time is observed (see individual time zone pages for details). The UTC offsets are for the current or upcoming rules, and may have been different in the past.

The "Status" field means:

- Canonical - The primary, preferred zone name.
- Alias - An alternative name, which may fit better within a particular country.
- Deprecated - An older style name, left in the tz database for backwards compatibility, which should generally not be used.

List [\[edit \]](#)

Country code	Latitude, longitude ±DDMM(SS) ±DDMM(SS)	TZ database name	Portion of country covered	Status	UTC offset ±hh:mm	UTC DST offset ±hh:mm	Notes
CI	+0519-00402	Africa/Abidjan		Canonical	+00:00	+00:00	
GH	+0533-00013	Africa/Accra		Canonical	+00:00	+00:00	
ET	+0902+03842	Africa/Addis_Ababa		Alias	+03:00	+03:00	Link to Africa/Nairobi
DZ	+3647+00303	Africa/Algiers		Canonical	+01:00	+01:00	
ER	+1520+03853	Africa/Asmara		Alias	+03:00	+03:00	Link to Africa/Nairobi
ML	+1239-00800	Africa/Bamako		Alias	+00:00	+00:00	Link to Africa/Abidjan
CF	+0422+01835	Africa/Bangui		Alias	+01:00	+01:00	Link to Africa/Lagos
GM	+1328-01639	Africa/Banjul		Alias	+00:00	+00:00	Link to Africa/Abidjan
GW	+1151-01535	Africa/Bissau		Canonical	+00:00	+00:00	
MW	-1547+03500	Africa/Blantyre		Alias	+02:00	+02:00	Link to Africa/Maputo
CG	-0416+01517	Africa/Brazzaville		Alias	+01:00	+01:00	Link to Africa/Lagos
BI	-0323+02922	Africa/Bujumbura		Alias	+02:00	+02:00	Link to Africa/Maputo
EG	+3003+03115	Africa/Cairo		Canonical	+02:00	+02:00	

If you do not know what Area and Location corresponds to your time zone, but you do know your offset from GMT, or your legacy time zone name (such as EST), scroll down in the table. There are TZ database names that correspond to these time zone identifiers, as shown in the following image.

	EST	Deprecated	-05:00	-05:00	Choose a zone that currently <i>observes</i> EST without daylight saving time, such as America/Cancun .
	EST6EDT	Deprecated	-05:00	-04:00	Choose a zone that <i>observes</i> EST with United States daylight saving time rules, such as America/New_York .
	Etc/GMT	Canonical	+00:00	+00:00	
	Etc/GMT+0	Alias	+00:00	+00:00	Link to Etc/GMT
	Etc/GMT+1	Canonical	-01:00	-01:00	Sign is intentionally inverted. See the Etc area description .
	Etc/GMT+10	Canonical	-10:00	-10:00	Sign is intentionally inverted. See the Etc area description .
	Etc/GMT+11	Canonical	-11:00	-11:00	Sign is intentionally inverted. See the Etc area description .
	Etc/GMT+12	Canonical	-12:00	-12:00	Sign is intentionally inverted. See the Etc area description .
	Etc/GMT+2	Canonical	-02:00	-02:00	Sign is intentionally inverted. See the Etc area description .
	Etc/GMT+3	Canonical	-03:00	-03:00	Sign is intentionally inverted. See the Etc area description .
	Etc/GMT+4	Canonical	-04:00	-04:00	Sign is intentionally inverted. See the Etc area description .
	Etc/GMT+5	Canonical	-05:00	-05:00	Sign is intentionally inverted. See the Etc area description .



Note: If you use a standard IANA time zone database name in the form 'Area/Location' (for example, 'America/New_York'), automatic adjustments are made for Daylight Savings Time. If you use a name that corresponds to an offset from GMT or to a legacy time zone name, it is your responsibility to account for Daylight Savings Time.

Convert UTC Time to Local Time

```
DT_TOLocal(datetime, timezone)
```

where:

datetime

Date-time

Is a date-time expression representing UTC time, containing date and time components.

timezone

Alphanumeric

Is a character expression containing the IANA time zone name of the local time, in the form 'Area/Location' (for example, 'America/New_York').

Converting UTC Time to Local Time

The following request converts the current date-time value from UTC time to local time for time zone 'America/New_York'.

```
TABLE FILE GGSales
SUM DOLLARS NOPRINT
COMPUTE UTC1/HYYMDS = DT_CURRENT_DATETIME(SECOND);
COMPUTE LOCAL1/HYYMDS = DT_TOLOCAL(UTC1, 'America/New_York');
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>UTC1</u>	<u>LOCAL1</u>
2020/09/04 15:00:26	2020/09/04 11:00:26

DT_TOLOCAL converts the column UTC1 to local time in time zone 'America/New_York'.

```
DT_TOLOCAL(UTC1, 'America/New_York')
```

For '2020/09/04 15:00:26', the result is '2020/09/04 11:00:26'.

DT_TOUTC: Converting Local Time to Universal Coordinated Time

Coordinated Universal Time (UTC) is the time standard commonly used around the world. To convert UTC time to a local time, a certain number of hours must be added to or subtracted from the UTC time, depending on the number of time zones between the locality and Greenwich, England (GMT).

DT_TOUTC converts local time to UTC time.

Converting timestamp values from different localities to a common standard time enables you to sort events into the actual event sequence.

This function requires an IANA (Internet Assigned Numbers Authority) time zone database names (expressed as 'Area/Location') as a parameter. You can find a table of IANA TZ database names on Wikipedia at https://en.wikipedia.org/wiki/List_of_tz_database_time_zones, as shown in the following image.

Legend [\[edit \]](#)

UTC offsets (columns 6 and 7) are positive east of UTC and negative west of UTC. The *UTC DST offset* is different from the *UTC offset* for zones where *daylight saving time* is observed (see individual time zone pages for details). The UTC offsets are for the current or upcoming rules, and may have been different in the past.

The "Status" field means:

- Canonical - The primary, preferred zone name.
- Alias - An alternative name, which may fit better within a particular country.
- Deprecated - An older style name, left in the tz database for backwards compatibility, which should generally not be used.

List [\[edit \]](#)

Country code	Latitude, longitude ±DDMM(°SS) ±DDMM(°SS)	TZ database name	Portion of country covered	Status	UTC offset ±hh:mm	UTC DST offset ±hh:mm	Notes
CI	+0519-00402	Africa/Abidjan		Canonical	+00:00	+00:00	
GH	+0533-00013	Africa/Accra		Canonical	+00:00	+00:00	
ET	+0902+03842	Africa/Addis_Ababa		Alias	+03:00	+03:00	Link to Africa/Nairobi
DZ	+3647+00303	Africa/Algiers		Canonical	+01:00	+01:00	
ER	+1520+03853	Africa/Asmara		Alias	+03:00	+03:00	Link to Africa/Nairobi
ML	+1239-00800	Africa/Bamako		Alias	+00:00	+00:00	Link to Africa/Abidjan
CF	+0422+01835	Africa/Bangui		Alias	+01:00	+01:00	Link to Africa/Lagos
GM	+1328-01639	Africa/Banjul		Alias	+00:00	+00:00	Link to Africa/Abidjan
GW	+1151-01535	Africa/Bissau		Canonical	+00:00	+00:00	
MW	-1547+03500	Africa/Blantyre		Alias	+02:00	+02:00	Link to Africa/Maputo
CG	-0416+01517	Africa/Brazzaville		Alias	+01:00	+01:00	Link to Africa/Lagos
BI	-0323+02922	Africa/Bujumbura		Alias	+02:00	+02:00	Link to Africa/Maputo
EG	+3003+03115	Africa/Cairo		Canonical	+02:00	+02:00	

If you do not know what Area and Location corresponds to your time zone, but you do know your offset from GMT, or your legacy time zone name (such as EST), scroll down in the table. There are TZ database names that correspond to these time zone identifiers, as shown in the following image.

		EST	Deprecated	-05:00	-05:00	Choose a zone that currently <i>observes</i> EST without daylight saving time, such as America/Cancun .
		EST5EDT	Deprecated	-05:00	-04:00	Choose a zone that <i>observes</i> EST with United States daylight saving time rules, such as America/New_York .
		Etc/GMT	Canonical	+00:00	+00:00	
		Etc/GMT+0	Alias	+00:00	+00:00	Link to Etc/GMT
		Etc/GMT+1	Canonical	-01:00	-01:00	Sign is intentionally inverted. See the Etc area description .
		Etc/GMT+10	Canonical	-10:00	-10:00	Sign is intentionally inverted. See the Etc area description .
		Etc/GMT+11	Canonical	-11:00	-11:00	Sign is intentionally inverted. See the Etc area description .
		Etc/GMT+12	Canonical	-12:00	-12:00	Sign is intentionally inverted. See the Etc area description .
		Etc/GMT+2	Canonical	-02:00	-02:00	Sign is intentionally inverted. See the Etc area description .
		Etc/GMT+3	Canonical	-03:00	-03:00	Sign is intentionally inverted. See the Etc area description .
		Etc/GMT+4	Canonical	-04:00	-04:00	Sign is intentionally inverted. See the Etc area description .
		Etc/GMT+5	Canonical	-05:00	-05:00	Sign is intentionally inverted. See the Etc area description .



Note: If you use a standard IANA time zone database name in the form 'Area/Location' (for example, 'America/New_York'), automatic adjustments are made for Daylight Savings Time. If you use a name that corresponds to an offset from GMT or to a legacy time zone name, it is your responsibility to account for Daylight Savings Time.

Convert Local Time to UTC Time

```
DT_TOUTC(datetime, timezone)
```

where:

datetime

Date-time

Is a date-time expression representing local time, containing date and time components.

timezone

Alphanumeric

Is a character expression containing the IANA time zone name of the local time, in the form 'Area/Location' (for example, 'America/New_York').

Converting Local Time to UTC Time

The following request converts the current local date-time value for time zone America/New_York to UTC time.

```
TABLE FILE GGSales
SUM DOLLARS NOPRINT
COMPUTE LOCAL1/HYYMDS = DT_CURRENT_DATETIME(SECOND);
COMPUTE UTC1/HYYMDS = DT_TOUTC(LOCAL1, 'America/New_York');
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>LOCAL1</u>	<u>UTC1</u>
2020/09/04 14:49:41	2020/09/04 18:49:41

DT_TOUTC converts the date-time column LOCAL1 in time zone 'America/New_York' to UTC time.

```
DT_TOUTC(LOCALT1, 'America/New_York')
```

For '2020/09/04 14:49:41', the result is '2020/09/04 18:49:41'.

Sorting by UTC Time

The following request retrieves the current date and time into the field LOCALT1 and sets the field TIMEZONE to IANA time zone database names. It then uses DT_TOUTC to convert the same local time, with different time zones, to the UTC time that corresponds to the given time zone, and sorts the output by the generated UTC time.

```
DEFINE FILE GGSales
LOCALT1/HYYMDS=DT_CURRENT_DATETIME(SECOND);
TIMEZONE/A30=IF LAST TIMEZONE EQ ' ' THEN 'AMERICA/NEW_YORK'
ELSE IF LAST TIMEZONE EQ 'AMERICA/NEW_YORK' THEN 'AMERICA/CHICAGO'
ELSE IF LAST TIMEZONE EQ 'AMERICA/CHICAGO' THEN 'AMERICA/DENVER'
ELSE IF LAST TIMEZONE EQ 'AMERICA/DENVER' THEN 'ASIA/TOKYO'
ELSE IF LAST TIMEZONE EQ 'ASIA/TOKYO' THEN 'EUROPE/LONDON'
ELSE IF LAST TIMEZONE EQ 'EUROPE/LONDON' THEN 'AMERICA/NEW_YORK';
UTCTIME/HYYMDS=DT_TOUTC(LOCALT1,TIMEZONE);
END
TABLE FILE GGSales
PRINT TIMEZONE LOCALT1 DOLLARS NOPRINT
BY UTCTIME
WHERE PRODUCT EQ 'Thermos'
IF RECORDLIMIT EQ 20
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>UTCTIME</u>	<u>TIMEZONE</u>	<u>LOCALT1</u>
2020/10/02 06:45:59	ASIA/TOKYO	2020/10/02 15:45:59
	ASIA/TOKYO	2020/10/02 15:45:59
	ASIA/TOKYO	2020/10/02 15:45:59
	ASIA/TOKYO	2020/10/02 15:45:59
2020/10/02 14:45:59	EUROPE/LONDON	2020/10/02 15:45:59
	EUROPE/LONDON	2020/10/02 15:45:59
	EUROPE/LONDON	2020/10/02 15:45:59
	EUROPE/LONDON	2020/10/02 15:45:59
2020/10/02 19:45:59	AMERICA/NEW_YORK	2020/10/02 15:45:59
	AMERICA/NEW_YORK	2020/10/02 15:45:59
	AMERICA/NEW_YORK	2020/10/02 15:45:59
	AMERICA/NEW_YORK	2020/10/02 15:45:59
2020/10/02 20:45:59	AMERICA/CHICAGO	2020/10/02 15:45:59
	AMERICA/CHICAGO	2020/10/02 15:45:59
	AMERICA/CHICAGO	2020/10/02 15:45:59
	AMERICA/CHICAGO	2020/10/02 15:45:59
2020/10/02 21:45:59	AMERICA/DENVER	2020/10/02 15:45:59
	AMERICA/DENVER	2020/10/02 15:45:59
	AMERICA/DENVER	2020/10/02 15:45:59
	AMERICA/DENVER	2020/10/02 15:45:59

DTADD: Incrementing a Date or Date-Time Component

Given a date in standard date or date-time format, DTADD returns a new date after adding the specified number of a supported component. The returned date format is the same as the input date format.

Increment a Date or Date-Time Component

```
DTADD(date, component, increment)
```

where:

date

Date or date-time

Is the date or date-time value to be incremented, which must provide a full component date.

component

Keyword

Is the component to be incremented. Valid components (and acceptable values) are:

- YEAR (1-9999).
- QUARTER (1-4).
- MONTH (1-12).
- WEEK (1-53). This is affected by the WEEKFIRST setting.
- DAY (of the Month, 1-31).
- HOUR (0-23).
- MINUTE (0-59).
- SECOND (0-59).

increment

Integer

Is the value (positive or negative) to add to the component.

Incrementing the DAY Component of a Date

The following request against the WF_RETAIL data source adds three days to the employee date of birth:

```
DEFINE FILE WF_RETAIL
NEWDATE/YYMD = DTADD(DATE_OF_BIRTH, DAY, 3);
MGR/A3 = DIGITS(ID_MANAGER, 3);
END
TABLE FILE WF_RETAIL
SUM MGR NOPRINT DATE_OF_BIRTH NEWDATE
BY MGR
ON TABLE SET PAGE NOPAGE
END
```

The output is:

MGR	Date of Birth	NEWDATE
001	1985/01/29	1985/02/01
101	1982/04/01	1982/04/04
201	1976/11/14	1976/11/17
301	1980/05/15	1980/05/18
401	1975/10/19	1975/10/22
501	1985/04/11	1985/04/14
601	1967/02/03	1967/02/06
701	1977/10/16	1977/10/19
801	1970/04/18	1970/04/21
901	1972/03/29	1972/04/01
999	1976/10/21	1976/10/24

DTADD adds three days to the employee date of birth:

```
DTADD(DATE_OF_BIRTH, DAY, 3)
```

For 1976/10/21, the result is 1976/10/24.

Usage Notes for DTADD

- Each element must be manipulated separately. Therefore, if you want to add 1 year and 1 day to a date, you need to call the function twice, once for YEAR (you need to take care of leap years) and once for DAY. The simplified functions can be nested in a single expression, or created and applied in separate DEFINE or COMPUTE expressions.
- With respect to parameter validation, DTADD will not allow anything but a standard date or a date-time value to be used in the first parameter.
- The increment is not checked, and the user should be aware that decimal numbers are not supported and will be truncated. Any combination of values that increases the YEAR beyond 9999 returns the input date as the value, with no message. If the user receives the input date when expecting something else, it is possible there was an error.

DTDIFF: Returning the Number of Component Boundaries Between Date or Date-Time Values

Given two dates in standard date or date-time formats, DTDIFF returns the number of given component boundaries between the two dates. The returned value has integer format for calendar components or double precision floating point format for time components.

Return the Number of Component Boundaries

```
DTDIFF(end_date, start_date, component)
```

where:

end_date

Date or date-time

Is the ending full-component date in either standard date or date-time format. If this date is given in standard date format, all time components are assumed to be zero.

start_date

Date or date-time

Is the starting full-component date in either standard date or date-time format. If this date is given in standard date format, all time components are assumed to be zero.

component

Keyword

Is the component on which the number of boundaries is to be calculated. For example, QUARTER finds the difference in quarters between two dates. Valid components (and acceptable values) are:

- YEAR (1-9999).
- QUARTER (1-4).
- MONTH (1-12).

- WEEK (1-53). This is affected by the WEEKFIRST setting.
- DAY (of the Month, 1-31).
- HOUR (0-23).
- MINUTE (0-59).
- SECOND (0-59).

Returning the Number of Years Between Two Dates

The following request against the WF_RETAIL data source calculates employee age when hired:

```
DEFINE FILE WF_RETAIL
YEARS/I9 = DTDIFF(START_DATE, DATE_OF_BIRTH, YEAR);
END
TABLE FILE WF_RETAIL
PRINT START_DATE DATE_OF_BIRTH YEARS AS 'Hire, Age'
BY EMPLOYEE_NUMBER
WHERE EMPLOYEE_NUMBER CONTAINS 'AA'
ON TABLE SET PAGE NOPAGE
END
```

The output is:

Employee Number	Start Date	Date of Birth	Hire Age
AA100	2008/11/14	1991/06/04	17
AA12	2008/11/19	1985/07/13	23
AA137	2013/01/15	1988/12/24	25
AA174	2013/01/15	1980/08/30	33
AA195	2013/01/15	1977/12/11	36
AA427	2008/12/23	1969/08/08	39
AA820	2013/10/29	1983/11/27	30
AA892	2013/10/27	1981/04/24	32

DTDIFF calculates employee age when hired:

```
DTDIFF (START_DATE, DATE_OF_BIRTH, YEAR)
```

For the date of birth 1991/06/04 and the start date 2008/11/14, the result is 17.

DTDIFF calculates the difference between two date-time values in minutes:

```
DTDIFF (DATETIME1, DATETIME2, MINUTES)
```

For DATETIME1 = 2020/0116 12:25 and DATETIME2 = 2020/0116 12:20, the result is 5.

For DATETIME1 = 2020/0116 12:25 and DATETIME2 = 2020/0115 12:20, the result is 1445.

DTIME: Extracting Time Components From a Date-Time Value

Given a date-time value and time component keyword as input, DTIME returns the value of all of the time components up to and including the requested component. The remaining time components in the value are set to zero. The field to which the time component is returned must have a time format that supports the component being returned.

Extract a Time Component From a Date-Time Value

```
DTIME(datetime, component)
```

where:

datetime

Date-time

Is the date-time value from which to extract the time component. It can be a field name or a date-time literal. It must provide a full component date.

component

Keyword

Valid values are:

- **TIME**. The complete time portion is returned. Its smallest component depends on the input date-time format. Nanoseconds are not supported or returned.
- **HOURL**. The time component up to and including the hour component is extracted.
- **MINUTE**. The time component up to and including the minute component is extracted.
- **SECOND**. The time component up to and including the second component is extracted.
- **MILLISECOND**. The time component up to and including the millisecond component is extracted.
- **MICROSECOND**. The time component up to and including the microsecond component is extracted.

Extracting Time Components

The following request defines two date-time fields:

- **TRANSTIME** contains the extracted time components from **TRANSDATE** down to the minute.
- **TRANSTIME2** extracts all of the time components from the literal date-time value 2018/01/17 05:45:22.777888.

```
DEFINE FILE VIDEOTR2
TRANSTIME/HHISsm = DTIME(TRANSDATE, MINUTE);
TRANSTIME2/HHISsm = DTIME(DT(2018/01/17 05:45:22.777888), TIME);
END
TABLE FILE VIDEOTR2
SUM  TRANSTIME TRANSTIME2
BY  MOVIECODE
BY  TRANSDATE
WHERE MOVIECODE CONTAINS 'MGM'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
```

```

GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>MOVIECODE</u>	<u>TRANSDATE</u>	<u>TRANSTIME</u>	<u>TRANSTIME2</u>
145MGM	1999/11/06 02:12	02:12:00.000000	05:45:22.777888
243MGM	1991/06/19 04:11	04:11:00.000000	05:45:22.777888
259MGM	1991/06/19 07:18	07:18:00.000000	05:45:22.777888
284MGM	1999/06/18 03:30	03:30:00.000000	05:45:22.777888
505MGM	1996/06/21 01:16	01:16:00.000000	05:45:22.777888
518MGM	1991/06/24 04:43	04:43:00.000000	05:45:22.777888
688MGM	1998/10/03 02:41	02:41:00.000000	05:45:22.777888
	1999/11/18 10:27	10:27:00.000000	05:45:22.777888
	1998/03/19 07:23	07:23:00.000000	05:45:22.777888
	1999/04/22 06:19	06:19:00.000000	05:45:22.777888
	1999/10/22 06:25	06:25:00.000000	05:45:22.777888
	1999/10/30 06:29	06:29:00.000000	05:45:22.777888
	1999/11/19 10:26	10:26:00.000000	05:45:22.777888

DTIME extracts the TIME component from the data-time value 2018/01/17 05:45:22.777888.

```
DTIME(DT(2018/01/17 05:45:22.777888), TIME)
```

The result is 05:45:22.777888.

DTPART: Returning a Date or Date-Time Component in Integer Format

Given a date in standard date or date-time format and a component, DTPART returns the component value in integer format.

Return a Date or Date-Time Component in Integer Format

```
DTPART(date, component)
```

where:

date

Date or date-time

Is the full-component date in a standard date or date-time format.

component

Keyword

Is the component to extract in integer format. Valid components (and values) are:

- YEAR (1-9999).
- QUARTER (1-4).
- MONTH (1-12).
- WEEK (of the year, 1-53). This is affected by the WEEKFIRST setting.
- DAY (of the Month, 1-31).
- DAY_OF_YEAR (1-366).
- WEEKDAY (day of the week, 1-7). This is affected by the WEEKFIRST setting.
- HOUR (0-23).
- MINUTE (0-59).
- SECOND (0-59).
- MILLISECOND (0-999).
- MICROSECOND (0-999999).

Extracting the Quarter Component as an Integer

The following request against the WF_RETAIL data source extracts the QUARTER component from the employee start date:

```
DEFINE FILE WF_RETAIL
  QTR/I2 = DTPART(START_DATE, QUARTER);
END
TABLE FILE WF_RETAIL
  PRINT START_DATE QTR AS Quarter
  BY EMPLOYEE_NUMBER
  WHERE EMPLOYEE_NUMBER CONTAINS 'AH'
  ON TABLE SET PAGE NOPAGE
END
```

The output is:

Employee Number	Start Date	Quarter
AH118	2013/01/15	1
AH288	2013/11/11	4
AH42	2008/11/13	4
AH928	2009/04/11	2

DTPART extracts the quarter from the employee start date:

```
DTPART(START_DATE, QUARTER)
```

For 2009/04/11, the result is 2.

DTRUNC: Returning the Start of a Date Period for a Given Date

Given a date or timestamp and a component, DTRUNC returns the first date within the period specified by that component.

Return the First or Last Date of a Date Period

```
DTRUNC(date_or_timestamp, date_period, extend)
```

where:

date_or_timestamp

Date or date-time

Is the date or timestamp of interest, which must provide a full component date.

date_period

Is the period whose starting or ending date you want to find. Can be one of the following:

- DAY, returns the date that represents the input date (truncates the time portion, if there is one).
- YEAR, returns the date of the first day of the year.
- MONTH, returns the date of the first day of the month.
- QUARTER, returns the date of the first day in the quarter.
- WEEK, returns the date that represents the first date of the given week.
By default, the first day of the week will be Sunday, but this can be changed using the WEEKFIRST parameter.
- YEAR_END, returns the last date of the year.
- QUARTER_END, returns the last date of the quarter.
- MONTH_END, returns the last date of the month.
- WEEK_END, returns the last date of the week.

extend

Optional. Is a number that indicates how many of the specified date components to include in the resulting date period.

Since all intervals have to be the same size, the extended argument is limited to the following values for the date period:

- YEAR. No limitations.
- QUARTER. 1 and 2 only.
- MONTH. 1, 2, 3, 4, and 6 only.
- HOUR. 1, 2, 3, 4, 6, and 12 only.
- MINUTE. 1, 2, 3, 4, 5, 6, 10, 15, 20, and 30 only.
- SECOND. 1, 2, 3, 4, 5, 6, 10, 15, 20, and 30 only.

Returning the First Date in a Date Period

In the following request, DTRUNC returns the first date of the quarter given the start date of the employee:

```
DEFINE FILE WF_RETAIL
QTRSTART/YYMD = DTRUNC(START_DATE, QUARTER);
END
TABLE FILE WF_RETAIL
PRINT START_DATE QTRSTART AS 'Start,of Quarter'
BY EMPLOYEE_NUMBER
WHERE EMPLOYEE_NUMBER CONTAINS 'AH'
ON TABLE SET PAGE NOPAGE
END
```

The output is:

Employee Number	Start Date	Start of Quarter
AH118	2013/01/15	2013/01/01
AH288	2013/11/11	2013/10/01
AH42	2008/11/13	2008/10/01
AH928	2009/04/11	2009/04/01

DTRUNC returns the first date of the quarter given the date of birth:

```
DTRUNC (DATE_OF_BIRTH, QUARTER)
```

For 1993/03/27, the result is 1993/03/01.

Using the Start of Week Parameter for DTRUNC

The following request returns the date that is the start of the week for the start date of certain employees:

```
DEFINE FILE WF_RETAIL
DAY1/WT = DTRUNC(START_DATE, DAY);
WKSTART/YYMD = DTRUNC(START_DATE, WEEK);
DAY2/WT = DTRUNC(WKSTART, DAY);
END
TABLE FILE WF_RETAIL
PRINT START_DATE
DAY1 AS 'DOW 1'
WKSTART AS 'Start,of Week'
DAY2 AS 'DOW 2'
BY EMPLOYEE_NUMBER
WHERE START_DATE GT '20130101'
WHERE EMPLOYEE_NUMBER CONTAINS 'AH'
ON TABLE SET PAGE NOPAGE
END
```

The output is:

Employee Number	Start Date	DOW 1	Start of Week	DOW 2
-----	-----	-----	-----	-----
AH118	2013/01/15	TUE	2013/01/13	SUN
AH2272	2013/01/17	THU	2013/01/13	SUN
AH288	2013/11/11	MON	2013/11/10	SUN
AH3520	2013/09/23	MON	2013/09/22	SUN
AH3591	2013/09/22	SUN	2013/09/22	SUN
AH5177	2013/07/21	SUN	2013/07/21	SUN

DTRUNC returns the date that represents the start of the week.

```
DTRUNC(START_DATE, WEEK)
```

For 2013/01/15, the result is 2013/01/13

Returning the Date of the First and Last Days of a Week

The following request returns the dates that correspond to the first day of the week and the last day of the week for the given date.

```
DEFINE FILE WF_RETAIL
WEEKSTART/YYMD = DTRUNC(START_DATE, WEEK);
WEEKEND/YYMD = DTRUNC(START_DATE, WEEK_END);
END
TABLE FILE WF_RETAIL
PRINT START_DATE WEEKSTART AS 'Start,of Week'
WEEKEND AS 'End,of Week'
BY EMPLOYEE_NUMBER
WHERE EMPLOYEE_NUMBER CONTAINS 'AH1'
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

Employee Number	Start Date	Start of Week	End of Week
AH118	2013/01/15	2013/01/13	2013/01/19
AH1348	2009/11/19	2009/11/15	2009/11/21
AH1398	2009/11/11	2009/11/08	2009/11/14
AH1994	2006/01/01	2006/01/01	2006/01/07

DTRUNC calculates the date of the end of the week.

```
WEEKEND/YYMD = DTRUNC(START_DATE, WEEK_END)
```

For 2013/01/15, the result is 2013/01/19.

Returning a Date Using the Extend Argument

In the following request, given the date of birth for each employee, the DTRUNC function uses the extended argument to return the start date of the decade in which they were born.

```

DEFINE FILE WF_RETAIL
BIRTH_DECADE/YYMD = DTRUNC(DATE_OF_BIRTH, YEAR, 10);
END
TABLE FILE WF_RETAIL
PRINT DATE_OF_BIRTH BIRTH_DECADE AS 'Start,of Decade'
BY EMPLOYEE_NUMBER
ON TABLE SET PAGE NOPAGE
END

```

The output is shown in the following image.

Employee Number	Date of Birth	Start of Decade
AD1804	1975/04/21	1970/01/01
AG5105	1971/02/28	1970/01/01
AT1871	1983/08/04	1980/01/01
BD3005	1975/08/22	1970/01/01
BM1802	1988/12/04	1980/01/01
DW5139	1979/04/02	1970/01/01
HV3086	1977/02/08	1970/01/01
IA1888	1989/08/15	1980/01/01
JF99999	1975/07/03	1970/01/01
JH5164	1970/08/01	1970/01/01
KV5101	1976/12/23	1970/01/01
LE3001	1982/11/05	1980/01/01
MS5102	1986/03/24	1980/01/01
PM5104	1979/05/02	1970/01/01
RA1801	1974/11/14	1970/01/01
RB3033	1977/02/22	1970/01/01
SV3002	1988/09/14	1980/01/01
YS3004	1976/09/13	1970/01/01
ZC1870	1974/05/10	1970/01/01

The DTRUNC extend argument is a number that indicates how many of the specified date components to include in the resulting date period. For example, DTRUNC calculates the start date of the decade in which an employee was born.

```
BIRTH_DECADE/YYMD = DTRUNC(DATE_OF_BIRTH, YEAR, 10);
```

For 1975/04/71, the result is 1970/01/01.

MONTHNAME: Returning the Name of the Month From a Date Expression

MONTHNAME returns a character string that contains the data-source-specific name of the month for the month part of a date expression.

Return the Name of the Month From a Date Expression

```
MONTHNAME(date_exp)
```

where:

date_exp

Is a date or date-time expression.

Returning the Name of the Month From a Date Expression

The following request returns the name of the month from the TRANSDATE field.

```
TABLE FILE EMPLOYEE
PRINT HIRE_DATE
COMPUTE TRANSDATE/YYMD= HIRE_DATE; NOPRINT
COMPUTE MONTHNAME1/A12 = MONTHNAME(TRANSDATE);
BY  TRANSDATE
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>TRANSDATE</u>	<u>HIRE_DATE</u>	<u>MONTHNAME1</u>
1980/06/02	80/06/02	June
1981/07/01	81/07/01	July
	81/07/01	July
1981/11/02	81/11/02	November
1982/01/04	82/01/04	January
	82/01/04	January
1982/02/02	82/02/02	February
1982/04/01	82/04/01	April
	82/04/01	April
1982/05/01	82/05/01	May
1982/07/01	82/07/01	July
1982/08/01	82/08/01	August

MONTHNAME returns the name of the month.

```
MONTHNAME (DATE)
```

For 'August 3, 2020', the result is August.

Date Functions

Date functions manipulate date values. There are two types of date functions:

- Standard date functions for use with non-legacy dates.
- Legacy date functions for use with legacy dates.

If a date is in an alphanumeric or numeric field that contains date display options (for example, I6YMD), you must use the legacy date functions.

Overview of Date Functions

The following explains the difference between the types of date functions:

- **Standard date** functions are for use with standard date formats, or just date formats. A date format refers to internally stored data that is capable of holding date components, such as century, year, quarter, month, and day. It does not include time components. A synonym does not specify an internal data type or length for a date format. Instead, it specifies display date components, such as D (day), M (month), Q (quarter), Y (2-digit year), or YY (4-digit year). For example, format MDYY is a date format that has three date components; it can be used in the USAGE attribute of a synonym. A real date value, such as March 9, 2004, described by this format is displayed as 03/09/2004, by default. Date formats can be full-component and non-full component. Full component formats include all three letters, for example, D, M, and Y. JUL for Julian can also be included. All other date formats are non-full component. Some date functions require full component arguments for date fields, while others will accept full or non-full components. A date format was formerly called a smart date.
- **Legacy date** functions are for use with legacy dates only. A legacy date refers to formats with date edit options, such as I6YMD, A6MDY, I8YYMD, or A8MDYY. For example, A6MDY is a 6-byte alphanumeric string. The suffix MDY indicates the order in which the date components are stored in the field, and the prefix I or A indicates a numeric or alphanumeric form of representation. For example, a value '030599' can be assigned to a field with format A6MDY, which will be displayed as 03/05/99.

Date formats have an internal representation matching either numeric or alphanumeric format. For example, A6MDY matches alphanumeric format, YYMD and I6DMY match numeric format. When the function output is a date in specified by *output*, it can be used either for assignment to another date field of this format, or it can be used for further data manipulation in the expression with data of matching formats. Assignment to another field of a different date format, will yield a random result.

All but three date functions deal with only one date format. The exceptions are DATECVT, HCNVRT, and HDATE, which convert one date type into another.

In addition to the functions discussed in this topic, there are date and time functions that are available only in the Maintain language. For information on these functions, see [Maintain-specific Date and Time Functions](#).

For many functions, the output argument can be supplied either as a field name or as a format enclosed in single quotation marks. However, if a function is called from a Dialogue Manager command, this argument must always be supplied as a format, and if a function is called from a Maintain procedure, this argument must always be supplied as a field name. For detailed information about calling a function and supplying arguments, see [Accessing and Calling a Function](#).

Using Standard Date Functions

When using standard date functions, you need to understand the settings that alter the behavior of these functions, as well as the acceptable formats and how to supply values in these formats.

You can affect the behavior of date functions in the following ways:

- Defining which days of the week are work days and which are not. Then, when you use a date function involving work days, dates that are not work days are ignored. For details, see [Using Standard Date Functions](#).
- Determining whether to display leading zeros when a date function in Dialogue Manager returns a date. For details, see [Using Standard Date Functions](#).

For detailed information on each standard date function, see:

[DATEADD: Adding or Subtracting a Date Unit to or From a Date](#)

[DATECVT: Converting the Format of a Date](#)

[DATEDIF: Finding the Difference Between Two Dates](#)

[DATEMOV: Moving a Date to a Significant Point](#)

[DATETRAN: Formatting Dates in International Formats](#)

[DPART: Extracting a Component From a Date](#)

[FIYR: Obtaining the Financial Year](#)

[FIQTR: Obtaining the Financial Quarter](#)

[FIYYQ: Converting a Calendar Date to a Financial Date](#)

[TODAY: Returning the Current Date](#)

Specifying Work Days

You can determine which days are work days and which are not. Work days affect the DATEADD, DATEDIF, and DATEMOV functions. You identify work days as business days or holidays.

Specifying Business Days

Business days are traditionally Monday through Friday, but not every business has this schedule. For example, if your company does business on Sunday, Tuesday, Wednesday, Friday, and Saturday, you can tailor business day units to reflect that schedule.

Set Business Days

```
SET BUSDAYS = smtwtfS
```

where:

smtwtfs

Is the seven character list of days that represents your business week. The list has a position for each day from Sunday to Saturday:

- To identify a day of the week as a business day, enter the first letter of that day in that day's position.
- To identify a non-business day, enter an underscore (_) in that day's position.

If a letter is not in its correct position, or if you replace a letter with a character other than an underscore, you receive an error message.

Setting Business Days to Reflect Your Work Week

The following designates work days as Sunday, Tuesday, Wednesday, Friday, and Saturday:

```
SET BUSDAYS = S_TW_FS
```

View the Current Setting of Business Days

```
? SET BUSDAYS
```

Specifying Holidays

You can specify a list of dates that are designated as holidays in your company. These dates are excluded when using functions that perform calculations based on working days. For example, if Thursday in a given week is designated as a holiday, the next working day after Wednesday is Friday.

To define a list of holidays, you must:

1. Create a holiday file using a standard text editor.
2. Select the holiday file by issuing the SET command with the HDAY parameter.

Rules for Creating a Holiday File

- Dates must be in YYMD format.
- Dates must be in ascending order.
- Each date must be on its own line.
- Each year for which data exists must be included or the holiday file is considered invalid. Calling a date function with a date value outside the range of the holiday file returns a zero for business day requests.

If you are subtracting two dates in 2005, and the latest date in the holiday file is 20041231, the subtraction will not be performed. One way to avoid invalidating the holiday file is to put a date very far in the future in any holiday file you create (for example, 29991231), and then it will always be considered valid.

- You may include an optional description of the holiday, separated from the date by a space.

By default, the holiday file has a file name of the form HDAYxxxx.err and is on your path, or on z/OS under PDS deployment, is a member named HDAYxxxx of a PDS allocated to DDNAME ERRORS. In your procedure or request, you must issue the SET HDAY=xxxx command to identify the file or member name. Alternatively, you can define the file to have any name and be stored anywhere or, on z/OS under PDS deployment, allocate the holiday file as a sequential file of any name or as member HDAYxxxx of any PDS. For information about using non-default holiday file names, see [Using Standard Date Functions](#).

Create a Holiday File

Procedure

1. In a text editor, create a list of dates designated as holidays using the [Using Standard Date Functions](#).
2. Save the file.

If you are not using the default naming convention, see [Using Standard Date Functions](#). If you are using the default naming convention, use the following instructions:

In Windows and UNIX: The file must be HDAYxxxx.ERR

In z/OS: The file must be a member of ERRORS named HDAYxxxx.

where:

xxxx

Is a string of text four characters long.

Select a Holiday File

```
SET HDAY = xxxx
```

where:

xxxx

Is the part of the name of the holiday file after HDAY. This string must be four characters long.

Creating and Selecting a Holiday File

The following is the HDAYTEST file, which establishes holidays:

```
19910325 TEST HOLIDAY
19911225 CHRISTMAS
```

The following sets HDAYTEST as the holiday file:

```
SET BUSDAYS = SMTWTFS
SET HDAY = TEST
```

This request uses HDAYTEST in its calculations:

```
TABLE FILE MOVIES
PRINT TITLE RELDATE
COMPUTE NEXTDATE/YMD = DATEADD(RELDATE, 'BD', 1);
WHERE RELDATE GE '19910101';
END
```

The output is:

TITLE	REDATE	NEXTDATE
-----	-----	-----
TOTAL RECALL	91/03/24	91/03/26

FILEDEF or DYNAM the Holiday File

In all environments except z/OS under PDS deployment, use the following syntax.

```
FILEDEF HDAYxxxx DISK {app/|path}/filename.ext
```

where:

HDAYxxxx

Is the logical name (DDNAME) for the holiday file, where **xxxx** is any four characters. You establish this logical name by issuing the SET HDAY=**xxxx** command in your procedure or request.

app

Is the name of the application in which the holiday file resides.

path

Is the path to the holiday file.

filename.ext

Is the name of the holiday file.

On z/OS under PDS deployment, use the following to allocate a sequential holiday file.

```
DYNAM ALLOC {DD|FILE} HDAYxxxx DA qualif.filename.suffix SHR REU
```

On z/OS under PDS deployment, use the following to allocate a holiday file that is a member of a PDS.

```
DYNAM ALLOC {DD|FILE} HDAYxxxx DA qualif.filename.suffix(HDAYxxx) SHR  
REU
```

where:

HDAYxxxx

Is the DDNAME for the holiday file. Your FOCEXEC or request must set the HDAY parameter to **xxxx**, where **xxxx** is any four characters you choose. If your holiday file is a member of a PDS, HDAY**xxxx** must also be the member name.

qualif.filename.suffix

Is the fully-qualified name of the sequential file that contains the list of holidays or the PDS with member HDAY**xxxx** that contains the list of holidays.

Defining a Holiday File

The following holiday file, named holiday.data in the c:\temp directory on Windows, defines November 3, 2011 and December 24, 2011 as holidays:

```
20111103
20111224
```

The following request against the MOVIES data source uses the FILEDEF command to define this file as the holiday file. The logical name in the FILEDEF command is HDAYMMMM, and the procedure issues the SET HDAY=MMMM command. It then defines the date November 2, 2011 and calculates the next business day:

```
FILEDEF HDAYMMMM DISK c:\ibi\holiday.data
SET HDAY = MMMM
SET BUSDAYS = _MTWTF_
DEFINE FILE MOVIES
NEWDATE/YYMD = '20111102';
NEXTDATE/YYMD = DATEADD(NEWDATE, 'BD', 1);
END
TABLE FILE MOVIES
SUM COPIES NEWDATE NEXTDATE
ON TABLE SET PAGE NOPAGE
END
```

The output shows that the next business day after November 2 is November 4 because November 3 is a holiday:

COPIES	NEWDATE	NEXTDATE
117	2011/11/02	2011/11/04

The following defines and sets the holiday file. Then DATEADD finds the next business day taking the holiday file into account:

```
FILEDEF HDAYMMMM DISK c:\ibi\holiday.data
SET HDAY = MMMM
SET BUSDAYS = _MTWTF_
DATEADD(NEWDATE, 'BD', 1);
```

For 2011/11/02, DATEADD returns 2011/11/04 because November 3 is a holiday.

Allocating the Holiday File to a Sequential File on z/OS Under PDS Deployment

The following sequential file, named USER1.HOLIDAY.DATA, defines November 3, 2011 and December 24, 2011 as holidays:

```
20111103
20111224
```

The following request against the MOVIES data source uses the DYNAM command to allocate this file as the holiday file. The DDNAME in the DYNAM command is HDAYMMMM, and the procedure issues the SET HDAY=MMMM command. It then defines the date November 2, 2011 and calculates the next business day:

```
DYNAM ALLOC DD HDAYMMMM DA USER1.HOLIDAY.DATA SHR REU
SET HDAY = MMMM
SET BUSDAYS = _MTWTF_
DEFINE FILE MOVIES
NEWDATE/YYMD = '20111102';
NEXTDATE/YYMD = DATEADD(NEWDATE, 'BD', 1);
END
TABLE FILE MOVIES
SUM COPIES NEWDATE NEXTDATE
ON TABLE SET PAGE NOPAGE
END
```

The output shows that the next business day after November 2 is November 4 because November 3 is a holiday:

COPIES	NEWDATE	NEXTDATE
-----	-----	-----
117	2011/11/02	2011/11/04

The following defines and sets the holiday file. Then DATEADD finds the next business day taking the holiday file into account:

```
DYNAM ALLOC DD HDAYMMMM DA USER1.HOLIDAY.DATA SHR REU
SET HDAY = MMMM
DATEADD(NEWDATE, 'BD', 1);
```

For 2011/11/02, DATEADD returns 2011/11/04 because November 3 is a holiday.

Allocating the Holiday File to a PDS Member on z/OS Under PDS Deployment

The following holiday file, member HDAYMMMM in a PDS named USER1.HOLIDAY.DATA, defines November 3, 2011 and December 24, 2011 as holidays:

```
20111103
20111224
```

The following request against the MOVIES data source uses the DYNAM command to allocate this file as the holiday file. The DDNAME in the DYNAM command is HDAYMMMM, the member name is also HDAYMMMM, and the procedure issues the SET HDAY=MMMM command. It then defines the date November 2, 2011 and calculates the next business day:

```
DYNAM ALLOC DD HDAYMMMM DA USER1.HOLIDAY.DATA(HDAYMMMM) SHR REU
SET HDAY = MMMM
SET BUSDAYS = _MTWTF_
DEFINE FILE MOVIES
NEWDATE/YYMD = '20111102';
NEXTDATE/YYMD = DATEADD(NEWDATE, 'BD', 1);
END
TABLE FILE MOVIES
SUM COPIES NEWDATE NEXTDATE
ON TABLE SET PAGE NOPAGE
END
```

The output shows that the next business day after November 2 is November 4 because November 3 is a holiday:

COPIES	NEWDATE	NEXTDATE
-----	-----	-----
117	2011/11/02	2011/11/04

The following defines and sets the holiday file. Then DATEADD finds the next business day taking the holiday file into account:

```
DYNAM ALLOC DD HDAYMMM DA USER1.HOLIDAY.DATA(HDAYMMM) SHR REU
SET HDAY = MMMM
SET BUSDAYS = _MTWTF_
DATEADD(NEWDATE, 'BD', 1);
```

For 2011/11/02, DATEADD returns 2011/11/04 because November 3 is a holiday.

Enabling Leading Zeros For Date and Time Functions in Dialogue Manager

If you use a date and time function in Dialogue Manager that returns a numeric integer format, Dialogue Manager truncates any leading zeros. For example, if a function returns the value 000101 (indicating January 1, 2000), Dialogue Manager truncates the leading zeros, producing 101, an incorrect date. To avoid this problem, use the LEADZERO parameter.

LEADZERO only supports an expression that makes a direct call to a function. An expression that has nesting or another mathematical function always truncates leading zeros. For example,

```
-SET &OUT = AYM(&IN, 1, 'I4')/100;
```

truncates leading zeros regardless of the LEADZERO parameter setting.

Set the Display of Leading Zeros

```
SET LEADZERO = {ON|OFF}
```

where:

ON

Displays leading zeros if present.

OFF

Truncates leading zeros. OFF is the default value.

Displaying Leading Zeros

The AYM function adds one month to the input date of December 1999:

```
-SET &IN = '9912';  
-RUN  
-SET &OUT = AYM(&IN, 1, 'I4');  
-TYPE &OUT
```

Using the default LEADZERO setting, this yields:

```
1
```

This represents the date January 2000 incorrectly. Setting the LEADZERO parameter in the request as follows:

```
SET LEADZERO = ON  
-SET &IN = '9912';  
-SET &OUT = AYM(&IN, 1, 'I4');  
-TYPE &OUT
```

results in the following:

```
0001
```

This correctly indicates January 2000.

DATEADD: Adding or Subtracting a Date Unit to or From a Date

Available Languages: reporting, Maintain

The DATEADD function adds a unit to or subtracts a unit from a full component date format. A unit is one of the following:

- **Year.**
- **Month.** If the calculation using the month unit creates an invalid date, DATEADD corrects it to the last day of the month. For example, adding one month to October 31 yields November 30, not November 31, since November has 30 days.
- **Day.**
- **Weekday.** When using the weekday unit, DATEADD does not count Saturday or Sunday. For example, if you add one day to Friday, first DATEADD moves to the next weekday, Monday, then it adds a day. The result is Tuesday.
- **Business day.** When using the business day unit, DATEADD uses the BUSDAYS parameter setting and holiday file to determine which days are working days and disregards the rest. If Monday is not a working day, then one business day past Sunday is Tuesday. See [Using Standard Date Functions](#) for more information.

Note that when the DATEADD function calculates the next or previous business day or work day, it always starts from a business day or work day. So if the actual day is Saturday or Sunday, and the request wants to calculate the next business day, the function will use Monday as the starting day, not Saturday or Sunday, and will return Tuesday as the next business day. Similarly, when calculating the previous business day, it will use the starting day Friday, and will return Thursday as the previous business day. You can use the DATEMOV function to move the date to the correct type of day before using DATEADD. For more information, see [DATEMOV: Moving a Date to a Significant Point](#).

DATEADD requires a date to be in date format. Since Dialogue Manager interprets a date as alphanumeric or numeric, and DATEADD requires a standard date stored as an offset from the base date, do not use DATEADD with Dialogue Manager unless you first convert the variable used as the input date to an offset from the base date.

For more information, see [Calling a Function From a Dialogue Manager Command](#).

You add or subtract non day-based dates (for example, YM or YQ) directly without using DATEADD.

DATEADD works only with full component dates.

Add or Subtract a Date Unit to or From a Date

```
DATEADD(date, 'component', increment)
```

where:

date

Date

Is a full component date.

component

Alphanumeric

Is one of the following enclosed in single quotation marks:

Y indicates a year component.

M indicates a month component.

D indicates a day component.

WD indicates a weekday component.

BD indicates a business day component.

increment

Integer

Is the number of date units added to or subtracted from *date*. If this number is not a whole unit, it is rounded down to the next largest integer.



Note: DATEADD does not use an **output** argument. It uses the format of the **date** argument for the result. As long as the result is a full component date, it can be assigned only to a full component date field or to integer field.

Adding or Subtracting a Date Unit to or From a Date

This example finds a delivery date that is 12 business days after today:

```
DELIV_DATE/YYMD = DATEADD('&DATEMDYY', 'BD', 12);
```

It returns 20040408, which will be Thursday if today is March 23 2004, Tuesday.

To make sure it is Thursday, assign it as

```
DELIV_DAY/W = DATEADD('&DATEMDYY', 'BD', 12);
```

which returns 4, representing Thursday. Note the use of the system variable &YYMD and the natural date representation of the today's date.



Tip: There is an alternative way to add to or subtract from the date. As long as any standard date is internally presented as a whole number of the least significant component units (that is, a number of days for full component dates, a number of months for YYM or MY format dates, and so on), you can add/subtract the desired number of these units directly, without DATEADD. Note that you must assign the date result to the same format date field, or the same field. For example, assuming YYM_DATE is a date field of format YYM, you can add 13 months to it and assign the result to the field NEW_YYM_DT, in the following statement:

```
NEW_YYM_DT/YYM = YYM_DATE + 13;
```

Otherwise, a non-full component date must be converted to a full component date before using DATEADD.

Truncation With DATEADD

The number of units passed to DATEADD is always a whole unit. For example

```
DATEADD(DATE, 'M', 1.999)
```

adds one month because the number of units is less than two.

Using the Weekday Unit

If you use the weekday unit and a Saturday or Sunday is the input date, DATEADD changes the input date to Monday. The function

```
DATEADD('910623', 'WD', 1)
```

in which DATE is either Saturday or Sunday yields Tuesday; Saturday and Sunday are not weekdays, so DATEADD begins with Monday and adds one.

Note that the single quotes around the number in the first argument, '910623', causes it to be treated as a natural date literal.

Adding Weekdays to a Date (Reporting)

DATEADD adds three weekdays to NEW_DATE. In some cases, it adds more than three days because HIRE_DATE_PLUS_THREE would otherwise be on a weekend.

```
TABLE FILE EMPLOYEE
PRINT FIRST_NAME AND HIRE_DATE AND COMPUTE
NEW_DATE/YYMD = HIRE_DATE;
HIRE_DATE_PLUS_THREE/YYMD = DATEADD(NEW_DATE, 'WD', 3);
BY LAST_NAME
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	NEW_DATE	HIRE_DATE_PLUS_THREE
-----	-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	82/04/01	1982/04/01	1982/04/06
CROSS	BARBARA	81/11/02	1981/11/02	1981/11/05
GREENSPAN	MARY	82/04/01	1982/04/01	1982/04/06
JONES	DIANE	82/05/01	1982/05/01	1982/05/06
MCCOY	JOHN	81/07/01	1981/07/01	1981/07/06
SMITH	MARY	81/07/01	1981/07/01	1981/07/06

Determining If a Date Is a Work Day (Reporting)

DATEADD determines which values in the TRANSDATE field do not represent work days by adding zero days to TRANSDATE using the business day unit. If TRANSDATE does not represent a business day, DATEADD returns the next business day to DATEX. TRANSDATE is then compared to DATEX, and the day of the week is printed for all dates that do not match between the two fields, resulting in a list of all non-work days.

```
DEFINE FILE VIDEOTRK
DATEX/YMD = DATEADD(TRANSDATE, 'BD', 0);
DATEINT/I8YYMD = DATECVT(TRANSDATE, 'YMD', 'I8YYMD');
END
TABLE FILE VIDEOTRK
SUM TRANSDATE NOPRINT
COMPUTE DAYNAME/A8 = DOWKL(DATEINT, DAYNAME); AS 'Day of Week'
BY TRANSDATE AS 'Date'
WHERE TRANSDATE NE DATEX
END
```

The output is:

Date	Day of Week
----	-----
91/06/22	SATURDAY
91/06/23	SUNDAY
91/06/30	SUNDAY

Adding Months to a Date (Maintain)

DATEADD adds months to the DATE1 field:

```
MAINTAIN
compute DATE1/yynd = '20000101'
compute DATE2/yynd=DATEADD(date1, 'M', 2, date2);
type "DATE1 = <<DATE1 + 2 MONTHS = DATE2 = <<DATE2"
END
```

The result is:

```
DATE1 = 2000/01/01+ 2 MONTHS = DATE2 = 2000/03/01
```


DATECVT: Converting the Format of a Date

Available Languages: reporting, Maintain

The DATECVT function converts the field value of any standard date format or legacy date format into a date format (offset from the base date), in the desired standard date format or legacy date format. If you supply an invalid format, DATECVT returns a zero or a blank.

DATECVT turns off optimization and compilation.



Note: You can use a simple assignment instead of calling this function.

Convert a Date Format

```
DATECVT(date, 'in_format', output)
```

where:

date

Date

Is the date to be converted. If you supply an invalid date, DATECVT returns zero. When the conversion is performed, a legacy date obeys any DEFCENT and YRTHRESH parameter settings supplied for that field.

in_format

Alphanumeric

Is the format of the date enclosed in single quotation marks. It is one of the following:

- A non-legacy date format (for example, YYMD, YQ, M, DMY, JUL).
- A legacy date format (for example, I6YMD or A8MDYY).
- A non-date format (such as I8 or A6). A non-date format in *in_format* functions as an offset from the base date of a YYMD field (12/31/1900).

output

Alphanumeric

Is the output format enclosed in single quotation marks or a field containing the format. It is one of the following:

- A non-legacy date format (for example, YYMD, YQ, M, DMY, JUL).
- A legacy date format (for example, I6YMD or A8MDYY).
- A non-date format (such as I8 or A6). This format type causes DATECVT to convert the date into a full component date and return it as a whole number in the format provided.

Converting the Format of a Date

This example first converts a numeric date, NUMDATE, to a character date, and then assigns the result to a non-date alphanumeric field, CHARDATE.

```
CHARDATE/A13 = DATECVT (NUMDATE, 'I8YYMD', 'A8YYMD');
```

i Note: DATECVT does not use an output format; it uses the format of the argument output_format for the result.

Converting a YYMD Date to DMY

DATECVT converts 19991231 to 311299 and stores the result in CONV_FIELD:

```
CONV_FIELD/DMY = DATECVT(19991231, 'I8YYMD', 'DMY');
```

or

```
ONV_FIELD/DMY = DATECVT('19991231', 'A8YYMD', 'DMY');
```

Converting a Legacy Date to Date Format (Reporting)

DATECVT converts HIRE_DATE from I6YMD legacy date format to YYMD date format:

```
TABLE FILE EMPLOYEE
PRINT FIRST_NAME AND HIRE_DATE AND COMPUTE
NEW_HIRE_DATE/YYMD = DATECVT(HIRE_DATE, 'I6YMD', 'YYMD');
BY LAST_NAME
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	NEW_HIRE_DATE
-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	82/04/01	1982/04/01
CROSS	BARBARA	81/11/02	1981/11/02
GREENSPAN	MARY	82/04/01	1982/04/01
JONES	DIANE	82/05/01	1982/05/01
MCCOY	JOHN	81/07/01	1981/07/01
SMITH	MARY	81/07/01	1981/07/01

DATEDIF: Finding the Difference Between Two Dates

Available Languages: reporting, Maintain

The DATEDIF function returns the difference between two full component standard dates in units of a specified component. A component is one of the following:

- **Year.** Using the year unit with DATEDIF yields the inverse of DATEADD. If subtracting one year from date X creates date Y, then the count of years between X and Y is one. Subtracting one year from February 29 produces the date February 28.
- **Month.** Using the month component with DATEDIF yields the inverse of DATEADD. If subtracting one month from date X creates date Y, then the count of months between X and Y is one. If the to-date is the end-of-month, then the month difference may be rounded up (in absolute terms) to guarantee the inverse rule.

If one or both of the input dates are the end of the month, DATEDIF takes this into account. This means that the difference between January 31 and April 30 is three months, not two months.

- **Day.**
- **Weekday.** With the weekday unit, DATEDIF does not count Saturday or Sunday when calculating days. This means that the difference between Friday and Monday is one day.
- **Business day.** With the business day unit, DATEDIF uses the BUSDAYS parameter setting and holiday file to determine which days are working days and disregards the rest. This means that if Monday is not a working day, the difference between Friday and Tuesday is one day. See [Using Standard Date Functions](#) for more information.

DATEDIF returns a whole number. If the difference between two dates is not a whole number, DATEDIF truncates the value to the next largest integer. For example, the number of years between March 2, 2001, and March 1, 2002, is zero. If the end date is before the start date, DATEDIF returns a negative number.

You can find the difference between non-day based dates (for example YM or YQ) directly without using DATEDIF.

Since Dialogue Manager interprets a date as alphanumeric or numeric, and DATEDIF requires a standard date stored as an offset from the base date, do not use DATEDIF with Dialogue Manager unless you first convert the variable used as the input date to an offset from the base date.

For more information, see [Calling a Function From a Dialogue Manager Command](#).

DATEDIF works only with full component dates.

Find the Difference Between Two Dates

```
DATEDIF(from_date, to_date, 'component')
```

```
DATEDIF('from_date', 'to_date', 'component')
```

where:

from_date

Date

Is the start date from which to calculate the difference. Is a full component date.

to_date

Date

Is the end date from which to calculate the difference.

component

Alphanumeric

Is one of the following enclosed in single quotation marks:

Y indicates a year unit.

M indicates a month unit.

D indicates a day unit.

WD indicates a weekday unit.

BD indicates a business day unit.



Note: DATEDIF does not use an **output** argument because for the result it uses the format 'I8'.

Finding the Difference Between Two Dates

The example finds the number of complete months between today, March 23, 2004, and one specific day in the past

```
DATEDIF('September 11 2001', '20040323', 'M')
```

and returns 30, which can be assigned to a numeric field.

✓ **Tip:** There is an alternative way to find the difference between dates. As long as any standard date is presented internally as a whole number of the least significant component units (that is, a number of days for full component dates, a number of months for YYM or MY format dates, etc.), you can find the difference in these component units (not any units) directly, without DATEDIF. For example, assume OLD_YYM_DT is a date field in format MYY and NEW_YYM_DT is another date in format YYM. Note that the least significant component for both formats is month, M. The difference in months, then, can be found by subtracting the field OLD_YYM_DT from NEW_YYM_DT in the following statement:

$$\text{MYDIFF/I8} = \text{NEW\_YYM\_DT/YYM} - \text{OLD\_YYM\_DT};$$

Otherwise, non-full component standard dates or legacy dates should be converted to full component standard dates before using DATEDIF.

Truncation With DATEDIF

DATEDIF calculates the difference between March 2, 1996, and March 1, 1997, and returns a zero because the difference is less than a year:

```
DATEDIF('19960302', '19970301', 'Y')
```

Using Month Calculations

The following expressions return a result of minus one month:

```
DATEDIF('19990228', '19990128', 'M')
DATEDIF('19990228', '19990129', 'M')
DATEDIF('19990228', '19990130', 'M')
DATEDIF('19990228', '19990131', 'M')
```

Additional examples:

DATEDIF('March 31 2001', 'May 31 2001', 'M') yields 2.

DATEDIF('March 31 2001', 'May 30 2001', 'M') yields 1 (because May 30 is not the end of the month).

DATEDIF('March 31 2001', 'April 30 2001', 'M') yields 1.

Finding the Number of Weekdays Between Two Dates (Reporting)

DATECVT converts the legacy dates in HIRE_DATE and DAT_INC to the date format YYMD. DATEDIF then uses those date formats to determine the number of weekdays between NEW_HIRE_DATE and NEW_DAT_INC:

```
TABLE FILE EMPLOYEE
PRINT FIRST_NAME AND
COMPUTE NEW_HIRE_DATE/YYMD = DATECVT(HIRE_DATE, 'I6YMD', 'YYMD'); AND
COMPUTE NEW_DAT_INC/YYMD = DATECVT(DAT_INC, 'I6YMD', 'YYMD'); AND
COMPUTE WDAY5_HIRED/I8 = DATEDIF(NEW_HIRE_DATE, NEW_DAT_INC, 'WD');
BY LAST_NAME
IF WDAY5_HIRED NE 0
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	NEW_HIRE_DATE	NEW_DAT_INC	WDAYS_HIRED
-----	-----	-----	-----	-----
IRVING	JOAN	1982/01/04	1982/05/14	94
MCKNIGHT	ROGER	1982/02/02	1982/05/14	73
SMITH	RICHARD	1982/01/04	1982/05/14	94
STEVENS	ALFRED	1980/06/02	1982/01/01	414
	ALFRED	1980/06/02	1981/01/01	153

Finding the Number of Years Between Two Dates (Maintain)

DATEDIF determines the number of years between DATE2 and DATE1:

```
MAINTAIN
Case Top
compute DATE1/yyymd = '20020717';
```

```
compute DATE2/yynd = '19880705';
compute DIFF/I3= DATEDIF(DATE2, DATE1, 'Y', DIFF);
type "<<DATE1 - <<DATE2 = <DIFF YEARS"
ENDCASE
END
```

The result is:

```
2002/07/17 - 1988/07/05 = 14 YEARS
```

DATEMOV: Moving a Date to a Significant Point

Available Languages: reporting, Maintain

The DATEMOV function moves a date to a significant point on the calendar.



Note: Using the beginning of week point (BOW) will always return Monday, and using the end of week point (EOW) will always return Friday. Also, if the date used with the DATEMOV function falls on Saturday or Sunday, the actual date used by the function will be the moved forward to the next Monday. If you do not want to do the calculation by moving the date from Saturday or Sunday to Monday, or if you want the BOW to be Sunday and the EOW to be Saturday, you can use the DTRUNC function.

Since Dialogue Manager interprets a date as alphanumeric or numeric, and DATEMOV requires a standard date stored as an offset from the base date, do not use DATEMOV with Dialogue Manager unless you first convert the variable used as the input date to an offset from the base date. For example, the following converts the integer legacy date 20050131 to a smart date, adds one month, and converts the result to an alphanumeric legacy date:

```
-SET &STRT=DATECVT(20050131,'I8YYMD', 'YYMD');
-SET &NMT=DATEADD(&STRT,'M',1);
-SET &NMTA=DATECVT(&NMT,'YYMD','A8MTDYY');
-TYPE A MONTH FROM 20050131 IS &NMTA
```

The output shows that the DATEADD function added the actual number of days in the month of February to get to the end of the month from the end of January:


```
A MONTH FROM 20050131 IS 02282005
```

For more information, see [Calling a Function From a Dialogue Manager Command](#).

DATEMOV works only with full component dates.

Move a Date to a Significant Point

```
DATEMOV(date, 'move-point')
```

where:

date

Date

Is the date to be moved. It must be a full component format date (for example, MDYY or YYJUL).

move-point

Alphanumeric

Is the significant point the date is moved to enclosed in single quotation marks ('). An invalid point results in a return code of zero. Valid values are:

- **EOM**, which is the end of the month.
- **BOM**, which is the beginning of the month.
- **EOQ**, which is the end of the quarter.
- **BOQ**, which is the beginning of the quarter.
- **EOY**, which is the end of the year.
- **BOY**, which is the beginning of year.
- **EOW**, which is the end of the week.
- **BOW**, which is the beginning of the week.
- **NWD**, which is the next weekday.

- **NBD**, which is the next business day.
- **PWD**, which is the prior weekday.
- **PBD**, which is the prior business day.
- **WD-**, which is a weekday or earlier.
- **BD-**, which is a business day or earlier.
- **WD+**, which is a weekday or later.
- **BD+**, which is a business day or later.

A business day calculation is affected by the BUSDAYS and HDAY parameter settings.

Note that when the DATEADD function calculates the next or previous business day or work day, it always starts from a business day or work day. So if the actual day is Saturday or Sunday, and the request wants to calculate the next business day, the function will use Monday as the starting day, not Saturday or Sunday, and will return Tuesday as the next business day. Similarly, when calculating the previous business day, it will use the starting day Friday, and will return Thursday as the previous business day.

To avoid skipping a business day or work day, use DATEMOV. To return to the next business or work day, use BD- or WD- to first move to the previous business or work day (if it is already a business day or work day, it will not be moved). Then use DATEADD to move to the next business or work day. If you want to return the previous business or work day, first use BD+ or WD+ to move to the next business or work day (if it is already the correct type of day, it will not be moved). Then use DATEADD to return the previous business or work day.

i Note: DATEMOV does not use an **output** argument. It uses the format of the **date** argument for the result. As long as the result is a full component date, it can be assigned only to a full component date field or to an integer field.

Moving a Date to a Significant Point

This example finds the end day of the current date week

```
DATEDIF('&YYMD', 'EOW')
```

and returns 20040326 if today is 2004, March 23rd. Note the use of the system variable &YYMD and natural date representation in the first argument.

Returning the Next Business Day

This example shows why you may need to use DATEMOV to get the correct result.

The following request against the GGSALES data source uses the BD (Business Day) move point against the DATE field. First DATE is converted to a smart date, then DATEADD is called with the BD move-point:

```
DEFINE FILE GGSALES
  DT1/WMDYY=DATE;
  DT2/WMDYY = DATEADD(DT1 , 'BD', 1);

  DAY/Dt = DT1;
  END

TABLE FILE GGSALES

SUM  DT1
    DT2
BY DT1 NOPRINT
WHERE RECORDLIMIT EQ 10
END
```

When the date is on a Saturday or Sunday on the output, the next business day is returned as a Tuesday. This is because before doing the calculation, the original date was moved to a business day:

DT1	DT2
---	---
SUN, 09/01/1996	TUE, 09/03/1996
FRI, 11/01/1996	MON, 11/04/1996
SUN, 12/01/1996	TUE, 12/03/1996
SAT, 03/01/1997	TUE, 03/04/1997
TUE, 04/01/1997	WED, 04/02/1997
THU, 05/01/1997	FRI, 05/02/1997
SUN, 06/01/1997	TUE, 06/03/1997
MON, 09/01/1997	TUE, 09/02/1997
WED, 10/01/1997	THU, 10/02/1997

In the following version of the request, DATEMOV is called to make sure the starting day is a business day. The move point specified in the first call is BD- which only moves the date to the prior business day if it is not already a business day. The call to DATEADD then uses the BD move point to return the next business day:

```

DEFINE FILE GGSALES
  DT1/WMDYY=DATE;
  DT1A/WMDYY=DATEMOV(DT1, 'BD-');

  DT2/WMDYY = DATEADD(DT1A,'BD',1);

  DAY/Dt = DT1;
  END

TABLE FILE GGSALES

  SUM  DT1 DT1A DT2
  BY DT1 NOPRINT
  WHERE RECORDLIMIT EQ 10
  END

```

On the output, the next business day after a Saturday or Sunday is now returned as Monday:

DT1	DT1A	DT2
---	----	---
SUN, 09/01/1996	FRI, 08/30/1996	MON, 09/02/1996
FRI, 11/01/1996	FRI, 11/01/1996	MON, 11/04/1996
SUN, 12/01/1996	FRI, 11/29/1996	MON, 12/02/1996
SAT, 03/01/1997	FRI, 02/28/1997	MON, 03/03/1997
TUE, 04/01/1997	TUE, 04/01/1997	WED, 04/02/1997
THU, 05/01/1997	THU, 05/01/1997	FRI, 05/02/1997
SUN, 06/01/1997	FRI, 05/30/1997	MON, 06/02/1997
MON, 09/01/1997	MON, 09/01/1997	TUE, 09/02/1997
WED, 10/01/1997	WED, 10/01/1997	THU, 10/02/1997

Using a DEFINE FUNCTION to Move a Date to the Beginning of the Week

The following DEFINE FUNCTION named BOWK takes a date and the name of the day you want to consider the beginning of the week and returns a date that corresponds to the

beginning of the week:

```
DEFINE FUNCTION BOWK(THEDATE/MDYY,WEEKSTART/A10)
DAYOFWEEK/W=THEDATE;
DAYNO/I1=IF DAYOFWEEK EQ 7 THEN 0 ELSE DAYOFWEEK;
FIRSTOFWK/I1=DECODE WEEKSTART('SUNDAY' 0 'MONDAY' 1 'TUESDAY' 2
'WEDNESDAY' 3 'THURSDAY' 4 'FRIDAY' 5 'SATURDAY' 6
'SUN' 0 'MON' 1 'TUE' 2 'WED' 3 'THU' 4 'FRI' 5 'SAT' 6);
BOWK/MDYY=IF DAYNO GE FIRSTOFWK THEN THEDATE-DAYNO+FIRSTOFWK
ELSE THEDATE-7-DAYNO+FIRSTOFWK;
END
```

The following request uses the BOWK function to use return a date (DT2) that corresponds to the beginning of the week for each value of the DT1 field:

```
DEFINE FILE GGSales
DT1/WMDYY=DATE;
DT2/WMDYY = BOWK(DT1 , 'SUN');
END

TABLE FILE GGSales
SUM DT1
DT2
BY DT1 NOPRINT
WHERE RECORDLIMIT EQ 10
ON TABLE SET PAGE NOLEAD
END
```

The output is shown in the following image:

DT1	DT2
SUN, 09/01/1996	SUN, 09/01/1996
FRI, 11/01/1996	SUN, 10/27/1996
SUN, 12/01/1996	SUN, 12/01/1996
SAT, 03/01/1997	SUN, 02/23/1997
TUE, 04/01/1997	SUN, 03/30/1997
THU, 05/01/1997	SUN, 04/27/1997
SUN, 06/01/1997	SUN, 06/01/1997
MON, 09/01/1997	SUN, 08/31/1997
WED, 10/01/1997	SUN, 09/28/1997

Determining Significant Points for a Date (Reporting)

The BUSDAYS parameter sets the business days to Monday, Tuesday, Wednesday, and Thursday. DATECVT converts the legacy date HIRE_DATE to the date format YYMD and provides date display options. DATEMOV then determines the significant points for HIRE_DATE.

```

SET BUSDAY = _MTWT__
TABLE FILE EMPLOYEE
PRINT
COMPUTE NEW_DATE/YYMD = DATECVT(HIRE_DATE, 'I6YMD', 'YYMD'); AND
COMPUTE NEW_DATE/WT = DATECVT(HIRE_DATE, 'I6YMD', 'WT'); AS 'DOW' AND
COMPUTE NWD/WT = DATEMOV(NEW_DATE, 'NWD'); AND
COMPUTE PWD/WT = DATEMOV(NEW_DATE, 'PWD'); AND
COMPUTE WDP/WT = DATEMOV(NEW_DATE, 'WD+'); AS 'WD+' AND
COMPUTE WDM/WT = DATEMOV(NEW_DATE, 'WD-'); AS 'WD-' AND
COMPUTE NBD/WT = DATEMOV(NEW_DATE, 'NBD'); AND
COMPUTE PBD/WT = DATEMOV(NEW_DATE, 'PBD'); AND
COMPUTE WBP/WT = DATEMOV(NEW_DATE, 'BD+'); AS 'BD+' AND
COMPUTE WBM/WT = DATEMOV(NEW_DATE, 'BD-'); AS 'BD-' BY LAST_NAME NOPRINT
HEADING
"Examples of DATEMOV"
"Business days are Monday, Tuesday, Wednesday, + Thursday "
" "
"START DATE.. | MOVE POINTS....."

```

```
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

```
Examples of DATEMOV
Business days are Monday, Tuesday, Wednesday, + Thursday
START DATE.. | MOVE POINTS.....
NEW_DATE      DOW  NWD  PWD  WD+  WD-  NBD  PBD  BD+  BD-
-----
1982/04/01    THU  FRI  WED  THU  THU  MON  WED  THU  THU
1981/11/02    MON  TUE  FRI  MON  MON  TUE  THU  MON  MON
1982/04/01    THU  FRI  WED  THU  THU  MON  WED  THU  THU
1982/05/01    SAT  TUE  THU  MON  FRI  TUE  WED  MON  THU
1981/07/01    WED  THU  TUE  WED  WED  THU  TUE  WED  WED
1981/07/01    WED  THU  TUE  WED  WED  THU  TUE  WED  WED
```

Determining the End of the Week (Reporting)

DATEMOV determines the end of the week for each date in NEW_DATE and stores the result in EOW:

```
TABLE FILE EMPLOYEE
PRINT FIRST_NAME AND
COMPUTE NEW_DATE/YYMDWT = DATECVT(HIRE_DATE, 'I6YMD', 'YYMDWT'); AND
COMPUTE EOW/YYMDWT = DATEMOV(NEW_DATE, 'EOW');
BY LAST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	NEW_DATE	EOW
-----	-----	-----	---
BANNING	JOHN	1982 AUG 1, SUN	1982 AUG 6, FRI
IRVING	JOAN	1982 JAN 4, MON	1982 JAN 8, FRI
MCKNIGHT	ROGER	1982 FEB 2, TUE	1982 FEB 5, FRI
ROMANS	ANTHONY	1982 JUL 1, THU	1982 JUL 2, FRI
SMITH	RICHARD	1982 JAN 4, MON	1982 JAN 8, FRI
STEVENS	ALFRED	1980 JUN 2, MON	1980 JUN 6, FRI

Determining the End of the Week (Maintain)

DATEMOV determines the end of the week for each date:

```
MAINTAIN
COMPUTE X/YYMDWT='20020717';
COMPUTE Y/YYMDWT=DATEMOV(X, 'EOW', Y);
TYPE "<<X      <<Y  END OF WEEK "
END
```

The result is:

```
2002/07/17, WED    2002/07/19, FRI  END OF WEEK
```

DATETRAN: Formatting Dates in International Formats

Available Languages: reporting, Maintain

The DATETRAN function formats dates in international formats.

Format Dates in International Formats

```
DATETRAN (indate, '(intype)', '([formatops]]', 'lang', outlen, output)
```

where:

indate

Is the input date (in date format) to be formatted. Note that the date format cannot be an alphanumeric or numeric format with date display options (legacy date format).

intype

Is one of the following character strings indicating the input date components and the order in which you want them to display, enclosed in parentheses and single quotation

marks.

The following table shows the single component input types:

Single Component Input Type	Description
'(W)'	Day of week component only (original format must have only W component).
'(M)'	Month component only (original format must have only M component).

The following table shows the two-component input types:

Two-Component Input Type	Description
'(YYM)'	Four-digit year followed by month.
'(YM)'	Two-digit year followed by month.
'(MYY)'	Month component followed by a four-digit year.
'(MY)'	Month component followed by a two-digit year.

The following table shows the three-component input types:

Three-Component Input Type	Description
'(YYMD)'	Four-digit year followed by month followed by day.

Three-Component Input Type	Description
' (YMD) '	Two-digit year followed by month followed by day.
' (DMYY) '	Day component followed by month followed by four-digit year.
' (DMY) '	Day component followed by month followed by two-digit year.
' (MDYY) '	Month component followed by day followed by four-digit year.
' (MDY) '	Month component followed by day followed by two-digit year.
' (MD) '	Month component followed by day (derived from three-component date by ignoring the year component).
' (DM) '	Day component followed by month (derived from three-component date by ignoring the year component).

formatops

Is a string of zero or more formatting options enclosed in parentheses and single quotation marks. The parentheses and quotation marks are required even if you do not specify formatting options. Formatting options fall into the following categories:

- Options for suppressing initial zeros in month or day numbers.



Note: Zero suppression replaces initial zeros with blanks spaces.

- Options for translating month or day components to full or abbreviated uppercase or default case (mixed-case or lowercase depending on the language) names.
- Date delimiter options and options for punctuating a date with commas.

Valid options for suppressing initial zeros in month or day numbers are listed in the following table. Note that the initial zero is replaced by a blank space:

Format Option	Description
m	Zero-suppresses months (displays numeric months before October as 1 through 9 rather than 01 through 09).
d	Displays days before the tenth of the month as 1 through 9 rather than 01 through 09.
dp	Displays days before the tenth of the month as 1 through 9 rather than 01 through 09 with a period after the number.
do	Displays days before the tenth of the month as 1 through 9. For English (langcode EN) only, displays an ordinal suffix (st, nd, rd, or th) after the number.

The following table shows valid month and day name translation options:

Format Option	Description
T	Displays month as an abbreviated name, with no punctuation, all uppercase.
TR	Displays month as a full name, all uppercase.
Tp	Displays month as an abbreviated name, followed by a period, all uppercase.
t	Displays month as an abbreviated name with no punctuation. The name is all lowercase or

Format Option	Description
	initial uppercase, depending on the language code.
tr	Displays month as a full name. The name is all lowercase or initial uppercase, depending on the language code.
tp	Displays month as an abbreviated name, followed by a period. The name displays in the default case of the specified language (for example, all lowercase for French and Spanish, initial uppercase for English and German).
W	Includes an abbreviated day-of-the-week name at the start of the displayed date, all uppercase with no punctuation.
WR	Includes a full day-of-the-week name at the start of the displayed date, all uppercase.
Wp	Includes an abbreviated day-of-the-week name at the start of the displayed date, all uppercase, followed by a period.
w	Includes an abbreviated day-of-the-week name at the start of the displayed date with no punctuation. The name displays in the default case of the specified language (for example, all lowercase for French and Spanish, initial uppercase for English and German).
wr	Includes a full day-of-the-week name at the start of the displayed date. The name displays in the default case of the specified language

Format Option	Description
	(for example, all lowercase for French and Spanish, initial uppercase for English and German).
wp	Includes an abbreviated day-of-the-week name at the start of the displayed date followed by a period. The name displays in the default case of the specified language (for example, all lowercase for French and Spanish, initial uppercase for English and German).
X	Includes an abbreviated day-of-the-week name at the end of the displayed date, all uppercase with no punctuation.
XR	Includes a full day-of-the-week name at the end of the displayed date, all uppercase.
Xp	Includes an abbreviated day-of-the-week name at the end of the displayed date, all uppercase, followed by a period.
x	Includes an abbreviated day-of-the-week name at the end of the displayed date with no punctuation. The name displays in the default case of the specified language (for example, all lowercase for French and Spanish, initial uppercase for English and German).
xr	Includes a full day-of-the-week name at the end of the displayed date. The name displays in the default case of the specified language (for example, all lowercase for French and Spanish, initial uppercase for English and

Format Option	Description
	German).
xp	Includes an abbreviated day-of-the-week name at the end of the displayed date followed by a period. The name displays in the default case of the specified language (for example, all lowercase for French and Spanish, initial uppercase for English and German).

The following table shows valid date delimiter options:

Format Option	Description
B	Uses a blank as the component delimiter. This is the default if the month or day of week is translated or if comma is used.
.	Uses a period (.) as the component delimiter.
-	Uses a minus sign (-) as the component delimiter. This is the default when the conditions for a blank default delimiter are not satisfied.
/	Uses a slash (/) as the component delimiter.
	Omits component delimiters.
K	Uses appropriate Asian characters as component delimiters.

Format Option	Description
c	Places a comma (,) after the month name (following T, Tp, TR, t, tp, or tr). Places a comma and blank after the day name (following W, Wp, WR, w, wp, or wr). Places a comma and blank before the day name (following X, XR, x, or xr).
e	Displays the Spanish or Portuguese word de or DE between the day and month, and between the month and year. The case of the word de is determined by the case of the month name. If the month is displayed in uppercase, DE is displayed. Otherwise, de is displayed. Useful for formats DMY, DMYy, MY, and MYy.
D	Inserts a comma (,) after the day number and before the general delimiter character specified.
Y	Inserts a comma (,) after the year and before the general delimiter character specified.

lang

Is the two-character standard ISO code for the language into which the date should be translated, enclosed in single quotation marks (''). Valid language codes are:

- 'AR' Arabic
- 'CS' Czech
- 'DA' Danish
- 'DE' German
- 'EN' English
- 'ES' Spanish
- 'FI' Finnish

- 'FR' French
- 'EL' Greek
- 'IW' Hebrew
- 'IT' Italian
- 'JA' Japanese
- 'KO' Korean
- 'LT' Lithuanian
- 'NL' Dutch
- 'NO' Norwegian
- 'PO' Polish
- 'PT' Portuguese
- 'RU' Russian
- 'SV' Swedish
- 'TH' Thai
- 'TR' Turkish
- 'TW' Chinese (Traditional)
- 'ZH' Chinese (Simplified)

outlen

Numeric

Is the length of the output field in bytes. If the length is insufficient, an all blank result is returned. If the length is greater than required, the field is padded with blanks on the right.

output

Alphanumeric

Is the name of the field that contains the translated date, or its format enclosed in single quotation marks.

Usage Notes for the DATETRAN Function

- The output field, though it must be type A, and not *AnV*, may in fact contain variable length information, since the lengths of month names and day names can vary, and also month and day numbers may be either one or two bytes long if a zero-suppression option is selected. Unused bytes are filled with blanks.
- All invalid and inconsistent inputs result in all blank output strings. Missing data also results in blank output.
- The base dates (1900-12-31 and 1900-12 or 1901-01) are treated as though the DATEDISPLAY setting were ON (that is, not automatically shown as blanks). To suppress the printing of base dates, which have an internal integer value of 0, test for 0 before calling DATETRAN. For example:

```
RESULT/A40 = IF DATE EQ 0 THEN ' ' ELSE
              DATETRAN (DATE, '(YYMD)', '(.t)', 'FR', 40, 'A40');
```

- Valid translated date components are contained in files named *DTLNGlng* where *lng* is a three-character code that specifies the language. These files must be accessible for each language into which you want to translate dates.
- For these NLS characters to appear correctly, the ibi™ WebFOCUS® Reporting Server and ibi™ WebFOCUS® must be configured with the correct code pages.
- The DATETRAN function is not supported in Dialogue Manager.

Using the DATETRAN Function

The following request prints the day of the week in the default case of the specific language:

```
DEFINE FILE VIDEOTRK
TRANS1/YYMD=20050104;
TRANS2/YYMD=20051003;
```

```
DATEW/W=TRANS1      ;
DATEW2/W=TRANS2     ;
```

```
DATEYYMD/YYMDW=TRANS1    ;
DATEYYMD2/YYMDW=TRANS2   ;
```

```
OUT1A/A8=DATETRAN(DATEW, '(W)', '(wr)', 'EN', 8 , 'A8') ;
OUT1B/A8=DATETRAN(DATEW2, '(W)', '(wr)', 'EN', 8 , 'A8') ;
OUT1C/A8=DATETRAN(DATEW, '(W)', '(wr)', 'ES', 8 , 'A8') ;
OUT1D/A8=DATETRAN(DATEW2, '(W)', '(wr)', 'ES', 8 , 'A8') ;
OUT1E/A8=DATETRAN(DATEW, '(W)', '(wr)', 'FR', 8 , 'A8') ;
OUT1F/A8=DATETRAN(DATEW2, '(W)', '(wr)', 'FR', 8 , 'A8') ;
OUT1G/A8=DATETRAN(DATEW, '(W)', '(wr)', 'DE', 8 , 'A8') ;
OUT1H/A8=DATETRAN(DATEW2, '(W)', '(wr)', 'DE', 8 , 'A8') ;
END
```

```
TABLE FILE VIDEOTRK
HEADING
"FORMAT wr"
""
"Full day of week name at beginning of date, default case (wr)"
"English / Spanish / French / German"
""
SUM OUT1A AS '' OUT1B AS '' TRANSDATE NOPRINT
OVER OUT1C AS '' OUT1D AS ''
OVER OUT1E AS '' OUT1F AS ''
OVER OUT1G AS '' OUT1H AS ''
ON TABLE SET PAGE-NUM OFF
ON TABLE SET STYLE *
GRID=OFF, $
END
```

The output is:

FORMAT wr	
Full day of week name at beginning of date, default case (wr)	
English / Spanish / French / German	
Tuesday	Monday
martes	lunes
mardi	lundi
Dienstag	Montag

The following request prints a blank delimited date with an abbreviated month name in English. Initial zeros in the day number are suppressed, and a suffix is added to the end of the number:

```
DEFINE FILE VIDEOTRK
TRANS1/YYMD=20050104;
TRANS2/YYMD=20050302;
```

```
DATEW/W=TRANS1      ;
DATEW2/W=TRANS2     ;
DATEYYMD/YYMDW=TRANS1  ;
DATEYYMD2/YYMDW=TRANS2 ;
```

```
OUT2A/A15=DATETRAN(DATEYYMD, ' (MDYY)', ' (Btdo)', 'EN', 15, 'A15') ;
OUT2B/A15=DATETRAN(DATEYYMD2, ' (MDYY)', ' (Btdo)', 'EN', 15, 'A15') ;
END
```

```
TABLE FILE VIDEOTRK
HEADING
"FORMAT Btdo"
""
"Blank-delimited (B)"
"Abbreviated month name, default case (t)"
"Zero-suppress day number, end with suffix (do)"
"English"
""
SUM OUT2A AS '' OUT2B AS '' TRANSDATE NOPRINT
ON TABLE SET PAGE-NUM OFF
END
```

The output is:

FORMAT Btdo	
Blank-delimited (B)	
Abbreviated month name, default case (t)	
Zero-suppress day number, end with suffix (do)	
English	
Jan 4th 2005	Mar 2nd 2005

The following request prints a blank delimited date, with an abbreviated month name in German. Initial zeros in the day number are suppressed, and a period is added to the end of the number:

```
DEFINE FILE VIDEOTRK
TRANS1/YYMD=20050104;
TRANS2/YYMD=20050302;
```

```
DATEW/W=TRANS1      ;
DATEW2/W=TRANS2     ;
DATEYYMD/YYMDW=TRANS1  ;
DATEYYMD2/YYMDW=TRANS2 ;
```

```
OUT3A/A12=DATETRAN(DATEYYMD, '(DMYY)', '(Btdp)', 'DE', 12, 'A12');
OUT3B/A12=DATETRAN(DATEYYMD2, '(DMYY)', '(Btdp)', 'DE', 12, 'A12');
END
```

```
TABLE FILE VIDEOTRK
HEADING
"FORMAT Btdp"
""
"Blank-delimited (B)"
"Abbreviated month name, default case (t)"
"Zero-suppress day number, end with period (dp)"
"German"
""
SUM OUT3A AS '' OUT3B AS '' TRANSDATE NOPRINT
ON TABLE SET PAGE-NUM OFF
END
```

The output is:

FORMAT Btdp	
Blank-delimited (B)	
Abbreviated month name, default case (t)	
Zero-suppress day number, end with period (dp)	
German	
4. Jan 2005	2. Mär 2005

The following request prints a blank delimited date in French, with a full day name at the beginning and a full month name, in lowercase (the default for French):

```
DEFINE FILE VIDEOTRK
TRANS1/YYMD=20050104;
TRANS2/YYMD=20050302;
```

```
DATEW/W=TRANS1      ;
DATEW2/W=TRANS2     ;
DATEYYMD/YYMDW=TRANS1 ;
DATEYYMD2/YYMDW=TRANS2 ;
```

```
OUT4A/A30 = DATETRAN(DATEYYMD, '(DMYY)', '(Bwrtr)', 'FR', 30, 'A30');
OUT4B/A30 = DATETRAN(DATEYYMD2, '(DMYY)', '(Bwrtr)', 'FR', 30, 'A30');
END
```

```
TABLE FILE VIDEOTRK
HEADING
"FORMAT Bwrtr"
""
"Blank-delimited (B)"
"Full day of week name at beginning of date, default case (wr)"
"Full month name, default case (tr)"
"English"
""
SUM OUT4A AS '' OUT4B AS '' TRANSDATE NOPRINT
ON TABLE SET PAGE-NUM OFF
END
```

The output is:

FORMAT Bwrtr	
Blank-delimited (B)	
Full day of week name at beginning of date, default case (wr)	
Full month name, default case (tr)	
English	
mardi 04 janvier 2005	mercredi 02 mars 2005

The following request prints a blank delimited date in Spanish with a full day name at the beginning in lowercase (the default for Spanish), followed by a comma, and with the word “de” between the day number and month and between the month and year:

```
DEFINE FILE VIDEOTRK
TRANS1/YYMD=20050104;
TRANS2/YYMD=20050302;
```

```
DATEW/W=TRANS1      ;
DATEW2/W=TRANS2     ;
DATEYYMD/YYMDW=TRANS1  ;
DATEYYMD2/YYMDW=TRANS2 ;
```

```
OUT5A/A30=DATETRAN(DATEYYMD, '(DMYY)', '(Bwrctrde)', 'ES', 30, 'A30');
OUT5B/A30=DATETRAN(DATEYYMD2, '(DMYY)', '(Bwrctrde)', 'ES', 30, 'A30');
END
```

```
TABLE FILE VIDEOTRK
HEADING
"FORMAT Bwrctrde"
""
"Blank-delimited (B)"
"Full day of week name at beginning of date, default case (wr)"
"Comma after day name (c)"
"Full month name, default case (tr)"
"Zero-suppress day number (d)"
"de between day and month and between month and year (e)"
"Spanish"
""
SUM OUT5A AS '' OUT5B AS '' TRANSDATE NOPRINT
ON TABLE SET PAGE-NUM OFF
END
```

The output is:

FORMAT Bwrctrde	
Blank-delimited (B)	
Full day of week name at beginning of date, default case (wr)	
Comma after day name (c)	
Full month name, default case (tr)	
Zero-suppress day number (d)	
de between day and month and between month and year (e)	
Spanish	
martes, 4 de enero de 2005	miércoles, 2 de marzo de 2005

The following request prints a date in Japanese characters with a full month name at the beginning, in the default case and with zero suppression:

```
DEFINE FILE VIDEOTRK
TRANS1/YYMD=20050104;
TRANS2/YYMD=20050302;
```

```
DATEW/W=TRANS1      ;
DATEW2/W=TRANS2     ;
DATEYYMD/YYMDW=TRANS1  ;
DATEYYMD2/YYMDW=TRANS2 ;
```

```
OUT6A/A30=DATETRAN(DATEYYMD , '(YYMD)', '(Ktrd)', 'JA', 30, 'A30');
OUT6B/A30=DATETRAN(DATEYYMD2, '(YYMD)', '(Ktrd)', 'JA', 30, 'A30');
END
```

```
TABLE FILE VIDEOTRK
HEADING
"FORMAT Ktrd"
""
"Japanese characters (K in conjunction with the language code JA)"
"Full month name at beginning of date, default case (tr)"
"Zero-suppress day number (d)"
"Japanese"
""
SUM OUT6A AS '' OUT6B AS '' TRANSDATE NOPRINT
ON TABLE SET PAGE-NUM OFF
END
```

The output is:

FORMAT Ktrd Japanese characters (K in conjunction with the language code JA) Full month name at beginning of date, default case (tr) Zero-suppress day number (d) Japanese	
2005年1月4日	2005年3月2日

The following request prints a blank delimited date in Greek with a full day name at the beginning in the default case, followed by a comma, and with a full month name in the default case:

```
DEFINE FILE VIDEOTRK
TRANS1/YYMD=20050104;
TRANS2/YYMD=20050302;
```

```
DATEW/W=TRANS1      ;
DATEW2/W=TRANS2     ;
DATEYYMD/YYMDW=TRANS1  ;
DATEYYMD2/YYMDW=TRANS2 ;
```

```
OUT7A/A30=DATETRAN(DATEYYMD , '(DMYY)', '(Bwrctr)', 'GR', 30, 'A30');
OUT7B/A30=DATETRAN(DATEYYMD2, '(DMYY)', '(Bwrctr)', 'GR', 30, 'A30');
END
```

```
TABLE FILE VIDEOTRK
HEADING
"FORMAT Bwrctrde"
""
"Blank-delimited (B)"
"Full day of week name at beginning of date, default case (wr)"
"Comma after day name (c)"
"Full month name, default case (tr)"
"Greek"
""
SUM OUT7A AS '' OUT7B AS '' TRANSDATE NOPRINT
ON TABLE SET PAGE-NUM OFF
END
```


The output is:

FORMAT Bwrctr	
Blank-delimited (B)	
Full day of week name at beginning of date, default case (wr)	
Comma after day name (c)	
Full month name, default case (tr)	
Greek	
Τρίτη, 04 Ιανουάριος 2005	Τετάρτη, 02 Μάρτιος 2005

DPART: Extracting a Component From a Date

The DPART function extracts a specified component from a date field and returns it in numeric format.

Since Dialogue Manager interprets a date as alphanumeric or numeric, and DPART requires a standard date stored as an offset from the base date, do not use DPART with Dialogue Manager unless you first convert the variable used as the input date to an offset from the base date.

For more information, see [Calling a Function From a Dialogue Manager Command](#).

Available Languages: reporting, Maintain

Extract a Date Component and Return It in Integer Format

```
DPART (datevalue, 'component', output)
```

where:

datevalue

Date

Is a full component date.

component

Alphanumeric

Is the name of the component to be retrieved enclosed in single quotation marks. Valid values are:

For year: YEAR, YY

For month: MONTH, MM

For day: DAY, For day of month: DAY-OF-MONTH, DD.

For weekday: WEEKDAY, WW.

For quarter: QUARTER, QQ

output

Integer

Is the field that contains the result, or the integer format of the output value enclosed in single quotation marks.

Extracting Date Components in Integer Format

The following request against the VIDEOTRK data source uses the DPART function to extract the year, month, and day component from the TRANSDATE field:

```
DEFINE FILE
  VIDEOTRK
  YEAR/I4 = DPART(TRANSDATE, 'YEAR', 'I11');
  MONTH/I4 = DPART(TRANSDATE, 'MM', 'I11');
  DAY/I4 = DPART(TRANSDATE, 'DAY', 'I11');
END

TABLE FILE VIDEOTRK
PRINT TRANSDATE YEAR MONTH DAY
BY LASTNAME BY FIRSTNAME
WHERE LASTNAME LT 'DIAZ'
END
```

The output is:

LASTNAME	FIRSTNAME	TRANSDATE	YEAR	MONTH	DAY
-----	-----	-----	----	-----	---
ANDREWS	NATALIA	91/06/19	1991	6	19
		91/06/18	1991	6	18
BAKER	MARIE	91/06/19	1991	6	19
		91/06/17	1991	6	17
BERTAL	MARCIA	91/06/23	1991	6	23
		91/06/18	1991	6	18
CHANG	ROBERT	91/06/28	1991	6	28
		91/06/27	1991	6	27
		91/06/26	1991	6	26
COLE	ALLISON	91/06/24	1991	6	24
		91/06/23	1991	6	23
CRUZ	IVY	91/06/27	1991	6	27
DAVIS	JASON	91/06/24	1991	6	24

FIQTR: Obtaining the Financial Quarter

The FIQTR function returns the financial quarter corresponding to a given calendar date based on the financial year starting date and the financial year numbering convention.

Since Dialogue Manager interprets a date as alphanumeric or numeric, and FIQTR requires a standard date stored as an offset from the base date, do not use FIQTR with Dialogue Manager unless you first convert the variable used as the input date to an offset from the base date.

For more information, see [Calling a Function From a Dialogue Manager Command](#).

Obtain the Financial Quarter

```
FIQTR(inputdate, lowcomponent, startmonth, startday, yrnumbering,
output)
```

where:

inputdate

Date

Is the date for which the financial year is returned. The date must be a standard date stored as an offset from the base date.

If the financial year does not begin on the first day of a month, the date must have Y(Y), M, and D components, or Y(Y) and JUL components (note that JUL is equivalent to YJUL). Otherwise, the date only needs Y(Y) and M components or Y(Y) and Q components.

lowcomponent

Alphanumeric

Is one of the following:

- D if the date contains a D or JUL component.
- M if the date contains an M component, but no D component.
- Q if the date contains a Q component.

startmonth

Numeric

1 through 12 are used to represent the starting month of the financial year, where 1 represents January and 12 represents December. If the low component is Q, the start month must be 1, 4, 7, or 10.

startday

Numeric

Is the starting day of the starting month, usually 1. If the low component is M or Q, 1 is required.

yrnumbering

Alphanumeric

Valid values are:

FYE to specify the **Financial Year Ending** convention. The financial year number is the calendar year of the ending date of the financial year. For example, when the financial year starts on October 1, 2008, the date 2008 November 1 is in FY 2009 Q1 because that date is in the financial year that ends on 2009 September 30.

FYS to specify the **Financial Year Starting** convention. The financial year number is the calendar year of the starting date of the financial year. For example, when the financial

year starts on April 6, 2008, the date 2008 July 6 is in FY 2008 Q2 because that date is in the financial year that starts on 2008 April 6.

output

I or Q

The result will be in integer format, or Q. This function will return a value of 1 through 4. In case of an error, zero is returned.



Note: February 29 cannot be used as a start day for a financial year.

Obtaining the Financial Quarter

The following request against the CENTHR data source obtains the financial quarter corresponding to an employee starting date (field START_DATE, format YYMD) and returns the values in each of the supported formats: Q and I1.

```
DEFINE FILE CENTHR
FISCALQ/Q=FIQTR(START_DATE,'D',10,1,'FYE',FISCALQ);
FISCALI/I1=FIQTR(START_DATE,'D',10,1,'FYE',FISCALI);
END
TABLE FILE CENTHR
PRINT START_DATE FISCALQ FISCALI
BY LNAME BY FNAME
WHERE LNAME LIKE 'C%'
END
```

On the output, note that the date November 12, 1998 (1998/11/12) is in fiscal quarter Q1 because the starting month is October (10):

Last Name	First Name	Starting Date	FISCALQ	FISCALI
----	-----	-----	-----	-----
CHARNEY	ROSS	1998/09/12	Q4	4
CHIEN	CHRISTINE	1997/10/01	Q1	1
CLEVELAND	PHILIP	1996/07/30	Q4	4
CLINE	STEPHEN	1998/11/12	Q1	1
COHEN	DANIEL	1997/10/05	Q1	1
CORRIVEAU	RAYMOND	1997/12/05	Q1	1
COSSMAN	MARK	1996/12/19	Q1	1
CRONIN	CHRIS	1996/12/03	Q1	1

CROWDER	WESLEY	1996/09/17	Q4	4
CULLEN	DENNIS	1995/09/05	Q4	4
CUMMINGS	JAMES	1993/07/11	Q4	4
CUTLIP	GREGG	1997/03/26	Q2	2

FIQTR obtains the financial quarter for START_DATE (format YYMD) and returns a column with format Q;

```
FIQTR(START_DATE, 'D', 10, 1, 'FYE', 'Q');
```

For 1997/10/01, the result is Q1.

For 1996/07/30, the result is Q4.

FIYR: Obtaining the Financial Year

The FIYR function returns the financial year, also known as the fiscal year, corresponding to a given calendar date based on the financial year starting date and the financial year numbering convention.

Since Dialogue Manager interprets a date as alphanumeric or numeric, and FIYR requires a standard date stored as an offset from the base date, do not use FIYR with Dialogue Manager unless you first convert the variable used as the input date to an offset from the base date.

For more information, see [Calling a Function From a Dialogue Manager Command](#).

Obtain the Financial Year

```
FIYR(inputdate, lowcomponent, startmonth, startday, yrnumbering, output)
```

where:

inputdate

Date

Is the date for which the financial year is returned. The date must be a standard date stored as an offset from the base date.

If the financial year does not begin on the first day of a month, the date must have Y(Y), M, and D components, or Y(Y) and JUL components (note that JUL is equivalent to YJUL). Otherwise, the date only needs Y(Y) and M components or Y(Y) and Q components.

lowcomponent

Alphanumeric

Is one of the following:

- D if the date contains a D or JUL component.
- M if the date contains an M component, but no D component.
- Q if the date contains a Q component.

startmonth

Numeric

1 through 12 are used to represent the starting month of the financial year, where 1 represents January and 12 represents December. If the low component is Q, the start month must be 1, 4, 7, or 10.

startday

Numeric

Is the starting day of the starting month, usually 1. If the low component is M or Q, 1 is required.

yrnumbering

Alphanumeric

Valid values are:

FYE to specify the **Financial Year Ending** convention. The financial year number is the calendar year of the ending date of the financial year. For example, when the financial year starts on October 1, 2008, the date 2008 November 1 is in FY 2009 Q1 because that date is in the financial year that ends on 2009 September 30.

FYS to specify the **Financial Year Starting** convention. The financial year number is the calendar year of the starting date of the financial year. For example, when the financial

year starts on April 6, 2008, the date 2008 July 6 is in FY 2008 Q2 because that date is in the financial year that starts on 2008 April 6.

output

I, Y, or YY

The result will be in integer format, or Y or YY. This function returns a year value. In case of an error, zero is returned.



Note: February 29 cannot be used as a start day for a financial year.

Obtaining the Financial Year

The following request against the CENTSTMT data source obtains the financial year corresponding to an account period (field PERIOD, format YYM) and returns the values in each of the supported formats: Y, YY, and I4.

```
DEFINE FILE CENTSTMT
FISCALYY/YY=FIYR(PERIOD,'M', 4,1,'FYE',FISCALYY);
FISCALY/Y=FIYR(PERIOD,'M', 4,1,'FYE',FISCALY);
FISCALI/I4=FIYR(PERIOD,'M', 4,1,'FYE',FISCALI);
END
TABLE FILE CENTSTMT
PRINT PERIOD FISCALYY FISCALY FISCALI
BY GL_ACCOUNT
WHERE GL_ACCOUNT LT '2100'
END
```

On the output, note that the period April 2002 (2002/04) is in fiscal year 2003 because the starting month is April (4), and the FYE numbering convention is used:

Ledger Account	PERIOD	FISCALYY	FISCALY	FISCALI
-----	-----	-----	-----	-----
1000	2002/01	2002	02	2002
	2002/02	2002	02	2002
	2002/03	2002	02	2002
	2002/04	2003	03	2003
	2002/05	2003	03	2003
	2002/06	2003	03	2003
	2002/07	2003	03	2003
2000	2002/01	2002	02	2002

2002/02	2002	02	2002
2002/03	2002	02	2002
2002/04	2003	03	2003
2002/05	2003	03	2003
2002/06	2003	03	2003

FIYR obtains the financial year for PERIOD, which has format YYM :

```
FIYR(PERIOD, 'M', 4, 1, 'FYE', 'YY');
```

For PERIOD 2002/03, the result is 2002

For PERIOD 2002/04, the result is 2003.

FIYYQ: Converting a Calendar Date to a Financial Date

The FIYYQ function returns a financial date containing both the financial year and quarter that corresponds to a given calendar date. The returned financial date is based on the financial year starting date and the financial year numbering convention.

Since Dialogue Manager interprets a date as alphanumeric or numeric, and FIYYQ requires a standard date stored as an offset from the base date, do not use FIYYQ with Dialogue Manager unless you first convert the variable used as the input date to an offset from the base date.

For more information, see [Calling a Function From a Dialogue Manager Command](#).

Convert a Calendar Date to a Financial Date

```
FIYYQ(inputdate, lowcomponent, startmonth, startday, yrnumbering, output)
```

where:

inputdate

Date

Is the date for which the financial year is returned. The date must be a standard date stored as an offset from the base date.

If the financial year does not begin on the first day of a month, the date must have Y(Y), M, and D components, or Y(Y) and JUL components (note that JUL is equivalent to YJUL). Otherwise, the date only needs Y(Y) and M components or Y(Y) and Q components.

lowcomponent

Alphanumeric

Is one of the following:

- D if the date contains a D or JUL component.
- M if the date contains an M component, but no D component.
- Q if the date contains a Q component.

startmonth

Numeric

1 through 12 are used to represent the starting month of the financial year, where 1 represents January and 12 represents December. If the low component is Q, the start month must be 1, 4, 7, or 10.

startday

Numeric

Is the starting day of the starting month, usually 1. If the low component is M or Q, 1 is required.

yrnumbering

Alphanumeric

Valid values are:

FYE to specify the **Financial Year Ending** convention. The financial year number is the calendar year of the ending date of the financial year. For example, when the financial

year starts on October 1, 2008, the date 2008 November 1 is in FY 2009 Q1 because that date is in the financial year that ends on 2009 September 30.

FYS to specify the **Financial Year Starting** convention. The financial year number is the calendar year of the starting date of the financial year. For example, when the financial year starts on April 6, 2008, the date 2008 July 6 is in FY 2008 Q2 because that date is in the financial year that starts on 2008 April 6.

output

Y[Y]Q or QY[Y]

In case of an error, zero is returned.



Note: February 29 cannot be used as a start day for a financial year.

Converting a Calendar Date to a Financial Date

The following request against the CENTHR data source converts each employee starting date (field START_DATE, format YYMD) to a financial date containing year and quarter components in all the supported formats: YQ, YYQ, QY, and QYY.

```
DEFINE FILE CENTHR
FISYQ/YQ=FIYYQ(START_DATE, 'D', 10, 1, 'FYE', FISYQ);
FISYYQ/YYQ=FIYYQ(START_DATE, 'D', 10, 1, 'FYE', FISYYQ);
FISQY/QY=FIYYQ(START_DATE, 'D', 10, 1, 'FYE', FISQY);
FISQYY/QYY=FIYYQ(START_DATE, 'D', 10, 1, 'FYE', FISQYY);
END
TABLE FILE CENTHR
PRINT START_DATE FISYQ FISYYQ FISQY FISQYY
BY LNAME BY FNAME
WHERE LNAME LIKE 'C%'
END
```

On the output, note that the date November 12, 1998 (1998/11/12) is converted to Q1 1999 because the starting month is October (10), and the FYE numbering convention is used:

Last Name	First Name	Starting Date	FISYQ	FISYYQ	FISQY	FISQYY
----	-----	-----	-----	-----	-----	-----
CHARNEY	ROSS	1998/09/12	98 Q4	1998 Q4	Q4 98	Q4 1998

CHIEN	CHRISTINE	1997/10/01	98 Q1	1998 Q1	Q1 98	Q1 1998
CLEVELAND	PHILIP	1996/07/30	96 Q4	1996 Q4	Q4 96	Q4 1996
CLINE	STEPHEN	1998/11/12	99 Q1	1999 Q1	Q1 99	Q1 1999
COHEN	DANIEL	1997/10/05	98 Q1	1998 Q1	Q1 98	Q1 1998
CORRIVEAU	RAYMOND	1997/12/05	98 Q1	1998 Q1	Q1 98	Q1 1998
COSSMAN	MARK	1996/12/19	97 Q1	1997 Q1	Q1 97	Q1 1997
CRONIN	CHRIS	1996/12/03	97 Q1	1997 Q1	Q1 97	Q1 1997
CROWDER	WESLEY	1996/09/17	96 Q4	1996 Q4	Q4 96	Q4 1996
CULLEN	DENNIS	1995/09/05	95 Q4	1995 Q4	Q4 95	Q4 1995
CUMMINGS	JAMES	1993/07/11	93 Q4	1993 Q4	Q4 93	Q4 1993
CUTLIP	GREGG	1997/03/26	97 Q2	1997 Q2	Q2 97	Q2 1997

FIYYQ returns the financial date in format YQ that corresponds to START_DATE (format YYMD);

```
FIYYQ(START_DATE, 'D', 10, 1, 'FYE', 'YQ');
```

For 1997/10/01, the result is 98 Q1.

For 1996/07/30, the result is 96 Q4.

TODAY: Returning the Current Date

Available Languages: reporting

The TODAY function retrieves the current date from the operating system in the format MM/DD/YY or MM/DD/YYYY. It always returns a date that is current. Therefore, if you are running an application late at night, use TODAY. You can remove the default embedded slashes with the EDIT function.

You can also retrieve the date in the same format (separated by slashes) using the Dialogue Manager system variable &DATE. You can retrieve the date without the slashes using the system variables &YMD, &MDY, and &DMY. The system variable &DATEfmt retrieves the date in a specified format.

Retrieve the Current Date

```
TODAY(output)
```

where:

output

Alphanumeric, at least A8

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

The following apply:

- If the format is A8 or A9, TODAY returns the 2-digit year.
- If the format is A10 or greater, TODAY returns the 4-digit year.

Retrieving the Current Date

TODAY retrieves the current date and stores it in the DATE field. The request then displays the date in the page heading.

```
DEFINE FILE EMPLOYEE
DATE/A10 WITH EMP_ID = TODAY(DATE);
END
```

```
TABLE FILE EMPLOYEE
SUM CURR_SAL BY DEPARTMENT
HEADING
"PAGE <TABPAGENO  "
"SALARY REPORT RUN ON <DATE  "
END
```

The output is:

```
SALARY REPORT RUN ON 12/13/2006
DEPARTMENT          CURR_SAL
-----
MIS                  $108,002.00
PRODUCTION           $114,282.00
```

TODAY retrieves the current date and stores it in a column with the format A10.

```
TODAY('A10')
```

Using Legacy Date Functions

The legacy date functions were created for use with dates in integer, packed decimal, or alphanumeric format.

For detailed information on each legacy date function, see:

[AYM: Adding or Subtracting Months](#)

[AYMD: Adding or Subtracting Days](#)

[CHGDAT: Changing How a Date String Displays](#)

[DA Functions: Converting a Legacy Date to an Integer](#)

[DMY, MDY, YMD: Calculating the Difference Between Two Dates](#)

[DOWK and DOWKL: Finding the Day of the Week](#)

[DT Functions: Converting an Integer to a Date](#)

[GREGDT: Converting From Julian to Gregorian Format](#)

[JULDAT: Converting From Gregorian to Julian Format](#)

[YM: Calculating Elapsed Months](#)

Using Old Versions of Legacy Date Functions

The functions described in this section are legacy date functions. They were created for use with dates in integer or alphanumeric format. They are no longer recommended for date manipulation. Standard date and date-time functions are preferred.

All legacy date functions support dates for the year 2000 and later.

Using Dates With Two- and Four-Digit Years

Legacy date functions accept dates with two- or four-digit years. Four-digit years that display the century, such as 2000 or 1900, can be used if their formats are specified as I8YYMD, P8YYMD, D8YYMD, F8YYMD, or A8YYMD. Two-digit years can use the DEFCENT and YRTHRESH parameters to assign century values if the field has a length of six (for example,

I6YMD). For information on these parameters, see *Customizing Your Environment* in the *ibi™ WebFOCUS® Developing Reporting Applications* manual.

Using Four-Digit Years

The EDIT function creates dates with four-digit years. The functions JULDAT and GREGDT then convert these dates to Julian and Gregorian formats.

```
DEFINE FILE EMPLOYEE
DATE/I8YYMD = EDIT('19'|EDIT(HIRE_DATE));
JDATE/I7 = JULDAT(DATE, 'I7');
GDATE/I8 = GREGDT(JDATE, 'I8');
END
TABLE FILE EMPLOYEE
PRINT DATE JDATE GDATE
END
```

The output is:

DATE ----	JDATE -----	GDATE -----
1980/06/02	1980154	19800602
1981/07/01	1981182	19810701
1982/05/01	1982121	19820501
1982/01/04	1982004	19820104
1982/08/01	1982213	19820801
1982/01/04	1982004	19820104
1982/07/01	1982182	19820701
1981/07/01	1981182	19810701
1982/04/01	1982091	19820401
1982/02/02	1982033	19820202
1982/04/01	1982091	19820401
1981/11/02	1981306	19811102
1982/04/01	1982091	19820401
1982/05/15	1982135	19820515

Using Two-Digit Years

The AYMD function returns an eight-digit date when the input argument has a six-digit legacy date format. Since DEFCENT is 19 and YRTHRESH is 83, year values from 83 through

99 are interpreted as 1983 through 1999, and year values from 00 through 82 are interpreted as 2000 through 2082.

```
SET DEFCENT=19, YRTHRESH=83

DEFINE FILE EMPLOYEE
NEW_DATE/I8YYMD = AYMD(EFFECT_DATE, 30, 'I8');
END

TABLE FILE EMPLOYEE
PRINT EFFECT_DATE NEW_DATE BY EMP_ID
END
```

The output is:

EMP_ID	EFFECT_DATE	NEW_DATE
-----	-----	-----
071382660		
112847612		
117593129	82/11/01	2082/12/01
119265415		
119329144	83/01/01	1983/01/31
123764317	83/03/01	1983/03/31
126724188		
219984371		
326179357	82/12/01	2082/12/31
451123478	84/09/01	1984/10/01
543729165		
818692173	83/05/01	1983/05/31

AYM: Adding or Subtracting Months

Available Languages: reporting, Maintain

The AYM function adds months to or subtracts months from a date in a year-month format. You can convert a date to this format using the CHGDAT or EDIT function.

Add or Subtract Months to or From a Date

```
AYM(indate, months, output)
```

where:

indate

I4, I4YM, I6, or I6YYM

Is the legacy date in year-month format, the name of a field that contains the date, or an expression that returns the date. If the date is not valid, the function returns the value 0 (zero).

months

Integer

Is the number of months you are adding to or subtracting from the date. To subtract months, use a negative number.

output

I4YM or I6YYM

Is the resulting legacy date. Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.



Tip: If the input date is in integer year-month-day format (I6YMD or I8YYMD), divide the date by 100 to convert to year-month format and set the result to an integer. This drops the day portion of the date, which is now after the decimal point.

Adding Months to a Date

The COMPUTE command converts the dates in HIRE_DATE from year-month-day to year-month format and stores the result in HIRE_MONTH. AYM then adds six months to HIRE_MONTH and stores the result in AFTER6MONTHS:

```
TABLE FILE EMPLOYEE
PRINT HIRE_DATE AND COMPUTE
HIRE_MONTH/I4YM = HIRE_DATE/100 ;
AFTER6MONTHS/I4YM = AYM(HIRE_MONTH, 6, AFTER6MONTHS);
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	HIRE_MONTH	AFTER6MONTHS
-----	-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	82/04/01	82/04	82/10
CROSS	BARBARA	81/11/02	81/11	82/05
GREENSPAN	MARY	82/04/01	82/04	82/10
JONES	DIANE	82/05/01	82/05	82/11
MCCOY	JOHN	81/07/01	81/07	82/01
SMITH	MARY	81/07/01	81/07	82/01

AYM adds six months to HIRE_MONTH and stores the result in a column with the format I4YM.

```
AYM(HIRE_MONTH, 6, 'I4YM')
```

For 99/04, the result is 99/10.

For 98/11, the result is 99/05.

AYMD: Adding or Subtracting Days

Available Languages: reporting, Maintain

The AYMD function adds days to or subtracts days from a date in a year-month-day format. You can convert a date to this format using the CHGDAT or EDIT function.

Add or Subtract Days to or From a Date

```
AYMD(indate, days, output)
```

where:

indate

I6, I6YMD, I8, I8YYMD

Is the legacy date in a year-month-day format. If the date is not valid, the function returns the value 0 (zero).

days

Integer

Is the number of days you are adding to or subtracting from *indate*. To subtract days, use a negative number.

output

I6, I6YMD, I8, or I8YYMD

Is the same format as *indate*.

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. If *indate* is a field, the *output* must have the same format.

If the addition or subtraction of days crosses forward or backward into another century, the century digits of the output year are adjusted.

Adding Days to a Date

AYMD adds 35 days to each value in the HIRE_DATE field, and stores the result in AFTER35DAYS:

```
TABLE FILE EMPLOYEE
PRINT HIRE_DATE AND COMPUTE
AFTER35DAYS/I6YMD = AYMD(HIRE_DATE, 35, AFTER35DAYS);
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	AFTER35DAYS
-----	-----	-----	-----
BANNING	JOHN	82/08/01	82/09/05
IRVING	JOAN	82/01/04	82/02/08
MCKNIGHT	ROGER	82/02/02	82/03/09
ROMANS	ANTHONY	82/07/01	82/08/05
SMITH	RICHARD	82/01/04	82/02/08
STEVENS	ALFRED	80/06/02	80/07/07

AYMD adds 35 days to each value in the HIRE_DATE field, and stores the result in a column with the format I6YMD.

```
AYMD(HIRE_DATE, 35, 'I6YMD')
```

For 99/08/01, the result is 99/09/05.

For 99/01/04, the result is 99/02/08.

CHGDAT: Changing How a Date String Displays

Available Languages: reporting, Maintain

The CHGDAT function rearranges the year, month, and day portions of an input character string representing a date. It may also convert the input string from long to short or short to long date representation. Long representation contains all three date components: year, month, and day; short representation omits one or two of the date components, such as year, month, or day. The input and output date strings are described by display options that specify both the order of date components (year, month, day) in the date string and whether two or four digits are used for the year (for example, 04 or 2004). CHGDAT reads an input date character string and creates an output date character string that represents the same date in a different way.



Note: CHGDAT requires a date character string as input, not a date itself. Whether the input is a standard or legacy date, convert it to a date character string (using the EDIT or DATECVT functions, for example) before applying CHGDAT.

The order of date components in the date character string is described by display options comprised of the following characters in your chosen order:

Character	Description
D	Day of the month (01 through 31).
M	Month of the year (01 through 12).
Y[Y]	Year. Y indicates a two-digit year (such as 94); YY indicates a four-digit year (such as 1994).

To spell out the month rather than use a number in the resulting string, append one of the following characters to the display options for the resulting string:

Character	Description
T	Displays the month as a three-letter abbreviation.
X	Displays the full name of the month.

Display options can consist of up to five display characters. Characters other than those display options are ignored.

For example: The display options 'DMYY' specify that the date string starts with a two-digit day, then two digit month, then four-digit year.

 **Note:** Display options are *not* date formats.

Short to Long Conversion

If you are converting a date from a short to long representation (for example, from year-month to year-month-day), the function supplies the portion of the date missing in the short representation, as shown in the following table:

Portion of Date Missing	Portion Supplied by Function
Day (for example, from YM to YMD)	Last day of the month.
Month (for example, from Y to YM)	Last month of the year (December).
Year (for example, from MD to YMD)	The year 99.
Converting year from two-digit to four-digit (for example, from YMD to YYMD)	The century will be determined by the 100-year window defined by DEFCENT and YRTHRESH. See <i>Customizing Your Environment</i> in the <i>ibi™ WebFOCUS® Developing Reporting Applications</i> manual or <i>Working With Cross-Century Dates</i> in the iBase archive for details on DEFCENT and YRTHRESH.

Change the Date Display String

```
CHGDAT('in_display_options','out_display_options',date_string,output)
```

where:

'in_display_options'

A1 to A5

Is a series of up to five display options that describe the layout of *date_string*. These options can be stored in an alphanumeric field or supplied as a literal enclosed in single quotation marks.

'out_display_options'

A1 to A5

Is a series of up to five display options that describe the layout of the converted date string. These options can be stored in an alphanumeric field or supplied as a literal enclosed in single quotation marks.

date_string

A2 to A8

Is the input date character string with date components in the order specified by *in_display_options*.

Note that if the original date is in numeric format, you must convert it to a date character string. If *date_string* does not correctly represent the date (the date is invalid), the function returns blank spaces.

output

Axx, where xx is a number of characters large enough to fit the date string specified by *out_display_options*. A17 is long enough to fit the longest date string.

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.



Note: Since CHGDAT uses a date string (as opposed to a date) and returns a date string with up to 17 characters, use the EDIT or DATECVT functions or any other means to convert the date to or from a date character string.

Converting the Date Display From YMD to MDYYX

The EDIT function changes HIRE_DATE from numeric to alphanumeric format. CHGDAT then converts each value in ALPHA_HIRE from displaying the components as YMD to MDYYX and stores the result in HIRE_MDY, which has the format A17. The option X in the output value displays the full name of the month.

```
TABLE FILE EMPLOYEE
PRINT HIRE_DATE AND COMPUTE
ALPHA_HIRE/A17 = EDIT(HIRE_DATE); NOPRINT AND COMPUTE
HIRE_MDY/A17 = CHGDAT('YMD', 'MDYYX', ALPHA_HIRE, 'A17');
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	HIRE_MDY
-----	-----	-----	-----
BANNING	JOHN	82/08/01	AUGUST 01 1982
IRVING	JOAN	82/01/04	JANUARY 04 1982
MCKNIGHT	ROGER	82/02/02	FEBRUARY 02 1982
ROMANS	ANTHONY	82/07/01	JULY 01 1982
SMITH	RICHARD	82/01/04	JANUARY 04 1982
STEVENS	ALFRED	80/06/02	JUNE 02 1980

ALPHA_HIRE is HIRE_DATE converted from numeric to alphanumeric format. CHGDATE converts each value in ALPHA_HIRE from displaying the components as YMD to MDYYX and stores the result in a column with the format A17. The option X in the output value displays the full name of the month.

```
CHGDATE('YMD', 'MDYYX', ALPHA_HIRE, 'A17')
```

DA Functions: Converting a Legacy Date to an Integer

Available Languages: reporting, Maintain

The DA functions convert a legacy date to the number of days between it and a base date (December 31, 1899). By converting a date to the number of days, you can add and subtract dates and calculate the intervals between them, or you can add to or subtract numbers from the dates to get new dates.

You can convert the result back to a date using the DT functions discussed in [DT Functions: Converting an Integer to a Date](#).

There are six DA functions; each one accepts a date in a different format.

Convert a Date to an Integer

```
function(indate, output)
```


where:

function

Is one of the following:

DADMY converts a date in day-month-year format.

DADYM converts a date in day-year-month format.

DAMDY converts a date in month-day-year format.

DAMYD converts a date in month-year-day format.

DAYDM converts a date in year-day-month format.

DAYMD converts a date in year-month-day format.

indate

I6xxx or P6xxx, where xxx corresponds to the function DAxxx you are using.

Is the legacy date to be converted, or the name of a field that contains the date. The date is truncated to an integer before conversion. If **indate** is a numeric literal, enter only the last two digits of the year; the function assumes the century component. If the date is invalid, the function returns a 0.

output

Integer

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The format of the date returned depends on the function.

Converting Dates and Calculating the Difference Between Them

DAYMD converts the DAT_INC and HIRE_DATE fields to the number of days since December 31, 1899, and the smaller number is then subtracted from the larger number:

```
TABLE FILE EMPLOYEE
PRINT DAT_INC AS 'RAISE DATE' AND COMPUTE
DAYS_HIRED/I8 = DAYMD(DAT_INC, 'I8') - DAYMD(HIRE_DATE, 'I8');
```

```

BY LAST_NAME BY FIRST_NAME
IF DAYS_HIRED NE 0
WHERE DEPARTMENT EQ 'PRODUCTION';
END

```

The output is:

LAST_NAME	FIRST_NAME	RAISE DATE	DAYS_HIRED
-----	-----	-----	-----
IRVING	JOAN	82/05/14	130
MCKNIGHT	ROGER	82/05/14	101
SMITH	RICHARD	82/05/14	130
STEVENS	ALFRED	82/01/01	578
		81/01/01	213

DAYMD converts DAT_INC and HIRE_DATE to the number of days since December 31, 1899 and the smaller number is then subtracted from the larger number:

```
DAYMD(DAT_INC, 'I8') - DAYMD(HIRE_DATE, 'I8')
```

DMY, MDY, YMD: Calculating the Difference Between Two Dates

Available Languages: reporting, Maintain

The DMY, MDY, and YMD functions calculate the difference between two legacy dates in integer, alphanumeric, or packed format.

Calculate the Difference Between Two Dates

```
function(from_date, to_date)
```

where:

function

Is one of the following:

DMY calculates the difference between two dates in day-month-year format.

MDY calculates the difference between two dates in month-day-year format.

YMD calculates the difference between two dates in year-month-day format.

from_date

I, P, or A format with date display options.

Is the beginning legacy date, or the name of a field that contains the date.

to_date

I, P, or A format with date display options. I6xxx or I8xxx where xxx corresponds to the specified function (DMY, YMD, or MDY).

Is the end date, or the name of a field that contains the date.

Calculating the Number of Days Between Two Dates

YMD calculates the number of days between the dates in HIRE_DATE and DAT_INC:

```
TABLE FILE EMPLOYEE
SUM HIRE_DATE FST.DAT_INC AS 'FIRST PAY, INCREASE' AND COMPUTE
DIFF/I4 = YMD(HIRE_DATE, FST.DAT_INC); AS 'DAYS, BETWEEN'
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

<u>LAST_NAME</u>	<u>FIRST_NAME</u>	<u>HIRE_DATE</u>	<u>FIRST PAY INCREASE</u>	<u>DAYS BETWEEN</u>

BLACKWOOD	ROSEMARIE	82/04/01	82/04/01	0
CROSS	BARBARA	81/11/02	82/04/09	158
GREENSPAN	MARY	82/04/01	82/06/11	71
JONES	DIANE	82/05/01	82/06/01	31
MCCOY	JOHN	81/07/01	82/01/01	184
SMITH	MARY	81/07/01	82/01/01	184

YMD calculates the number of days between the dates in HIRE_DATE and DAT_INC.

```
YMD(HIRE_DATE, DAT_INC)
```

DOWK and DOWKL: Finding the Day of the Week

Available Languages: reporting, Maintain

The DOWK and DOWKL functions find the day of the week that corresponds to a date.

DOWK returns the day as a three letter abbreviation; DOWKL displays the full name of the day.

Find the Day of the Week

```
{DOWK|DOWKL}(indate, output)
```

where:

indate

I6YMD or I8YYMD

Is the legacy date in year-month-day format. If the date is not valid, the function returns spaces. If the date specifies a two-digit year and DEFCENT and YRTHRESH values have not been set, the function assumes the 20th century.

output

DOWK: A4. DOWKL: A12

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Finding the Day of the Week

DOWK determines the day of the week that corresponds to the value in the HIRE_DATE field and stores the result in DATED:

```
TABLE FILE EMPLOYEE
PRINT EMP_ID AND HIRE_DATE AND COMPUTE
DATED/A4 = DOWK(HIRE_DATE, DATED);
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

EMP_ID	HIRE_DATE	DATED
-----	-----	-----
071382660	80/06/02	MON
119265415	82/01/04	MON
119329144	82/08/01	SUN
123764317	82/01/04	MON
126724188	82/07/01	THU
451123478	82/02/02	TUE

DOWK determines the day of the week that corresponds to the value in the HIRE_DATE field and stores the result in a column with the format A4.

```
DOWK(HIRE_DATE, 'A4')
```

For 80/06/02, the result is MON.

For 82/08/01, the result is SUN.

DT Functions: Converting an Integer to a Date

Available Languages: reporting, Maintain

The DT functions convert an integer representing the number of days elapsed since December 31, 1899 to the corresponding date. They are useful when you are performing arithmetic on a date converted to the number of days (for more information, see [DA Functions: Converting a Legacy Date to an Integer](#)). The DT functions convert the result back to a date.

There are six DT functions; each one converts a number into a date of a different format.



Note: When USERFNS is set to LOCAL, DT functions only display a six-digit date.

Convert an Integer to a Date

```
function(number, output)
```

where:

function

Is one of the following:

DTDMY converts a number to a day-month-year date.

DTDYM converts a number to a day-year-month date.

DTMDY converts a number to a month-day-year date.

DTMYD converts a number to a month-year-day date.

DTYDM converts a number to a year-day-month date.

DTYMD converts a number to a year-month-day date.

number

Integer

Is the number of days since December 31, 1899. The number is truncated to an integer.

Is the number of days since the base date, possibly received from the functions DAxxx.

output

I8xxx, where xxx corresponds to the function DTxxx in the above list.

Is the name of the field containing the result or the format of the output value enclosed in single quotation marks. The output format depends on the function being used.

Converting an Integer to a Date

DTMDY converts the NEWF field (which was converted to the number of days by DAYMD) to the corresponding date and stores the result in NEW_HIRE_DATE:

```
--* THIS PROCEDURE CONVERTS HIRE_DATE, WHICH IS IN I6YMD FORMAT,
--* TO A DATE IN I8MDYY FORMAT.
--* FIRST IT USES THE DAYMD FUNCTION TO CONVERT HIRE_DATE
--* TO A NUMBER OF DAYS.
--* THEN IT USES THE DTMDY FUNCTION TO CONVERT THIS NUMBER OF
--* DAYS TO I8MDYY FORMAT
--*
DEFINE FILE EMPLOYEE
NEWF/I8 WITH EMP_ID = DAYMD(HIRE_DATE, NEWF);
NEW_HIRE_DATE/I8MDYY WITH EMP_ID = DTMDY(NEWF, NEW_HIRE_DATE);
END
TABLE FILE EMPLOYEE
PRINT HIRE_DATE NEW_HIRE_DATE
BY FN BY LN
WHERE DEPARTMENT EQ 'MIS'
END
```

The output is:

FIRST_NAME	LAST_NAME	HIRE_DATE	NEW_HIRE_DATE
-----	-----	-----	-----
BARBARA	CROSS	81/11/02	11/02/1981
DIANE	JONES	82/05/01	05/01/1982
JOHN	MCCOY	81/07/01	07/01/1981
MARY	GREENSPAN	82/04/01	04/01/1982
	SMITH	81/07/01	07/01/1981
ROSEMARIE	BLACKWOOD	82/04/01	04/01/1982

DTMDY converts NEWF (which was converted to the number of days by DAYMD) to the corresponding date and stores the result in a column with the format I8MDYY.

```
DTMDY(NEWF, 'I8MDYY')
```

For 81/11/02, the result is 11/02/1981.

For 82/05/01, the result is 05/01/1982.

GREGDT: Converting From Julian to Gregorian Format

Available Languages: reporting, Maintain

The GREGDT function converts a date in Julian format (year-day) to Gregorian format (year-month-day).

A date in Julian format is a five- or seven-digit number. The first two or four digits are the year; the last three digits are the number of the day, counting from January 1. For example, January 1, 1999 in Julian format is either 99001 or 1999001; June 21, 2004 in Julian format is 2004173.

Format Options for GREGDT

GREGDT converts a Julian date to either YMD or YYMD format using the DEFCENT and YRTHRESH parameter settings to determine the century, if required. GREGDT returns a date as follows:

- If the format is I6 or I7, GREGDT returns the date in YMD format.
- If the format is I8 or greater, GREGDT returns the date in YYMD format.

Convert From Julian to Gregorian Format

```
GREGDT(indate, output)
```

where:

indate

I5 or I7

Is the Julian date, which is truncated to an integer before conversion. Each value must be a five- or seven-digit number after truncation. If the date is invalid, the function returns a 0 (zero).

output

I6, I8, I6YMD, or I8YYMD

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Converting From Julian to Gregorian Format

GREGDT converts the JULIAN field to YYMD (Gregorian) format. It determines the century using the default DEFCENT and YRTHRESH parameter settings.

```
TABLE FILE EMPLOYEE
PRINT HIRE_DATE AND
COMPUTE JULIAN/I5 = JULDAT(HIRE_DATE, JULIAN); AND
COMPUTE GREG_DATE/I8 = GREGDT(JULIAN, 'I8');
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	JULIAN	GREG_DATE
-----	-----	-----	-----	-----
BANNING	JOHN	82/08/01	82213	19820801
IRVING	JOAN	82/01/04	82004	19820104
MCKNIGHT	ROGER	82/02/02	82033	19820202
ROMANS	ANTHONY	82/07/01	82182	19820701
SMITH	RICHARD	82/01/04	82004	19820104
STEVENS	ALFRED	80/06/02	80154	19800602

DTMDY converts NEWF (which was converted to the number of days by DAYMD) to the corresponding date and stores the result in a column with the format I8MDYY.

```
DTMDY(NEWF, 'I8MDYY')
```

For 81/11/02, the result is 11/02/1981.

For 82/05/01, the result is 05/01/1982.

JULDAT: Converting From Gregorian to Julian Format

Available Languages: reporting, Maintain

The JULDAT function converts a date from Gregorian format (year-month-day) to Julian format (year-day). A date in Julian format is a five- or seven-digit number. The first two or four digits are the year; the last three digits are the number of the day, counting from January 1. For example, January 1, 1999 in Julian format is either 99001 or 1999001.

Format Settings for JULDAT

JULDAT converts a Gregorian date to either YNNNN or YYYYNNN format, using the DEFCENT and YRTHRESH parameter settings to determine if the century is required.

JULDAT returns dates as follows:

- If the format is I6, JULDAT returns the date in the YNNNN format.
- If the format is I7 or greater, JULDAT returns the date in YYYYNNN format.

Convert From Gregorian to Julian Format

```
JULDAT(indate, output)
```

where:

indate

I6, I8, I6YMD, I8YYMD

Is the legacy date to convert or the name of the field that contains the date in year-month-day format (YMD or YYMD).

output

I5 or I7

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Converting From Gregorian to Julian Format

JULDAT converts the HIRE_DATE field to Julian format. It determines the century using the default DEFCENT and YRTHRESH parameter settings.

```
TABLE FILE EMPLOYEE
PRINT HIRE_DATE AND COMPUTE
JULIAN/I7 = JULDAT(HIRE_DATE, JULIAN);
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	JULIAN
-----	-----	-----	-----
BANNING	JOHN	82/08/01	1982213
IRVING	JOAN	82/01/04	1982004
MCKNIGHT	ROGER	82/02/02	1982033
ROMANS	ANTHONY	82/07/01	1982182
SMITH	RICHARD	82/01/04	1982004
STEVENS	ALFRED	80/06/02	1980154

GREGDT converts JULIAN to YYMD (Gregorian) format. It determines the century using the default DEFCENT and YRTHRESH parameter settings. The result is stored in a column with the format I8.

```
GREGDT(JULIAN, 'I8')
```

For 82213, the result is 19820801.

For 82004, the result is 19820104.

YM: Calculating Elapsed Months

Available Languages: reporting, Maintain

The YM function calculates the number of months between two dates. The dates must be in a year-month format. You can convert a date to this format by using the CHGDAT or EDIT function.

Calculate Elapsed Months

```
YM(fromdate, todate, output)
```

where:

fromdate

I4YM or I6YYM

Is the start date a in year-month format (for example, I4YM). If the date is not valid, the function returns the value 0 (zero).

todate

I4YM or I6YYM

Is the end date in a year-month format. If the date is not valid, the function returns the value 0 (zero).

output

Integer

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.



Tip: If *fromdate* or *todate* is in integer year-month-day format (I6YMD or I8YYMD), simply divide by 100 to convert to year-month format and set the result to an integer. This drops the day portion of the date, which is now after the decimal point.

Calculating Elapsed Months

The COMPUTE commands convert the dates from year-month-day to year-month format; then YM calculates the difference between the values in the HIRE_DATE/100 and DAT_INC/100 fields:

```
TABLE FILE EMPLOYEE
PRINT DAT_INC AS 'RAISE DATE' AND COMPUTE
HIRE_MONTH/I4YM = HIRE_DATE/100; NOPRINT AND COMPUTE
MONTH_INC/I4YM = DAT_INC/100; NOPRINT AND COMPUTE
MONTHS_HIRED/I3 = YM(HIRE_MONTH, MONTH_INC, 'I3');
BY LAST_NAME BY FIRST_NAME BY HIRE_DATE
IF MONTHS_HIRED NE 0
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	RAISE DATE	MONTHS_HIRED
-----	-----	-----	-----	-----
CROSS	BARBARA	81/11/02	82/04/09	5
GREENSPAN	MARY	82/04/01	82/06/11	2
JONES	DIANE	82/05/01	82/06/01	1
MCCOY	JOHN	81/07/01	82/01/01	6
SMITH	MARY	81/07/01	82/01/01	6

YM calculates the difference between HIRE_MONTH and MONTH_INC and stores the results in a column with the format I3.

```
YM(HIRE_MONTH, MONTH_INC, 'I3')
```

Date-Time Functions

Date-Time functions are for use with timestamps in date-time formats, also known as H formats. A timestamp value refers to internally stored data capable of holding both date and time components with an accuracy of up to a nanosecond.

Using Date-Time Functions

The functions described in this section operate on fields in date-time format (sometimes called H format).

However, you can also provide a date as a character string using the macro DT, followed by a character string in parentheses, presenting the date and time. Date components are separated by slashes '/'; time components by colons ':'.

Alternatively, the day can be given as a natural day, like 2004 March 31, in parentheses. Either the date or time component can be omitted. For example, the date-time format argument can be expressed as DT(2004/03/11 13:24:25.99) or DT(March 11 2004).

The following is another example that creates a timestamp representing the current date and time. The system variables &YYMD and &TOD are used to obtain the current date and time, respectively:

```
-SET &MYSTAMP = &YYMD | ' ' | EDIT(&TOD,'99:$99:$99') ;
```

Today's date (&YYMD) is concatenated with the time of day (&TOD). The EDIT function is used to change the dots (.) in the time of day variable to colons (:).

The following request uses the DT macro on the alphanumeric date and time variable &MYSTAMP:

```
TABLE FILE CAR
  PRINT CAR NOPRINT
  COMPUTE DTCUR/HYYMDS = DT(&MYSTAMP);
  IF RECORDLIMIT IS 1;
END
```

Date-Time Parameters

The DATEFORMAT parameter specifies the order of the date components for certain types of date-time values. The WEEKFIRST parameter specifies the first day of the week. The DTSTRICT parameter determines the extent to which date-time values are checked for validity.

Specifying the Order of Date Components

The DATEFORMAT parameter specifies the order of the date components (month/day/year) when date-time values are entered in the formatted string and translated string formats described in [Using Date-Time Functions](#). It makes the input format of a value independent of the format of the variable to which it is being assigned.

Specify the Order of Date Components in a Date-Time Field

```
SET DATEFORMAT = option
```

where:

option

Can be one of the following: MDY, DMY, YMD, or MYD. MDY is the default value for the U.S. English format.

Using the DATEFORMAT Parameter

The following request uses a natural date literal with ambiguous numeric day and month components (APR 04 05) as input to the HINPUT function:

```
SET DATEFORMAT = MYD  
DEFINE FILE EMPLOYEE
```

```
DTFLDYMD/HYYMDI = HINPUT(9,'APR 04 05', 8, DTFLDYMD);
END
TABLE FILE EMPLOYEE
SUM    CURR_SAL NOPRINT DTFLDYMD
END
```

With DATEFORMAT set to MYD, the value is interpreted as April 5, 1904:

```
DTFLDYMD
-----
1904-04-05 00:00
```

Specifying the First Day of the Week for Use in Date-Time Functions

The WEEKFIRST parameter specifies a day of the week as the start of the week. This is used in week computations by the HADD, HDIFF, HNAME, HPART, and HYYWD functions. It is also used by the DTADD, DTDIFF, DTRUNC, and DTPART functions. The default values are different for these functions, as described in [Using Date-Time Functions](#). The WEEKFIRST parameter does not change the day of the month that corresponds to each day of the week, but only specifies which day is considered the start of the week.

The HPART, DTPART, HYYWD, and HNAME subroutines can extract a week number from a date-time value. To determine a week number, they can use different definitions. For example, ISO 8601 standard week numbering defines the first week of the year as the first week in January with four or more days. Any preceding days in January belong to week 52 or 53 of the preceding year. The ISO standard also establishes Monday as the first day of the week.

You specify which type of week numbering to use by setting the WEEKFIRST parameter, as described in [Using Date-Time Functions](#).

Since the week number returned by HNAME, DTPART, and HPART functions can be in the current year or the year preceding or following, the week number by itself may not be useful. The function HYYWD returns both the year and the week for a given date-time value.

Set a Day as the Start of the Week

```
SET WEEKFIRST = value
```

where:

value

Can be:

- **1 through 7**, representing Sunday through Saturday with non-standard week numbering.
Week numbering using these values establishes the first week in January with seven days as week number 1. Preceding days in January belong to the last week of the previous year. All weeks have seven days.
- **ISO1 through ISO7**, representing Sunday through Saturday with ISO standard week numbering.

 **Note:** ISO is a synonym for ISO2.

Week numbering using these values establishes the first week in January with at least four days as week number 1. Preceding days in January belong to the last week of the previous year. All weeks have seven days.

- **STD1 through STD7**, in which the digit 1 (Sunday) through 7 (Saturday) indicates the starting day of the week.

 **Note:** STD without a digit is equivalent to STD1.

Week numbering using these values is as follows. Week number 1 begins on January 1 and ends on the day preceding the first day of the week. For example, for STD1, the first week ends on the first Saturday of the year. The first and last week may have fewer than seven days.

- **SIMPLE**, which establishes January 1 as the start of week 1, January 8 is the start of week 2, and so on. The first day of the week is, thus, the same as the first day of the year. The last week (week 53) is either one or two days long.
- **0 (zero)**, is the value of the WEEKFIRST setting before the user issues an explicit

WEEKFIRST setting. The date-time functions HPART, HNAME, HYYWD, HADD, and HDIFF use Saturday as the start of the week, when the WEEKFIRST setting is 0. The simplified functions DTADD, DTDIFF, DTRUNC, and DTPART, as well as printing of dates truncated to weeks, and recognition of date constant strings that contain week numbers, use Sunday as the default value, when the WEEKFIRST setting is 0. If the user explicitly sets WEEKFIRST to another value, that value is used by all of the functions.

Setting Sunday as the Start of the Week

The following designates Sunday as the start of the week, using non-standard week numbering:

```
SET WEEKFIRST = 1
```

View the Current Setting of WEEKFIRST

```
? SET WEEKFIRST
```

This returns the value that indicates the week numbering algorithm and the first day of the week. For example, the integer 1 represents Sunday with non-standard week numbering.

Controlling Processing of Date-Time Values

Strict processing checks date-time values when they are input by an end user, read from a transaction file, displayed, or returned by a subroutine to ensure that they represent a valid date and time. For example, a numeric month must be between 1 and 12, and the day must be within the number of days for the specified month.

Enable Strict Processing of Date-Time Values

```
SET DTSTRICT = {ON|OFF}
```

where:

ON

Invokes strict processing. ON is the default value.

Strict processing checks date-time values when they are input by an end user, read from a transaction file, displayed, or returned by a subroutine to ensure that they represent a valid date and time. For example, a numeric month must be between 1 and 12, and the day must be within the number of days for the specified month.

If DTSTRICT is ON and the result would be an invalid date-time value, the function returns the value zero (0).

OFF

Does not invoke strict processing. Date-time components can have any value within the constraint of the number of decimal digits allowed in the field. For example, if the field is a two-digit month, the value can be 12 or 99, but not 115.

Supplying Arguments for Date-Time Functions

Date-time functions may operate on a component of a date-time value. This topic lists the valid component names and abbreviations for use with these functions.

Arguments for Use With Date and Time Functions

The following component names, valid abbreviations, and values are supported as arguments for the date-time functions that require them:

Component Name	Abbreviation	Valid Values
year	yy	0001-9999
quarter	qq	1-4
month	mm	1-12 or a month name, depending on the function.
day-of-year	dy	1-366
day or day-of-month	dd	1-31 (The two component names are equivalent.)
week	wk	1-53
weekday	dw	1-7 (Sunday-Saturday)
hour	hh	0-23
minute	mi	0-59
second	ss	0-59
millisecond	ms	0-999

Component Name	Abbreviation	Valid Values
microsecond	mc	0-999999
nanosecond	ns	0-999999999

i Note:

- For an argument that specifies a length of eight, ten, or 12 characters, use eight to include milliseconds, ten to include microseconds, and 12 to include nanoseconds in the returned value.
- The last argument is always a USAGE format that indicates the data type returned by the function. The type may be A (alphanumeric), I (integer), D (floating-point double precision), H (date-time), or a date format (for example, YYMD).

Using Date-Time Formats

There are three types of date formats that are valid in date-time values: numeric string format, formatted-string format, and translated-string format. In each format, two-digit years are interpreted using the DEFCENT and YRTHRESH parameters.

Time components are separated by colons and may be followed by A.M., P.M., a.m., or p.m.

The DATEFORMAT parameter specifies the order of the date components (month/day/year) when date-time values are entered in the formatted string and translated string formats. It makes a value's input format independent of the format of the variable to which it is being assigned.

Numeric String Format

The numeric string format is exactly two, four, six, or eight digits. Four-digit strings are considered to be a year (century must be specified), and the month and day are set to January 1. Six and eight-digit strings contain two or four digits for the year, followed by

two for the month, and two for the day. Because the component order is fixed with this format, the DATEFORMAT setting is ignored.

If a numeric-string format longer than eight digits is encountered, it is treated as a combined date-time string in the *Hnn* format.

Using Numeric String Format

The following are examples of numeric string date constants:

String	Date
99	January 1, 1999
1999	January 1, 1999
19990201	February 1, 1999

Formatted-string Format

The formatted-string format contains a one or two-digit day, a one or two-digit month, and a two or four-digit year, each component separated by a space, slash, hyphen, or period. All three components must be present and follow the DATEFORMAT setting. If any of the three fields is four digits, it is interpreted as the year, and the other two fields must follow the order given by the DATEFORMAT setting.

Using Formatted-string Format

The following are examples of formatted-string date constants and specify May 20, 1999:

```
1999/05/20  
5 20 1999  
99.05.20  
1999-05-20
```

Translated-string Format

The translated-string format contains the full or abbreviated month name. The year must also be present in four-digit or two-digit form. If the day is missing, day 1 of the month is assumed; if present, it can have one or two digits. If the string contains both a two-digit year and a two-digit day, they must be in the order given by the DATEFORMAT setting.

Using Translated-string Format

The following date is in translated-string format:

```
January 6 2000
```

Time Format

Time components are separated by colons and may be followed by A.M., P.M., a.m., or p.m.

Seconds can be expressed with a decimal point or be followed by a colon. If there is a colon after seconds, the value following it represents milliseconds. There is no way to express microseconds or nanoseconds using this notation.

A decimal point in the seconds value indicates the decimal fraction of a second. Microseconds can be represented using six decimal digits. Nanoseconds can be represented using nine decimal digits.

Using Time Formats

The following are examples of acceptable time formats:

```

14:30:20:99      (99 milliseconds)
14:30
14:30:20.99      (99/100 seconds)
14:30:20.999999  (999999 microseconds)
02:30:20:500pm

```

Using Universal Date-Time Input Values

With DTSTANDARD settings of STANDARD and STANDARDU, the following date-time values can be read as input:

Input Value	Description
14:30[:20,99]	Comma separates time components instead of period
14:30[:20.99]Z	Universal time
15:30[:20,99]+01 15:30 [:20,99]+0100 15:30 [:20,99]+01:00	Each of these is the same as above in Central European Time
09:30[:20.99]-05	Same as above in Eastern Standard Time

Note that these values are stored identically internally with the STANDARDU setting. With the STANDARD setting, everything following the Z, +, or - is ignored.

Assigning Date-Time Values

A date-time value is a constant in character format assigned by one of the following:

- A sequential data source.
- An expression that defines WHERE or IF criteria or creates a temporary field using the DEFINE or COMPUTE command.

A date-time constant can have blanks at the beginning or end or immediately preceding an am/pm indicator.

Assign Date-Time Values

In a character file

```
date_string [time_string]
```

or

```
time_string [date_string]
```

In a COMPUTE, DEFINE, or WHERE expression

```
DT(date_string [time_string])
```

or

```
DT(time_string [date_string])
```

In an IF expression

```
'date_string [time_string]'
```

or

```
'time_string [date_string]'
```

where:

time_string

Is a time string in an acceptable format. A time string can have a blank immediately preceding an am/pm indicator.

date_string

Is a date string in numeric string, formatted-string, or translated-string format.

In an IF criteria, if the value does not contain blanks or special characters, the single quotation marks are not necessary.



Note: The date and time strings must be separated by at least one blank space. Blank spaces are also permitted at the beginning and end of the date-time string.

Assigning Date-Time Literals

The DT prefix can be used in a COMPUTE, DEFINE, or WHERE expression to assign a date-time literal to a date-time field. For example:

```
DT2/HYYMDS = DT(20051226 05:45);
DT3/HYYMDS = DT(2005 DEC 26 05:45);
DT4/HYYMDS = DT(December 26 2005 05:45);
```

Assigning a Date-Time Value in a COMPUTE Command

The following uses the DT function in a COMPUTE command to create a new field containing an assigned date-time value.

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME FIRST_NAME AND COMPUTE
NEWSAL/D12.2M = CURR_SAL + (0.1 * CURR_SAL);
RAISETIME/HYYMDIA = DT(20000101 09:00AM);
WHERE CURR_JOBCODE LIKE 'B%'
END
```

The output is:

LAST_NAME	FIRST_NAME	NEWSAL	RAISETIME	
-----	-----	-----	-----	-----
SMITH	MARY	\$14,520.00	2000/01/01	9:00AM
JONES	DIANE	\$20,328.00	2000/01/01	9:00AM
ROMANS	ANTHONY	\$23,232.00	2000/01/01	9:00AM
MCCOY	JOHN	\$20,328.00	2000/01/01	9:00AM
BLACKWOOD	ROSEMARIE	\$23,958.00	2000/01/01	9:00AM
MCKNIGHT	ROGER	\$17,710.00	2000/01/01	9:00AM

Assigning a Date-Time Value in WHERE Criteria

The following uses the DT function to create a new field containing an assigned date-time value. This value is then used as a WHERE criteria.

```
DEFINE FILE EMPLOYEE
NEWSAL/D12.2M = CURR_SAL + (0.1 * CURR_SAL);
RAISETIME/HYYMDIA = DT(20000101 09:00AM);
END
```

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME FIRST_NAME NEWSAL RAISETIME
WHERE RAISETIME EQ DT(20000101 09:00AM)
END
```

The output is:

LAST_NAME	FIRST_NAME	NEWSAL	RAISETIME	
-----	-----	-----	-----	-----
STEVENS	ALFRED	\$12,100.00	2000/01/01	9:00AM
SMITH	MARY	\$14,520.00	2000/01/01	9:00AM
JONES	DIANE	\$20,328.00	2000/01/01	9:00AM
SMITH	RICHARD	\$10,450.00	2000/01/01	9:00AM
BANNING	JOHN	\$32,670.00	2000/01/01	9:00AM
IRVING	JOAN	\$29,548.20	2000/01/01	9:00AM
ROMANS	ANTHONY	\$23,232.00	2000/01/01	9:00AM
MCCOY	JOHN	\$20,328.00	2000/01/01	9:00AM
BLACKWOOD	ROSEMARIE	\$23,958.00	2000/01/01	9:00AM
MCKNIGHT	ROGER	\$17,710.00	2000/01/01	9:00AM

GREENSPAN	MARY	\$9,900.00	2000/01/01	9:00AM
CROSS	BARBARA	\$29,768.20	2000/01/01	9:00AM

Assigning a Date-Time Value in IF Criteria

The following uses the DT function to create a new field containing an assigned date-time value. This value is then used in the IF phrase.

```

DEFINE FILE EMPLOYEE
NEWSAL/D12.2M = CURR_SAL + (0.1 * CURR_SAL);
RAISETIME/HYYMDIA = DT(20000101 09:00AM);
END

TABLE FILE EMPLOYEE
PRINT LAST_NAME FIRST_NAME NEWSAL RAISETIME
IF RAISETIME EQ '20000101 09:00AM'
END

```

The output is:

LAST_NAME	FIRST_NAME	NEWSAL	RAISETIME
-----	-----	-----	-----
STEVENS	ALFRED	\$12,100.00	2000/01/01 9:00AM
SMITH	MARY	\$14,520.00	2000/01/01 9:00AM
JONES	DIANE	\$20,328.00	2000/01/01 9:00AM
SMITH	RICHARD	\$10,450.00	2000/01/01 9:00AM
BANNING	JOHN	\$32,670.00	2000/01/01 9:00AM
IRVING	JOAN	\$29,548.20	2000/01/01 9:00AM
ROMANS	ANTHONY	\$23,232.00	2000/01/01 9:00AM
MCCOY	JOHN	\$20,328.00	2000/01/01 9:00AM
BLACKWOOD	ROSEMARIE	\$23,958.00	2000/01/01 9:00AM
MCKNIGHT	ROGER	\$17,710.00	2000/01/01 9:00AM
GREENSPAN	MARY	\$9,900.00	2000/01/01 9:00AM
CROSS	BARBARA	\$29,768.20	2000/01/01 9:00AM

HADD: Incrementing a Date-Time Value

Available Languages: reporting, Maintain

The HADD function increments a date-time value by a given number of units.

Increment a Date-Time Value

```
HADD(datetime, 'component', increment, length, output)
```

where:

datetime

Date-time

Is the date-time value to be incremented, the name of a date-time field that contains the value, or an expression that returns the value.

component

Alphanumeric

Is the name of the component to be incremented enclosed in single quotation marks. For a list of valid components, see [Using Date-Time Functions](#).



Note: WEEKDAY is not a valid component for HADD.

increment

Integer

Is the number of units (positive or negative) by which to increment the component, the name of a numeric field that contains the value, or an expression that returns the value.

length

Integer

Is the number of characters returned. Valid values are:

- **8** indicates a date-time value that includes one to three decimal digits (milliseconds).
- **10** indicates a date-time value that includes four to six decimal digits (microseconds).
- **12** indicates a date-time value that includes seven to nine decimal digits (nanoseconds).

output

Date-time

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. This field must be in date-time format (data type H).

Incrementing a Date-Time Value

The following example increments thirty months to some specific date-time in the past

```
HADD(DT(2001/09/11 08:54:34), 'MONTH', 30, 8, 'HYMDS')
```

and returns the timestamp 2004/03/11 08:54:34.00.

Incrementing the Month Component of a Date-Time Field (Reporting)

HADD adds two months to each value in TRANSDATE and stores the result in ADD_MONTH. If necessary, the day is adjusted so that it is valid for the resulting month.

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
ADD_MONTH/HYMDS = HADD(TRANSDATE, 'MONTH', 2, 8, 'HYMDS');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	ADD_MONTH
-----	-----	-----
1237	2000/02/05 03:30	2000/04/05 03:30:00
1118	2000/06/26 05:45	2000/08/26 05:45:00

Incrementing the Month Component of a Date-Time Field (Maintain)

HADD adds two months to the DT1 field:

```
MAINTAIN FILE DATETIME
FOR 1 NEXT ID DT1 INTO DTSTK
COMPUTE
NEW_DATE/HYYMDS = HADD(DTSTK.DT1, 'MONTH', 2,10, NEW_DATE);
TYPE "DT1 IS: <DTSTK(1).DT1 "
TYPE "NEW_DATE IS: <NEW_DATE "
```

The result is:

```
DT1 IS: 2000/1/1 02:57:25
NEW_DATE IS: 2000/3/1 02:57:25
TRANSACTIONS: COMMITS = 1 ROLLBACKS = 0
SEGMENTS : INCLUDED = 0 UPDATED = 0 DELETED = 0
```

Converting Unix (Epoch) Time to a Date-Time Value

Unix time (also known as Epoch time) defines an instant in time as the number of seconds that have elapsed since 00:00:00 Coordinated Universal Time (UTC), Thursday, 1 January 1970, not counting leap seconds.

The following DEFINE FUNCTION takes a number representing epoch time and converts it to a date-time value by using the HADD function to add the number of seconds represented by the input value in epoch time to the epoch base date:

```
DEFINE FUNCTION UNIX2GMT(INPUT/I9)
    UNIX2GMT/HYYMDS = HADD(DT(1970 JAN 1), 'SECONDS', INPUT, 8, 'HYYMDS');
END
```

The following request uses this DEFINE FUNCTION to convert the epoch time 1449068652 to a date-time value:

```
DEFINE FILE GGSales
INPUT/I9=1449068652;
```

```

OUTDATE/HMTDYYSb = UNIX2GMT(INPUT);
END
TABLE FILE GGSales
PRINT DATE NOPRINT INPUT OUTDATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
END

```

The output is shown in the following image:

INPUT	OUTDATE
1449068652	December 02 2015 3:04:12 pm

HCNVRT: Converting a Date-Time Value to Alphanumeric Format

Available Languages: reporting, Maintain

The HCNVRT function converts a date-time value to an alphanumeric format for use with operators such as EDIT, CONTAINS, and LIKE.

Convert a Date-Time Value to Alphanumeric Format

```
HCNVRT(datetime, '(format)', length, output)
```

where:

datetime

Date-time

Is the date-time value to be converted, the name of a date-time field that contains the value, or an expression that returns the value.

format

Alphanumeric

Is the format of the date-time field enclosed in parentheses and single quotation marks. It must be a date-time format (data type H, up to H23).

length

Integer

Is the number of characters in the alphanumeric field that is returned. You can supply the actual value, the name of a numeric field that contains the value, or an expression that returns the value. If the *length* is smaller than the number of characters needed to display the alphanumeric field, the function returns a blank.

output

Alphanumeric

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. This field must be in alphanumeric format and must be long enough to contain all of the characters returned.

Converting a Date-Time Value to Alphanumeric Format

Assume that you have a date-time field DTCUR in H format. To convert this timestamp to an alphanumeric string, use the following syntax:

```
HCNVRT(DTCUR, '(HMDYYS)', 20, 'A20')
```

The function returns the string '03/26/2004 14:25:58' that is assignable to an alphanumeric variable.

Converting a Date-Time Field to Alphanumeric Format (Reporting)

HCNVRT converts the TRANSDATE field to an alphanumeric format. The first function does not include date-time display options for the field; the second function does for readability. It also specifies the display of seconds in the input field.

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
ALPHA_DATE_TIME1/A20 = HCNVRT(TRANSDATE, '(H17)', 17, 'A20');
ALPHA_DATE_TIME2/A20 = HCNVRT(TRANSDATE, '(HYMDS)', 20, 'A20');
WHERE DATE EQ 2000
END
```

The output is:

CUSTID	DATE-TIME	ALPHA_DATE_TIME1	ALPHA_DATE_TIME2
-----	-----	-----	-----
1237	2000/02/05 03:30	200002050330000000	2000/02/05 03:30:00
1118	2000/06/26 05:45	200006260545000000	2000/06/26 05:45:00

Converting a Date-Time Field to Alphanumeric Format (Maintain)

HCNVRT converts the DT1 field to alphanumeric format:

```
MAINTAIN FILE DATETIME
FOR ALL NEXT ID INTO STK;
COMPUTE
RESULT_HCNVRT/A20 = HCNVRT(STK.DT1, '(HYMDH)', 20, RESULT_HCNVRT);
TYPE "STK(1).DT1 = "STK(1).DT1;
TYPE "RESULT_HCNVRT = " RESULT_HCNVRT;
END
```

HDATE: Converting the Date Portion of a Date-Time Value to a Date Format

Available Languages: reporting, Maintain

The HDATE function converts the date portion of a date-time value to the date format YYMD. You can then convert the result to other date formats.

Convert the Date Portion of a Date-Time Value to a Date Format

```
HDATE(datetime, output)
```

where:

datetime

Date-time

Is the date-time value to be converted, the name of a date-time field that contains the value, or an expression that returns the value.

output

Date

Is the format in single quotation marks or the field that contains the result.

Converting the Date Portion of a Timestamp Value to a Date Format

This example converts the DTCUR field, which is the current date/time timestamp, into a date field using the format DMY:

```
MYDATE/DMY = HDATE(DTCUR, 'YYMD');
```

The function returns the date in format YYMD, then assigns it to MYDATE after conversion to its format MY as 03/04. Note that the output_format of HDATE is presented as a full component date format MDYY, as required.

Converting the Date Portion of a Date-Time Field to a Date Format (Reporting)

HDATE converts the date portion of the TRANSDATE field to the date format YYMD:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
TRANSDATE_DATE/YYMD = HDATE(TRANSDATE, 'YYMD');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	TRANSDATE_DATE
-----	-----	-----
1237	2000/02/05 03:30	2000/02/05
1118	2000/06/26 05:45	2000/06/26

Converting the Date Portion of a Date-Time Field to a Date Format (Maintain)

HDATE converts the date portion of DT1 to date format YYMD:

```
MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE
DT1_DATE/YYMD = HDATE(STK.DT1, DT1_DATE);
TYPE "STK(1).DT1 = <STK(1).DT1";
TYPE "DT1_DATE = <DT1_DATE";
END
```

The output is:

```
STK(1).DT1 = 2000/1/1 02:57:25
```

```
DT1_DATE = 2000/01/01
```

HDIFF: Finding the Number of Units Between Two Date-Time Values

Available Languages: reporting, Maintain

The HDIFF function calculates the number of date or time component units between two date-time values.

Usage Notes for HDIFF

HDIFF does its subtraction differently from DATEDIF, which subtracts date components stored in date fields. The DATEDIF calculation looks for full years or full months. Therefore, subtracting the following two dates and requesting the number of months or years, results in 0:

```
DATE1 12/25/2014, DATE2 1/5/2015
```

Performing the same calculation using HDIFF on date-time fields results in a value of 1 month or 1 year as, in this case, the month or year is first extracted from each date-time value, and then the subtraction occurs.

Find the Number of Units Between Two Date-Time Values

```
HDIFF(end_dt, start_dt, 'component', output)
```

where:

end_dt

Date-time

Is the date-time value to subtract from, the name of a date-time field that contains the value, or an expression that returns the value.

start_dt

Date-time

Is the date-time value to subtract, the name of a date-time field that contains the value, or an expression that returns the value.

component

Alphanumeric

Is the name of the component to be used in the calculation, enclosed in single quotation marks. If the component is a week, the WEEKFIRST parameter setting is used in the calculation.

output

Floating-point double-precision

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be floating-point double-precision.

Finding the Number of Units Between Two Date-Time Values

Assume that we have a date-time field DTCUR in H format, which is has a current date and time timestamp. To find the number of days from President's Day 2004 to today use the expression:

```
DIFDAY/I6 = HDIF(DTCUR, DT(2004/02/16), 'DAY', 'D6.0')
```

The function returns the number of days in double precision floating point format, then assigns it to DIFDAY as an integer value. If today is March 31, 2004, the DIFDAY is assigned to 46.

If you wish to obtain results in seconds, use the expression

```
DIFSEC/I9 = HDIF(DTCUR, DT(2004 February 16), 'SECOND', 'D9.0')
```

which assigns 3801600 to DIFSEC. Note that the format 'D9.0' is used with HDIF. Using 'I9' for an output_format in HDIF is invalid.

Finding the Number of Days Between Two Date-Time Fields (Reporting)

HDIFF calculates the number of days between the TRANSDATE and ADD_MONTH fields and stores the result in DIFF_PAYS, which has the format D12.2:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
ADD_MONTH/HYYMDS = HADD(TRANSDATE, 'MONTH', 2, 8, 'HYYMDS');
DIFF_DAYS/D12.2 = HDIFF(ADD_MONTH, TRANSDATE, 'DAY', 'D12.2');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	ADD_MONTH	DIFF_DAYS
-----	-----	-----	-----
1237	2000/02/05 03:30	2000/04/05 03:30:00	60.00
1118	2000/06/26 05:45	2000/08/26 05:45:00	61.00

Finding the Number of Days Between Two Date-Time Fields (Maintain)

HDIFF calculates the number of days between ADD_MONTH and DT1:

```
MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE
NEW_DATE/HYYMDS = HADD(STK.DT1, 'MONTH', 2,10, NEW_DATE);
```

```
DIFF_DAYS/D12.2 = HDIFF(NEW_DATE,STK.DT1,'DAY', DIFF_DAYS);
TYPE "STK(1).DT1 = "STK(1).DT1;
TYPE "NEW_DATE = "NEW_DATE;
TYPE "DIFF_DAYS = "DIFF_DAYS
END
```

HDTTM: Converting a Date Value to a Date-Time Value

Available Languages: reporting, Maintain

The HDTTM function converts a date value to a date-time value. The time portion is set to midnight.

Convert a Date Value to a Date-Time Value

```
HDTTM(date, length, output)
```

where:

date

Date

Is the date to be converted, the name of a date field that contains the value, or an expression that returns the value. It must be a full component format date. For example, it can be MDYY or YYJUL.

length

Integer

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes milliseconds.
- **10** indicates a time value that includes microseconds.

- **12** indicates a time value that includes nanoseconds.

output

Date-time

Is the generated date-time value. It can be a field or the format of the output value enclosed in single quotation marks. The value must have a date-time format (data type H).

Converting a Date to a Timestamp

This example converts the President's Day date into a timestamp:

```
TS/HYYMDS = HDTTM('February 16 2004', 8, TS)
```

the function returns 2004/02/16 00:00:00 and assigns this timestamp to field TS. Note the zero values of time components in the timestamp. Also note the use of natural date constants in single quotation marks for the date in the first function parameter.

Converting a Date Field to a Date-Time Field (Reporting)

HDTTM converts the date field TRANSDATE_DATE to a date-time field:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
TRANSDATE_DATE/YYMD = HDATE(TRANSDATE, 'YYMD');
DT2/HYYMDIA = HDTTM(TRANSDATE_DATE, 8, 'HYYMDIA');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	TRANSDATE_DATE	DT2
-----	-----	-----	---
1237	2000/02/05 03:30	2000/02/05	2000/02/05 12:00AM
1118	2000/06/26 05:45	2000/06/26	2000/06/26 12:00AM

Converting a Date Field to a Date-Time Field (Maintain)

HDTTM converts the date field DT1_DATE to a date-time field:

```
MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE
DT1_DATE/YYMD = HDATE(DT1, DT1_DATE);
DT2/HYYMDIA = HDTTM(DT1_DATE, 8, DT2);
TYPE "STK(1).DT1 = <STK(1).DT1";
TYPE "DT1_DATE = <DT1_DATE";
TYPE "DT2 = <DT2";
END
```

HEXTR: Extracting Components of a Date-Time Value and Setting Remaining Components to Zero

Available Languages: reporting, Maintain

The HEXTR function extracts one or more components from a date-time value and moves them to a target date-time field with all other components set to zero.

Extract Multiple Components From a Date-Time Value

```
HEXTR(datetime, 'componentstring', length, output)
```

where:

datetime

Date-time

Is the date-time value from which to extract the specified components.

componentstring

Alphanumeric

Is a string of codes, in any order, that indicates which components are to be extracted and moved to the output date-time field. The following table shows the valid values. The string is considered to be terminated by any character not in this list:

Code	Description
C	century (the two high-order digits only of the four-digit year)
Y	year (the two low-order digits only of the four-digit year)
YY	Four digit year.
M	month
D	day
H	hour
I	minutes
S	seconds
s	milliseconds (the three high-order digits of the six-digit microseconds value)
u	microseconds (the three low-order digits of the six-digit microseconds value)
m	All six digits of the microseconds value.
n	Low order three digits of nine decimal digits.

length

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes milliseconds.
- **10** indicates a time value that includes microseconds.
- **12** indicates a time value that includes nanoseconds.

output

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. This field must be in date-time format (data type H).

Extracting Hour and Minute Components Using HEXTR

The VIDEOTR2 data source has a date-time field named TRANSDATE of type HYYMDI. The following request selects all records containing the time 09:18AM, regardless of the value of the remaining components:

```
TABLE FILE VIDEOTR2
PRINT TRANSDATE
BY LASTNAME
BY FIRSTNAME
WHERE HEXTR(TRANSDATE, 'HI', 8, 'HYYMDI') EQ DT(09:18AM)
END
```

The output is:

LASTNAME	FIRSTNAME	TRANSDATE
-----	-----	-----
DIZON	JANET	1999/11/05 09:18
PETERSON	GLEN	1999/09/09 09:18

HGETC: Storing the Current Local Date and Time in a Date-Time Field

Available Languages: reporting, Maintain

The HGETC function returns the current local date and time in the desired date-time format. If millisecond or microsecond values are not available in your operating environment, the function retrieves the value zero for these components.

Store the Current Local Date and Time in a Date-Time Field

```
HGETC(length, output)
```

where:

length

Integer

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes milliseconds.
- **10** indicates a time value that includes microseconds.
- **12** indicates a time value that includes nanoseconds.

output

Date-time

Is the returned date-time value. Can be a field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be in date-time format (data type H).

Storing the Current Date and Time as a Timestamp

This example,

```
HGETC(8, 'HY YMDS')
```

creates a timestamp representing the current date and time.

Storing the Current Date and Time in a Date-Time Field (Reporting)

HGETC stores the current date and time in DT2:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
DT2/HYYMDm = HGETC(10, 'HYYMDm');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	DT2
-----	-----	---
1237	2000/02/05 03:30	2000/10/03 15:34:24.000000
1118	2000/06/26 05:45	2000/10/03 15:34:24.000000

Storing the Current Local Date and Time in a Date-Time Field (Maintain)

HGETC stores the current date and time in DT2:

```
MAINTAIN
COMPUTE DT2/HYYMDm = HGETC(10, DT2);
TYPE "DT2 = <DT2";
END
```

HGETZ: Storing the Current Coordinated Universal Time in a Date-Time Field

Available Languages: reporting, Maintain

HGETZ provides the current Coordinated Universal Time (UTC/GMT time, often called Zulu time). UTC is the primary civil time standard by which the world regulates clocks and time.

The value is returned in the desired date-time format. If millisecond or microsecond values are not available in your operating environment, the function retrieves the value zero for these components.

Store the Current Universal Date and Time in a Date-Time Field

```
HGETZ(length, output)
```

where:

length

Integer

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes milliseconds.
- **10** indicates a time value that includes microseconds.
- **12** indicates a time value that includes nanoseconds.

output

Date-time

Is the returned date-time value. Can be a field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be in date-time format (data type H).

Storing the Current Universal Date and Time as a Timestamp

This example,

```
HGETZ(8, 'HYYMDS')
```

creates a timestamp representing the current date and time.

Storing the Current Universal Date and Time in a Date-Time Field (Reporting)

HGETZ stores the current universal date and time in DT2:

```
TABLE FILE VIDEOTRK
PRINT CUSTID AND COMPUTE
DT2/HYYMDm = HGETZ(10, 'HYYMDm');
WHERE CUSTID GE '2000' AND CUSTID LE '3000';
END
```

The output is:

CUSTID	DT2
-----	---
2165	2015/05/08 14:43:08.740000
2187	2015/05/08 14:43:08.740000
2280	2015/05/08 14:43:08.740000
2282	2015/05/08 14:43:08.740000
2884	2015/05/08 14:43:08.740000

Calculating the Time Zone

The time zone can be calculated as a positive or negative hourly offset from GMT. Locations to the west of the prime meridian have a negative offset. The following request uses the HGETC function to retrieve the local time, and the HGETZ function to retrieve the

GMT time. The HDIFF function calculates the number of boundaries between them in minutes. The zone is found by dividing the minutes by 60:

```

DEFINE FILE EMPLOYEE
LOCALTIME/HYYMDS = HGETC(8, LOCALTIME);
UTCTIME/HYYMDS = HGETZ(8, UTCTIME);
MINUTES/D4= HDIFF(LOCALTIME, UTCTIME, 'MINUTES', 'D4');
ZONE/P3 = MINUTES/60;
END
TABLE FILE EMPLOYEE
PRINT EMP_ID NOPRINT OVER
LOCALTIME OVER
UTCTIME OVER
MINUTES OVER
ZONE
IF RECORDLIMIT IS 1
END

```

The output is:

```

LOCALTIME  2015/05/12 12:47:04
UTCTIME    2015/05/12 16:47:04
MINUTES    -240
ZONE       -4

```

HHMMSS: Retrieving the Current Time

Available Languages: reporting

The HHMMSS function retrieves the current time from the operating system as an eight character string, separating the hours, minutes, and seconds with periods.

A compiled MODIFY procedure must use HHMMSS to obtain the time; it cannot use the &TOD variable, which also returns the time. The &TOD variable is made current only when you execute a MODIFY, SCAN, or FSCAN procedure.

There is also an HHMMSS function available in the Maintain language. For information on this function, see [Maintain-specific Standard Date and Time Functions](#).

Retrieve the Current Time

```
HHMMSS(output)
```

where:

output

Alphanumeric, at least A8

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Retrieving the Current Time

This example,

```
HMMSS('A10')
```

creates a character string representing the current time, like 12.09.47. Note that a shorter output_format format will cause truncation of output.

Retrieving the Current Time

HHMMSS retrieves the current time and displays it in the page footing:

```
TABLE FILE EMPLOYEE
SUM CURR_SAL AS 'TOTAL SALARIES' AND COMPUTE
NOWTIME/A8 = HHMMSS(NOWTIME); NOPRINT
BY DEPARTMENT
FOOTING
"SALARY REPORT RUN AT TIME <NOWTIME>"
END
```

The output is:

```
DEPARTMENT    TOTAL SALARIES
-----
```

MIS	\$108,002.00
PRODUCTION	\$114,282.00

SALARY REPORT RUN AT TIME 15.21.14

HHMS: Converting a Date-Time Value to a Time Value

Available Languages: reporting

The HHMS function converts a date-time value to a time value.

Convert a Date-Time Value to a Time Value

```
HHMS(datetime, length, output)
```

where:

datetime

Date-time

Is the date-time value to be converted.

length

Numeric

Is the length of the returned time value. Valid values are:

- **8** indicates a time value that includes milliseconds.
- **10** indicates a time value that includes microseconds.
- **12** indicates a time value that includes nanoseconds.

output

Time

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Converting a Date-Time Value to a Time value

The following example converts the date-time field TRANSDATE to a time field with the time format HHIS,

```
DEFINE FILE VIDEOTR2
  TRANSYEAR/I4 = HPART(TRANSDATE, 'YEAR', 'I4');
END
TABLE FILE VIDEOTR2
  PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
  TRANS_TIME/HHIS = HHMS(TRANSDATE, 8, 'HHIS');
WHERE TRANSYEAR EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	TRANS_TIME
-----	-----	-----
1118	2000/06/26 05:45	05:45:00
1237	2000/02/05 03:30	03:30:00

HHMS converts the date-time field TRANSDATE to a time value with the format HHIS:

```
HHMS(TRANSDATE, 8, 'HHIS')
```

For 2000/06/26 05:45, the output is 05:45:00

HINPUT: Converting an Alphanumeric String to a Date-Time Value

Available Languages: reporting, Maintain

The HINPUT function converts an alphanumeric string to a date-time value.

Convert an Alphanumeric String to a Date-Time Value

```
HINPUT(source_length, 'source_string', output_length, output)
```

where:

source_length

Integer

Is the number of characters in the source string to be converted. You can supply the actual value, the name of a numeric field that contains the value, or an expression that returns the value.

source_string

Alphanumeric

Is the string to be converted enclosed in single quotation marks, the name of an alphanumeric field that contains the string, or an expression that returns the string. The string can consist of any valid date-time input value.

output_length

Integer

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes one to three decimal digits (milliseconds).
- **10** indicates a time value that includes four to six decimal digits (microseconds).
- **12** indicates a time value that includes seven to nine decimal digits (nanoseconds).

output

Date-time

Is the returned date-time value. Is a field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be in date-time format (data type H).

Converting an Alphanumeric String to a Timestamp

This example,

```
DTM/HYYMDS = HINPUT(14, '20040229 13:34:00', 8, DTM);
```

converts the character string (20040229 13:34:00) into a timestamp, which is then assigned to the date-time field DTM. DTM is displayed as 2004/02/29 13:34:00.

Converting an Alphanumeric String to a Date-Time Value (Reporting)

HCNVRT converts the TRANSDATE field to an alphanumeric format, then HINPUT converts the alphanumeric string to a date-time value:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
ALPHA_DATE_TIME/A20 = HCNVRT(TRANSDATE, '(H17)', 17, 'A20');
DT_FROM_ALPHA/HYYMDS = HINPUT(14, ALPHA_DATE_TIME, 8, 'HYYMDS');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	ALPHA_DATE_TIME	DT_FROM_ALPHA
-----	-----	-----	-----
1237	2000/02/05 03:30	200002050330000000	2000/02/05 03:30:00
1118	2000/06/26 05:45	200006260545000000	2000/06/26 05:45:00

Converting an Alphanumeric String to a Date-Time Value (Maintain)

HINPUT converts the DT1 field to alphanumeric format:

```

MAINTAIN FILE DATETIME
COMPUTE
RESULT/HMtdYYmA = HINPUT(20,'19971029133059888999',10,RESULT);
TYPE RESULT;
END

```

HMIDNT: Setting the Time Portion of a Date-Time Value to Midnight

Available Languages: reporting, Maintain

The HMIDNT function changes the time portion of a date-time value to midnight (all zeros by default). This allows you to compare a date field with a date-time field.

Set the Time Portion of a Date-Time Value to Midnight

```
HMIDNT(datetime, length, output)
```

where:

datetime

Date-time

Is the date-time value whose time is to be set to midnight, the name of a date-time field that contains the value, or an expression that returns the value.

length

Integer

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes milliseconds.
- **10** indicates a time value that includes microseconds.

- **12** indicates a time value that includes nanoseconds.

output

Date-time

Is the date-time return value whose time is set to midnight and whose date is copied from the timestamp. Is the field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be in date-time format (data type H).

Setting the Time Portion of a Timestamp to Midnight

This example converts the character string (20040229 13:34:00) to a timestamp, which is assigned to DTM:

```
DTM/HYYMDS = HINPUT(14, '20040229 13:34:00', 8, DTM);
```

This example resets the time portion of DTM to midnight and assigned the timestamp (02/29/2004 00:00:00) to DTMIDNT:

```
DTMIDNT/HMDYYS = HMIDNT(DTM, 8, DTMIDNT);
```

Setting the Time to Midnight (Reporting)

HMIDNT sets the time portion of the TRANSDATE field to midnight first in the 24-hour system and then in the 12-hour system:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
TRANSDATE_MID_24/HYYMDS = HMIDNT(TRANSDATE, 8, 'HYYMDS');
TRANSDATE_MID_12/HYYMDSA = HMIDNT(TRANSDATE, 8, 'HYYMDSA');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	TRANSDATE_MID_24	TRANSDATE_MID_12
-----	-----	-----	-----
1118	2000/06/26 05:45	2000/06/26 00:00:00	2000/06/26 12:00:00AM
1237	2000/02/05 03:30	2000/02/05 00:00:00	2000/02/05 12:00:00AM

Setting the Time to Midnight (Maintain)

HMIDNT sets the time portion of DT1 to midnight in both the 24-hour and 12-hour systems:

```

MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE
DT_MID_24/HYYMDS = HMIDNT(STK(1).DT1, 8, DT_MID_24);
DT_MID_12/HYYMSA= HMIDNT(STK(1).DT1, 8, DT_MID_12);
TYPE "STK(1).DT1 = "STK(1).DT1;
TYPE "DT_MID_24 = <DT_MID_24";
TYPE "DT_MID_12 = <DT_MID_12";
END

```

HMASK: Extracting Date-Time Components and Preserving Remaining Components

Available Languages: reporting, Maintain

The HMASK function extracts one or more components from a date-time value and moves them to a target date-time field with all other components of the target field preserved.

Move Multiple Date-Time Components to a Target Date-Time Field

```
HMASK(source, 'componentstring', input, length, output)
```

where:

source

Is the date-time value from which the specified components are extracted.

componentstring

Is a string of codes, in any order, that indicates which components are to be extracted and moved to the output date-time field. The following table shows the valid values. The string is considered to be terminated by any character not in this list:

Code	Description
C	century (the two high-order digits only of the four-digit year)
Y	year (the two low-order digits only of the four-digit year)
YY	Four-digit year.
M	month
D	day
H	hour
I	minutes
S	seconds
s	milliseconds (the three high-order digits of the six-digit microseconds value)
u	microseconds (the three low-order digits of the six-digit microseconds value)
m	All six digits of the microseconds value.
n	Low order three digits of nine decimal digits.

input

Is the date-time value that provides all the components for the output that are not specified in the component string.

length

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes one to three decimal digits (milliseconds).
- **10** indicates a time value that includes four to six decimal digits (microseconds).
- **12** indicates a time value that includes seven to nine decimal digits (nanoseconds).

output

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. This field must be in date-time format (data type H).

Usage Notes for the HMASK Function

HMASK processing is subject to the DTSTRICT setting. Moving the day (D) component without the month (M) component could lead to an invalid result, which is not permitted if the DTSTRICT setting is ON. Invalid date-time values cause any date-time function to return zeros.

Changing a Date-Time Field Using HMASK

The following changes the time component of the TRANSDATE field to 8:30 and stores the new value in a column with the format HYYMDI:

```
NEW_DT/HYYMDI = HMASK(DT(08:30), 'HISs', TRANSDATE, 8, 'HYYMDI');
```

Changing a Date-Time Field Using HMASK

The VIDEOTRK data source has a date-time field named TRANSDATE of format HYYMDI. The following request changes any TRANSDATE value with a time component greater than 11:00 to 8:30 of the following day. First the HEXTR function extracts the hour and minutes portion of the value and compares it to 11:00. If it is greater than 11:00, the HADD function calls HMASK to change the time to 08:30 and adds one day to the date:

```

DEFINE FILE VIDEOTR2
  ORIG_TRANSDATE/HYYMDI = TRANSDATE;
  TRANSDATE =
  IF HEXTR(TRANSDATE, 'HI', 8, 'HHI') GT DT(12:00)
    THEN HADD (HMASK(DT(08:30), 'HISs', TRANSDATE, 8, 'HYYMDI'), 'DAY',
      1,8, 'HYYMDI')
    ELSE TRANSDATE;
END

TABLE FILE VIDEOTR2
PRINT ORIG_TRANSDATE TRANSDATE
BY LASTNAME
BY FIRSTNAME
WHERE ORIG_TRANSDATE NE TRANSDATE
END

```

The output is

LASTNAME	FIRSTNAME	ORIG_TRANSDATE	TRANSDATE
-----	-----	-----	-----
BERTAL	MARCIA	1999/07/29 12:19	1999/07/30 08:30
GARCIA	JOANN	1998/05/08 12:48	1998/05/09 08:30
		1999/11/30 12:12	1999/12/01 08:30
PARKER	GLENDA	1999/01/06 12:22	1999/01/07 08:30
RATHER	MICHAEL	1998/02/28 12:33	1998/03/01 08:30
WILSON	KELLY	1999/06/26 12:34	1999/06/27 08:30

HNAME: Retrieving a Date-Time Component in Alphanumeric Format

Available Languages: reporting, Maintain

The HNAME function extracts a specified component from a date-time value and returns it in alphanumeric format.

Retrieve a Date-Time Component in Alphanumeric Format

```
HNAME(datetime, 'component', output)
```

where:

datetime

Date-time

Is the date-time value from which a component value is to be extracted, the name of a date-time field containing the value that contains the value, or an expression that returns the value.

component

Alphanumeric

Is the name of the component to be retrieved enclosed in single quotation marks. For a list of valid components, see [Using Date-Time Functions](#).

output

Alphanumeric, at least A2

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be in alphanumeric format.

The function converts a month argument to an abbreviation of the month name and converts and all other components to strings of digits only. The year is always four digits, and the hour assumes the 24-hour system.

Retrieving a Timestamp Date or Time Component as an Alphanumeric Value

Assuming that the current time obtained by the function HGETC in the first parameter is 13:22:11, this example returns the string '13' and assigns it to AHOUR:

```
AHOUR/A2 = HNAME(HGETC(8,'HYMDS'),'HOUR', AHOUR);
```

Retrieving a Timestamp Date or Time Component as an Alphanumeric Value

Assuming that the current time obtained by the function HGETC in the first parameter is 13:22:11, this example returns the string '13' and assigns it to AHOUR:

```
AHOUR/A2 = HNAME(HGETC(8,'HYMDS'),'HOUR', AHOUR);
```

Retrieving the Week Component in Alphanumeric Format (Reporting)

HNAME returns the week in alphanumeric format from the TRANSDATE field. Changing the WEEKFIRST parameter setting changes the value of the component.

```
SET WEEKFIRST = 7
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
WEEK_COMPONENT/A10 = HNAME(TRANSDATE, 'WEEK', 'A10');
WHERE DATE EQ 2000;
END
```

When WEEKFIRST is set to seven, the output is:

CUSTID	DATE-TIME	WEEK_COMPONENT
-----	-----	-----

1237	2000/02/05 03:30	06
1118	2000/06/26 05:45	26

When WEEKFIRST is set to three, the output is:

CUSTID	DATE-TIME	WEEK_COMPONENT
-----	-----	-----
1237	2000/02/05 03:30	05
1118	2000/06/26 05:45	25

For details on WEEKFIRST, see the *ibi™ WebFOCUS® Developing Reporting Applications* manual.

Retrieving the Day Component in Alphanumeric Format (Reporting)

HNAME retrieves the day in alphanumeric format from the TRANSDATE field:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
DAY_COMPONENT/A2 = HNAME(TRANSDATE, 'DAY', 'A2');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	DAY_COMPONENT
-----	-----	-----
1237	2000/02/05 03:30	05
1118	2000/06/26 05:45	26

Retrieving the Day Component in Alphanumeric Format (Maintain)

HNAME extracts the day in alphanumeric format from DT1:

```

MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE
DAY_COMPONENT/A2=HNAME(STK.DT1,'DAY',DAY_COMPONENT);
TYPE "STK(1).DT1 = "STK(1).DT1;
TYPE "DAY_COMPONENT = <DAY_COMPONENT"
END

```

HPART: Retrieving a Date-Time Component as a Numeric Value

Available Languages: reporting, Maintain

The HPART function extracts a specified component from a date-time value and returns it in numeric format.

Retrieve a Date-Time Component in Numeric Format

```
HPART(datetime, 'component', output)
```

where:

datetime

Date-time

Is the date-time value from which the component is to be extracted, the name of a date-time field that contains the value, or an expression that returns the value.

component

Alphanumeric

Is the name of the component to be retrieved enclosed in single quotation marks. For a list of valid components, see [Using Date-Time Functions](#).

output

Integer

Is the field that contains the result, or the integer format of the output value enclosed in single quotation marks.

Retrieving a Timestamp Date or Time Component as Numeric Value

Assuming that the current time obtained by HGETC in the first parameter is 14:01:39, this example returns a whole number, 14, and assigns it to I HOUR:

```
I HOUR/I2 = HPART(HGETC(8,'HYMDS'),'HOUR', I HOUR);
```

Retrieving the Day Component in Numeric Format (Reporting)

HPART retrieves the day in integer format from the TRANSDATE field:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
DAY_COMPONENT/I2 = HPART(TRANSDATE, 'DAY', 'I2');
WHERE DATE EQ 2000;
END
```

The output is:

<u>CUSTID</u>	<u>DATE-TIME</u>	<u>DAY_COMPONENT</u>	
1237	2000/02/05	5	
1118	03:30	26	

	2000/06/26 05:45		

Retrieving the Day Component in Numeric Format (Maintain)

HPART extracts the day in integer format from DT1:

```
MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE
DAY_COMPONENT/I2 = HPART(STK.DT1, 'DAY', DAY_COMPONENT);
TYPE "STK(1).DT1 = <STK(1).DT1";
TYPE "DAY_COMPONENT = <DAY_COMPONENT";
END
```

HSETPT: Inserting a Component Into a Date-Time Value

Available Languages: reporting, Maintain

The HSETPT function inserts the numeric value of a specified component into a date-time value.

Insert a Component Into a Date-Time Value

```
HSETPT(datetime, 'component', value, length, output)
```

where:

datetime

Date-time

Is the date-time value in which to insert the component, the name of a date-time field that contains the value, or an expression that returns the value.

component

Alphanumeric

Is the name of the component to be inserted enclosed in single quotation marks. See [Using Date-Time Functions](#) for a list of valid components.

value

Integer

Is the numeric value to be inserted for the requested component, the name of a numeric field that contains the value, or an expression that returns the value.

length

Integer

Is the length of the returned date-time value. Valid values are:

- **8** indicates a time value that includes one to three decimal digits (milliseconds).
- **10** indicates a time value that includes four to six decimal digits (microseconds).
- **12** indicates a time value that includes seven to nine decimal digits (nanoseconds).

output

Date-time

Is the returned date-time value whose chosen component is updated. All other components are copied from the source date-time value.

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be in date-time format (data type H).

Inserting a Component Into a Date-Time Value

Assuming that the current date and time obtained by HGETC in the first parameter are 03/31/2004 and 13:34:36, this example,

```
UHOUR/HMDYYS = HSETPT(HGETC(8,'HYYMDS'),'HOUR', 7, 8, UHOUR);
```

returns 03/31/2004 07:34:36.

Inserting the Day Component Into a Date-Time Field (Reporting)

HSETPT inserts the day as 28 into the ADD_MONTH field and stores the result in INSERT_DAY:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
ADD_MONTH/HYYMDS = HADD(TRANSDATE, 'MONTH', 2, 8, 'HYYMDS');
INSERT_DAY/HYYMDS = HSETPT(ADD_MONTH, 'DAY', 28, 8, 'HYYMDS');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	ADD_MONTH	INSERT_DAY
-----	-----	-----	-----
1118	2000/06/26 05:45	2000/08/26 05:45:00	2000/08/28 05:45:00
1237	2000/02/05 03:30	2000/04/05 03:30:00	2000/04/28 03:30:00

Inserting the Day Component Into a Date-Time Field (Maintain)

HSETPT inserts the day into ADD_MONTH:

```

MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE
ADD_MONTH/HYYMDS = HADD(STK.DT1,'MONTH', 2, 8, ADD_MONTH);
INSERT_DAY/HYYMDS = HSETPT(ADD_MONTH,'DAY', 28, 8, INSERT_DAY);
TYPE "STK(1).DT1 = <STK(1).DT1";
TYPE "ADD_MONTH = <ADD_MONTH";
TYPE "INSERT_DAY = <INSERT_DAY";
END

```

HTIME: Converting the Time Portion of a Date-Time Value to a Number

Available Languages: reporting, Maintain

The HTIME function converts the time portion of a date-time value to the number of milliseconds if the length argument is eight, microseconds if the length argument is ten, or nanoseconds if the length argument is 12.

Convert the Time Portion of a Date-Time Value to a Number

```
HTIME(length, datetime, output)
```

where:

length

Integer

Is the length of the input date-time value. Valid values are:

- **8** indicates a time value that includes one to three decimal digits (milliseconds).
- **10** indicates a time value that includes four to six decimal digits (microseconds).

- **12** indicates a time value that includes seven to nine decimal digits (nanoseconds).

datetime

Date-time

Is the date-time value from which to convert the time, the name of a date-time field that contains the value, or an expression that returns the value.

output

Floating-point double-precision

Is the field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be floating-point double-precision.

Converting the Time Portion of a Date-Time Value to a Number

Assuming that the current date and time obtained by HGETC in the second parameter are 03/31/2004 and 13:48:14, this example returns and assigns to NMILLI, 49,694,395. (Note that this example uses milliseconds rather than microseconds.)

```
NMILLI/D12.0 = HTIME(8, HGETC(10, 'HYMDSS'), NMICRO);
```

Assuming that the first parameter is equal to 10 and the timestamp format is HYYMDSS, this example returns and assigns to NMICRO, 50,686,123,024.

```
NMICRO/D12.0 = HTIME(10, HGETC(10, 'HYYMDSS'), NMICRO);
```

Converting the Time Portion of a Date-Time Field to a Number (Reporting)

HTIME converts the time portion of the TRANSDATE field to the number of milliseconds:

```
TABLE FILE VIDEOTR2
PRINT CUSTID TRANSDATE AS 'DATE-TIME' AND COMPUTE
MILLISEC/D12.2 = HTIME(8, TRANSDATE, 'D12.2');
WHERE DATE EQ 2000;
END
```

The output is:

CUSTID	DATE-TIME	MILLISEC
-----	-----	-----
1237	2000/02/05 03:30	12,600,000.00
1118	2000/06/26 05:45	20,700,000.00

Converting the Time Portion of a Date-Time Field to a Number (Maintain)

HTIME converts the time portion of the DT1 field to the number of milliseconds:

```
MAINTAIN FILE DATETIME
FOR 1 NEXT ID INTO STK;
COMPUTE MILLISEC/D12.2 = HTIME(8, STK.DT1, MILLISEC);
TYPE "STK(1).DT1 = <STK(1).DT1";
TYPE "MILLISEC = <MILLISEC";
END
```

HTMTOTS or TIMETOTS: Converting a Time to a Timestamp

The HTMTOTS function returns a timestamp using the current date to supply the date components of its value, and copies the time components from its input date-time value.

 **Note:** TIMETOTS is a synonym for HTMTOTS.

Convert a Time to a Timestamp

```
HTMTOTS(time, length, output)
```

or

```
TIMETOTS(time, length, output)
```

where:

time

Date-Time

Is the date-time value whose time will be used. The date portion will be ignored.

length

Integer

Is the length of the result. This can be one of the following:

- **8** for input time values including milliseconds.
- **10** for input time values including microseconds.
- **12** for input time values including nanoseconds.

output_format

Date-Time

Is the timestamp whose date is set to the current date, and whose time is copied from time.

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Converting a Time to a Timestamp

This example produces a timestamp, whose date and time are current, and stores the result in a column with the format in the field HMDYYS:


```
HMDYYS = HTMTOTS(DT(&MYTOD), 8, 'HMDYYS');
```

The result is 03/26/2004 13:48:14.

Converting a Time to a Timestamp

HTMTOTS converts the time portion of the TRANSDATE field to a timestamp, using the current date for the date portion of the returned value:

```
DEFINE FILE VIDEOTR2
  TSTMPSEC/HYYMDS = HTMTOTS(TRANSDATE, 8, 'HYYMDS');
END
TABLE FILE VIDEOTR2
PRINT TRANSDATE TSTMPSEC
BY LASTNAME BY FIRSTNAME
WHERE DATE EQ '1991'
END
```

The output is:

LASTNAME	FIRSTNAME	TRANSDATE	TSTMPSEC
-----	-----	-----	-----
CRUZ	IVY	1991/06/27 02:45	2011/01/11 02:45:00
GOODMAN	JOHN	1991/06/25 01:19	2011/01/11 01:19:00
GREEVEN	GEORGIA	1991/06/24 10:27	2011/01/11 10:27:00
HANDLER	EVAN	1991/06/20 05:15	2011/01/11 05:15:00
		1991/06/21 07:11	2011/01/11 07:11:00
KRAMER	CHERYL	1991/06/21 01:10	2011/01/11 01:10:00
		1991/06/19 07:18	2011/01/11 07:18:00
		1991/06/19 04:11	2011/01/11 04:11:00
MONROE	CATHERINE	1991/06/25 01:17	2011/01/11 01:17:00
	PATRICK	1991/06/27 01:17	2011/01/11 01:17:00
SPIVEY	TOM	1991/11/17 11:28	2011/01/11 11:28:00
WILLIAMS	KENNETH	1991/06/24 04:43	2011/01/11 04:43:00
		1991/06/24 02:08	2011/01/11 02:08:00

HYYWD: Returning the Year and Week Number From a Date-Time Value

The week number returned by HNAME and HPART can actually be in the year preceding or following the input date.

The HYYWD function returns both the year and the week number from a given date-time value.

The output is edited to conform to the ISO standard format for dates with week numbers, yyyy-Www-d.

Return the Year and Week Number From a Date-Time Value

```
HYYWD(dtvalue, output)
```

where:

dtvalue

Date-time

Is the date-time value to be edited, the name of a date-time field that contains the value, or an expression that returns the value.

output

Alphanumeric

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

The output format must be at least 10 characters long. The output is in the following format:

```
yyyy-Www-d
```

where:

yyyy

Is the four-digit year.

ww

Is the two-digit week number (01 to 53).

d

Is the single-digit day of the week (1 to 7). The d value is relative to the current WEEKFIRST setting. If WEEKFIRST is 2 or ISO2 (Monday), then Monday is represented in the output as 1, Tuesday as 2.

Using the EDIT function, you can extract the individual subfields from this output.

Returning the Year and Week Number From a Date-time Value

The following converts the TRANSDATE date-time value to the ISO standard format for dates with week numbers. WEEKFIRST is set to ISO2, which produces ISO standard week numbering:

```
ISODATE/A10 = HYYWD(TRANSDATE, 'A10');
```

For the date component 1999/01/30 04:16, the value is 1999-W04-6.

For the date component 1999/12/15, the value is 1999-W50-3.

Returning the Year and Week Number From a Date-Time Value

The following request against the VIDEOTR2 data source calls HYYWD to convert the TRANSDATE date-time field to the ISO standard format for dates with week numbers. WEEKFIRST is set to ISO2, which produces ISO standard week numbering:

```
SET WEEKFIRST = ISO2
TABLE FILE VIDEOTR2
```

```

SUM TRANSTOT QUANTITY
COMPUTE ISODATE/A10 = HYYWD(TRANSDATE, 'A10');
BY TRANSDATE
WHERE QUANTITY GT 1
END

```

The output is:

TRANSDATE -----	TRANSTOT -----	QUANTITY -----	ISODATE -----
1991/06/24 04:43	16.00	2	1991-W26-1
1991/06/25 01:17	2.50	2	1991-W26-2
1991/06/27 02:45	16.00	2	1991-W26-4
1996/08/17 05:11	5.18	2	1996-W33-6
1998/02/04 04:11	12.00	2	1998-W06-3
1999/01/30 04:16	13.00	2	1999-W04-6
1999/04/22 06:19	3.75	3	1999-W16-4
1999/05/06 05:14	1.00	2	1999-W18-4
1999/08/09 03:17	15.00	2	1999-W32-1
1999/09/09 09:18	14.00	2	1999-W36-4
1999/10/16 09:11	5.18	2	1999-W41-6
1999/11/05 11:12	2.50	2	1999-W44-5
1999/12/09 09:47	5.18	2	1999-W49-4
1999/12/15 04:04	2.50	2	1999-W50-3

Extracting a Component From a Date Returned by HYYWD

The following request against the VIDEOTR2 data source calls HYYWD to convert the TRANSDATE date-time field to the ISO standard format for dates with week numbers. It then uses the EDIT function to extract the week component from this date. WEEKFIRST is set to ISO2, which produces ISO standard week numbering:

```

SET WEEKFIRST = ISO2
TABLE FILE VIDEOTR2
SUM TRANSTOT QUANTITY
COMPUTE ISODATE/A10 = HYYWD(TRANSDATE, 'A10');
COMPUTE WEEK/A2 = EDIT(ISODATE, '$$$$$$99$$');
BY TRANSDATE

```

```
WHERE QUANTITY GT 1 AND DATE EQ 1991  
END
```

The output is:

TRANSDATE -----	TRANSTOT -----	QUANTITY -----	ISODATE -----	WEEK -----
1991/06/24 04:43	16.00	2	1991-W26-1	26
1991/06/25 01:17	2.50	2	1991-W26-2	26
1991/06/27 02:45	16.00	2	1991-W26-4	26

Maintain-specific Date and Time Functions

Maintain-specific date and time functions manipulate date and time values. These functions are available only in Maintain Data.

There are additional date and time functions available in both the reporting and Maintain languages. For more information on these functions, see [Date-Time Functions](#).

Maintain-specific Standard Date and Time Functions

Standard date and time functions are for use with non-legacy dates. For a definition of standard dates and times, see [Date-Time Functions](#).

HHMMSS: Retrieving the Current Time (Maintain)

The HHMMSS function retrieves the current time from the operating system as an 8-character string, separating the hours, minutes, and seconds with periods.

To use this function, you must import the function library MNTUWS. For information on importing a function library, see [Calling a Function](#).

There is also an HHMMSS function available in the reporting language. For information on this function, see [HHMMSS: Retrieving the Current Time](#).

Retrieve the Current Time

```
HHMMSS()
```

Retrieving the Current Time

HHMMSS retrieves the current time from the operating system:

```
MAINTAIN
Module Import (mntuws);
Case Top
Compute now/a10 = hhmmss();
type "Now = <<now"
EndCase
END
```

The output is:

```
Now = 14.25.33
```

Initial_HHMMSS: Returning the Time the Application Was Started

The Initial_HHMMSS function returns the time when the Maintain Data application was started as an 8-character string, with embedded periods separating the hours, minutes, and seconds.

To use this function, you must import the function library MNTUWS. For details on importing this library, see [Calling a Function](#).

Retrieve the Initial Time

```
Initial_HHMMSS()
```

Initial_TODAY: Returning the Date the Application Was Started

The Initial_TODAY function returns the date in MM/DD/YY format when the Maintain Data application was started as an 8-character string with embedded slashes.

To use this function, you must import the function library MNTUWS. For details on importing this library, see [Calling a Function](#).

Retrieve the Initial Date

```
Initial_TODAY()
```

TODAY: Retrieving the Current Date (Maintain)

The TODAY function retrieves the current date from the system in the format MM/DD/YY. TODAY always returns a date that is current. Therefore, if you are running an application late at night, use TODAY. You can remove the embedded slashes using the EDIT function.

To use this function, you must import the function library MNTUWS. For information on importing this library, see [Calling a Function](#).

There is a version of the TODAY function that is available only in the reporting language. For information on this function, see [HTMTOTS or TIMETOTS: Converting a Time to a Timestamp](#).

Retrieve the Current Date

```
TODAY()
```


Retrieving the Current Date

TODAY retrieves the current date from the system:

```
MAINTAIN
Module Import (mntuws);

Case Top
Compute date1/a8 = today();
type "Date1 = <<date1"
Endcase
END
```

The result is:

```
Date1 = 07/17/02
```

TODAY2: Returning the Current Date

The TODAY2 function retrieves the current date from the operating system in the format MM/DD/YYYY. Use format A10 with the TODAY2 function to ensure proper results.

To use this function, you must import the function library MNTUWS. For information on importing this library, see [Calling a Function](#).

Retrieve the Current Date

```
TODAY2()
```

Retrieving the Current Date

TODAY2 retrieves the current date from the system:

```
MAINTAIN
Module Import (mntuws);

Case Top
Compute date2/a10 = today2();
type "Date2 = <<date2"
Endcase
END
```

The result is:

```
Date2 = 07/17/2002
```

ADD: Adding Days to a Date

The ADD function adds a given number of days to a date.

Add Days to a Date

```
ADD(date,value)
```

or

```
date.ADD(value)
```

where:

date

Is the date to add days to, or a field containing the date.

value

Is the number of days by which to increase the date.

This function changes the value of *date*.

Adding Days to a Date

ADD adds 10 days to each value in the DateVar field:

```
ADD(DateVar, 10)
```

The following are sample values for DateVar and the corresponding values for ADD (DateVar, 10):

DateVar	ADD(DateVar, 10);
-----	-----
12/31/1999	01/10/2000
01/01/2000	01/11/2000
01/02/2000	01/12/2000

DAY: Extracting the Day of the Month From a Date

The DAY function extracts the day of the month from a date and returns the result as an integer.

Extract the Day of the Month From a Date

```
DAY(date);
```

where:

date

Is the date (in date format) from which to extract the day of the month, or a field containing the date.

Extracting the Day of the Month From a Date

DAY extracts the day of the month from the DATE field:

```
DAY (DATE)
```

The following are sample values for DATE and the corresponding values for DAY(DATE):

DATE ----	DAY (DATE) -----
01/01/2000	1
01/02/2000	2
01/03/2000	3

JULIAN: Determining How Many Days Have Elapsed in the Year

The JULIAN function determines the number of days that have elapsed in the given year up to a given date, and returns the result as an integer.

Determine How Many Days Have Elapsed in the Year

```
JULIAN(date);
```

where:

date

Is the date (in date format) for which to determine the number of days elapsed in the given year, or a field containing the date.

Determining How Many Days Have Elapsed in the Year

JULIAN determines the number of days that have elapsed up to the date in the DATE field:

```
JULIAN (DATE)
```

The following are sample values for DATE and the corresponding values for JULIAN (DATE):

DATE	JULIAN (DATE)
----	-----
01/01/2000	1
02/01/2000	32
03/01/2000	61

MONTH: Extracting the Month From a Date

The MONTH function extracts the month from a date and returns the result as an integer.

Extract the Month From a Date

```
MONTH (date) ;
```

where:

date

Is the date (in date format) from which to extract the month, or a field containing the date.

Extracting the Month From a Date

MONTH extracts the month from each value in the DATE field:

```
MONTH (DATE)
```

The following are sample values for DATE and the corresponding values for MONTH (DATE):

DATE ----	MONTH (DATE) -----
01/01/2000	1
02/01/2000	2
03/01/2000	3

QUARTER: Determining the Quarter

The QUARTER function determines the quarter of the year in which a date resides, and returns the result as an integer.

Determine the Quarter for a Date

```
QUARTER (date) ;
```

where:

date

Is the date (in date format) for which to determine the quarter, or a field containing the date.

Determining the Quarter for a Date

QUARTER extracts the quarter component from each value in the DATE field:

```
QUARTER (DATE)
```

The following are sample values for DATE and the corresponding values for QUARTER (DATE):

DATE	QUARTER (DATE)
----	-----
01/01/2000	1
04/01/2000	2
07/01/2000	3

SETMDY: Setting the Value to a Date

The SETMDY function sets a value to a date based on numeric values representing a day, month, and year. SETMDY returns a 0 if the function is successful, and a negative number if the function fails.

Set a Value to a Date

```
SETMDY(date, month, day, year);
```

or

```
date.SETMDY(month, day, year);
```

where:

date

Is the date, in date format, or a field containing the date.

month

Is an integer value representing a month.

day

Is an integer value representing the day of the month.

year

Is an integer value representing a year.

Setting a Value to a Date

SETMDY sets the value of DateVar, which is formatted as a date that appears as wrMtrDYY (for example, Saturday, January 1, 2000):

```
SETMDY(DateVar, month, day, year);
```

The following are sample values for month, day, and year, and the corresponding dates for DateVar:

month	day	year	DateVar
-----	---	----	-----
04	05	1965	Monday, April 5, 1965
02	01	1997	Saturday, February 1, 1997
01	01	2000	Saturday, January 1, 2000

SUB: Subtracting a Value From a Date

The SUB function subtracts a given number of days from a date.

Subtract a Value From a Date

```
SUB(date,value)
```

or

```
date.SUB(value)
```

where:

date

Is the date from which to subtract the value, or a field containing the date.

value

Is the value to subtract from the date.

Subtracting Days From a Date

SUB subtracts 10 days from each value in the DateVar field.

```
SUB(DateVar, 10)
```

The following are sample values for DateVar and the corresponding values for SUB (DateVar, 10):

DateVar	SUB(DateVar, 10);
-----	-----
12/31/1999	12/21/2000
01/01/2000	12/22/2000
01/02/2000	12/23/2000

WEEKDAY: Determining the Day of the Week for a Date

The WEEKDAY function determines the day of the week for a date and returns the result as an integer (1=Monday, 2=Tuesday, and so on).

Determine the Day of the Week for a Date

```
WEEKDAY(date);
```

where:

date

Is the date (in date format) for which to determine the weekday, or a field containing the date.

Determining the Day of the Week for a Date

WEEKDAY determines the day of the week for each date in the DATE field, and stores that day as a number corresponding to a weekday:

```
WEEKDAY (DATE)
```

The following are sample values for DATE and the corresponding values for WEEKDAY (DATE):

DATE	WEEKDAY (DATE)
----	-----
01/01/2000	6
01/02/2000	7
01/03/2000	1

YEAR: Extracting the Year From a Date

The YEAR function extracts the year from a date.

Extract the Year From a Date

```
YEAR(date);
```

where:

date

Is the date from which to extract the year, or a field containing the date.

Extracting a Year From a Date

YEAR extracts the year from the DATE field, and stores that year in the YEAR (DATE) field:

```
YEAR (DATE)
```

The following are sample values for DATE and the corresponding values for YEAR(DATE):

DATE	YEAR(DATE)
----	-----
01/01/2000	2000
02/01/2001	2001
03/01/2002	2002

Simplified Conversion Functions

Simplified conversion functions have streamlined parameter lists, similar to those used by SQL functions. In some cases, these simplified functions provide slightly different functionality than previous versions of similar functions.

The simplified functions do not have an output argument. Each function returns a value that has a specific data type.

When used in a request against a relational data source, these functions are optimized (passed to the RDBMS for processing).

CHAR: Returning a Character Based on a Numeric Code

The CHAR function accepts a decimal integer and returns the character identified by that number converted to ASCII or EBCDIC, depending on the operating environment. The output is returned as a variable length alphanumeric. If the number is above the range of valid characters, a null value is returned.

For a chart of printable characters and their decimal equivalents, see [Character Chart for ASCII and EBCDIC](#).

Return a Character Based on a Numeric Code

```
CHAR(number_code)
```

where:

number_code

Integer

Is a field, number, or numeric expression whose whole absolute value will be used as a number code to retrieve an output character.

For example, a TAB character is returned by CHAR(9) in ASCII environments, or by CHAR(5) in EBCDIC environments.

Using the CHAR Function to Insert Control Characters Into a String

The following request defines a field with carriage return (CHAR(13)) and line feed (CHAR(10)) characters inserted between the words HELLO and GOODBYE (in an ASCII environment). To show that these characters were inserted, the output is generated in PDF format and the StyleSheet attribute LINEBREAK='CRLF' is used to have these characters respected and print the field value on two lines.

```
DEFINE FILE WF_RETAIL_LITE
MYFIELD/A20 WITH COUNTRY_NAME='HELLO' | CHAR(13) | CHAR(10) | 'GOODBYE';
END
TABLE FILE WF_RETAIL_LITE
SUM MYFIELD
ON TABLE PCHOLD FORMAT PDF
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
TYPE=REPORT,LINEBREAK='CRLF', $
ENDSTYLE
END
```

The output is shown in the following image.



CHAR returns a carriage control character in an ASCII environment.

```
CHAR(13)
```

COMPACTFORMAT: Displaying Numbers in an Abbreviated Format

COMPACTFORMAT displays numbers in a compact format where:

- K is an abbreviation for thousands.
- M is an abbreviation for millions.
- B is an abbreviation for billions.
- T is an abbreviation for trillions.

COMPACTFORMAT computes which abbreviation to use, based on the order of magnitude of the largest value in the column. The returned value is an alphanumeric string.

Attempting to output this value to a numeric format will result in a format error, and the value zero (0) will be displayed.

Display Numbers in an Abbreviated Format

```
COMPACTFORMAT(input)
```

where:

input

Is the name of a numeric field.

Displaying Numbers in an Abbreviated Format

The following example uses the COMPACTFORMAT function to abbreviate the display of the summed values of the DAYSDELAYED, QUANTITY_SOLD, and COGS_US fields.

```
TABLE FILE WF_RETAIL_LITE
SUM DAYSDELAYED QUANTITY_SOLD COGS_US
COMPUTE
CDAYS/A30= COMPACTFORMAT(DAYSDELAYED);
CQUANT/A30= COMPACTFORMAT(QUANTITY_SOLD);
```

```
CCOGS/A30= COMPACTFORMAT(COGS_US);
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Days</u>	<u>Quantity</u>	<u>Cost of Goods</u>	<u>CDAYS</u>	<u>CQUANT</u>	<u>CCOGS</u>
<u>Delayed</u>	<u>Sold</u>				
5,355	13,923	\$2,950,358.00	5,355	14K	\$3M

COMPACTFORMAT abbreviates the display of COGS_US.

```
COMPACTFORMAT(COGS_US)
```

For \$2,950,358.00, the result is \$3M.

CTRLCHAR: Returning a Non-Printable Control Character

The CTRLCHAR function returns a nonprintable control character specific to the running operating environment, based on a supported list of keywords. The output is returned as variable length alphanumeric.

Return a Non-Printable Control Character

```
CTRLCHAR(ctrl_char)
```

where:

ctrl_char

Is one of the following keywords.

- **NUL** returns a null character.
- **SOH** returns a start of heading character.
- **STX** returns a start of text character.
- **ETX** returns an end of text character.
- **EOT** returns an end of transmission character.
- **ENQ** returns an enquiry character.
- **ACK** returns an acknowledge character.
- **BEL** returns a bell or beep character.
- **BS** returns a backspace character.
- **TAB** or **HT** returns a horizontal tab character.
- **LF** returns a line feed character.
- **VT** returns a vertical tab character.
- **FF** returns a form feed (top of page) character.
- **CR** returns a carriage control character.
- **SO** returns a shift out character.
- **SI** returns a shift in character.
- **DLE** returns a data link escape character.
- **DC1** or **XON** returns a device control 1 character.
- **DC2** returns a device control 2 character.
- **DC3** or **XOFF** returns a device control 3 character.
- **DC4** returns a device control 4 character.
- **NAK** returns a negative acknowledge character.
- **SYN** returns a synchronous idle character.
- **ETB** returns an end of transmission block character.
- **CAN** returns a cancel character.

- **EM** returns an end of medium character.
- **SUB** returns a substitute character.
- **ESC** returns an escape, prefix, or altmode character.
- **FS** returns a file separator character.
- **GS** returns a group separator character.
- **RS** returns a record separator character.
- **US** returns a unit separator character.
- **DEL** returns a delete, rubout, or interrupt character.

Using the CTRLCHAR Function to Insert Control Characters Into a String

The following request defines a field with carriage return (CTRLCHAR(CR)) and line feed (CTRLCHAR(LF)) characters inserted between the words HELLO and GOODBYE. To show that these characters were inserted, the output is generated in PDF format and the StyleSheet attribute LINEBREAK='CRLF' is used to have these characters respected and print the field value on two lines.

```
DEFINE FILE WF_RETAIL_LITE
MYFIELD/A20 WITH COUNTRY_NAME='HELLO' | CTRLCHAR(CR) | CTRLCHAR(LF) |
'GOODBYE';
END
TABLE FILE WF_RETAIL_LITE
SUM MYFIELD
ON TABLE PCHOLD FORMAT PDF
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
TYPE=REPORT,LINEBREAK='CRLF', $
ENDSTYLE
END
```

The output is shown in the following image.



CTRLCHAR returns a carriage control character in an ASCII environment.

```
CTRLCHAR(CR)
```

DT_FORMAT: Converting a Date or Date-Time Value to an Alphanumeric String

DT_FORMAT converts a date or date-time value to an alphanumeric string in a specified date or date-time format. For information about date and date-time formats, see the *Describing Data With ibi™ WebFOCUS® Language* manual. For information about date and date-time formats, see the *Describing Data With ibi™ WebFOCUS® Language* manual.

Convert a Date Value to an Alphanumeric String in a Specified Date Format

```
DT_FORMAT(date, 'date_format')
```

where:

date

Numeric, date, or date-time

Is the date or date-time field or value to be converted.

'date_format'

Alphanumeric literal

Is a date or date-time format that fits the input date format type, enclosed in single quotation marks.

Converting Date and Date_Time Values to Alphanumeric Format

The following request converts date and date-time values to alphanumeric values with specified date and date-time formats.

```
DEFINE FILE VIDEOTRK
NEWDT1/A12 = DT_FORMAT(TRANSDAT,'YYMD');
NEWDT2/A30 = DT_FORMAT(DT_CURRENT_DATETIME(SECOND),'HYYMTDs');
NEWDT3/A30= DT_FORMAT('April 1, 2019','YYMDTr');
END
TABLE FILE VIDEOTRK
PRINT NEWDT1 NEWDT2 NEWDT3
BY TRANSDAT
WHERE OUTPUTLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
END
```

The output is shown in the following image.

<u>TRANSDATE</u>	<u>NEWDT1</u>	<u>NEWDT2</u>	<u>NEWDT3</u>
91/06/17	1991/06/17	2019 December 17 11:36:45.000	2019, APRIL 1

DT_FORMAT converts the current date and time down to the seconds to a string in date-time format HYYMTDs:

```
DT_FORMAT( DT_CURRENT_DATETIME(SECOND), 'HYYMTDs')
```

On December 17, 2019 at approximately 11:36 A.M., the result is:

```
2019 December 17 11:36:45.000
```

FPRINT: Displaying a Value in a Specified Format

Given an output format, the simplified conversion function FPRINT converts a value to an alphanumeric format for display.



Note: A legacy FPRINT function also exists and is still supported. For information, see [FPRINT: Converting Fields to Alphanumeric Format](#). The legacy function has an additional argument for the name or format of the returned value.

Display a Value in a Specified Format

```
FPRINT(value, 'out_format')
```

where:

value

Any data type

Is the value to be converted.

'out_format'

Fixed length alphanumeric

Is the display format. For information about valid display formats, see the *Describing Data With ibi™ WebFOCUS® Language* manual.

Displaying a Value in a Specified Format

The following request displays COGS_US as format 'D9M', and TIME_DATE as format 'YYMtrD', by converting them to alphanumeric using FPRINT.

```

DEFINE FILE WF_RETAIL_LITE
COGS_A/A25 = FPRINT(COGS_US, 'D9M');
DATE1/A25 = FPRINT(TIME_DATE, 'YYMtrD');
END
TABLE FILE WF_RETAIL_LITE
PRINT LST.COGS_US COGS_A DATE1
BY TIME_DATE
WHERE RECORDLIMIT EQ 10
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Sale</u> <u>Date</u>	<u>LST</u> <u>Cost of Goods</u>	<u>COGS_A</u>	<u>DATE1</u>
01/03/2009	\$234.00	\$234	2009, January 3
	\$46.00	\$46	2009, January 3
	\$380.00	\$380	2009, January 3
	\$374.00	\$374	2009, January 3
	\$310.00	\$310	2009, January 3
	\$83.00	\$83	2009, January 3
	\$312.00	\$312	2009, January 3
	\$548.00	\$548	2009, January 3
	\$400.00	\$400	2009, January 3
	\$131.00	\$131	2009, January 3

FPRINT converts a date to an alphanumeric format.

```
FPRINT(TIME_DATE, 'YYMtrD')
```

For 01/03/2009, the result is 2009, January 3.

HEXTYPE: Returning the Hexadecimal View of an Input Value

The HEXTYPE function returns the hexadecimal view of an input value of any data type. The result is returned as variable length alphanumeric. The alphanumeric field to which the hexadecimal value is returned must be large enough to hold two characters for each input character. The value returned depends on the running operating environment.

Returning the Hexadecimal View of an Input Value

```
HEXTYPE(in_value)
```

where:

in_value

Is an alphanumeric or integer field, constant, or expression.

Returning a Hexadecimal View

The following request returns a hexadecimal view of the country names and the sum of the days delayed.

```
DEFINE FILE WF_RETAIL_LITE
Days/I8 = DAYSDELAYED;
Country/A20 = COUNTRY_NAME;
HexCountry/A30 = HEXTYPE(Country);
END
TABLE FILE WF_RETAIL_LITE
SUM COUNTRY_NAME NOPRINT Country HexCountry Days
COMPUTE HexDays/A40 = HEXTYPE(Days);
BY COUNTRY_NAME NOPRINT
WHERE COUNTRY_NAME LT 'P'
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

Country	HexCountry	Days	HexDays
Argentina	417267656E74696E6120202020202020	84	00000054
Australia	4175737472616C696120202020202020	27	0000001B
Austria	417573747269612020202020202020	798	0000031E
Belgium	42656C6769756D2020202020202020	14	0000000E
Brazil	4272617A696C202020202020202020	204	000000CC
Canada	43616E616461202020202020202020	584	00000248
Chile	4368696C6520202020202020202020	45	0000002D
China	4368696E6120202020202020202020	1	00000001
Colombia	436F6C6F6D62696120202020202020	114	00000072
Denmark	44656E6D61726B2020202020202020	0	00000000
Egypt	456779707420202020202020202020	3	00000003
Finland	46696E6C616E642020202020202020	3	00000003
France	4672616E6365202020202020202020	49	00000031
Germany	4765726D616E792020202020202020	498	000001F2
Greece	477265656365202020202020202020	9	00000009
Hungary	48756E676172792020202020202020	7	00000007
India	496E64696120202020202020202020	23	00000017
Ireland	4972656C616E642020202020202020	7	00000007
Israel	49737261656C202020202020202020	2	00000002
Italy	4974616C7920202020202020202020	7	00000007
Japan	4A6170616E20202020202020202020	12	0000000C
Luxembourg	4C7578656D626F7572672020202020	0	00000000
Malaysia	4D616C617973696120202020202020	20	00000014
Mexico	4D657869636F202020202020202020	170	000000AA
Netherlands	4E65746865726C616E647320202020	8	00000008
Norway	4E6F72776179202020202020202020	0	00000000

HEXTYPE returns a hexadecimal view of COUNTRY_NAME.

```
HEXTYPE (COUNTRY_NAME)
```

For Argentina, the result is 417267656E74696E61.

PHONETIC: Returning a Phonetic Key for a String

PHONETIC calculates a phonetic key for a string, or a null value on failure. Phonetic keys are useful for grouping alphanumeric values, such as names, that may have spelling variations. This is done by generating an index number that will be the same for the variations of the same name based on pronunciation. One of two phonetic algorithms can be used for indexing, Metaphone and Soundex. Metaphone is the default algorithm, except on z/OS where the default is Soundex.

You can set the algorithm to use with the following command.

```
SET PHONETIC_ALGORITHM = {METAPHONE|SOUNDEX}
```

Most phonetic algorithms were developed for use with the English language. Therefore, applying the rules to words in other languages may not give a meaningful result.

Metaphone is suitable for use with most English words, not just names. Metaphone algorithms are the basis for many popular spell checkers.

i Note: Metaphone is not optimized in generated SQL. Therefore, if you need to optimize the request for an SQL DBMS, the SOUNDEX setting should be used.

Soundex is a legacy phonetic algorithm for indexing names by sound, as pronounced in English.

Return a Phonetic Key

```
PHONETIC(string)
```

where:

string

Alphanumeric

Is a string for which to create the key. A null value will be returned on failure.

Generating a Phonetic Key

The following request changes the spelling of the last name for MARY SMITH to SMYTHE and generates a phonetic key for each last name.

```
DEFINE FILE EMPLOYEE
  LAST_NAME2/A16 = IF LAST_NAME EQ 'SMITH' AND FIRST_NAME EQ 'MARY' THEN
    'SMYTHE' ELSE LAST_NAME;
  PKEY/A10 = PHONETIC(LAST_NAME2);
END
TABLE FILE EMPLOYEE
PRINT FIRST_NAME LAST_NAME2
  BY PKEY
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
  GRID=OFF,$
  ENDSTYLE
END
```

The output is shown in the following image. Note that the two spellings for SMITH are assigned the same index number.

<u>PKEY</u>	<u>FIRST NAME</u>	<u>LAST NAME2</u>
B423	ROSEMARIE	BLACKWOOD
B552	JOHN	BANNING
C620	BARBARA	CROSS
G652	MARY	GREENSPAN
I615	JOAN	IRVING
J520	DIANE	JONES
M200	JOHN	MCCOY
M252	ROGER	MCKNIGHT
R552	ANTHONY	ROMANS
S315	ALFRED	STEVENS
S530	MARY	SMYTHE
	RICHARD	SMITH

PHONETIC generates a phonetic key for LAST_NAME:

```
PHONETIC(LAST_NAME)
```

For last names SMITH and SMYTHE, the same phonetic key, S530, is generated.

TO_INTEGER: Converting a Character String to an Integer Value

TO_INTEGER converts a character string that contains a valid number consisting of digits and an optional decimal point to an integer value. If the value contains a decimal point, the value after the decimal point is truncated. If the value does not represent a valid number, zero (0) is returned.

Convert a Character String to an Integer

```
TO_INTEGER(string)
```

where:

string

Is a character string enclosed in single quotation marks or a character field that represents a number containing digits and an optional decimal point.

Converting a Character String to an Integer Value

The following request converts character strings to integers. Digits following the decimal point are truncated.

```
DEFINE FILE WF_RETAIL_LITE
INT1/I8 = TO_INTEGER('56.78');
INT2/I8 = TO_INTEGER('.5678');
INT3/I8 = TO_INTEGER('5678');
END
TABLE FILE WF_RETAIL_LITE
PRINT INT1 INT2 INT3
BY BUSINESS_REGION AS Region
WHERE READLIMIT EQ 1
```

```
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Region</u>	<u>INT1</u>	<u>INT2</u>	<u>INT3</u>
EMEA	56	0	5678

TO_INTEGER converts the character string '56.78' to an integer.

```
TO_INTEGER('56.78')
```

The result is 56.

TO_NUMBER: Converting a Character String to a Numeric Value

TO_NUMBER converts a character string that contains a valid number consisting of digits and an optional decimal point to the numeric format most appropriate to the context. If the value does not represent a valid number, zero (0) is returned.

Convert a Character String to a Number

```
TO_NUMBER(string)
```

where:

string

Is a character string enclosed in single quotation marks or a character field that represents a number containing digits and an optional decimal point. This string will be

converted to a double-precision floating point number.

Converting a Character String to a Number

The following request converts character strings to double-precision floating point numbers.

```
DEFINE FILE WF_RETAIL_LITE
NUM1/D12.1 = TO_NUMBER('56.78');
NUM2/D12.2 = TO_NUMBER('0.5678');
END
TABLE FILE WF_RETAIL_LITE
PRINT NUM1 NUM2
BY BUSINESS_REGION AS Region
WHERE READLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Region</u>	<u>NUM1</u>	<u>NUM2</u>
EMEA	56.8	.57

TO_NUMBER converts the string '56.78' to a number with one decimal place.

```
TO_NUMBER('56.78')
```

The result is 56.8.

Format Conversion Functions

Format conversion functions convert fields from one format to another.

For information on field formats see the *Describing Data With ibi™ WebFOCUS® Language* manual.

For many functions, the *output* argument can be supplied either as a field name or as a format enclosed in single quotation marks. However, if a function is called from a Dialogue Manager command, this argument must always be supplied as a format, and if a function is called from a Maintain Data procedure, this argument must always be supplied as a field name.

ATODBL: Converting an Alphanumeric String to Double-Precision Format

Available Languages: reporting, Maintain

The ATODBL function converts a number in alphanumeric format to decimal (double-precision) format.

Convert an Alphanumeric String to Double-Precision Format

```
ATODBL(source_string, length, output)
```

where:

source_string

Alphanumeric

Is the string consisting of digits and, optionally, one sign and one decimal point to be converted, or a field or variable that contains the string.

length

Alphanumeric

Is the two-character length of the source string in bytes. This can be a numeric constant, or a field or variable that contains the value. If you specify a numeric constant, enclose it in single quotation marks, for example '12'.

output

Double precision floating-point

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Converting an Alphanumeric Field to Double-Precision Format

ATODBL converts EMP_ID into double-precision format.

```
ATODBL(EMP_ID, '09', 'D12.2')
```

For 112847612, the result is 112,847,612.00.

For 117593129, the result is 117,593,129.00.

ATODBL converts the EMP_ID field into double-precision format and stores the result in D_EMP_ID:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND FIRST_NAME AND
EMP_ID AND
COMPUTE D_EMP_ID/D12.2 = ATODBL(EMP_ID, '09', D_EMP_ID);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

<u>LAST_NAME</u>	<u>FIRST_NAME</u>	<u>EMP_ID</u>	<u>D_EMP_ID</u>
SMITH	MARY	112847612	112,847,612.00
JONES	DIANE	117593129	117,593,129.00
MCCOY	JOHN	219984371	219,984,371.00
BLACKWOOD	ROSEMARIE	326179357	326,179,357.00
GREENSPAN	MARY	543729165	543,729,165.00
CROSS	BARBARA	818692173	818,692,173.00

EDIT: Converting the Format of a Field

Available Languages: reporting

The EDIT function converts an alphanumeric field that contains numeric characters to numeric format or converts a numeric field to alphanumeric format.

This function is useful for manipulating a field in an expression that performs an operation that requires operands in a particular format.

When EDIT assigns a converted value to a new field, the format of the new field must correspond to the format of the returned value. For example, if EDIT converts a numeric field to an alphanumeric format, you must give the new field an alphanumeric format:

```
DEFINE ALPHAPRICE/A6 = EDIT(PRICE);
```

EDIT deals with a symbol in the following way:

- When an alphanumeric field is converted to numeric format, a sign or decimal point in the field is stored as part of the numeric value.
Any other non-numeric characters are invalid, and EDIT returns the value zero.
- When converting a floating-point or packed-decimal field to alphanumeric format, EDIT removes the sign, the decimal point, and any number to the right of the decimal point. It then right-justifies the remaining digits and adds leading zeros to achieve the specified field length. Converting a number with more than nine significant digits in floating-point or packed-decimal format may produce an incorrect result.

EDIT also extracts characters from or add characters to an alphanumeric string. For more information, see [EDIT: Extracting or Adding Characters](#).

Convert the Format of a Field

```
EDIT(fieldname);
```

where:

fieldname

Alphanumeric or Numeric

Is the field name.

Converting From Numeric to Alphanumeric Format

EDIT converts HIRE_DATE (a legacy date format) to alphanumeric format.

```
EDIT(HIRE_DATE)
```

For 82/04/01, the result is 820401.

For 81/11/02, the result is 811102.

EDIT converts HIRE_DATE (a legacy date format) to an alphanumeric format. CHGDAT is then able to use the field, which it expects in alphanumeric format:

```
TABLE FILE EMPLOYEE
PRINT HIRE_DATE AND COMPUTE
ALPHA_HIRE/A17 = EDIT(HIRE_DATE); NOPRINT AND COMPUTE
HIRE_MDY/A17 = CHGDAT('YMD', 'MDYYX', ALPHA_HIRE, 'A17');
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	HIRE_MDY
-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	82/04/01	APRIL 01 1982
CROSS	BARBARA	81/11/02	NOVEMBER 02 1981
GREENSPAN	MARY	82/04/01	APRIL 01 1982
JONES	DIANE	82/05/01	MAY 01 1982

MCCOY	JOHN	81/07/01	JULY 01 1981
SMITH	MARY	81/07/01	JULY 01 1981

FPRINT: Converting Fields to Alphanumeric Format

The FPRINT function converts any type of field except for a text field to its alphanumeric equivalent for display. The alphanumeric representation will include any display options that are specified in the format of the original field.

Available Languages: reporting

Convert Fields Using FPRINT

```
FPRINT(in_value, 'usageformat', output)
```

where:

in_value

Any format except TX

Is the value to be converted.

usageformat

Alphanumeric

Is the usage format of the value to be converted, including display options. The format must be enclosed in single quotation marks.

output

Alphanumeric

Is the name of the output field or its format enclosed in single quotation marks.

The output format must be long enough to hold the converted number itself, with a sign and decimal point, plus any additional characters generated by display options, such as commas, a currency symbol, or a percent sign.

For example, the D12.2 format is converted to A14 because it outputs two decimal digits, a decimal point, a possible minus sign, up to eight integer digits, and two commas. If the output format is not large enough, excess right-hand characters may be truncated.

Usage Notes for the FPRINT Function

- The USAGE format must match the actual data in the field.
- The output of FPRINT for numeric values is right-justified within the area required for the maximum number of characters corresponding to the supplied format. This ensures that all possible values are aligned vertically along the decimal point or units digit.
- By default, the column title is left justified for alphanumeric fields. To right justify the column title, use the /R reformatting option for the field.
- Maintain Data does not support the FPRINT function. However, you can do the same type of conversion in Maintain Data using the COMPUTE command.

Converting a Numeric Field to Alphanumeric Format

FPRINT converts CURR_SAL (format D12.2)M to a column with format A15:

```
FPRINT(CURR_SAL, 'D12.2M', 'A15')
```

Converting Numeric Fields to Alphanumeric Format

The following request against the EMPLOYEE data source uses FPRINT to convert the CURR_SAL, ED_HRS, and BANK_ACCT fields to alphanumeric for display on the report output. Then, the STRREP function replaces the blanks in the alphanumeric representation of CURR_SAL with asterisks. CURR_SAL has format D12.2M, so the alphanumeric representation has format A15. The ED_HRS field has format F6.2, so the alphanumeric

representation has format A6. The BANK_ACCT field has format I9S, so the alphanumeric representation has format A9. The alphanumeric representations of the numeric fields are right-justified. The /R options in the PRINT command cause the column titles to be right-justified over the values:

```
DEFINE FILE EMPLOYEE
  ASAL/A15 = FPRINT(CURR_SAL, 'D12.2M', ASAL);
  ASAL/A15 = STRREP(15, ASAL, 1, ' ', 1, '*', 15, ASAL);
  AED/A6 = FPRINT(ED_HRS, 'F6.2', AED);
  ABANK/A9 = FPRINT(BANK_ACCT, 'I9S', ABANK);
END
TABLE FILE EMPLOYEE
PRINT CURR_SAL ASAL
ED_HRS AED/R
BANK_ACCT ABANK/R
WHERE BANK_NAME NE ' '
ON TABLE SET PAGE NOPAGE
END
```

The output is:

CURR_SAL	ASAL	ED_HRS	AED	BANK_ACCT	ABANK
-----	-----	-----	-----	-----	-----
\$18,480.00	*****\$18,480.00	50.00	50.00	40950036	40950036
\$29,700.00	*****\$29,700.00	.00	.00	160633	160633
\$26,862.00	*****\$26,862.00	30.00	30.00	819000702	819000702
\$21,780.00	*****\$21,780.00	75.00	75.00	122850108	122850108
\$16,100.00	*****\$16,100.00	50.00	50.00	136500120	136500120
\$27,062.00	*****\$27,062.00	45.00	45.00	163800144	163800144

Converting Alphanumeric and Numeric Date Fields to Alphanumeric Format

The following request against the EMPLOYEE data source converts the HIRE_DATE field to alphanumeric format. It also creates an alphanumeric date field named ADATE and converts it to its alphanumeric representation. The HIRE_DATE field has format I6YMD and the ADATE field has format A6YMD, so the alphanumeric representations have format A8 to account for the slashes between the date components. The /R option right-justifies the column titles over the field values:

```

DEFINE FILE EMPLOYEE
  AHDATE/A8 = FPRINT(HIRE_DATE,'I6YMD', AHDATE);
  ADATE/A6YMD = EDIT(HIRE_DATE);
  AADATE/A8 = FPRINT(ADATE,'A6YMD', AADATE);
END
TABLE FILE EMPLOYEE
  PRINT HIRE_DATE AHDATE/R
  ADATE AADATE/R
ON TABLE SET PAGE NOPAGE
END

```

The output is:

HIRE_DATE	AHDATE	ADATE	AADATE
-----	-----	-----	-----
80/06/02	80/06/02	80/06/02	80/06/02
81/07/01	81/07/01	81/07/01	81/07/01
82/05/01	82/05/01	82/05/01	82/05/01
82/01/04	82/01/04	82/01/04	82/01/04
82/08/01	82/08/01	82/08/01	82/08/01
82/01/04	82/01/04	82/01/04	82/01/04
82/07/01	82/07/01	82/07/01	82/07/01
81/07/01	81/07/01	81/07/01	81/07/01
82/04/01	82/04/01	82/04/01	82/04/01
82/02/02	82/02/02	82/02/02	82/02/02
82/04/01	82/04/01	82/04/01	82/04/01
81/11/02	81/11/02	81/11/02	81/11/02

Converting a Date Field to Alphanumeric Format

The following request against the VIDEOTRK data source converts the TRANSDATE (YMD) field to alphanumeric format. The alphanumeric representation has format A8 to account for the slashes between the date components:

```

DEFINE FILE VIDEOTRK
  ALPHA_DATE/A8 = FPRINT(TRANSDATE,'YMD', ALPHA_DATE);
END
TABLE FILE VIDEOTRK
  PRINT TRANSDATE ALPHA_DATE
  WHERE TRANSDATE LE '91/06/20'
ON TABLE SET PAGE NOPAGE
END

```

The output is:

TRANSDATE	ALPHA_DATE
-----	-----
91/06/19	91/06/19
91/06/17	91/06/17
91/06/20	91/06/20
91/06/19	91/06/19
91/06/18	91/06/18
91/06/17	91/06/17
91/06/17	91/06/17
91/06/17	91/06/17
91/06/20	91/06/20
91/06/19	91/06/19
91/06/18	91/06/18
91/06/19	91/06/19
91/06/18	91/06/18
91/06/20	91/06/20
91/06/18	91/06/18
91/06/20	91/06/20
91/06/19	91/06/19
91/06/17	91/06/17

Converting a Date-Time Field to Alphanumeric Format and Creating a HOLD File

The following request against the VIDEOTR2 data source converts the TRANSDATE (HYYYMDI) field to alphanumeric format. The alphanumeric representation has format A16 to account for a four-digit year, two-digit month, two-digit day, two slashes between the date components, a space between the date and time, a two-digit hour, a colon between the hour and minute components, and a two-digit minute:

```

DEFINE FILE VIDEOTR2
DATE/I4 = HPART(TRANSDATE, 'YEAR', 'I4');
ALPHA_DATE/A16 = FPRINT(TRANSDATE, 'HYYYMDI', ALPHA_DATE);
END
TABLE FILE VIDEOTR2
PRINT TRANSDATE ALPHA_DATE/R
WHERE DATE EQ '1991'
ON TABLE SET PAGE NOPAGE
END

```

The output is:

TRANSDATE	ALPHA_DATE
-----	-----
1991/06/27 02:45	1991/06/27 02:45
1991/06/20 05:15	1991/06/20 05:15
1991/06/21 07:11	1991/06/21 07:11
1991/06/21 01:10	1991/06/21 01:10
1991/06/19 07:18	1991/06/19 07:18
1991/06/19 04:11	1991/06/19 04:11
1991/06/25 01:19	1991/06/25 01:19
1991/06/24 04:43	1991/06/24 04:43
1991/06/24 02:08	1991/06/24 02:08
1991/06/25 01:17	1991/06/25 01:17
1991/06/27 01:17	1991/06/27 01:17
1991/11/17 11:28	1991/11/17 11:28
1991/06/24 10:27	1991/06/24 10:27

If you hold the output in a comma-delimited or other alphanumeric output file, you can see that while the original field propagates only the numeric representation of the value, the converted field propagates the display options as well:

```

DEFINE FILE VIDEOTR2
DATE/I4 = HPART(TRANSDATE, 'YEAR', 'I4');
ALPHA_DATE/A16 = FPRINT(TRANSDATE, 'HYMDI', ALPHA_DATE);
END
TABLE FILE VIDEOTR2
PRINT TRANSDATE ALPHA_DATE/R
WHERE DATE EQ '1991'
ON TABLE HOLD FORMAT COMMA
END

```

The HOLD file follows. The first field represents the original data, and the second field contains the converted values with display options:

```

"19910627024500000","1991/06/27 02:45"
"19910620051500000","1991/06/20 05:15"
"19910621071100000","1991/06/21 07:11"
"19910621011000000","1991/06/21 01:10"
"19910619071800000","1991/06/19 07:18"
"19910619041100000","1991/06/19 04:11"
"19910625011900000","1991/06/25 01:19"
"19910624044300000","1991/06/24 04:43"
"19910624020800000","1991/06/24 02:08"

```

```
"19910625011700000", "1991/06/25 01:17"
"19910627011700000", "1991/06/27 01:17"
"19911117112800000", "1991/11/17 11:28"
"19910624102700000", "1991/06/24 10:27"
```

FTOA: Converting a Number to Alphanumeric Format

Available Languages: reporting, Maintain

The FTOA function converts a number up to 16 digits long from numeric format to alphanumeric format. It retains the decimal positions of the number and right-justifies it with leading spaces. You can also add edit options to a number converted by FTOA.

When using FTOA to convert a number containing decimals to a character string, you must specify an alphanumeric format large enough to accommodate both the integer and decimal portions of the number. For example, a D12.2 format is converted to A14. If the output format is not large enough, decimals are truncated.

Convert a Number to Alphanumeric Format

```
FTOA(number, '(format)', output)
```

where:

number

Numeric F or D (single and double precision floating-point)

Is the number to be converted, or the name of the field that contains the number.

format

Alphanumeric

Is the format of the number to be converted enclosed in parentheses. Only floating point single-precision and double-precision formats are supported. Include any edit

options that you want to appear in the output. The D (floating-point double-precision) format automatically supplies commas.

If you use a field name for this argument, specify the name without quotation marks or parentheses. If you specify a format, the format must be enclosed in single quotation marks and parentheses.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The length of this argument must be greater than the length of *number* and must account for edit options and a possible negative sign.

Converting From Numeric to Alphanumeric Format

FTOA converts GROSS from floating point double-precision to alphanumeric format.

```
FTOA(GROSS, '(D12.2)', 'A15')
```

For \$1,815.00, the result is 1,815.00.

For \$2,255.00, the result is 2,255.00.

FTOA converts the GROSS field from floating point double-precision to alphanumeric format and stores the result in ALPHA_GROSS:

```
TABLE FILE EMPLOYEE
PRINT GROSS AND COMPUTE
ALPHA_GROSS/A15 = FTOA(GROSS, '(D12.2)', ALPHA_GROSS);
BY HIGHEST 1 PAY_DATE NOPRINT
BY LAST_NAME
WHERE (GROSS GT 800) AND (GROSS LT 2300);
END
```

The output is:

LAST_NAME	GROSS	ALPHA_GROSS
-----	-----	-----
BLACKWOOD	\$1,815.00	1,815.00
CROSS	\$2,255.00	2,255.00

IRVING	\$2,238.50	2,238.50
JONES	\$1,540.00	1,540.00
MCKNIGHT	\$1,342.00	1,342.00
ROMANS	\$1,760.00	1,760.00
SMITH	\$1,100.00	1,100.00
STEVENS	\$916.67	916.67

HEXBYT: Converting a Decimal Integer to a Character

Available Languages: reporting, Maintain

The HEXBYT function obtains the ASCII, EBCDIC, or Unicode character equivalent of a decimal integer, depending on your configuration and operating environment. The decimal value you specify must be the value associated with the character on the configured code page. HEXBYT returns a single alphanumeric character in the ASCII, EBCDIC, or Unicode character set. You can use this function to produce characters that are not on your keyboard, similar to the CTRAN function.

In Unicode configurations, this function uses values in the range:

- 0 to 255 for 1-byte characters.
- 256 to 65535 for 2-byte characters.
- 65536 to 16777215 for 3-byte characters.
- 16777216 to 4294967295 for 4-byte characters (primarily for EBCDIC).

The display of special characters depends on your software and hardware; not all special characters may appear. For printable ASCII and EBCDIC characters and their integer equivalents see the [Character Chart for ASCII and EBCDIC](#).

Convert a Decimal Integer to a Character

```
HEXBYT(decimal_value, output)
```

where:

decimal_value

Integer

Is the decimal integer to be converted to a single character. In non-Unicode environments, a value greater than 255 is treated as the remainder of *decimal_value* divided by 256. The decimal value you specify must be the value associated with the character on the configured code page.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks (').

Converting a Decimal Integer to a Character in ASCII and Unicode

The following request uses HEXBYT to convert the decimal integer value 130 to the comma character on ASCII code page 1252. The comma is then concatenated between LAST_NAME and FIRST_NAME to create the NAME field:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND
COMPUTE COMMA1/A1 = HEXBYT(130, COMMA1); NOPRINT
COMPUTE NAME/A40 = LAST_NAME || COMMA1| ' '| FIRST_NAME;
BY LAST_NAME NOPRINT
BY FIRST_NAME
WHERE DEPARTMENT EQ 'MIS';
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>FIRST_NAME</u>	<u>LAST_NAME</u>	<u>NAME</u>
ROSEMARIE	BLACKWOOD	BLACKWOOD, ROSEMARIE
BARBARA	CROSS	CROSS, BARBARA
MARY	GREENSPAN	GREENSPAN, MARY
DIANE	JONES	JONES, DIANE
JOHN	MCCOY	MCCOY, JOHN
MARY	SMITH	SMITH, MARY

To produce the same output in a Unicode environment configured for code page 65001, replace the COMPUTE command for the field COMMA1 with the following syntax, in which the call to HEXBYT converts the integer value 14844058 to the comma character:

```
COMPUTE COMMA1/A1 = HEXBYT(14844058, COMMA1); NOPRINT
```

Converting a Decimal Integer to a Character

HEXBYT converts LAST_INIT_CODE to its character equivalent and stores the result in a column with the format A1.

```
HEXBYT(LAST_INIT_CODE, 'A1')
```

On an ASCII platform, for 83, the result is S.

On the ASCII platform, for 74, the result is J.

HEXBYT converts LAST_INIT_CODE to its character equivalent and stores the result in LAST_INIT:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME AND
COMPUTE LAST_INIT_CODE/I3 = BYTVAL(LAST_NAME, 'I3');
COMPUTE LAST_INIT/A1 = HEXBYT(LAST_INIT_CODE, LAST_INIT);
WHERE DEPARTMENT EQ 'MIS';
END
```

The output for an ASCII platform is:

```
LAST_NAME LAST_INIT_CODE LAST_INIT
-----
```

SMITH	83 S
JONES	74 J
MCCOY	77 M
BLACKWOOD	66 B
GREENSPAN	71 G
CROSS	67 C

The output for an EBCDIC platform is:

LAST_NAME	LAST_INIT_CODE	LAST_INIT
-----	-----	-----
SMITH	226 S	
JONES	209 J	
MCCOY	212 M	
BLACKWOOD	194 B	
GREENSPAN	199 G	
CROSS	195 C	

ITONUM: Converting a Large Binary IntegerNumber to Double-Precision Format

Available Languages: reporting, Maintain

The ITONUM function converts a large binary integernumber in a non-FOCUS data source from a special long integer to double-precision format.

This is useful for some programming languages and some non-FOCUS data storage systems that use special long integers, which do not fit the regular integer format (four bytes in length) supported in the synonym, and, therefore, require conversion to double-precision format.

Some programming languages and some non-FOCUS data storage systems use large binary integer formats. However, large binary integers (more than 4 bytes in length) are not supported in the Master File so they require conversion to double-precision format.

You must specify how many of the right-most bytes in the input field are significant. The result is an 8-byte double-precision field.

Convert a Large Binary Integer to Double-Precision Format

```
ITONUM(maxbytes, infield, output)
```

where:

maxbytes

Numeric

Is the maximum number of bytes in the 8-byte binary input field that have significant numeric data, including the binary sign. Valid values are:

5 ignores the left-most 3 bytes.

6 ignores the left-most 2 bytes.

7 ignores the left-most byte.

infield

A8

Is the field that contains the binary number. Both the USAGE and ACTUAL formats of the field must be A8.

output

Double precision floating-point (*Dn*)

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be *Dn*.

Converting a Large Binary Integer to Double-Precision Format

ITONUM converts BINARYFLD to double-precision format.

```
ITONUM(6, BINARYFLD, 'D14')
```

Suppose a binary number in an external file has the following COBOL format:

```
PIC 9(8)V9(4) COMP
```

It is defined in the EUROCAR Master File as a field named BINARYFLD. Its field formats are USAGE=A8 and ACTUAL=A8, since its length is greater than 4 bytes.

The following request converts the field to double-precision format:

```
DEFINE FILE EUROCAR
MYFLD/D14 = ITONUM(6, BINARYFLD, MYFLD);
END
TABLE FILE EUROCAR
PRINT MYFLD BY CAR
END
```

ITOPACK: Converting a Large Binary Integer to Packed-Decimal Format

Available Languages: reporting, Maintain

The ITOPACK function converts a large binary integer in a non-FOCUS data source to a packed-decimal format.

This is useful for some programming languages and some non-FOCUS data storage systems that use special long integers, which do not fit the regular integer format (four bytes in length) supported in the synonym, and, therefore, require conversion to packed-decimal format.

Some programming languages and some non-FOCUS data storage systems use double-word binary integer formats. These are similar to the single-word binary integers used by FOCUS, but they allow larger numbers. However, large binary integers (more than 4 bytes in length) are not supported in the Master File so they require conversion to packed-decimal format.

You must specify how many of the right-most bytes in the input field are significant. The result is an 8-byte packed-decimal field of up to 15 significant numeric positions (for example, P15 or P16.2).

Limit: For a field defined as 'PIC 9(15) COMP' or the equivalent (15 significant digits), the maximum number that can be converted is 167,744,242,712,576.

Convert a Large Binary Integer to Packed-Decimal Format

```
ITOPACK(maxbytes, infield, output)
```

where:

maxbytes

Numeric

Is the maximum number of bytes in the 8-byte binary input field that have significant numeric data, including the binary sign.

Valid values are:

- **5** ignores the left-most 3 bytes (up to 11 significant positions).
- **6** ignores the left-most 2 bytes (up to 14 significant positions).
- **7** ignores the left-most byte (up to 15 significant positions).

infield

A8

Is the field that contains the binary number. Both the USAGE and ACTUAL formats of the field must be A8.

output

Numeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The format must be *Pn* or *Pn.d*.

Converting a Large Binary Integer to Packed-Decimal Format

ITOPACK converts BINARYFLD to a packed-decimal format.

```
ITOPACK(6, BINARYFLD, 'P14.4')
```

Suppose a binary number in an external file has the following COBOL format:

```
PIC 9(8)V9(4) COMP
```

It is defined in the EUROCAR Master File as a field named BINARYFLD. Its field formats are USAGE=A8 and ACTUAL=A8, since its length is greater than 4 bytes.

The following request converts the field to packed-decimal format:

```
DEFINE FILE EUROCAR
PACKFLD/P14.4 = ITOPACK(6, BINARYFLD, PACKFLD);
END
TABLE FILE EUROCAR
PRINT PACKFLD BY CAR
END
```

IT0Z: Converting a Number to Zoned Format

Available Languages: reporting, Maintain

The IT0Z function converts a number in numeric format to a zoned-decimal format. Although a request cannot process zoned numbers, it can write zoned fields to an extract file for use by an external program.

Convert a Number to Zoned Format

```
IT0Z(length, in_value, output)
```

where:

length

Integer

Is the length of *in_value* in bytes. The maximum number of bytes is 15. The last byte includes the sign.

in_value

Numeric

Is the number to be converted, or the field that contains the number. The number is truncated to an integer before it is converted.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Converting a Number to Zoned Format

ITOEZ converts CURR_SAL to zoned format.

```
ITOEZ(8, CURR_SAL, 'A8')
```

The following request creates an extract file containing employee IDs and salaries in zoned format for a COBOL program:

```
DEFINE FILE EMPLOYEE
ZONE_SAL/A8 = ITOEZ(8, CURR_SAL, ZONE_SAL);
END
```

```
TABLE FILE EMPLOYEE
PRINT CURR_SAL ZONE_SAL BY EMP_ID
ON TABLE SAVE AS SALARIES
END
```

The resulting extract file is:

```
NUMBER OF RECORDS IN TABLE= 12 LINES= 12
```

ALPHANUMERIC FIELDNAME	RECORD	NAMED	SALARIES ALIAS	FORMAT	LENGTH
EMP_ID			EID	A9	9

CURR_SAL	CSAL	D12.2M	12
ZONE_SAL		A8	8
TOTAL			29

PCKOUT: Writing a Packed Number of Variable Length

Available Languages: reporting, Maintain

The PCKOUT function writes a packed-decimal number of variable length to an extract file. When a request saves a packed number to an extract file, it typically writes it as an 8- or 16-byte field regardless of its format specification. With PCKOUT, you can vary the field's length between 1 to 16 bytes.

Write a Packed Number of Variable Length

```
PCKOUT(in_value, length, output)
```

where:

in_value

Numeric

Is the input value field that contains the values. It can be in packed, integer, single- or double-precision floating point format. If it is not in integer format, it is rounded to the nearest whole number.

length

Numeric

Is the length of the output value, from 1 to 16 bytes.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The function returns the field as alphanumeric although it contains packed data.

Writing a Packed Number of Variable Length

PCKOUT converts CURR_SAL to a five-byte packed format.

```
PCKOUT(CURR_SAL, 5, 'A5')
```

PCKOUT converts the CURR_SAL field to a 5-byte packed field and stores the result in SHORT_SAL:

```
DEFINE FILE EMPLOYEE
SHORT_SAL/A5 = PCKOUT(CURR_SAL, 5, SHORT_SAL);
END
TABLE FILE EMPLOYEE
PRINT LAST_NAME SHORT_SAL HIRE_DATE
ON TABLE SAVE
END
```

The resulting extract file is:

NUMBER OF RECORDS IN TABLE=	12	LINES=	12
ALPHANUMERIC	RECORD	NAMED	SAVE
FIELDNAME		ALIAS	FORMAT
LAST_NAME		LN	A15
SHORT_SAL			A5
HIRE_DATE		HDT	I6YMD
TOTAL			26

PTOA: Converting a Packed-Decimal Number to Alphanumeric Format

Available Languages: reporting, Maintain

The PTOA function converts a packed-decimal number from numeric format to an alphanumeric format. It retains the decimal positions of the number and right-justifies it with leading spaces. You can also add edit options to a number converted by PTOA.

When using PTOA to convert a number containing decimals to a character string, you must specify an alphanumeric format large enough to accommodate both the integer and decimal portions of the number. For example, a P12.2C format is converted to A14. If the output format is not large enough, the right-most characters are truncated.

Convert a Packed-Decimal Number to Alphanumeric Format

```
PTOA(number, '(format)', output)
```

where:

number

Numeric P (packed-decimal) or F or D (single and double precision floating-point)

Is the number to be converted, or the name of the field that contains the number.

format

Alphanumeric

Is the format of the number enclosed in both single quotation marks and parentheses.

Only packed-decimal format is supported. Include any edit options that you want to display in the output.

The format value does not require the same length or number of decimal places as the original field. If you change the number of decimal places, the result is rounded. If you make the length too short to hold the integer portion of the number, asterisks appear instead of the number.

If you use a field name for this argument, specify the name without quotation marks or parentheses. However, parentheses must be included around the format stored in this field. For example:

```
FMT/A10 = '(P12.2C)';
```

You can then use this field as the format argument when using the function in your request:

```
COMPUTE ALPHA_GROSS/A20 = PTOA(PGROSS, FMT, ALPHA_GROSS);
```

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The length of this argument must be greater than the length of *number* and must account for edit options and a possible negative sign.

Converting From Packed to Alphanumeric Format

PTOA converts PGROSS from packed-decimal to alphanumeric format.

```
PTOA(PGROSS, FMT, 'A17')
```

PTOA is called twice to convert the PGROSS field from packed-decimal to alphanumeric format. The format specified in the first call to the function is stored in a virtual field named FMT. The format specified in the second call to the function does not include decimal places, so the value is rounded when it appears:

```
DEFINE FILE EMPLOYEE
  PGROSS/P18.2=GROSS;
  FMT/A10='(P14.2C)';
  END
  TABLE FILE EMPLOYEE PRINT PGROSS NOPRINT
  COMPUTE AGROSS/A17 = PTOA(PGROSS, FMT, AGROSS); AS ''
  COMPUTE BGROSS/A37 = '<- THIS AMOUNT IS' |
                        PTOA(PGROSS, '(P5C)', 'A6') |
                        ' WHEN ROUNDED'; AS '' IN +1
  BY HIGHEST 1 PAY_DATE NOPRINT
  BY LAST_NAME NOPRINT
  END
```

The output is:

```

2,475.00 <- THIS AMOUNT IS 2,475 WHEN ROUNDED
1,815.00 <- THIS AMOUNT IS 1,815 WHEN ROUNDED
2,255.00 <- THIS AMOUNT IS 2,255 WHEN ROUNDED
  750.00 <- THIS AMOUNT IS   750 WHEN ROUNDED
2,238.50 <- THIS AMOUNT IS 2,239 WHEN ROUNDED
1,540.00 <- THIS AMOUNT IS 1,540 WHEN ROUNDED
1,540.00 <- THIS AMOUNT IS 1,540 WHEN ROUNDED
1,342.00 <- THIS AMOUNT IS 1,342 WHEN ROUNDED
1,760.00 <- THIS AMOUNT IS 1,760 WHEN ROUNDED
1,100.00 <- THIS AMOUNT IS 1,100 WHEN ROUNDED
  791.67 <- THIS AMOUNT IS   792 WHEN ROUNDED
   916.67 <- THIS AMOUNT IS   917 WHEN ROUNDED

```

TSTOPACK: Converting an MSSQL or Sybase Timestamp Column to Packed Decimal

This function applies to the Microsoft SQL Server and Sybase adapters only.

Microsoft SQL Server and Sybase have a data type called `TIMESTAMP`. Rather than containing an actual timestamp, columns with this data type contain a number that is incremented for each record inserted or updated in the data source. This timestamp comes from a common area, so no two tables in the database have the same timestamp column value. The value is stored in `Binary(8)` or `Varbinary(8)` format in the table, but is returned as a double wide alphanumeric column (`A16`). You can use the `TSTOPACK` function to convert the timestamp value to a packed decimal.

Convert an MSSQL or Sybase Timestamp Column to Packed Decimal

```
TSTOPACK(tscol, output);
```

where:

tscol

A16

Is the timestamp column to be converted.

output

P21

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks (').

Converting a Microsoft SQL Server Timestamp Column to Packed Decimal

The following CREATE TABLE command creates a SQL Server table name TSTEST that contains an integer counter column named I and a timestamp column named TS:

```
SQL SQLMSS
  CREATE TABLE TSTEST (I INT, TS timestamp) ;
END
```

The Master File for the TSTEST data source follows. The field TS represents the TIMESTAMP column:

```
FILENAME=TSTEST, SUFFIX=SQLMSS , $
SEGMENT=TSTEST, SEGTYPE=S0, $
  FIELDNAME=I, ALIAS=I, USAGE=I11, ACTUAL=I4,
    MISSING=ON, $
  FIELDNAME=TS, ALIAS=TS, USAGE=A16, ACTUAL=A16, FIELDTYPE=R, $
```

i Note: When you generate a synonym for a table with a TIMESTAMP column, the TIMESTAMP column is created as read only (FIELDTYPE=R).

TSTOPACK converts the timestamp column TS to packed decimal:

```
DEFINE FILE TSTEST
  TSNUM/P21=TSTOPACK(TS, 'P21');
END
```

```
TABLE FILE TEST64
PRINT I TS TSNUM
END
```

```
TSNUM/P21=TSTOPACK(TS, 'P21');
```

The output is:

I	TS	TSNUM
1	00000000000007815	30741
2	00000000000007816	30742
3	00000000000007817	30743
4	00000000000007818	30744
5	00000000000007819	30745
6	0000000000000781A	30746
7	0000000000000781B	30747
8	0000000000000781C	30748
9	0000000000000781D	30749
10	0000000000000781E	30750

For 00000000000007815, the result is 30741.

For 00000000000007816, the result is 30742.

UFMT: Converting an Alphanumeric String to Hexadecimal

Available Languages: reporting, Maintain

The UFMT function converts characters in an alphanumeric source string to their hexadecimal representation. This function is useful for examining data of unknown format. As long as you know the length of the data, you can examine its content.

Convert an Alphanumeric String to Hexadecimal

```
UFMT(source_string, length, output)
```

where:

source_string

Alphanumeric

Is the alphanumeric string to convert enclosed in single quotation marks ('), or the field that contains the string.

length

Integer

Is the number of characters in *source_string*.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks ('). The format of *output* must be alphanumeric and its length must be twice that of *length*.

Converting an Alphanumeric String to Hexadecimal

UFMT converts each value in JOBCODE to its hexadecimal representation and stores it in a column with the format A6.

```
UFMT(JOBCODE, 3, 'A6')
```

For A01, the result is C1F0F1.

For A02, the result is C1F0F2.

UFMT converts each value in JOBCODE to its hexadecimal representation and stores the result in HEXCODE:

```

DEFINE FILE JOBFIL
HEXCODE/A6 = UFMF(JOBCODE, 3, HEXCODE);
END
TABLE FILE JOBFIL
PRINT JOBCODE HEXCODE
END

```

The output is:

JOBCODE	HEXCODE
-----	-----
A01	C1F0F1
A02	C1F0F2
A07	C1F0F7
A12	C1F1F2
A14	C1F1F4
A15	C1F1F5
A16	C1F1F6
A17	C1F1F7
B01	C2F0F1
B02	C2F0F2
B03	C2F0F3
B04	C2F0F4
B14	C2F1F4

XTPACK: Writing a Packed Number With Up to 31 Significant Digits to an Output File

The XTPACK function stores packed numbers with up to 31 significant digits in an alphanumeric field, retaining decimal data. This permits writing a short or long packed field of any length, 1 to 16 bytes, to an output file.

Store Packed Values in an Alphanumeric Field

```
XTPACK(in_value, outlength, outdec, output)
```

where:

infield

Numeric

Is the packed value.

outlength

Numeric

Is the length of the alphanumeric field that will hold the converted packed field. Can be from 1 to 16.

outdec

Numeric

Is the number of decimal positions for *output*.

output

Alphanumeric

Is the name of the field to contain the result or the format of the field enclosed in single quotation marks.

Writing a Long Packed Number to an Output File

XTPACK converts LONGPCK to alphanumeric so that it can be saved in an output file:

```
XTPACK(LONGPCK,13,2,'A13');
```

The following request creates a long packed decimal field named LONGPCK. ALPHAPCK (format A13) is the result of applying XTPACK to the long packed field. PCT_INC, LONGPCK, and ALPHAPCK are then written to a SAVE file named XTOUT.

```
DEFINE FILE EMPLOYEE
LONGPCK/P25.2 = PCT_INC + 1111111111111111111;
ALPHAPCK/A13 = XTPACK(LONGPCK,13,2,'A13');
END
TABLE FILE EMPLOYEE
PRINT PCT_INC LONGPCK ALPHAPCK
```

```
WHERE PCT_INC GT 0  
      ON TABLE SAVE AS XTOUT  
END
```

The SAVE file has the following fields and formats:

ALPHANUMERIC RECORD NAMED	XTOUT		
FIELDNAME	ALIAS	FORMAT	LENGTH
PCT_INC	PI	F6.2	6
LONGPCK		P25.2	25
ALPHAPCK		A13	13
TOTAL			44
SAVED...			

Maintain-specific Light Update Support Functions

Light update support functions retrieve WebFOCUS parameter or variable data implicitly from within a Maintain Data procedure.

IWC.FindAppCGIValue: Retrieving a WebFOCUS Parameter or Variable Value

The IWC.FindAppCGIValue function retrieves WebFOCUS parameter or variable values by pairing the WebFOCUS parameter or variable name with the Maintain Data variable name to which the value is assigned.



Note: Unlike Maintain variables, WebFOCUS parameters and variables are case-sensitive.

Retrieve a WebFOCUS Parameter or Variable Value

```
IWC.FindAppCGIValue(parm,mnt_var);
```

where:

parm

Is the WebFOCUS parameter or variable whose value you are retrieving. This value is case-sensitive, and must be alphanumeric.

mnt_var

Is the Maintain Data variable that receives the value of the WebFOCUS parameter or variable.

Retrieving a WebFOCUS Variable Value From a Launch Form

IWC.findAppCgiValue retrieves the user name and password from the IBIC_user and IBIC_pass variables, respectively:

```
Maintain
COMPUTE username/A8;
COMPUTE password/A8;
IWC.findAppCgiValue("IBIC_user", username);
IWC.findAppCgiValue("IBIC_pass", password);
```

Retrieving Parameterized Data From Excel

IWC.findAppCgiValue retrieves the values for fields listed in an Excel file:

```
MAINTAIN FILE car
MODULE IMPORT (webbase2 errors);
Case Top
compute xlsRetail_Cost/a0;
Infer car.ORIGIN.COUNTRY car.COMP.CAR car.CARREC.MODEL
car.BODY.BODYTYPE car.BODY.RETAIL_COST into car_stack;
car_stack.FocCount=1;
car_stack.FocIndex=1;
iwc.findAppCgiValue("COUNTRY",car_stack.country);
iwc.findAppCgiValue("CAR",car_stack.car);
iwc.findAppCgiValue("MODEL",car_stack.model);
iwc.findAppCgiValue("BODYTYPE",car_stack.bodytype);
iwc.findAppCgiValue("RETAIL_COST",xlsRetail_Cost);
```

```
car_stack.retail_cost = xlsRetail_Cost;
update car.BODY.RETAIL_COST from car_stack;
EndCase
END
```

IWC.GetAppCGIValue: Importing a WebFOCUS Parameter or Variable

The IWC.GetAppCGIValue function imports the value of a WebFOCUS parameter or variable into a Maintain Data variable. IWC.GetAppCGIValue returns a value from the HTTP request header if the name of the variable or parameter is passed. If the name is not found, the function returns a null value. Therefore, you can check for errors by looking for a null value, then handle the error as needed.

Note: Unlike Maintain variables, WebFOCUS parameters and variables are case-sensitive.

Import a WebFOCUS Parameter

```
Declare mnt_var/type_length = IWC.GetAppCGIValue(parm);
```

where:

mnt_var

Is the Maintain Data variable that receives the ASCII return value of the WebFOCUS parameter or variable. The value should be unescaped before being passed to the Maintain variable.

type_length

Is the selected type and length of the Maintain Data variable.

parm

Is the WebFOCUS parameter or variable to import. This value is case-sensitive, and must be alphanumeric.

Importing a WebFOCUS Parameter

IWC.getAppCGIValue imports the WebFOCUS parameter PRODUCT_ID to Maintain Data:

```
Maintain File GGPRODS
Infer Product_ID into prodstk;
Declare pcode/a4=IWC.getAppCGIValue("PRODUCT_ID");
For 1 next Product_ID into prodstk where Product_ID eq pcode;
```


Simplified Numeric Functions

Numeric functions have been developed that make it easier to understand and enter the required arguments. These functions have streamlined parameter lists, similar to those used by SQL functions. In some cases, these simplified functions provide slightly different functionality than previous versions of similar functions.

The simplified functions do not have an output argument. Each function returns a value that has a specific data type.

When used in a request against a relational data source, these functions are optimized (passed to the RDBMS for processing).

**Note:**

- The simplified numeric functions are supported in Dialogue Manager.
- The simplified numeric functions are not supported in Maintain Data.

ASCII: Returning the ASCII Code for the Leftmost Character in a String

ASCII takes a character string and returns the ASCII code in integer format for the leftmost character in the string.

Return the ASCII Code for the Leftmost Character in a String

```
ASCII(charexp)
```

where:

charexp

Is any character string.

Returning the ASCII Code for the Leftmost Character in a String

In the following request, ASCII returns the ASCII code for the leftmost character in the CATEGORY field.

```
TABLE FILE GGSALES
SUM DOLLARS NOPRINT
AND COMPUTE
ASCII_CODE/I9 = ASCII(CATEGORY);
BY CATEGORY
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Category</u>	<u>ASCII_CODE</u>
Coffee	67
Food	70
Gifts	71

ASCII returns the ASCII code of the leftmost character of CATEGORY.

```
ASCII(CATEGORY)
```

For Coffee, the result is 67.

CEILING: Returning the Smallest Integer Value Greater Than or Equal to a Value

CEILING returns the smallest integer value that is greater than or equal to a number.

Return the Smallest Integer Greater Than or Equal to a Number

```
CEILING(number)
```

where:

number

Numeric

Is the number whose ceiling will be returned. The output data type is the same as the input data type.

Returning the Ceiling of a Number

In the following request, CEILING returns the smallest integer greater than or equal to the GROSS_PROFIT_US value.

```
DEFINE FILE WF_RETAIL_LITE  
CEIL1/D7.2= CEILING(GROSS_PROFIT_US);  
END  
TABLE FILE WF_RETAIL_LITE  
PRINT GROSS_PROFIT_US/D9.2 CEIL1  
ON TABLE SET PAGE NOPAGE  
END
```

CEILING returns the smallest integer larger than the value in GROSS_PROFIT_US:

```
CEILING(GROSS_PROFIT_US)
```

The partial output follows. Note that even though the value returned is an integer, it is returned with the same format as the CEIL1 field (D7.2):

Gross Profit	CEIL1
-----	-----
165.00	165.00
13.99	14.00
60.99	61.00
225.98	226.00
79.99	80.00
44.59	45.00
94.30	95.00
238.50	239.00
199.99	200.00
68.99	69.00
63.58	64.00
129.99	130.00
37.49	38.00
75.99	76.00
13.99	14.00
119.00	119.00
-30.01	-30.00
54.99	55.00
189.98	190.00
44.59	45.00
91.98	92.00
89.00	89.00
59.50	60.00
129.99	130.00
54.00	54.00
109.98	110.00
98.99	99.00
98.99	99.00
99.99	100.00
44.59	45.00

For 225.98, the output is 226.00.

For -30.01, the output is -30.00.

EXPONENT: Raising e to a Power

EXPONENT raises the constant **e** to a power.

Raise the Constant e to a Power

EXPONENT(power)

where:

power

Numeric

Is the power to which to raise **e**. The output data type is numeric.

Raising e to a Power

The following request prints the value of e and the value of e raised to the fifth power.

```
DEFINE FILE WF_RETAIL_LITE
EXP1/D12.5 = EXPONENT(1);
EXP2/D12.5 = EXPONENT(5);
END
TABLE FILE WF_RETAIL_LITE
PRINT EXP1 EXP2
BY BUSINESS_REGION AS Region
WHERE BUSINESS_REGION EQ 'EMEA'
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

Region	EXP1	EXP2
EMEA	2.71828	148.41316

For EXPONENT(1), the value is 2.71828

For EXPONENT(5), the value is 148.41316

FLOOR: Returning the Largest Integer Less Than or Equal to a Value

FLOOR returns the largest integer value that is less than or equal to a number.

Return the Largest Integer Less Than or Equal to a Number

```
FLOOR(number)
```

where:

number

Numeric

Is the number whose floor will be returned. The output data type is the same as the input data type.

Returning the Floor of a Number

In the following request, FLOOR returns the largest integer less than or equal to the GROSS_PROFIT_US value.

```
DEFINE FILE WF_RETAIL_LITE  
FLOOR1/D7.2= FLOOR(GROSS_PROFIT_US);  
END  
TABLE FILE WF_RETAIL_LITE  
PRINT GROSS_PROFIT_US/D9.2 FLOOR1  
ON TABLE SET PAGE NOPAGE  
END
```

FLOOR returns the smallest integer larger than the value in GROSS_PROFIT_US:

```
FLOOR(GROSS_PROFIT_US)
```

Partial output follows. Note that even though the value returned is an integer, it is returned with the same format as the FLOOR1 field (D7.2):

Gross Profit	FLOOR1
-----	-----
165.00	165.00
13.99	13.00
60.99	60.00
225.98	225.00
79.99	79.00
44.59	44.00
94.30	94.00
238.50	238.00
199.99	199.00
68.99	68.00
63.58	63.00
129.99	129.00
37.49	37.00
75.99	75.00
13.99	13.00
119.00	119.00
-30.01	-31.00
54.99	54.00
189.98	189.00
44.59	44.00
91.98	91.00
89.00	89.00
59.50	59.00
129.99	129.00
54.00	54.00
109.98	109.00
98.99	98.00
98.99	98.00
99.99	99.00
44.59	44.00

For 225.98, the output is 225.00.

For -30.01, the output is -31.00.

LOG10: Calculating the Base 10 Logarithm

LOG10 returns the base-10 logarithm of a numeric expression.

Calculate the Base 10 Logarithm

LOG10(num_exp)

where:

num_exp

Numeric

Is the numeric value for which to calculate the base 10 logarithm.

Calculating the Base 10 Logarithm

The following request calculates the base 10 logarithm of current salaries.

```
TABLE FILE EMPLOYEE
PRINT CURR_SAL AND COMPUTE
LOG_CURR_SAL/D12.6 = LOG10(CURR_SAL);
BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>LAST_NAME</u>	<u>FIRST_NAME</u>	<u>CURR_SAL</u>	<u>LOG_CURR_SAL</u>
BANNING	JOHN	\$29,700.00	4.472756
IRVING	JOAN	\$26,862.00	4.429138
MCKNIGHT	ROGER	\$16,100.00	4.206826
ROMANS	ANTHONY	\$21,120.00	4.324694
SMITH	RICHARD	\$9,500.00	3.977724
STEVENS	ALFRED	\$11,000.00	4.041393

LOG10 calculates the base 10 log of NUMBER.

LOG10(NUMBER)

For 145, the result is 2.161.

MOD: Calculating the Remainder From a Division

MOD calculates the remainder from a division. The output data type is the same as the input data type.

Calculate the Remainder From a Division

```
MOD(dividend, divisor)
```

where:

dividend

Numeric

Is the value to divide.



Note: The sign of the returned value will be the same as the sign of the dividend.

divisor

Numeric

Is the value to divide by.

If the divisor is zero (0), the dividend is returned.

Calculating the Remainder From a Division

In the following request, MOD returns the remainder of PRICE_DOLLARS divided by DAYSDELAYED:

```
DEFINE FILE WF_RETAIL_LITE  
MOD1/D7.2= MOD(PRICE_DOLLARS, DAYSDELAYED);  
END
```

```
TABLE FILE WF_RETAIL_LITE
PRINT PRICE_DOLLARS/D7.2 DAYSDELAYED/I5 MOD1
WHERE DAYSDELAYED GT 1
ON TABLE SET PAGE NOPAGE
ON TABLE PCHOLD FORMAT WP
END
```

Partial output follows:

Price Dollars	Days Delayed	MOD1
-----	-----	----
399.00	3	.00
489.99	3	.99
786.50	2	.50
599.99	4	3.99
29.99	4	1.99
169.00	2	1.00
219.99	2	1.99
280.00	3	1.00
79.99	4	3.99
145.99	2	1.99
399.99	3	.99
349.99	3	1.99
169.00	3	1.00

MOD returns the remainder of PRICE_DOLLARS divided by DAYSDELAYED

```
MOD(PRICE_DOLLARS, DAYSDELAYED)
```

For **399.00/3**, the value is zero (0).

for **489.00/3**, the value is .99.

POWER: Raising a Value to a Power

POWER raises a base value to a power.

Raise a Value to a Power

```
POWER(base, power)
```

where:

base

Numeric

Is the value to raise to a power. The output value has the same data type as the base value. If the base value is integer, negative power values will result in truncation.

power

Numeric

Is the power to which to raise the base value.

Raising a Base Value to a Power

In the following request, POWER returns the value COGS_US/20.00 raised to the power stored in DAYSDELAYED:

```
DEFINE FILE WF_RETAIL_LITE
BASE=COGS_US/20.00;
POWER1= POWER(COGS_US/20.00,DAYSDELAYED);
END
TABLE FILE WF_RETAIL_LITE
PRINT BASE IN 15 DAYSDELAYED POWER1
BY PRODUCT_CATEGORY
WHERE PRODUCT_CATEGORY EQ 'Computers'
WHERE DAYSDELAYED NE 0
ON TABLE SET PAGE NOPAGE
END
```

Partial output follows:

Product Category	BASE	Days Delayed	POWER1
-----	----	-----	-----
Computers	12.15	3	1,793.61

16.70	2	278.89
8.35	1	8.35
8.10	2	65.61
4.05	1	4.05
4.05	2	16.40
4.05	4	269.04
8.35	1	8.35
16.70	1	16.70
8.35	3	582.18
8.35	1	8.35
4.05	1	4.05
4.05	1	4.05
8.35	4	4,861.23
8.35	-1	.12
8.35	1	8.35
8.35	3	582.18

Power returns the value COGS_US/20.00 raised to the power stored in DAYSDELAYED.

```
POWER1= POWER(COGS_US/20.00,DAYSDELAYED)
```

For base 12.15 and power 3, the value is 1,793.61

ROUND: Rounding a Number to a Given Number of Decimal Places

Given a numeric expression and an integer count, ROUND returns the numeric expression rounded to that number of decimal places. If the number of decimal places is negative, it rounds to the left of the decimal point.

Round a Number to a Given Number of Decimal Places

```
ROUND(num_exp, count)
```

where:

num_exp

Numeric

Is the numeric expression to be rounded.

count

Numeric

Is the number of decimal places to which the numeric expression is to be rounded. If the number of decimal places is negative, ROUND rounds to the left of the decimal point.

Rounding a Number to a Given Number of Decimal Places

The following request rounds the LISTPR field to zero decimal places and the NEWLISTPR field to 1 decimal place and to -2 decimal places.

```
TABLE FILE MOVIES
PRINT LISTPR
AND COMPUTE
NEWLISTPR/D12.3 = LISTPR * 99;
ROUND_ZERO/D12.3 = ROUND(LISTPR, 0);
ROUND_PLUS1/D12.3 = ROUND(NEWLISTPR, 1);
ROUND_MINUS1/D12.3 = ROUND(NEWLISTPR, -2);
BY MOVIECODE
WHERE RECORDLIMIT EQ 3
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>MOVIECODE</u>	<u>LISTPR</u>	<u>NEWLISTPR</u>	<u>ROUND_ZERO</u>	<u>ROUND_PLUS1</u>	<u>ROUND_MINUS2</u>
001MCA	19.95	1,975.050	20.000	1,975.100	2,000.000
005WAR	24.98	2,473.020	25.000	2,473.000	2,500.000
020TUR	39.99	3,959.010	40.000	3,959.000	4,000.000

ROUND rounds the number 1234.56 to -3 decimal places.

```
ROUND(1.23456, 3)
```

The result is 1.23500.

ROUND rounds the number 1.23456 to 3 decimal places.

```
ROUND(1234.56, -3)
```

The result is 1000.00.

SIGN: Returning the Sign of a Number

SIGN takes a numeric argument and returns the value -1 if the number is negative, 0 (zero) if the number is zero, and 1 if the number is positive.

Return the Sign of a Number

```
SIGN(number)
```

where:

number

Is a field containing a numeric value or a number.

Returning the Sign of a Number

The following request returns the sign of positive numbers, negative numbers, and zero (0).

```
TABLE FILE GGSALES
SUM DOLLARS NOPRINT AND COMPUTE
PLUSDOLL/I9 = IF DOLLARS GT 12000000 THEN DOLLARS ELSE 0;
SIGN1/I5 = SIGN(PLUSDOLL);
NEGDOLL/I9 = IF DOLLARS LT 12000000 THEN 0 ELSE -DOLLARS;
SIGN2/I5 = SIGN(NEGDOLL);
BY CATEGORY
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
```

```
ENDSTYLE
END
```

The output is shown in the following image.

<u>Category</u>	<u>PLUSDOLL</u>	<u>SIGN1</u>	<u>NEGDOLL</u>	<u>SIGN2</u>
Coffee	17231455	1	-17231455	-1
Food	17229333	1	-17229333	-1
Gifts	0	0	0	0

SIGN(-5.5) returns -1.

SIGN(4) returns 1.

SIGN(0) returns 0.

TRUNCATE: Truncating a Number to a Given Number of Decimal Places

Given a numeric expression and an integer count, TRUNCATE returns the numeric expression truncated to that number of decimal places. If the number of decimal places is negative, it truncates to the left of the decimal point.

Truncate a Number to a Given Number of Decimal Places

```
TRUNCATE(num_exp, count)
```

where:

num_exp

Numeric

Is the numeric expression to be truncated.

count

Numeric

Is the number of decimal places to which the numeric expression is to be truncated. If the number of decimal places is negative, TRUNCATE truncates to the left of the decimal point.

Truncating a Number to a Given Number of Decimal Places

The following request truncates the LISTPR field to 1 decimal place and to -1 decimal places.

```
TABLE FILE MOVIES
PRINT LISTPR
AND COMPUTE
TRUNCATE_PLUS1/D12.3 = TRUNCATE(LISTPR, 1);
TRUNCATE_MINUS1/D12.3 = TRUNCATE(LISTPR, -1);
BY MOVIECODE
WHERE RECORDLIMIT EQ 3
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>MOVIECODE</u>	<u>LISTPR</u>	<u>TRUNCATE_PLUS1</u>	<u>TRUNCATE_MINUS1</u>
001MCA	19.95	19.900	10.000
005WAR	24.98	24.900	20.000
020TUR	39.99	39.900	30.000

TRUNCATE truncates 1.23456 to 3 decimal places.

```
TRUNCATE(1.23456, 3)
```

The result is 1.23400.

Numeric Functions

Numeric functions perform calculations on numeric constants and fields.

For many functions, the output argument can be supplied either as a field name or as a format enclosed in single quotation marks. However, if a function is called from a Dialogue Manager command, this argument must always be supplied as a format, and if a function is called from a Maintain Data procedure, this argument must always be supplied as a field name. For detailed information about calling a function and supplying arguments, see [Accessing and Calling a Function](#).



Note: With CDN ON, numeric arguments must be delimited by a comma followed by a space.

ABS: Calculating Absolute Value

Available Languages: reporting, Maintain

The ABS function returns the absolute value of a number.

Calculate Absolute Value

```
ABS(in_value)
```

where:

in_value

Numeric

Is the value for which the absolute value is returned, the name of a field that contains the value, or an expression that returns the value. If you use an expression, use parentheses as needed to ensure the correct order of evaluation.

Calculating Absolute Value

ABS calculates the absolute value of DIFF.

```
ABS(DIFF);
```

For 15, the result is 15.

For -2, the result is 2.

The COMPUTE command creates the DIFF field, then ABS calculates the absolute value of DIFF:

```
TABLE FILE SALES
PRINT UNIT_SOLD AND DELIVER_AMT AND
COMPUTE DIFF/I5 = DELIVER_AMT - UNIT_SOLD; AND
COMPUTE ABS_DIFF/I5 = ABS(DIFF); BY PROD_CODE
WHERE DATE LE '1017';
END
```

The output is:

PROD_CODE	UNIT_SOLD	DELIVER_AMT	DIFF	ABS_DIFF
-----	-----	-----	----	-----
B10	30	30	0	0
B17	20	40	20	20
B20	15	30	15	15
C17	12	10	-2	2
D12	20	30	10	10
E1	30	25	-5	5
E3	35	25	-10	10

ASIS: Distinguishing Between a Blank and a Zero

Available Languages: reporting

The ASIS function distinguishes between a blank and a zero in Dialogue Manager. It differentiates between a numeric string constant or variable defined as a numeric string, and a field defined simply as numeric.

For details on ASIS, see [ASIS: Distinguishing Between Space and Zero](#).

BAR: Producing a Bar Chart

Available Languages: reporting, Maintain

The BAR function produces a horizontal bar chart using repeating characters to form each bar. Optionally, you can create a scale to clarify the meaning of a bar chart by replacing the title of the column containing the bar with a scale.

Produce a Bar Chart

```
BAR(barlength, infield, maxvalue, 'char', output)
```

where:

barlength

Numeric

Is the maximum length of the bar, in characters. If this value is less than or equal to 0, the function does not return a bar.

infield

Numeric

Is the data field plotted as a bar chart.

maxvalue

Numeric

Is the maximum value of a bar. This value must be greater than the maximum value stored in *infield*. If *infield* is larger than *maxvalue*, the function uses *maxvalue* and returns a bar of maximum length.

'char'

Alphanumeric

Is the repeating character that creates the bars enclosed in single quotation marks. If you specify more than one character, only the first character is used.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The output field must be large enough to contain a bar of maximum length as defined by *barlength*.

Producing a Bar Chart

BAR creates a bar chart for the CURR_SAL field, and stores the output in SAL_BAR. The bar created can be no longer than 30 characters long, and the value it represents can be no greater than 30,000.

```
TABLE FILE EMPLOYEE
PRINT CURR_SAL AND COMPUTE
SAL_BAR/A30 = BAR(30, CURR_SAL, 30000, '=', SAL_BAR);BY LAST_NAME BY
FIRST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	CURR_SAL	SAL_BAR
-----	-----	-----	-----
BANNING	JOHN	\$29,700.00	=====
IRVING	JOAN	\$26,862.00	=====
MCKNIGHT	ROGER	\$16,100.00	=====
ROMANS	ANTHONY	\$21,120.00	=====
SMITH	RICHARD	\$9,500.00	=====
STEVENS	ALFRED	\$11,000.00	=====

Creating a Bar Chart With a Scale

BAR creates a bar chart for the CURR_SAL field. The request then replaces the field name SAL_BAR with a scale using the AS phrase.

To run this request on a platform for which the default font is proportional, use a non-proportional font or issue SET STYLE=OFF.

```
SET STYLE=OFF
```

```
TABLE FILE EMPLOYEE
HEADING
"CURRENT SALARIES OF EMPLOYEES IN PRODUCTION DEPARTMENT"
"GRAPHED IN THOUSANDS OF DOLLARS"
" "
PRINT CURR_SAL AS 'CURRENT SALARY'
AND COMPUTE
    SAL_BAR/A30 = BAR(30, CURR_SAL, 30000, '=', SAL_BAR);
    AS '    5    10    15    20    25    30,-----+-----+-----+-----+-----+'
BY LAST_NAME AS 'LAST NAME'
BY FIRST_NAME AS 'FIRST NAME'
WHERE DEPARTMENT EQ 'PRODUCTION';
ON TABLE SET PAGE-NUM OFF
ON TABLE SET STYLE * GRID=OFF,
$,
END
```

The output is:

```
CURRENT SALARIES OF EMPLOYEES IN PRODUCTION DEPARTMENT
GRAPHED IN THOUSANDS OF DOLLARS

                                5 10 15 20 25 30
LAST NAME    FIRST NAME    CURRENT SALARY  -----+-----+-----+-----+-----+
-----
BANNING      JOHN          $29,700.00     =====
IRVING       JOAN           $26,862.00     =====
MCKNIGHT     ROGER            $16,100.00     =====
ROMANS       ANTHONY          $21,120.00     =====
SMITH        RICHARD          $9,500.00      =====
STEVENS      ALFRED           $11,000.00     =====
```

CHKPCK: Validating a Packed Field

Available Languages: reporting, Maintain

The CHKPCK function validates the data in a field described as packed format (if available on your platform). The function prevents a data exception from occurring when a request reads a field that is expected to contain a valid packed number but does not.

To use CHKPCK:

1. Ensure that the Master File (USAGE and ACTUAL attributes) defines the field as alphanumeric, not packed. This does *not* change the field data, which remains packed, but it enables the request to read the data without a data exception.
2. Call CHKPCK to examine the field. The function returns the output to a field defined as packed. If the value it examines is a valid packed number, the function returns the value; if the value is not packed, the function returns an error code.

Validate a Packed Field

```
CHKPCK(length, in_value, error, output)
```

where:

length

Numeric

Is the length of number of bytes in the packed field. It can be between 1 and 16 bytes.

infield

Alphanumeric

Is the name of the packed field or the value to be verified as packed decimal. The value must be described as alphanumeric, not packed.

error

Numeric

Is the error code that the function returns if a value is not packed. Choose an error code outside the range of data. The error code is first truncated to an integer, then

converted to a packed format. However, it may appear on a report with a decimal point depending on the output format.

output

Packed-decimal

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Validating Packed Data

CHKPCK validates the values in PACK_SAL, and stores the result in a column with the format P8CM. Values not in packed format return the error code -999. Values in packed format appear accurately.

```
CHKPCK(8, PACK_SAL, -999, 'P8CM')
```

1. Prepare a data source that includes invalid packed data. The following example creates TESTPACK, which contains the PACK_SAL field. PACK_SAL is defined as alphanumeric but actually contains packed data. The invalid packed data is stored as AAA.

```
DEFINE FILE EMPLOYEE
PACK_SAL/A8 = IF EMP_ID CONTAINS '123'
    THEN 'AAA' ELSE PCKOUT(CURR_SAL, 8, 'A8');
END
```

```
TABLE FILE EMPLOYEE
PRINT DEPARTMENT PACK_SAL BY EMP_ID
ON TABLE SAVE AS TESTPACK
END
```

The output is:

```
NUMBER OF RECORDS IN TABLE=      12  LINES=      12
ALPHANUMERIC  RECORD NAMED  TESTPACK
FIELDNAME                ALIAS                FORMAT
LENGTH
```

EMP_ID	EID	A9	9
DEPARTMENT	DPT	A10	10
PACK_SAL		A8	8
TOTAL			27

2. Create a Master File for the TESTPACK data source. Define the PACK_SAL field as alphanumeric in the USAGE and ACTUAL attributes.

```
FILE = TESTPACK, SUFFIX = FIX
FIELD = EMP_ID ,ALIAS = EID,USAGE = A9 ,ACTUAL = A9 ,$
FIELD = DEPARTMENT,ALIAS = DPT,USAGE = A10,ACTUAL = A10,$
FIELD = PACK_SAL ,ALIAS = PS ,USAGE = A8 ,ACTUAL = A8 ,
```

3. Create a request that uses CHKPK to validate the values in the PACK_SAL field, and store the result in the GOOD_PACK field. Values not in packed format return the error code -999. Values in packed format appear accurately.

```
DEFINE FILE TESTPACK
GOOD_PACK/P8CM = CHKPK(8, PACK_SAL, -999, GOOD_PACK);
END
```

```
TABLE FILE TESTPACK
PRINT DEPARTMENT GOOD_PACK BY EMP_ID
END
```

The output is:

EMP_ID	DEPARTMENT	GOOD_PACK
-----	-----	-----
071382660	PRODUCTION	\$11,000
112847612	MIS	\$13,200
117593129	MIS	\$18,480
119265415	PRODUCTION	\$9,500
119329144	PRODUCTION	\$29,700
123764317	PRODUCTION	-\$999
126724188	PRODUCTION	\$21,120
219984371	MIS	\$18,480
326179357	MIS	\$21,780
451123478	PRODUCTION	-\$999
543729165	MIS	\$9,000
818692173	MIS	\$27,062

DMOD, FMOD, and IMOD: Calculating the Remainder From a Division

Available Languages: reporting, Maintain

The MOD functions calculate the remainder from a division. Each function returns the remainder in a different format.

The functions use the following formula.

```
remainder = dividend - INT(dividend/divisor) * divisor
```

- *DMOD* returns the remainder as a decimal number.
- *FMOD* returns the remainder as a floating-point number.
- *IMOD* returns the remainder as an integer.

For information on the INT function, see [INT: Finding the Greatest Integer](#).

Calculate the Remainder From a Division

```
function(dividend, divisor, output)
```

where:

function

Is one of the following:

DMOD returns the remainder as a decimal number.

FMOD returns the remainder as a floating-point number.

IMOD returns the remainder as an integer.

dividend

Numeric

Is the number being divided.

divisor

Numeric

Is the number dividing the dividend.

output

Numeric

Is the result whose format is determined by the function used. Can be the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

If the divisor is zero (0), the dividend is returned.

Calculating the Remainder From a Division

IMOD divides ACCTNUMBER by 1000 and stores the remainder in a column with the format I3L.

```
IMOD(ACCTNUMBER, 1000, 'I3L')
```

For 122850108, the result is 108.

For 163800144, the result is 144.

IMOD divides ACCTNUMBER by 1000 and returns the remainder to LAST3_ACCT:

```
TABLE FILE EMPLOYEE
PRINT ACCTNUMBER AND COMPUTE
LAST3_ACCT/I3L = IMOD(ACCTNUMBER, 1000, LAST3_ACCT);
BY LAST_NAME BY FIRST_NAME
WHERE (ACCTNUMBER NE 0000000000) AND (DEPARTMENT EQ 'MIS');
END
```

The output is:

LAST_NAME	FIRST_NAME	ACCTNUMBER	LAST3_ACCT
-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	122850108	108
CROSS	BARBARA	163800144	144
GREENSPAN	MARY	150150302	302

JONES	DIANE	040950036	036
MCCOY	JOHN	109200096	096
SMITH	MARY	027300024	024

EXP: Raising *e* to the Nth Power

Available Languages: reporting, Maintain

The EXP function raises the value "e" (approximately 2.72) to a specified power. This function is the inverse of the LOG function, which returns the logarithm of the argument.

EXP calculates the result by adding terms of an infinite series. If a term adds less than .000001 percent to the sum, the function ends the calculation and returns the result as a double-precision number.

Raise *e* to the Nth Power

```
EXP(power, output)
```

where:

power

Numeric

Is the power to which "e" is raised.

output

Double-precision floating-point

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Raising *e* to the Nth Power

EXP raises "e" to the power designated by the &POW variable, specified here as 3. The result is then rounded to the nearest integer with the .5 rounding constant. The result has

the format D15.3.

```
EXP(&POW, 'D15.3') + 0.5;
```

For 3, the result is APPROXIMATELY 20.

EXP raises "e" to the power designated by the &POW variable, specified here as 3. The result is then rounded to the nearest integer with the .5 rounding constant and returned to the variable &RESULT. The format of the output value is D15.3.

```
-SET &POW = '3';
-SET &RESULT = EXP(&POW, 'D15.3') + 0.5;-HTMLFORM BEGIN
<HTML>
<BODY>
E TO THE &POW POWER IS APPROXIMATELY &RESULT
</BODY>
</HTML>
-HTMLFORM END
```

The output is:

```
E TO THE 3 POWER IS APPROXIMATELY 20
```

EXPON: Evaluating a Number in Scientific Notation

The EXPON function evaluates a numeric literal or Dialogue Manager variable expressed in scientific notation.

Evaluate a Number in Scientific Notation

```
EXPON(n.nn {E|D} {+|-} p)
```

where:

n.nn

Numeric

Is a numeric literal that consists of a whole number component, followed by a decimal point, followed by a fractional component.

E, D

Denotes scientific notation. E and D are interchangeable.

+, -

Indicates if **p** is positive or negative.

p

Integer

Is the power of 10 to which to raise **n.nn**.



Note: EXPN does not use an output argument. The format of the result is floating-point double precision.

Evaluating a Number in Scientific Notation

EXPN evaluates 1.03E+2.

```
EXPN(1.03E+2)
```

The result is 103.

FMLCAP: Retrieving FML Hierarchy Captions

Available Languages: reporting

The FMLCAP function returns the caption value for each row in an FML hierarchy request. In order to retrieve caption values, the Master File must define an FML hierarchy and the request must use the GET CHILDREN, ADD, or WITH CHILDREN option to retrieve hierarchy

data. If the FOR field in the request does not have a caption field defined, FMLCAP returns a blank string.

FMLCAP is supported for COMPUTE but is not recommended for use with DEFINE.

Retrieve Captions in an FML Request Using the FMLCAP Function

```
FMLCAP(fieldname|'format')
```

where:

fieldname

Is the name of the caption field.

'format'

Is the format of the caption field enclosed in single quotation marks.

Retrieving FML Hierarchy Captions Using FMLCAP

The following request retrieves and aggregates the FML hierarchy that starts with the parent value 2000. FMLCAP retrieves the captions, while the actual account numbers appear as the FOR values.

```
SET FORMULTIPLE = ON
TABLE FILE CENTSTMT
SUM ACTUAL_AMT
COMPUTE CAP1/A30= FMLCAP(GL_ACCOUNT_CAPTION);
FOR GL_ACCOUNT
2000 WITH CHILDREN 2 ADD
END
```

The output is:

```
Actual  CAP1
-----  ----
```

2000	313,611,852.	Gross Margin
2100	187,087,470.	Sales Revenue
2200	98,710,368.	Retail Sales
2300	13,798,832.	Mail Order Sales
2400	12,215,780.	Internet Sales
2500	100,885,159.	Cost Of Goods Sold
2600	54,877,250.	Variable Material Costs
2700	6,176,900.	Direct Labor
2800	3,107,742.	Fixed Costs

FMLFOR: Retrieving FML Tag Values

Available Languages: reporting

FMLFOR retrieves the tag value associated with each row in an FML request. If the FML row was generated as a sum of data records using the OR phrase, FMLFOR returns the first value specified in the list. If the OR phrase was generated by an FML Hierarchy ADD command, FMLFOR returns the tag value associated with the parent specified in the ADD command.

The FMLFOR function is supported for COMPUTE but not for DEFINE. Attempts to use it in a DEFINE result in blank values.

Retrieve FML Tag Values

```
FMLFOR(output)
```

where:

output

Is name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Retrieving FML Tag Values With FMLFOR

```
SET FORMULTIPLE = ON
TABLE FILE LEDGER
SUM AMOUNT
COMPUTE RETURNEDFOR/A8 = FMLFOR('A8');
FOR ACCOUNT
1010                OVER
1020                OVER
1030                OVER
BAR                 OVER
1030 OR 1020 OR 1010
END
```

The output is:

	AMOUNT	RETURNEDFOR
	-----	-----
1010	8,784	1010
1020	4,494	1020
1030	7,961	1030
	-----	-----
1010	21,239	1030

FMLINFO: Returning FOR Values

Available Languages: reporting

The FMLINFO function returns the FOR value associated with each row in an FML report. With FMLINFO, you can use the appropriate FOR value in a COMPUTE command to do drill-downs and sign changes for each row in the report, even when the row is a summary row created using an OR list or a Financial Modeling Language (FML) Hierarchy ADD command.



Note: You can use the SET parameter FORMULTIPLE=ON to enable an incoming record to be used on more than one line in an FML report.

Retain FOR Values in an FML Request

```
FMLINFO('FORVALUE', output)
```

where:

'FORVALUE'

Alphanumeric

Returns the FOR value associated with each row in an FML report. If the FML row was generated as a sum of data records using the OR phrase, FMLINFO returns the first FOR value specified in the list of values. If the OR phrase was generated by an FML Hierarchy ADD command, FMLINFO returns the FOR value associated with the parent specified in the ADD command.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Retrieving FOR Values for FML Hierarchy Rows

The following request creates a field called PRINT_AMT that is the negative of the NAT_AMOUNT field for account numbers less than 2500 in the CENTSYSF data source. The CENTGL data source contains the hierarchy information for CENTSYSF. Therefore, CENTGL is joined to CENTSYSF for the request:

```
SET FORMULTIPLE = ON
JOIN SYS_ACCOUNT IN CENTGL TO ALL SYS_ACCOUNT IN CENTSYSF
TABLE FILE CENTGL
SUM NAT_AMOUNT/D10 IN 30
COMPUTE PRINT_AMT/D10 = IF FMLINFO('FORVALUE','A7') LT '2500'
    THEN 0-NAT_AMOUNT ELSE NAT_AMOUNT;
COMPUTE FORV/A4 = FMLINFO('FORVALUE','A4');
COMPUTE ACTION/A9 = IF FORV LT '2500'
    THEN 'CHANGED' ELSE 'UNCHANGED';
FOR GL_ACCOUNT
```

```
2000 WITH CHILDREN 2 ADD AS CAPTION
END
```

i Note: The parent value specified in the WITH CHILDREN ADD command (2000) is returned for the first row on the report. Each subsequent row is also a consolidated subsection of the hierarchy with a parent value that is returned by FMLINFO:

ACTION	Month Actual	PRINT_AMT	FORV	
-----	-----	-----	----	-
Gross Margin	-25,639,223	25,639,223	2000	
CHANGED				
Sales Revenue	-62,362,490	62,362,490	2100	
CHANGED				
Retail Sales	-49,355,184	49,355,184	2200	
CHANGED				
Mail Order Sales	-6,899,416	6,899,416	2300	
CHANGED				
Internet Sales	-6,107,890	6,107,890	2400	
CHANGED				
Cost Of Goods Sold	36,723,267	36,723,267	2500	
UNCHANGED				
Variable Material Costs	27,438,625	27,438,625	2600	
UNCHANGED				
Direct Labor	6,176,900	6,176,900	2700	
UNCHANGED				
Fixed Costs	3,107,742	3,107,742	2800	
UNCHANGED				

Using FMLINFO With an OR Phrase

The FOR value printed for the summary line is 1010, but FMLINFO returns the first value specified in the OR list, 1030:

```
SET FORMULTIPLE = ON
TABLE FILE LEDGER
SUM AMOUNT
```

```

COMPUTE RETURNEDFOR/A8 = FMLINFO('FORVALUE','A8');
FOR ACCOUNT
1010                OVER
1020                OVER
1030                OVER
BAR                OVER
1030 OR 1020 OR 1010
END

```

The output is:

	AMOUNT	RETURNEDFOR
1010 1020 1030	8,784 4,494 7,961	1010 1020 1030
	-----	-----
1010	21,239	1030

FMLLIST: Returning an FML Tag List

Available Languages: reporting

FMLLIST returns a string containing the complete tag list for each row in an FML request. If a row has a single tag value, that value is returned.

The FMLLIST function is supported for COMPUTE but not for DEFINE. Attempts to use it in a DEFINE result in blank values.

Retrieve an FML Tag List

```
FMLLIST('A4096V')
```

where:

'A4096V'

Is the required argument.

Retrieving an FML Tag List With FMLLIST

```
SET FORMULTIPLE=ON
TABLE FILE LEDGER
HEADING
"TEST OF FMLLIST"
" "
SUM AMOUNT
COMPUTE LIST1/A36 = FMLLIST('A4096V');
FOR ACCOUNT
'1010'                OVER
'1020'                OVER
'1030'                OVER
BAR                  OVER
'1030' OR '1020' OR '1010'
END
```

The output is:

```
TEST OF FMLLIST
      AMOUNT  LIST1
-----  -----
1010    8,784  1010
1020    4,494  1020
1030    7,961  1030
-----  -----
1010   21,239  1010 OR 1020 OR 1030
```

INT: Finding the Greatest Integer

Available Languages: reporting, Maintain

The INT function returns the integer component of a number.

Find the Greatest Integer

```
INT(in_value)
```

where:

in_value

Numeric

Is the value for which the integer component is returned, the name of a field that contains the value, or an expression that returns the value. If you supply an expression, use parentheses as needed to ensure the correct order of evaluation.



Note: INT does not use an output argument. The format of the result is floating-point double precision.

Finding the Greatest Integer

INT finds the greatest integer in DED_AMT.

```
INT(DED_AMT)
```

For \$1,261.40, the result is 1261.

For \$1,668.69, the result is 1668.

INT finds the greatest integer in the DED_AMT field and stores it in INT_DED_AMT:

```
TABLE FILE EMPLOYEE  
SUM DED_AMT AND COMPUTE
```

```
INT_DED_AMT/I9 = INT(DED_AMT); BY LAST_NAME BY FIRST_NAME
WHERE (DEPARTMENT EQ 'MIS') AND (PAY_DATE EQ 820730);
END
```

The output is:

LAST_NAME	FIRST_NAME	DED_AMT	INT_DED_AMT
-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	\$1,261.40	1261
CROSS	BARBARA	\$1,668.69	1668
GREENSPAN	MARY	\$127.50	127
JONES	DIANE	\$725.34	725
SMITH	MARY	\$334.10	334

LOG: Calculating the Natural Logarithm

Available Languages: reporting, Maintain

The LOG function returns the natural logarithm of a number.

Calculate the Natural Logarithm

```
LOG(in_value)
```

where:

in_value

Numeric

Is the value for which the natural logarithm is calculated, the name of a field that contains the value, or an expression that returns the value. If you supply an expression, use parentheses as needed to ensure the correct order of evaluation. If *in_value* is less than or equal to 0, LOG returns 0.

i Note: LOG does not use an output argument. The format of the result is floating-point double precision.

Calculating the Natural Logarithm

LOG calculates the logarithm of CURR_SAL.

```
LOG(CURR_SAL)
```

For \$29,700.00, the result is 10.30.

For \$26,862.00, the result is 10.20.

LOG calculates the logarithm of the CURR_SAL field:

```
TABLE FILE EMPLOYEE
PRINT CURR_SAL AND COMPUTE
LOG_CURR_SAL/D12.2 = LOG(CURR_SAL); BY LAST_NAME BY FIRST_NAME
WHERE DEPARTMENT EQ 'PRODUCTION';
END
```

The output is:

LAST_NAME	FIRST_NAME	CURR_SAL	LOG_CURR_SAL
-----	-----	-----	-----
BANNING	JOHN	\$29,700.00	10.30
IRVING	JOAN	\$26,862.00	10.20
MCKNIGHT	ROGER	\$16,100.00	9.69
ROMANS	ANTHONY	\$21,120.00	9.96
SMITH	RICHARD	\$9,500.00	9.16
STEVENS	ALFRED	\$11,000.00	9.31

MAX and MIN: Finding the Maximum or Minimum Value

Available Languages: reporting, Maintain

The MAX and MIN functions return the maximum or minimum value, respectively, from a list of values.

Find the Maximum or Minimum Value

```
{MAX|MIN}(value1, value2, ...)
```

where:

MAX

Returns the maximum value.

MIN

Returns the minimum value.

value1, value2

Numeric

Are the values for which the maximum or minimum value is returned, the name of a field that contains the values, or an expression that returns the values. If you supply an expression, use parentheses as needed to ensure the correct order of evaluation.



Note: MAX and MIN do not use an output argument. The format of the result is floating-point double precision.

Determining the Minimum Value

MIN returns either the value of ED_HRS or the constant 30, whichever is lower.

```
MIN(ED_HRS, 30)
```

For 45.00, the result is 30.00.

For 25.00, the result is 25.00.

MIN returns either the value of the ED_HRS field or the constant 30, whichever is lower:

```
TABLE FILE EMPLOYEE
PRINT ED_HRS AND COMPUTE
MIN_EDHRS_30/D12.2 = MIN(ED_HRS, 30);BY LAST_NAME BY FIRST_NAME
```



```
WHERE DEPARTMENT EQ 'MIS';
END
```

The output is:

LAST_NAME	FIRST_NAME	ED_HRS	MIN_EDHRS_30
-----	-----	-----	-----
BLACKWOOD	ROSEMARIE	75.00	30.00
CROSS	BARBARA	45.00	30.00
GREENSPAN	MARY	25.00	25.00
JONES	DIANE	50.00	30.00
MCCOY	JOHN	.00	.00
SMITH	MARY	36.00	30.00

MIRR: Calculating the Modified Internal Return Rate

Available languages: reporting

The MIRR function calculates the modified internal rate of return for a series of periodic cash flows.

Calculate the Modified Internal Rate of Return

```
TABLE FILE ...
{PRINT|SUM} field ...COMPUTE rrate/fmt = MIRR(cashflow, finrate,
reinrate, output);
WITHIN {sort_field|TABLE}
```

where:

field ...

Are fields that appear in the report output.

rrate

Is the field that contains the calculated return rate.

fmt

Is the format of the return rate. The data type must be D.

cashflow

Is a numeric field. Each value represents either a payment (negative value) or income (positive value) for one period. The values must be in the correct sequence in order for the sequence of cash flows to be calculated correctly. The dates corresponding to each cash flow should be equally spaced and sorted in chronological order. The calculation requires at least one negative value and one positive value in the *cashflow* field. If the values are all positive or all negative, a zero result is returned.

finrate

Is a finance rate for negative cash flows. This value must be expressed as a non-negative decimal fraction between 0 and 1. It must be constant within each sort group for which a return rate is calculated, but it can change between sort groups.

reinvrate

Is the reinvestment rate for positive cash flows. This value must be expressed as a non-negative decimal fraction between 0 and 1. It must be constant within each sort group but can change between sort groups. It must be constant within each sort group for which a return rate is calculated, but it can change between sort groups.

output

Is the name of the field that contains the return rate, or its format enclosed in single quotation marks.

sort_field

Is a field that sorts the report output and groups it into subsets of rows on which the function can be calculated separately. To calculate the function using every row of the report output, use the WITHIN TABLE phrase. A WITHIN phrase is required.

Usage Notes for the MIRR Function

- This function is only supported in a COMPUTE command with the WITHIN phrase.
- The cash flow field must contain at least one negative value and one positive value.

- Dates must be equally spaced.
- Missing cash flows or dates are not supported.

Calculating the Modified Internal Rate of Return

The following request calculates modified internal return rates for categories of products. It assumes a finance charge of ten percent and a reinvestment rate of ten percent. The request is sorted by date so that the correct cash flows are calculated. The rate returned by the function is multiplied by 100 in order to express it as a percent rather than a decimal value. Note that the format includes the % character. This causes a percent symbol to display, but it does not calculate a percent.

In order to create one cash flow value per date, the values are summed. NEWDOLL is defined in order to create negative values in each category as required by the function:

```
DEFINE FILE GGSales
  SDATE/YYM = DATE;
  SYEAR/Y = SDATE;
  NEWDOLL/D12.2 = IF DATE LT '19970401' THEN -1 * DOLLARS ELSE DOLLARS;
END
TABLE FILE GGSales
  SUM NEWDOLL
  COMPUTE RRATE/D7.2% = MIRR(NEWDOLL, .1, .1, RRATE) * 100;
  WITHIN CATEGORY
  BY CATEGORY
  BY SDATE
  WHERE SYEAR EQ 97
END
```

A separate rate is calculated for each category because of the WITHIN CATEGORY phrase. A portion of the output is shown:

Category	SDATE	NEWDOLL	RRATE
-----	-----	-----	-----
Coffee	1997/01	-801,123.00	15.11%
	1997/02	-682,340.00	15.11%
	1997/03	-765,078.00	15.11%
	1997/04	691,274.00	15.11%
	1997/05	720,444.00	15.11%
	1997/06	742,457.00	15.11%
	1997/07	747,253.00	15.11%

Food	1997/08	655,896.00	15.11%
	1997/09	730,317.00	15.11%
	1997/10	724,412.00	15.11%
	1997/11	620,264.00	15.11%
	1997/12	762,328.00	15.11%
	1997/01	-672,727.00	16.24%
	1997/02	-699,073.00	16.24%
	1997/03	-642,802.00	16.24%
	1997/04	718,514.00	16.24%
	1997/05	660,740.00	16.24%
	1997/06	734,705.00	16.24%
	1997/07	760,586.00	16.24%

To calculate one modified internal return rate for all of the report data, use the WITHIN TABLE phrase. In this case, the data does not have to be sorted by CATEGORY:

```

DEFINE FILE GGSALES
  SDATE/YYM = DATE;
  SYEAR/Y = SDATE;
  NEWDOLL/D12.2 = IF DATE LT '19970401' THEN -1 * DOLLARS ELSE DOLLARS;
END

TABLE FILE GGSALES
  SUM NEWDOLL
  COMPUTE RRATE/D7.2% = MIRR(NEWDOLL, .1, .1, RRATE) * 100;
  WITHIN TABLE
  BY SDATE
  WHERE SYEAR EQ 97
END

```

The output is:

SDATE	NEWDOLL	RRATE
-----	-----	-----
1997/01	-1,864,129.00	15.92%
1997/02	-1,861,639.00	15.92%
1997/03	-1,874,439.00	15.92%
1997/04	1,829,838.00	15.92%
1997/05	1,899,494.00	15.92%
1997/06	1,932,630.00	15.92%
1997/07	2,005,402.00	15.92%
1997/08	1,838,863.00	15.92%
1997/09	1,893,944.00	15.92%
1997/10	1,933,705.00	15.92%

1997/11	1,865,982.00	15.92%
1997/12	2,053,923.00	15.92%

NORMSDST and NORMSINV: Calculating Normal Distributions

The NORMSDST and NORMSINV functions perform calculations on a standard normal distribution curve. NORMSDST calculates the percentage of data values that are less than or equal to a normalized value; NORMSINV is the inverse of NORMSDST, which calculates the normalized value that forms the upper boundary of a percentile in a standard normal distribution curve.

NORMSDST: Calculating Standard Cumulative Normal Distribution

The NORMSDST function performs calculations on a standard normal distribution curve, calculating the percentage of data values that are less than or equal to a normalized value. A normalized value is a point on the X-axis of a standard normal distribution curve in standard deviations from the mean. This is useful for determining percentiles in normally distributed data.

The NORMSINV function is the inverse of NORMSDST. For information about NORMSINV, see [NORMSDST and NORMSINV: Calculating Normal Distributions](#).

The results of NORMSDST are returned as double-precision and are accurate to 6 significant digits.

A standard normal distribution curve is a normal distribution that has a mean of 0 and a standard deviation of 1. The total area under this curve is 1. A point on the X-axis of the standard normal distribution is called a normalized value. Assuming that your data is normally distributed, you can convert a data point to a normalized value to find the percentage of scores that are less than or equal to the raw score.

You can convert a value (raw score) from your normally distributed data to the equivalent normalized value (z-score) as follows:

$$z = (\text{raw\_score} - \text{mean}) / \text{standard\_deviation}$$

To convert from a z-score back to a raw score, use the following formula:

$$\text{raw\_score} = z * \text{standard\_deviation} + \text{mean}$$


The mean of data points x_i , where i is from 1 to n is:

$$(\sum x_i) / n$$

The standard deviation of data points x_i , where i is from 1 to n is:

$$\text{SQRT}((\sum x_i^2 - (\sum x_i)^2 / n) / (n - 1))$$

The following diagram illustrates the results of the NORMSDST and NORMSINV functions.

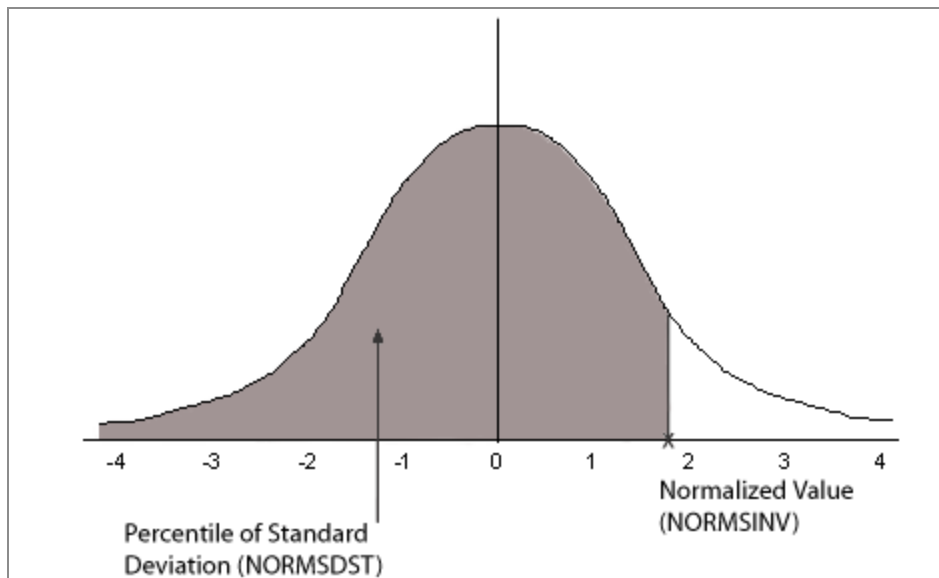

Characteristics of the Normal Distribution

Many common measurements are normally distributed. A plot of normally distributed data values approximates a bell-shaped curve. The two measures required to describe any normal distribution are the mean and the standard deviation:

- The mean is the point at the center of the curve.
- The standard deviation describes the spread of the curve. It is the distance from the

mean to the point of inflection (where the curve changes direction).

Calculate the Cumulative Standard Normal Distribution Function

```
NORMSDST(value, 'D8');
```

where:

value

Is a normalized value.

D8

Is the required format for the result. The value returned by the function is double-precision. You can assign it to a field with any valid numeric format.

Using the NORMSDST Function

NORMSDST finds the percentile for Z and stores the result in a column with the format D8.

```
NORMSDST(Z, 'D8')
```

For -.07298, the result is .47091.

For -.80273 the result is .21106.

NORMSDST calculates the Z value and finds its percentile:

```
DEFINE FILE GGPRODS
  -* CONVERT SIZE FIELD TO DOUBLE PRECISION
  X/D12.5 = SIZE;
  END
  TABLE FILE GGPRODS
  SUM X NOPRINT CNT.X NOPRINT
  -* CALCULATE MEAN AND STANDARD DEVIATION
  COMPUTE NUM/D12.5 = CNT.X; NOPRINT
  COMPUTE MEAN/D12.5 = AVE.X; NOPRINT
```

```

COMPUTE VARIANCE/D12.5 = ((NUM*ASQ.X) - (X*X/NUM))/(NUM-1); NOPRINT
COMPUTE STDEV/D12.5 = SQRT(VARIANCE); NOPRINT
PRINT SIZE X NOPRINT
-* COMPUTE NORMALIZED VALUES AND USE AS INPUT TO NORMSDST FUNCTION
COMPUTE Z/D12.5 = (X - MEAN)/STDEV;
COMPUTE NORMSD/D12.5 = NORMSDST(Z, 'D8');
BY PRODUCT_ID NOPRINT
END

```

The output is:

Size	Z	NORMSD
----	-	-----
16	-.07298	.47091
12	-.80273	.21106
12	-.80273	.21106
20	.65678	.74434
24	1.38654	.91721
20	.65678	.74434
24	1.38654	.91721
16	-.07298	.47091
12	-.80273	.21106
8	-1.53249	.06270

NORMSINV: Calculating Inverse Cumulative Normal Distribution

The NORMSINV function performs calculations on a standard normal distribution curve, finding the normalized value that forms the upper boundary of a percentile in a standard normal distribution curve. This is the inverse of NORMSDST. For information about NORMSDST, see [NORMSDST and NORMSINV: Calculating Normal Distributions](#).

The results of NORMSINV are returned as double-precision and are accurate to 6 significant digits.

Calculate the Inverse Cumulative Standard Normal Distribution Function

```
NORMSINV(value, 'D8');
```

where:

value

Is a number between 0 and 1 (which represents a percentile in a standard normal distribution).

D8

Is the required format for the result. The value returned by the function is double-precision. You can assign it to a field with any valid numeric format.

Using the NORMSINV Function

NORMSINV returns a normalized value from a percentile found using NORMSDST.

```
NORMSINV(NORMSD, 'D8')
```

For .21106, the result is -.80273.

For .47091, the result is -.07298

NORMSDST finds the percentile for the Z field. NORMSINV then returns this percentile to a normalized value:

```
DEFINE FILE GGPRODS
  -* CONVERT SIZE FIELD TO DOUBLE PRECISION
  X/D12.5 = SIZE;
  END
  TABLE FILE GGPRODS
  SUM X NOPRINT CNT.X NOPRINT
  -* CALCULATE MEAN AND STANDARD DEVIATION
  COMPUTE NUM/D12.5 = CNT.X; NOPRINT
  COMPUTE MEAN/D12.5 = AVE.X; NOPRINT
  COMPUTE VARIANCE/D12.5 = ((NUM*ASQ.X) - (X*X/NUM))/(NUM-1); NOPRINT
```

```

COMPUTE STDEV/D12.5 = SQRT(VARIANCE); NOPRINT
PRINT SIZE X NOPRINT
-* COMPUTE NORMALIZED VALUES AND USE AS INPUT TO NORMSDST FUNCTION
-* THEN USE RETURNED VALUES AS INPUT TO NORMSINV FUNCTION
-* AND CONVERT BACK TO DATA VALUES
COMPUTE Z/D12.5 = (X - MEAN)/STDEV;
COMPUTE NORMSD/D12.5 = NORMSDST(Z, 'D8');
COMPUTE NORMSI/D12.5 = NORMSINV(NORMSD, 'D8');
COMPUTE DSIZE/D12 = NORMSI * STDEV + MEAN;
BY PRODUCT_ID NOPRINT
END

```

The output shows that NORMSINV is the inverse of NORMSDST and returns the original values:

Size	Z	NORMSD	NORMSI	DSIZE
----	-	-----	-----	-----
16	-.07298	.47091	-.07298	16
12	-.80273	.21106	-.80273	12
12	-.80273	.21106	-.80273	12
20	.65678	.74434	.65678	20
24	1.38654	.91721	1.38654	24
20	.65678	.74434	.65678	20
24	1.38654	.91721	1.38654	24
16	-.07298	.47091	-.07298	16
12	-.80273	.21106	-.80273	12
8	-1.53249	.06270	-1.53249	8

PRDNOR and PRDUNI: Generating Reproducible Random Numbers


Available Languages: reporting, Maintain

The PRDNOR and PRDUNI functions generate reproducible random numbers:

- PRDNOR generates reproducible double-precision random numbers normally distributed with an arithmetic mean of 0 and a standard deviation of 1.

If PRDNOR generates a large set of numbers, they have the following properties:

- The numbers lie roughly on a bell curve, as shown in the following figure. The bell curve is highest at the 0 mark, meaning that there are more numbers closer to 0 than farther away.

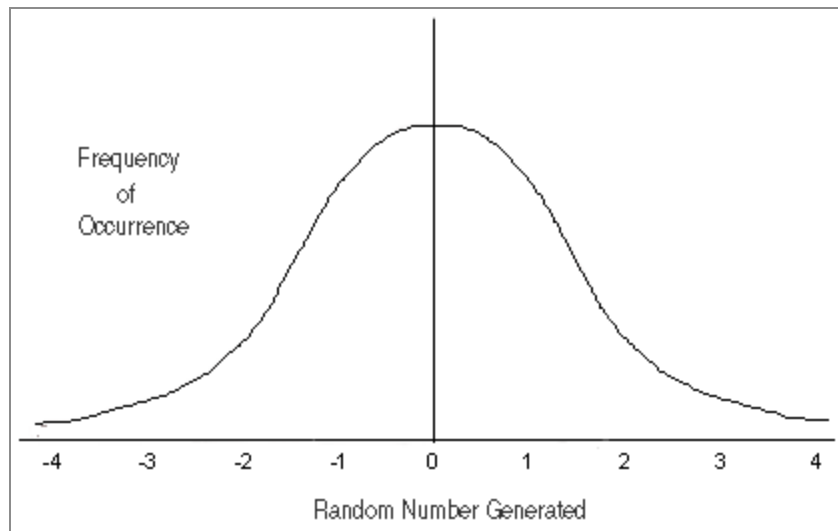

- The average of the numbers is close to 0.
- The numbers can be any size, but most are between 3 and -3.
- PRDUNI generates reproducible double-precision random numbers uniformly distributed between 0 and 1 (that is, any random number it generates has an equal probability of being anywhere between 0 and 1).

Generate Reproducible Random Numbers

```
{PRDNOR|PRDUNI}(seed, output)
```

where:

PRDNOR

Generates reproducible double-precision random numbers normally distributed with an arithmetic mean of 0 and a standard deviation of 1.

PRDUNI

Generates reproducible double-precision random numbers uniformly distributed between 0 and 1.

seed

Numeric

Is the seed or the field that contains the seed, up to 9 digits. The seed is truncated to an integer.

On z/OS, the numbers do not reproduce.

output

Double-precision

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Generating Reproducible Random Numbers

PRDNOR assigns random numbers and stores them in a column with the format D12.2.

```
PRDNOR(40, 'D12.2')
```

PRDNOR assigns random numbers and stores them in RAND. These values are then used to randomly pick five employee records identified by the values in the LAST NAME and FIRST NAME fields. The seed is 40. To produce a different set of numbers, change the seed.

```
DEFINE FILE EMPLOYEE
  RAND/D12.2 WITH LAST_NAME = PRDNOR(40, RAND);END
```

```
TABLE FILE EMPLOYEE
  PRINT LAST_NAME AND FIRST_NAME
  BY HIGHEST 5 RAND
  END
```

The output is:

RAND	LAST_NAME	FIRST_NAME
----	-----	-----
1.38	STEVENS	ALFRED
1.12	MCCOY	JOHN
.55	SMITH	RICHARD
.21	JONES	DIANE
.01	IRVING	JOAN

RDNORM and RDUNIF: Generating Random Numbers


Available Languages: reporting, Maintain

The RDNORM and RDUNIF functions generate random numbers:

- RDNORM generates double-precision random numbers normally distributed with an arithmetic mean of 0 and a standard deviation of 1.

If RDNORM generates a large set of numbers (between 1 and 32768), they have the following properties:

- The numbers lie roughly on a bell curve, as shown in the following figure. The bell curve is highest at the 0 mark, meaning that there are more numbers closer to 0 than farther away.

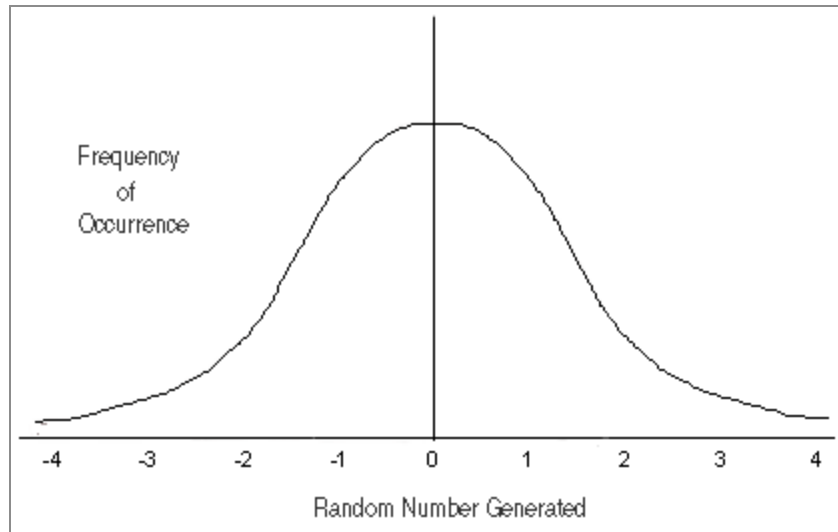

- The average of the numbers is close to 0.
- The numbers can be any size, but most are between 3 and -3.
- RDUNIF generates double-precision random numbers uniformly distributed between 0 and 1 (that is, any random number it generates has an equal probability of being anywhere between 0 and 1).

Generate Random Numbers

`{RDNORM|RDUNIF}(output)`

where:

RDNORM

Generates double-precision random numbers normally distributed with an arithmetic mean of 0 and a standard deviation of 1.

RDUNIF

Generates double-precision random numbers uniformly distributed between 0 and 1.

output

Double-precision

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Generating Random Numbers

RDNORM assigns random numbers and stores them in a column with the format D12.2.

```
RDNORM('D12.2')
```

RDNORM assigns random numbers and stores them in RAND. These numbers are then used to randomly choose five employee records identified by the values in the LAST NAME and FIRST NAME fields.

```
DEFINE FILE EMPLOYEE
  RAND/D12.2 WITH LAST_NAME = RDNORM(RAND) ;END
TABLE FILE EMPLOYEE
  PRINT LAST_NAME AND FIRST_NAME
  BY HIGHEST 5 RAND
END
```

The request produces output similar to the following:

RAND	LAST_NAME	FIRST_NAME
----	-----	-----
.65	CROSS	BARBARA
.20	BANNING	JOHN
.19	IRVING	JOAN
.00	BLACKWOOD	ROSEMARIE
-.14	GREENSPAN	MARY

SQRT: Calculating the Square Root

Available Languages: reporting, Maintain

The SQRT function calculates the square root of a number.

Calculate the Square Root

```
SQRT(in_value)
```

where:

in_value

Numeric

Is the value for which the square root is calculated, the name of a field that contains the value, or an expression that returns the value. If you supply an expression, use parentheses as needed to ensure the correct order of evaluation. If you supply a negative number, the result is zero.



Note: SQRT does not use an output argument. The result of the function is floating-point double precision.

Calculating the Square Root

SQRT calculates the square root of LISTPR.

```
SQRT(LISTPR)
```

For 19.98, the result is 4.47.

For 14.98, the result is 3.87.

SQRT calculates the square root of LISTPR:

```
TABLE FILE MOVIES
PRINT LISTPR AND COMPUTE
SQRT_LISTPR/D12.2 = SQRT(LISTPR);BY TITLE
WHERE CATEGORY EQ 'MUSICALS';
END
```

The output is:

TITLE -----	LISTPR -----	SQRT_LISTPR -----
ALL THAT JAZZ	19.98	4.47
CABARET	19.98	4.47
CHORUS LINE, A	14.98	3.87
FIDDLER ON THE ROOF	29.95	5.47

XIRR: Calculating the Modified Internal Return Rate (Periodic or Non-Periodic)

Available languages: reporting

The XIRR function calculates the internal rate of return for a series of cash flows that can be periodic or non-periodic.

Calculate the Internal Rate of Return

```
TABLE FILE ...
{PRINT|SUM} field ...
COMPUTE rrate/fmt = XIRR (cashflow, dates,guess, maxiterations, output);
WITHIN {sort_field|TABLE}
```

where:

field ...

Are fields that appear in the report output.

rrate

Is the field that contains the calculated return rate.

fmt

Is the format of the return rate. The data type must be D.

cashflow

Is a numeric field. Each value of this field represents either a payment (negative value) or income (positive value) for one period. The values must be in the correct sequence in order for the sequence of cash flows to be calculated correctly. The dates corresponding to each cash flow should be equally spaced and sorted in chronological order. The calculation requires at least one negative value and one positive value in the *cashflow* field. If the values are all positive or all negative, a zero result is returned.

dates

Is a date field containing the cash flow dates. The dates must be full component dates with year, month, and day components. Dates cannot be stored in fields with format A, I, or P. They must be stored in date fields (for example, format YMD, not AYMD). There must be the same number of dates as there are cash flow values. The number of dates must be the same as the number of cash flows.

guess

Is an (optional) initial estimate of the expected return rate expressed as a decimal. The default value is .1 (10%). To accept the default, supply the value 0 (zero) for this argument.

maxiterations

Is an (optional) number specifying the maximum number of iterations that can be used to resolve the rate using Newton's method. 50 is the default value. To accept the default, supply the value 0 (zero) for this argument. The rate is considered to be resolved when successive iterations do not differ by more than 0.0000003. If this level of accuracy is achieved within the maximum number of iterations, the calculation stops at that point. If it is not achieved after reaching the maximum number of iterations, the calculation stops and the value calculated by the last iteration is returned.

output

D

Is the name of the field that contains the return rate, or its format enclosed in single quotation marks.

sort_field

Is a field that sorts the report output and groups it into subsets of rows on which the function can be calculated separately. To calculate the function using every row of the

report output, use the WITHIN TABLE phrase. A WITHIN phrase is required.

Usage Notes for the XIRR Function

- This function is only supported in a COMPUTE command with the WITHIN phrase.
- The cash flow field must contain at least one negative value and one positive value.
- Dates cannot be stored in fields with format A, I, or P. They must be stored in date fields (for example, format YMD, not AYMD).
- Cash flows or dates with missing values are not supported.

Calculating the Internal Rate of Return

The following request creates a FOCUS data source with cash flows and dates and calculates the internal return rate.

The Master File for the data source is:

```
FILENAME=XIRR01,SUFFIX=FOC
SEGNAME=SEG1,SEGTYPE=S1
FIELDNAME=DUMMY,FORMAT=A2,$
FIELDNAME=DATES,FORMAT=YYMD,$
FIELDNAME=CASHFL,FORMAT=D12.4,$
END
```

The procedure to create the data source is:

```
CREATE FILE XIRR01
MODIFY FILE XIRR01
FREEFORM DUMMY DATES CASHFL
DATA
AA,19980101,-10000. , $
BB,19980301,2750. , $
CC,19981030,4250. , $
DD,19990215,3250. , $
EE,19990401,2750. , $
END
```

The request is sorted by date so that the correct cash flows can be calculated. The rate returned by the function is multiplied by 100 in order to express it as a percent rather than a decimal value. Note that the format includes the % character. This causes a percent symbol to display, but it does not calculate a percent:

```
TABLE FILE XIRR01
PRINT CASHFL
COMPUTE RATEX/D12.2%=XIRR(CASHFL, DATES, 0., 0., RATEX) * 100;
WITHIN TABLE
BY DATES
END
```

One rate is calculated for the entire report because of the WITHIN TABLE phrase:

DATES	CASHFL	RATEX
----	-----	-----
1998/01/01	-10,000.0000	37.49%
1998/03/01	2,750.0000	37.49%
1998/10/30	4,250.0000	37.49%
1999/02/15	3,250.0000	37.49%
1999/04/01	2,750.0000	37.49%

Maintain-specific Script Functions

Script functions enable you to integrate JavaScript and VBScripts into your Maintain Data applications and perform client-side execution without returning to the WebFOCUS Reporting Server.

IWCLink: Displaying a URL in a Browser or Frame

The IWCLink function displays a URL in a new browser window or in a frame within your current form. You can use IWCLink as part of a technique that enables you to invoke an external procedure without the EXEC command.

Display a URL in a Browser or Frame

```
IWCLink(url, [target], [newwindow], [options])
```

where:

url

Is the URL of the webpage to display.

target

Is the window or frame to send the URL request output to.

newwindow

Determines if the URL appears in a new browser window. When this parameter is a non-zero or true, a new browser window is created.

options

Are new window parameters. This includes, but is not limited to, the following:

- **screenX=*distance***, which is the distance the new window is placed from the left side of the screen.
- **screenY=*distance***, which is the distance the new window is placed from the top of the screen.
- **scrollbars={yes|no}**, which determines whether horizontal and vertical scrollbars are created when the document grows larger than the window dimensions. When set to yes, scrollbars are created. When set to no, scrollbars are not created.
- **status={yes|no}**, which determines whether a status bar appears at the bottom of the window. When set to yes, a status bar is created. When set to no, a status bar is not created.
- **titlebar={yes|no}**, which determines whether a title bar appears at the bottom of the window. When set to yes, a title bar is created. When set to no, a title bar is not created.
- **toolbar={yes|no}**, which determines whether a standard browser toolbar appears in the window. When set to yes, a toolbar is created. When set to no, a toolbar is not created.
- **height=*pixels***, which is the height of the window in pixels.
- **resizable={yes|no}**, which determines whether a user is able to resize the window. If set to yes, a user can resize the window. If set to no, a user cannot resize the window.

Displaying a URL in a Frame

The following JavaScript code is called from a script event handler and uses IWCLink as part of a technique to invoke an external procedure, and to supply the procedure's parameter dynamically at run time.

```
1. var theReport = "http://172.19.81.107/ibi_apps/WFServlet?IBIF_
   focexec=rsales4&IBIF_parms=STCD%3D"
```

```
2. theReport = theReport + document.Form1.EditBox1.value;
```

```
3. IWCLink(theReport,"MyFrame",0,menubar=no,resizable=no,scrollbars=no,
  status=no,toolbar=no,height=600,width=600");
```

These commands accomplish the following:

1. Defines a variable named theReport and initializes it to the target URL.

When you use IWCLink as part of a technique to invoke an external procedure, the target URL must identify the WebFOCUS script (IPAddress/ibi_apps/WFServlet), the target external procedure (?IBIF_focexec=ProcedureName), and the procedure's parameters (&IBIF_parms=ParameterName%3D). A parameter name is the name of the target procedure's corresponding Dialogue Manager variable without the initial ampersand. Note that %3D is the HTML code for an equal sign; the next statement will append the parameter's value to the equal sign.

In this case, the target procedure is named rsales4, and rsales4 has a parameter named STCD.

2. Assigns a value from an edit box (Form1.EditBox1) to the target procedure's STCD parameter by appending the value to the URL string in theReport.
3. Invokes IWCLink to display a WebFOCUS reporting session, running the external procedure rsales4, in the frame named MyFrame.

If you want the reporting session to appear in a new browser window, you would leave the second argument blank and change the third argument from 0 to 1.

The remaining arguments beginning with "menubar" customize the appearance of the browser window; for information about browser settings, see your browser documentation.

IWCSwitchToSecure and IWCSwitchToUnsecure: Turning the Secure Sockets Layer On and Off

The IWCSwitchToSecure and IWCSwitchToUnsecure functions turn the Secure Sockets Layer on and off, respectively. Use these two functions when configuring an application that requires certain transmissions to be private, such as transferring credit card information. Currently, these functions are most commonly used in e-commerce applications.

Before using IWCSwitchToSecure and IWCSwitchToUnsecure, you must do the following:

- Obtain secure certification for your Web server.
- For an e-commerce application, purchase an e-commerce product from a vendor. The product verifies your credit card number and completes the transaction.

IWCSwitchToSecure and IWCSwitchToUnsecure are JavaScript functions. JavaScript is case-sensitive. Ensure you enter these functions exactly as they appear. You can reference these functions in a VBScript or JavaScript.

Turn Secure Sockets Layer On

```
IWCSwitchToSecure();
```

Turn Secure Sockets Layer Off

```
IWCSwitchToUnsecure();
```

IWCTrigger: Calling a Maintain Function From a Script Handler

The IWCTrigger function can be used in two ways:

- To control the Maintain Data application when a local validation test succeeds. If the validation test fails, the function returns the end user to the form from which they executed it.

If you use IWCTrigger in a script library, ensure the Maintain function you are calling is in the same procedure in which you are using the script library.

- To retrieve the value of an ActiveX Control property in a Maintain function. In an event handler for an ActiveX control event, use a script function for the handler and

then call the Maintain function using IWCTrigger.

IWCTrigger can be used in JavaScript or VBScript. IWCTrigger is a Maintain Data-supplied script function for use in any Maintain Data application.

Call a Maintain Function From a Script Handler

```
IWCTrigger("functionname",[, "parm"]
```

where:

functionname

Is the Maintain function to call. Scripts are case-sensitive, so you must specify the name using the same uppercase and lowercase letters that you used to name the function in the Maintain Data procedure.

parm

Is a parameter being passed to the function.

Retrieve a Parameter From the Called Function

```
formname.Triggervalue
```

where:

formname

Is the name of the form in the Maintain Data application.

Pass the Value of an ActiveX Control Property to a Maintain Function

```
IWCTrigger ("function",document.form.control.property);
```

where:

function

Is the Maintain function you are calling.

form

Is the name of the form on which the ActiveX control is located.

control

Is the name of the ActiveX control.

property

Is the name of the ActiveX control property (look for ActiveX control properties in the ActiveX tab of the property sheet for the ActiveX control).

Passing an ActiveX Control Value to a Maintain Function

If you have an ActiveX calendar control on Form1 that has a property called Month, you can use IWCTrigger to send the value of Month to a Maintain function called UpdateDate, via either JavaScript or VBScript:

```
IWCTrigger("UpdateDate",document.Form1.CalendarControl.Month);
```

IWC.FindAppCGIValue: Finding a WebFOCUS Parameter or Variable Value

The IWC.FindAppCGIValue function finds WebFOCUS parameter or variable values by pairing the parameter or variable name with the Maintain Data variable name to which the value is assigned.

i Note: IWC.FindAppCGIValue retrieves values, but cannot directly assign the values to a Maintain Data variable as IWC.GetAppCGIValue does.

Find a WebFOCUS Parameter Value

```
IWC.FindAppCGIValue(name,value);
```

where:

name

Is the WebFOCUS parameter or variable whose value you are finding.

value

Is the Maintain Data variable that receives the value of the WebFOCUS parameter or variable.

Finding a Variable Value From a Launch Form

IWC.findAppCgiValue finds the user name and password values of the IBIC_user and IBIC_pass variables, respectively:

```
Maintain  
COMPUTE username/A8;  
COMPUTE password/A8;  
IWC.findAppCgiValue("IBIC_user", username);  
IWC.findAppCgiValue("IBIC_pass", password);
```

Finding Parameterized Data From Excel

IWC.findAppCgiValue finds the values for fields listed in an Excel file:

```

MAINTAIN FILE car
MODULE IMPORT (webbase2 errors);
Case Top
compute xlsRetail_Cost/a0;
Infer car.ORIGIN.COUNTRY car.COMP.CAR car.CARREC.MODEL
car.BODY.BODYTYPE car.BODY.RETAIL_COST into car_stack;
car_stack.FocCount=1;
car_stack.FocIndex=1;
iwc.findAppCgiValue("COUNTRY",car_stack.country);
iwc.findAppCgiValue("CAR",car_stack.car);
iwc.findAppCgiValue("MODEL",car_stack.model);
iwc.findAppCgiValue("BODYTYPE",car_stack.bodytype);
iwc.findAppCgiValue("RETAIL_COST",xlsRetail_Cost);
car_stack.retail_cost = xlsRetail_Cost;
update car.BODY.RETAIL_COST from car_stack;
EndCase
END

```

IWC.GetAppCGIValue: Retrieving a WebFOCUS Parameter or Variable

The IWC.GetAppCGIValue function retrieves the value of a WebFOCUS parameter or variable and imports it into a Maintain Data variable. IWC.GetAppCGIValue returns the value from the HTTP request header if the name of the parameter or variable is passed.

If the passed parameter or variable name is not found, the function returns a null value. Therefore, you can check for errors by looking for a null value, then handle the error as needed.

Both the IWC.FindAppCGIValue and IWC.GetAppCGIValue functions are supported, but it is recommended you use IWC.GetAppCGIValue. This function allows the parameter or variable value to be directly assigned to a Maintain Data variable, while IWC.FindAppCGIValue does not.



Note: Unlike Maintain Data variables, WebFOCUS parameters and variables are case-sensitive.

Retrieve a WebFOCUS Parameter

```
Declare mnt_var/type_length = IWC.GetAppCGIValue(parm);
```

where:

mnt_var

Is the Maintain Data variable that receives the ASCII return value of the WebFOCUS parameter or variable. The value is unescaped before being passed to the Maintain Data variable.

type_length

Is the selected type and length format of the Maintain Data variable.

parm

Is the WebFOCUS parameter or variable to import. This value is case-sensitive.

Retrieving a WebFOCUS Parameter

IWC.getAppCGIValue retrieves the PRODUCT_ID WebFOCUS parameter:

```
Maintain File GGPRODS  
Infer Product_ID into prodstk;  
Declare pcode/a4=IWC.getAppCGIValue("PRODUCT_ID");  
For 1 next Product_ID into prodstk where Product_ID eq pcode;
```

Simplified Statistical Functions

Simplified statistical functions can be called in a COMPUTE command to perform statistical calculations on the internal matrix that is generated during TABLE request processing. The STDDEV and CORRELATION functions can also be called as a verb object in a display command. Prior to calling a statistical function, you need to establish the size of the partition on which these functions will operate, if the request contains sort fields.



Note: It is recommended that all numbers and fields used as parameters to these functions be double-precision.

Specify the Partition Size for Simplified Statistical Functions

```
SET PARTITION_ON = {FIRST|PENULTIMATE|TABLE}
```

where:

FIRST

Uses the first (also called the major) sort field in the request to partition the values.

PENULTIMATE

Uses the next to last sort field where the COMPUTE is evaluated to partition the values. This is the default value.

TABLE

Uses the entire internal matrix to calculate the statistical function.

CORRELATION: Calculating the Degree of Correlation Between Two Sets of Data

The CORRELATION function calculates the correlation coefficient between two numeric fields. The function returns a numeric value between zero (-1.0) and 1.0.

Calculate the Correlation Coefficient Between Two Fields

```
CORRELATION(field1, field2)
```

where:

field1

Numeric

Is the first set of data for the correlation.

field2

Numeric

Is the second set of data for the correlation.

i Note: Arguments for CORRELATION cannot be prefixed fields. If you need to work with fields that have a prefix operator applied, apply the prefix operators to the fields in COMPUTE commands and save the results in a HOLD file. Then, run the correlation against the HOLD file.

Calculating a Correlation

The following request calculates the correlation between the DOLLARS and BUDDOLLARS fields converted to double precision.

```

DEFINE FILE ibisamp/ggsales
DOLLARS/D12.2 = DOLLARS;
BUDDOLLARS/D12.2 = BUDDOLLARS;
END
TABLE FILE ibisamp/ggsales
SUM DOLLARS BUDDOLLARS
CORRELATION(DOLLARS, BUDDOLLARS)
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

CORRELATION		
DOLLARS		
<u>DOLLARS</u>	<u>BUDDOLLARS</u>	<u>BUDDOLLARS</u>
46,156,290.00	46,220,778.00	.895691073

CORRELATION calculates the correlation between DOLLARS and BUDDOLLARS.

```
CORRELATION(DOLLARS, BUDDOLLARS)
```

For DOLLARS=46,156,290.00 and BUDDOLLARS=46,220,778.00, the result is 0.895691073.

KMEANS_CLUSTER: Partitioning Observations Into Clusters Based on the Nearest Mean Value

The KMEANS_CLUSTER function partitions observations into a specified number of clusters based on the nearest mean value. The function returns the cluster number assigned to the field value passed as a parameter.

i Note: If there are not enough points to create the number of clusters requested, the value -10 is returned for any cluster that cannot be created.

Partition Observations Into Clusters Based on the Nearest Mean Value

```
KMEANS_CLUSTER(number, percent, iterations, tolerance,  
                [prefix1.]field1[, [prefix1.]field2 ...])
```

where:

number

Integer

Is number of clusters to extract.

percent

Numeric

Is the percent of training set size (the percent of the total data to use in the calculations). The default value is AUTO, which uses the internal default percent.

iterations

Integer

Is the maximum number of times to recalculate using the means previously generated. The default value is AUTO, which uses the internal default number of iterations.

tolerance

Numeric

Is a weight value between zero (0) and 1.0. The value AUTO uses the internal default tolerance.

prefix1, prefix2

Defines an optional aggregation operator to apply to the field before using it in the calculation. Valid operators are:

- **SUM.** which calculates the sum of the field values. SUM is the default value.
- **CNT.** which calculates a count of the field values.
- **AVE.** which calculates the average of the field values.

- **MIN.** which calculates the minimum of the field values.
- **MAX.** which calculates the maximum of the field values.
- **FST.** which retrieves the first value of the field.
- **LST.** which retrieves the last value of the field.

i Note: The operators PCT., RPCT., TOT., MDN., MDE., RNK., and DST. are not supported.

field1

Numeric

Is the set of data to be analyzed.

field2

Numeric

Is an optional set of data to be analyzed.

Partitioning Data Values Into Clusters

The following request partitions the DOLLARS field values into four clusters and displays the result as a scatter chart in which the color represents the cluster. The request uses the default values for the percent, iterations, and tolerance parameters by passing them as the value 0 (zero).


```
SET PARTITION_ON = PENULTIMATE
GRAPH FILE GGSales
PRINT UNITS DOLLARS
COMPUTE KMEAN1/D20.2 TITLE 'K-MEANS'= KMEANS_CLUSTER(4, AUTO, AUTO,
AUTO, DOLLARS);
ON GRAPH SET LOOKGRAPH SCATTER
ON GRAPH PCHOLD FORMAT JSCHART
ON GRAPH SET STYLE *
INCLUDE=IBFS:/FILE/IBI_HTML_DIR/ibi_themes/Warm.sty,$
type = data, column = N2, bucket=y-axis,$
type=data, column= N1, bucket=x-axis,$
type=data, column=N3, bucket=color,$
GRID=OFF,$
*GRAPH_JS_FINAL
```

```

colorScale: {
    colorMode: 'discrete',
    colorBands: [{start: 1, stop: 1.99, color: 'red'}, {start: 2, stop:
2.99, color: 'green'},
    {start: 3, stop: 3.99, color: 'yellow'}, {start: 3.99,
stop: 4, color: 'blue'} ]
}
*END
ENDSTYLE
END

```

The output is shown in the following image.

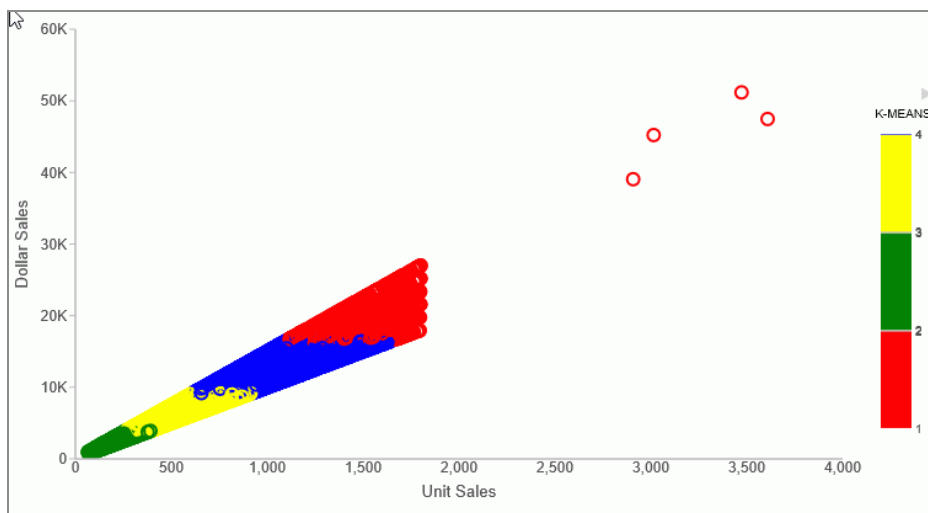

MULTIREGRESS: Creating a Multivariate Linear Regression Column

MULTIREGRESS derives a linear equation that best fits a set of numeric data points, and uses this equation to create a new column in the report output. The equation can be based on one or more independent variables.

The equation generated is of the following form, where y is the dependent variable and x1, x2, and x3 are the independent variables.

$$y = a1 \times x1 \ [+ \ a2 \times x2 \ [+ \ a3 \times x3 \ \dots] \ + \ b$$

When there is one independent variable, the equation represents a straight line. When there are two independent variables, the equation represents a plane, and with three independent variables, it represents a hyperplane. You should use this technique when you have reason to believe that the dependent variable can be approximated by a linear combination of the independent variables.

Create a Multivariate Linear Regression Column

```
MULTIREGRESS(input_field1, [input_field2, ...])
```

where:

input_field1, input_field2 ...

Are any number of field names to be used as the independent variables. They should be independent of each other. If an input field is non-numeric, it will be categorized to transform it to numeric values that can be used in the linear regression calculation.


Creating a Multivariate Linear Regression Column

The following request uses the DOLLARS and BUDDOLLARS fields to generate a regression column named Estimated_Dollars.

```
GRAPH FILE GGSales
SUM BUdunits UNITS BUdDOLLARS DOLLARS
COMPUTE Estimated_Dollars/F8 = MULTIREGRESS(DOLLARS, BUdDOLLARS);
BY DATE
ON GRAPH SET LOOKGRAPH LINE
ON GRAPH PCHOLD FORMAT JSCHART
ON GRAPH SET STYLE *
INCLUDE=IBFS:/FILE/IBI_HTML_DIR/ibi_themes/Warm.sty,$
type=data, column = n1, bucket = x-axis,$
type=data, column= dollars, bucket=y-axis,$
type=data, column= buddollars, bucket=y-axis,$
type=data, column= Estimated_Dollars, bucket=y-axis,$
*GRAPH_JS
"series":[
{"series":2, "color":"orange"}]
*END
```

```
ENDSTYLE
END
```

The output is shown in the following image. The orange line represents the regression equation.

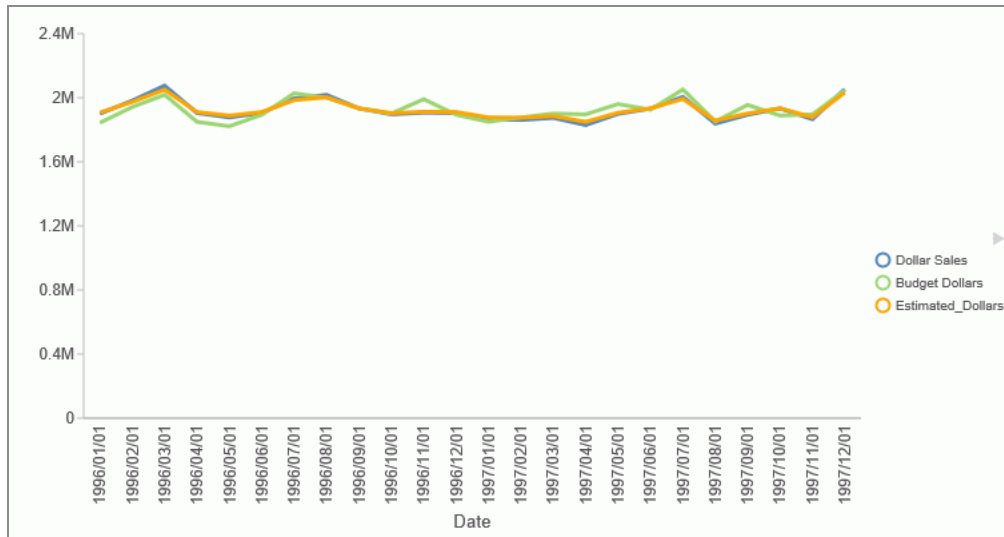

OUTLIER: Identifying Outliers in Numeric Data

The $1.5 \times \text{IQR}$ (Inner Quartile Range) rule is a common way to identify outliers in data. This rule defines an outlier as a value that is above or below 1.5 times the inner quartile range in the data. The inner quartile range is based on sorting the data values, dividing it into equal quarters, and calculating the range of values between the first quartile (the value one quarter of the way through the sorted data) and third quartile (the value three quarters of the way through the sorted data). The value that is 1.5 times below the inner quartile range is called the *lower fence*, and the value that is 1.5 times above the inner quartile range is called the *upper fence*.

OUTLIER is not supported in a DEFINE expression. It can be used in a COMPUTE expression or a WHERE, WHERE TOTAL, or WHERE_GROUPED phrase.

Given a numeric field as input, OUTLIER returns one of the following values for each value of the field, using the $1.5 \times \text{IQR}$ rule:

- **0 (zero).** The value is not an outlier.

- **-1.** The value is below the lower fence.
- **1.** The value is above the upper fence.

Identify Outliers in Numeric Data

```
OUTLIER(input_field)
```

where:

input_field

Numeric

Is the numeric field to be analyzed.

Identifying Outliers

The following request defines the SALES field to have different values depending on the store code, and uses OUTLIER to determine whether each field value is an outlier.

```
DEFINE FILE GGSales
SALES/D12 = IF ((CATEGORY EQ 'Coffee') AND (STCD EQ 'R1019')) THEN 19000
  ELSE IF ((CATEGORY EQ 'Coffee') AND (STCD EQ 'R1020')) THEN 20000
  ELSE IF ((CATEGORY EQ 'Coffee') AND (STCD EQ 'R1040')) THEN 7000
  ELSE DOLLARS;
END
TABLE FILE GGSales
SUM SALES
COMPUTE OUT1/I3 = OUTLIER(SALES);
BY CATEGORY
BY STCD
WHERE CATEGORY EQ 'Coffee'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image. Values above 2 million are above the upper fence, values below 1 million are below the lower fence, and other values are not outliers:

<u>Category</u>	<u>Store ID</u>	<u>SALES</u>	<u>OUT1</u>
Coffee	R1019	2,280,000	1
	R1020	2,400,000	1
	R1040	840,000	-1
	R1041	1,576,915	0
	R1044	1,340,437	0
	R1088	1,375,040	0
	R1100	1,364,420	0
	R1109	1,459,160	0
	R1200	1,463,453	0
	R1244	1,553,962	0
	R1248	1,535,631	0
	R1250	1,386,124	0

RSERVE: Running an R Script

You can use the RSERVE function in a COMPUTE command to run an R script that returns vector output. This requires that you have a configured Adapter for Rserve.

Run an R Script

```
RSERVE(rserve_mf, input_field1, ...input_fieldn, output)
```

where:

rserve_mf

Is the synonym for the R script.

input_field1, ...input_fieldn

Are the independent variables used by the R script.

output

Is the dependent variable returned by the R script. It must be a single column (vector) of output.

Using RSERVICE to Run an R Script

The R script named `wine_run_model.R` predicts Bordeaux wine prices based on the average growing season temperature, the amount of rain during the harvest season, the amount of rain during the winter, and the age of the wine.

Using a configured connection (named `MyRserve`) for the Adapter for Rserve, and a sample data file named `wine_input_sample.csv`, you create the following synonym for the R script, as described in the *ibi™ WebFOCUS® Adapter Administration* manual.

Master File

```
FILENAME=WINE_RUN_MODEL, SUFFIX=RSERVE , $
  SEGMENT=INPUT_DATA, SEGTYPE=S0, $
    FIELDNAME=AGST, ALIAS=AGST, USAGE=D9.4, ACTUAL=STRING,
    MISSING=ON,
    TITLE='AGST', $
    FIELDNAME=HARVESTRAIN, ALIAS=HarvestRain, USAGE=I11, ACTUAL=STRING,
    MISSING=ON,
    TITLE='HarvestRain', $
    FIELDNAME=WINTERRAIN, ALIAS=WinterRain, USAGE=I11, ACTUAL=STRING,
    MISSING=ON,
    TITLE='WinterRain', $
    FIELDNAME=AGE, ALIAS=Age, USAGE=I11, ACTUAL=STRING,
    MISSING=ON,
    TITLE='Age', $
  SEGMENT=OUTPUT_DATA, SEGTYPE=U, PARENT=INPUT_DATA, $
    FIELDNAME=PRICE, ALIAS=Price, USAGE=D18.14, ACTUAL=STRING,
    MISSING=ON,
    TITLE='Price', $
```

Access File

```
SEGNAME=INPUT_DATA,
  CONNECTION=MyRserve,
  R_SCRIPT=/prediction/wine_run_model.r,
  R_SCRIPT_LOCATION=WFRS,
  R_INPUT_SAMPLE_DAT=prediction/wine_input_sample.csv, $
```


Now that the synonym has been created for the model, the model will be used to run against the following data file named wine_forecast.csv.

```
Year,Price,WinterRain,AGST,HarvestRain,Age,FrancePop
1952,7.495,600,17.1167,160,31,43183.569
1953,8.0393,690,16.7333,80,30,43495.03
1955,7.6858,502,17.15,130,28,44217.857
1957,6.9845,420,16.1333,110,26,45152.252
1958,6.7772,582,16.4167,187,25,45653.805
1959,8.0757,485,17.4833,187,24,46128.638
1960,6.5188,763,16.4167,290,23,46583.995
1961,8.4937,830,17.3333,38,22,47128.005
1962,7.388,697,16.3,52,21,48088.673
1963,6.7127,608,15.7167,155,20,48798.99
1964,7.3094,402,17.2667,96,19,49356.943
1965,6.2518,602,15.3667,267,18,49801.821
1966,7.7443,819,16.5333,86,17,50254.966
1967,6.8398,714,16.2333,118,16,50650.406
1968,6.2435,610,16.2,292,15,51034.413
1969,6.3459,575,16.55,244,14,51470.276
1970,7.5883,622,16.6667,89,13,51918.389
1971,7.1934,551,16.7667,112,12,52431.647
1972,6.2049,536,14.9833,158,11,52894.183
1973,6.6367,376,17.0667,123,10,53332.805
1974,6.2941,574,16.3,184,9,53689.61
1975,7.292,572,16.95,171,8,53955.042
1976,7.1211,418,17.65,247,7,54159.049
1977,6.2587,821,15.5833,87,6,54378.362
1978,7.186,763,15.8167,51,5,54602.193
```

The data file can be any type of file that R can read. In this case it is another .csv file. This file needs a synonym in order to be used in a report request. You create the synonym for this file using the Adapter for Delimited Files.

The following is the generated Master File, wine_forecast.mas.

```
FILENAME=WINE_FORECAST, SUFFIX=DFIX      , CODEPAGE=1252,
  DATASET=prediction/wine_forecast.csv, $
SEGMENT=WINE_FORECAST, SEGTYPE=S0, $
  FIELDNAME=YEAR1, ALIAS=Year, USAGE=I6, ACTUAL=A5V,
    MISSING=ON,      TITLE='Year', $
  FIELDNAME=PRICE, ALIAS=Price, USAGE=D8.4, ACTUAL=A7V,
    MISSING=ON,      TITLE='Price', $
  FIELDNAME=WINTERRAIN, ALIAS=WinterRain, USAGE=I5, ACTUAL=A3V,
    MISSING=ON,      TITLE='WinterRain', $
```

```

FIELDNAME=AGST, ALIAS=AGST, USAGE=D9.4, ACTUAL=A8V,
MISSING=ON, TITLE='AGST', $
FIELDNAME=HARVESTRAIN, ALIAS=HarvestRain, USAGE=I5, ACTUAL=A3V,
MISSING=ON, TITLE='HarvestRain', $
FIELDNAME=AGE, ALIAS=Age, USAGE=I4, ACTUAL=A2V, MISSING=ON,
TITLE='Age', $
FIELDNAME=FRANCEPOP, ALIAS=FrancePop, USAGE=D11.3, ACTUAL=A11V,
MISSING=ON, TITLE='FrancePop', $

```

The following is the generated Access File, wine_forecast.acx.

```

SEGNAME=WINE_FORECAST, DELIMITER=',', ENCLOSURE=", HEADER=YES,
CDN=COMMAS_DOT, CONNECTION=<local>, $

```

The following request, wine_forecast_price_report.fex, uses the RSERVE built-in function to run the script and return a report.

```

-*wine_forecast_price_report.fex
TABLE FILE PREDICTION/WINE_FORECAST
PRINT
  YEAR
  WINTERRAIN
  AGST
  HARVESTRAIN
  AGE

  COMPUTE PREDICTED_PRICE/D18.2 MISSING ON ALL=
    RSERVE(prediction/wine_run_model, AGST, HARVESTRAIN, WINTERRAIN,
AGE, Price); AS 'Predicted,Price'

ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Year</u>	<u>WinterRain</u>	<u>AGST</u>	<u>HarvestRain</u>	<u>Age</u>	<u>Predicted Price</u>
1952	600	17.1167	160	31	7.72
1953	690	16.7333	80	30	7.87
1955	502	17.1500	130	28	7.68
1957	420	16.1333	110	26	7.00
1958	582	16.4167	187	25	7.02
1959	485	17.4833	187	24	7.54
1960	763	16.4167	290	23	6.76
1961	830	17.3333	38	22	8.36
1962	697	16.3000	52	21	7.51
1963	608	15.7167	155	20	6.63
1964	402	17.2667	96	19	7.56
1965	602	15.3667	267	18	5.92
1966	819	16.5333	86	17	7.56
1967	714	16.2333	118	16	7.11
1968	610	16.2000	292	15	6.26
1969	575	16.5500	244	14	6.60
1970	622	16.6667	89	13	7.32
1971	551	16.7667	112	12	7.19
1972	536	14.9833	158	11	5.88
1973	376	17.0667	123	10	7.09
1974	574	16.3000	184	9	6.57
1975	572	16.9500	171	8	6.99
1976	418	17.6500	247	7	6.92
1977	821	15.5833	87	6	6.71
1978	763	15.8167	51	5	6.91

STDDEV: Calculating the Standard Deviation for a Set of Data Values

The STDDEV function returns a numeric value that represents the amount of dispersion in the data. The set of data can be specified as the entire population or a sample. The standard deviation is the square root of the variance, which is a measure of how observations deviate from their expected value (mean). If specified as a population, the

divisor in the standard deviation calculation (also called degrees of freedom) will be the total number of data points, N . If specified as a sample, the divisor will be $N-1$.

If x_i is an observation, N is the number of observations, and μ is the mean of all of the observations, the formula for calculating the standard deviation for a population is:

$$\sqrt{\frac{1}{N} \sum_{i=1}^N (x_i - \mu)^2}$$

To calculate the standard deviation for a sample, the mean is calculated using the sample observations, and the divisor is $N-1$ instead of N .

Calculate the Standard Deviation in a Set of Data

```
STDDEV(field, sampling)
```

where:

field

Numeric

Is the set of observations for the standard deviation calculation.

sampling

Keyword

Indicates the origin of the data set. Can be one of the following values.

- **P** Entire population.
- **S** Sample of population.

i Note: Arguments for STDDEV cannot be prefixed fields. If you need to work with fields that have a prefix operator applied, apply the prefix operators to the fields in COMPUTE commands and save the results in a HOLD file. Then, run the standard deviation against the HOLD file.

Calculating a Standard Deviation

The following request calculates the standard deviation of the DOLLARS field converted to double precision.

```
DEFINE FILE ibisamp/ggsales
DOLLARS/D12.2 = DOLLARS;
END
TABLE FILE ibisamp/ggsales
SUM DOLLARS STDDEV(DOLLARS,S)
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>DOLLARS</u>	STDS <u>DOLLARS</u>
46,156,290.00	6,157.711080272

STDDEV calculates the standard deviation of DOLLARS.

```
STDDEV(DOLLARS,S)
```

The result is 6,157.711080272.

Machine Learning (Python-based) Functions

The Machine Learning (Python-based) functions are FOCUS functions implemented as Python scripts. These Python scripts take advantage of Python packages such as scipy, numpy, scikit-learn, and pandas, which extend the Python capabilities to machine learning.

The Machine Learning (Python-based) functions perform regression, classification, extreme gradient boosting, and outlier detection using a variety of machine learning methods. The Python scripts perform a sequence of conventional machine learning tasks including scaling of the data where appropriate. They are built around a grid search with cross-validation. That is, some hyper-parameters (parameters that influence the learning process, but that are not model parameters) are identified, and models are built using a number of values for each hyper-parameter, in order to determine the optimal values. To determine optimality, cross-validation is used, which ensures that the performance is measured on a validation-subset of the data that is distinct from the training-subset. Rows with missing values in the target-column are not used for training and validation, but a predicted value is computed by the trained model.

You can generate the .csv file and accompanying Master File used in the examples by running the **WebFOCUS - Machine Learning Demo** tutorial in the WebFOCUS Reporting Server browser interface.

ANOMALY_IF: Detecting Outliers

ANOMALY_IF detects outliers using an Isolation Forest. An Isolation Forest uses decision trees to randomly and recursively split the space spanned by the observations $X_0, X_1, \dots$ into hyper-rectangles, each containing one or a small number of samples. Outlier samples can be isolated in a hyper-rectangle with fewer splits than samples that are in close vicinity of many other samples. The number of splits needed to reach a sample translates into the anomaly score of the sample.

Calculate an Anomaly Score

```
ANOMALY_IF('options' predictor_field1[, predictor_field2, ...])
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... , "parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"trees"

Is the number of decision trees in the forest. Allowed values are integers greater than 10. The default value is "100".

"score"

Defines the type of value returned by the function. If the score is "binary", the function returns -1 for anomalous samples and +1 for normal samples. If the score is "grade", a continuous anomaly score between -1.0 and 1.0 is returned, in which the more negative the number returned is, the more of an outlier the point is. Valid values are "binary" and "grade". The default value is "binary".

"max_samples"

Is the fraction of the rows in the training set used per tree. Allowed values are fractions between 0 (zero) and 1. The default value is "0.5".

"contamination"

Only applies when the score is "binary". Is the fraction of the samples in the training set that will be marked anomalous. Allowed values are fractions between 0 (zero) and 0.5. The default value is "0.1".

"train_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for training the model. The default value is "1.0".

predictor_field1[, predictor_field2, ...]

Numeric

Are one or more predictor field names.

Detecting Outliers Using ANOMALY_IF

The following procedure uses ANOMALY_IF to detect outliers using binary mode and predictors horsepower, peak RPM, city MPG, highway MPG, and price. Outliers are identified by the return value -1.00.

```
TABLE FILE imports85
PRINT horsepower peakRpm cityMpg highwayMpg price
COMPUTE AnomalyBinaryScore/D5.2 = ANOMALY_IF('
{"trees":"123","score":"binary","contamination":"0.2"}',
      horsepower, peakRpm, cityMpg, highwayMpg, price);
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>horsepower</u>	<u>peakRpm</u>	<u>cityMpg</u>	<u>highwayMpg</u>	<u>price</u>	<u>AnomalyBinaryScore</u>
111	5000	21	27	13495	1.00
111	5000	21	27	16500	1.00
154	5000	19	26	16500	1.00
102	5500	24	30	13950	1.00
115	5500	18	22	17450	1.00
110	5500	19	25	15250	1.00
110	5500	19	25	17710	1.00
110	5500	19	25	18920	1.00
140	5500	17	20	23875	-1.00
160	5500	16	22	.	-1.00
101	5800	23	29	16430	1.00
101	5800	23	29	16925	1.00
121	4250	21	28	20970	1.00
121	4250	21	28	21105	1.00
121	4250	20	25	24565	-1.00
182	5400	16	22	30760	-1.00
182	5400	16	22	41315	-1.00
182	5400	15	20	36880	-1.00
48	5100	47	53	5151	-1.00
70	5400	38	43	6295	1.00
70	5400	38	43	6575	1.00
68	5500	37	41	5572	1.00
68	5500	31	38	6377	1.00
102	5500	24	30	7957	1.00

The following version of the request uses grade mode with the same advanced parameters and predictors.

```
TABLE FILE imports85
PRINT horsepower peakRpm cityMpg highwayMpg price
COMPUTE AnomalyGradeScore/D5.2 = ANOMALY_IF(
{"trees":"123","score":"grade","contamination":"0.2"}',
horsepower, peakRpm,
cityMpg, highwayMpg, price);
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>horsepower</u>	<u>peakRpm</u>	<u>cityMpg</u>	<u>highwayMpg</u>	<u>price</u>	<u>AnomalyGradeScore</u>
111	5000	21	27	13495	.09
111	5000	21	27	16500	.08
154	5000	19	26	16500	.07
102	5500	24	30	13950	.08
115	5500	18	22	17450	.05
110	5500	19	25	15250	.09
110	5500	19	25	17710	.09
110	5500	19	25	18920	.08
140	5500	17	20	23875	-.01
160	5500	16	22	.	.00
101	5800	23	29	16430	.03
101	5800	23	29	16925	.03
121	4250	21	28	20970	.02
121	4250	21	28	21105	.02
121	4250	20	25	24565	-.01
182	5400	16	22	30760	-.03
182	5400	16	22	41315	-.09
182	5400	15	20	36880	-.06
48	5100	47	53	5151	-.16
70	5400	38	43	6295	.00
70	5400	38	43	6575	.00
68	5500	37	41	5572	.03
68	5500	31	38	6377	.10
102	5500	24	30	7957	.09
68	5500	31	38	6229	.10
68	5500	31	38	6692	.10
68	5500	31	38	7609	.09
102	5500	24	30	8558	.09
88	5000	24	30	8921	.10

CLASSIFY_BLR: Binary Logistic Regression

Binary logistic regression finds the best linear separation between two classes in the space spanned by the predictors. The target variable has two values (0 and 1), corresponding to the two classes. The predicted value is either a class assignment (0 or 1) or the probability of belonging to class 1.

Calculate a Binary Logistic Regression

```
CLASSIFY_BLR('options',
             predictor_field1[, predictor_field2, ...] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... ,"parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"proba"

Indicates whether to display a probability of being in the target class or a class prediction. Valid values are "no" (the default) or "yes". The value "yes" produces a probability Y ($0 \leq Y \leq 1$) for belonging to the class specified by "pos_label" (default is "1") for each point in the space. The value "no" produces a class-prediction Y (0 or 1) for each point in the space.

"pos_label"

Is relevant when "proba" is "yes". Specifies the class for which the probability of belonging is to be computed. Valid values are "0" and "1". The default is "1".

"train_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for training the model. The default value is "0.8".

"test_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"l2_grid"

Is a grid consisting of comma-separated positive numbers to be used as L2-regularization strengths. The default value is "0,1,1,10". The optimal value is chosen by cross-validation.

"kfold"

Is the number of folds used for cross-validation. The suggested values are integers between "2" and "10". The default value is "4".

predictor_field1[, predictor_field2, ...]

Numeric

Are one or more predictor field names.

target_field

Numeric

Is the target field.

Using CLASSIFY_BLR to Predict Number of Doors

The following TABLE request uses CLASSIFY_BLR to compute the number of doors in a car, using the default values for the advanced parameters and predictors price, height, horsepower, peak RPM, city MPG, and highway MPG.

```
TABLE FILE imports85
PRINT numOfDoors
COMPUTE predictedNumOfDoors/A6 = CLASSIFY_BLR(
{"proba":"no","kfold":"4","test_ratio":"0.2"}',
price, height, horsepower, peakRpm,
cityMpg, highwayMpg, numOfDoors);
WHERE price LT 30000
ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The partial output is shown in the following image.

<u>numOfDoors</u>	<u>predictedNumOfDoors</u>
two	two
two	two
two	two
four	four
four	four
two	four
four	four
four	four
four	four
two	two
two	four
four	four
two	four
four	four
four	four
two	two
two	two
four	two
two	two
two	two
two	two
four	two
four	two
four	two
.	two
four	four
two	two

CLASSIFY_KNN: K-Nearest Neighbors Classification

K-nearest neighbors classification is a method for assigning a class membership to a data point in the space spanned by the predictors. The classification is done by assigning the

class most common among its k nearest neighbors. This method requires having a distance definition in this space.

Calculate a K-Nearest Neighbors Classification

```
CLASSIFY_KNN('options',
             predictor_field1[, predictor_field2, ...] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... ,"parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"k"

Is the number of nearest neighbors. Allowed values are integers greater than 1. The default value is "5".

"p"

Is the power (p) of the L^p -distance. Allowed values are positive integers. The suggested values are "1" and "2". The default value is "2".

- power=1 calculates the distance as the sum of the absolute values of the differences between the coordinates (Manhattan distance).
- power=2 calculates the distance as the square root of the sum of the squares of the differences between the coordinates (Euclidean distance). This is the default value.

"prediction_ratio"

Is the fraction of the data that will be used for prediction. Allowed values are numbers between 0 and 1. The default value is "0.8".

"test_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"kfold"

Is the number of folds used in the grid-search with cross-validation. A grid-search of the nearest neighbors grid K/2, K, 2K is done. Suggested values are integers between "2" and "10". The default value is "4".

predictor_field1[, predictor_field2, ...]

Numeric

Are one or more predictor field names.

target_field

Numeric

Is the target field.

Predicting Class Assignment Using CLASSIFY_KNN

The following request creates classes 0 (zero) and 1 based on the number of doors in a car, then uses CLASSIFY_KNN to predict the class assignment using the 10 nearest neighbors and Euclidean distance, with predictors price, height, horsepower, peak RPM, city MPG, and highway MPG. The data set includes rows with missing target values.

```
DEFINE FILE imports85
OUR_CLASSES/I2 MISSING ON = IF numOfDoors EQ MISSING THEN MISSING
                           ELSE IF numOfDoors EQ 'two' THEN 0
                           ELSE 1;

END
TABLE FILE imports85
PRINT numOfDoors BODYSTYLE OUR_CLASSES
COMPUTE predictedCLASSES/I2 = CLASSIFY_KNN('
{"K":"10","p":"2","kfold":"4","test_ratio":"0.2"}',
      price, height, horsepower, peakRpm,
```

```

        cityMpg, highwayMpg, OUR_CLASSES);

ON TABLE SET PAGE NOPAGE
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

Partial output is shown in the following image.

<u>numOfDoors</u>	<u>bodyStyle</u>	<u>OUR_CLASSES</u>	<u>predictedCLASSES</u>
two	convertible	0	0
two	convertible	0	0
two	hatchback	0	0
four	sedan	1	1
four	sedan	1	1
two	sedan	0	1
four	sedan	1	1
four	wagon	1	1
four	sedan	1	1
two	hatchback	0	0
two	sedan	0	1
four	sedan	1	1
two	sedan	0	1
four	sedan	1	1
four	sedan	1	1
four	sedan	1	1
two	sedan	0	1
four	sedan	1	1
two	hatchback	0	0
two	hatchback	0	0
four	sedan	1	0
two	hatchback	0	0
two	hatchback	0	0
two	hatchback	0	0
four	hatchback	1	0
four	sedan	1	0
four	sedan	1	0
.	sedan	.	0
four	wagon	1	1
two	hatchback	0	0

CLASSIFY_RF: Random Forest Classification

CLASSIFY_RF creates a random forest, which is an ensemble of decision trees. Each decision tree produces an independent classification prediction, and the prediction of the forest is the majority vote of the individual predictions.

Calculate a Random Forest Classification

```
CLASSIFY_RF('options', number_of_trees,
            predictor_field1[, predictor_field2, ...] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... , "parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"trees"

Is the number of decision trees in the forest. Allowed values are integers greater than 10. The default value is "100".

"feature_importances"

Specifies whether to compute feature importances. Valid values are "yes" and "no". The default value is "yes".

"train_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for training the model. The default value is "0.8".

"test_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"scoring"

The training optimizes either for F1 Score (weighted average of Precision and Recall) or accuracy (ratio of correctly predicted observations to total observations). Allowed values are "f1_score" and "accuracy". The default value is "f1_score".

"min_values_leaf_grid"

Is a grid of the minimum number of samples required in a node in order to split the node, or a single value. The optimal value is chosen by cross-validation. The default value is "1,3,5".

predictor_field1[, predictor_field2, ...]

Numeric or alphanumeric

Are one or more predictor field names.

target_field

Numeric or alphanumeric

Is the target field.

Predicting Class Assignment Using CLASSIFY_RF

The following procedure uses CLASSIFY_RF to predict a class assignment for the number of doors in a car, using a random forest with 100 decision trees, with predictors price, body style, height, horsepower, peak RPM, city MPG, highway MPG.

```
TABLE FILE imports85
PRINT numOfDoors
COMPUTE predictedNumOfDoors/A6 = CLASSIFY_RF('
{"trees":"100","kfold":"4","test_ratio":"0.2"}',
      price, bodyStyle, height, horsepower,
      peakRpm, cityMpg, highwayMpg, numOfDoors);

WHERE price LT 30000
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>numOfDoors</u>	<u>predictedNumOfDoors</u>
two	two
two	two
two	two
four	four
four	four
two	four
four	four
four	four
four	four
two	two
two	four
four	four
two	four
four	four
four	four
two	two
two	two
four	four
two	two
two	two
two	two
four	two
four	four
four	four
.	four
four	four
two	two
two	two

CLASSIFY_XGB: Extreme Gradient Boosting Classification

CLASSIFY_XGB creates a series of decision trees, where each new tree attempts to improve on the predictive capabilities of the prior trees. Each decision tree arrives at its prediction based on a partitioning of the space spanned by the predictors, using a recursive

succession of binary splits. At each split, the values of one predictor are partitioned into two sets. The splits are guided (choice of the split-predictor and the split-point) by the greedy maximization of an objective function that involves measuring how much alike the y-values of the data points in each partition are (called purity), as well as a regularization term. Early stopping is applied when the predictive capability starts to deteriorate.

Calculate an Extreme Gradient Boosting Classification

```
CLASSIFY_XGB('options',
             predictor_field1[, predictor_field2, ...] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... , "parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"trees"

Is the number of decision trees in the forest. Allowed values are integers greater than 10. The default value is "300".

"train_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for training the model. The default value is "0.8".

"test_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"early_stopping_rounds"

Specifies the number of added trees such that if the algorithm has not improved its performance in this many added trees, it stops. Allowed values are integers between 1 and the number of trees. The default value is "10".

"l2_grid"

Is a grid consisting of comma-separated positive numbers to be used as L2-regularization strengths. The default value is "0,1,1,10". The optimal value is chosen by cross-validation.

"kfold"

Is the number of folds used in the grid-search with cross-validation. The suggested values are integers between "2" and "10". The default value is "4".

"max_depth_grid"

Is the maximum depth of each decision tree. A grid in the form "4,5,6" is allowed. The default value is "5". The optimal value is chosen by cross-validation.

"scoring"

The training optimizes either for F1 Score (weighted average of Precision and Recall) or accuracy (ratio of correctly predicted observations to total observations). Allowed values are "f1_score" and "accuracy". The default value is "f1_score".

predictor_field1[, predictor_field2, ...]

Numeric or Alphanumeric

Are one or more predictor field names.

target_field

Numeric or alphanumeric

Is the target field.

Predicting Price Using CLASSIFY_XGB

The following procedure uses CLASSIFY_XGB to predict the number, using 400 trees, 10 early stopping rounds, and default values for the other advanced parameters, and with predictors price, body style, height, horsepower, peak RPM, city MPG, and highway MPG.

```
TABLE FILE imports85
PRINT numOfDoors
COMPUTE predictedNumOfDoors/A6 = CLASSIFY_XGB('{ "trees": "400", "early_
stopping_rounds": "10",
                                     "kfold": "4", "test_ratio": "0.2" }',
                                     price, bodyStyle, height, horsepower,
                                     peakRpm, cityMpg, highwayMpg, numOfDoors);
WHERE price LT 30000
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>numOfDoors</u>	<u>predictedNumOfDoors</u>
two	four
two	four
two	two
four	four
four	four
two	four
four	four
four	four
four	four
two	two
two	four
four	four
two	four
four	four
four	four
two	two
two	two
four	four
two	two
two	two
two	two
four	two
four	four
four	four
.	four
four	four
two	two

REGRESS_KNN: K-Nearest Neighbors Regression

K-nearest neighbors regression is a method for predicting a target value for a data point in the space spanned by the predictors. The prediction is the average of the target values of its K nearest neighbors. This method requires having a distance definition in this space.

Calculate a K-Nearest Neighbors Regression

```
REGRESS_KNN('options',
            predictor_field1[, predictor_field2, ...] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... ,"parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"K"

Is the number of nearest neighbors to participate in the prediction. Allowed values are integers greater than 1. The default value is "5".

"p"

Is the power (p) of the L^p-distance. Allowed values are integers. Suggested values are "1" and "2". The default value is "2".

- power=1 calculates the distance as the sum of the absolute values of the differences between the coordinates (Manhattan distance).
- power=2 calculates the distance as the square root of the sum of the squares of the differences between the coordinates (Euclidean distance).

"prediction_ratio"

Is the fraction of the data that will be used for prediction. Allowed values are numbers between 0 and 1. The default value is "0.8".

"test_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"kfold"

Is the number of folds used in the grid-search with cross-validation. A grid-search of the nearest neighbors grid K/2, K, 2K is done. Suggested values are integers between "2" and "10". The default value is "4".

predictor_field1[, predictor_field2, ...]

Numeric

Are one or more predictor field names.

target_field

Numeric

Is the target field.

Predicting Price Using REGRESS_KNN

The following request uses REGRESS_KNN to predict price using the default advanced parameters (10 nearest neighbors and Euclidean distance), with predictors height, horsepower, peak RPM, city MPG, and highway MPG.

```
TABLE FILE imports85
PRINT price
COMPUTE predictedPrice/I5 = REGRESS_KNN('
{"K":"10","p":"2","kfold":"4","prediction_ratio":"0.8","test_
ratio":"0.2"}',
      height, horsepower, peakRpm,
      cityMpg, highwayMpg, price);
WHERE price LT 30000
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>price</u>	<u>predictedPrice</u>
13495	12461
16500	12461
16500	16099
13950	12951
17450	17266
15250	17266
17710	17612
18920	17612
23875	18281
.	16099
16430	13541
16925	13541
20970	20690
21105	20690
24565	24088
5151	6851
6295	5934
6575	5934
5572	5724
6377	6677
7957	8765
6229	6685
6692	6685

REGRESS_POLY: Polynomial Regression

Polynomial regression fits the target column to a polynomial expression of the predictor columns. The degree of the polynomial is specified as an input argument to the function.

Calculate a Polynomial Regression Column

```
REGRESS_POLY('options',
             predictor_field1, predictor_field2, [...,] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... ,"parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"degree"

Optional. Is the degree of the polynomial. Low degree polynomials are recommended. The default value is "1".

"interaction_only"

Optional. Controls the terms that are generated in the polynomial equation. The default value is "no". Allowed values are:

- **"no"**, which generates the most general polynomial of degree *degree* based on the predictor fields.
- **"yes"**, which uses only terms linear in each predictor $X_0, X_1, \dots$, and cross-terms of the form $X_0 \cdot X_1 \cdot X_2$ of at most *degree* predictors.

"train_ratio"

Optional. Is a value between 0 and 1 that specifies the fraction of data used for training the model. The default value is "0.8".

"test_ratio"

Optional. Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"l2_grid"

Optional. Is a grid consisting of comma-separated positive numbers to be used as L2-regularization strengths. The default value is "0,1,1,10". The optimal value is chosen by cross-validation.

"kfold"

Optional. Is the number of folds used for cross-validation. Suggested values are integers between "2" and "10". The default value is "4".

predictor_field1, predictor_field2, [...]

Numeric

Are at least two predictor field names.

target_field

Numeric

Is the target field.

Using REGRESS_POLY to Predict Price

The following request uses REGRESS_POLY to compute the predicted price using a polynomial regression of degree 4 and predictors height, horsepower, peak RPM, city MPG, and highway MPG.

```
TABLE FILE imports85
PRINT price
COMPUTE predictedPrice/I5 = REGRESS_POLY('{ "degree": "4" }',
      height, horsepower, peakRpm,
      cityMpg, highwayMpg, price);
WHERE price LT 30000
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The partial output is shown in the following image.

<u>price</u>	<u>predictedPrice</u>
13495	13981
16500	13981
16500	14360
13950	11755
17450	18201
15250	14163
17710	17545
18920	17545
23875	22230
.	15711
16430	13639
16925	13639
20970	19351
21105	19351
24565	23792
5151	9471
6295	7992
6575	7992
5572	5927
6377	6849
7957	9107
6229	6624
6692	6624
7609	6624
8558	8940
8921	8948

REGRESS_RF: Random Forest Regression

REGRESS_RF creates a random forest, which is an ensemble of decision trees. Each decision tree produces an independent regression prediction, and the prediction of the forest is the average of the individual predictions.

Calculate a Random Forest Regression

```
REGRESS_RF('options',
           predictor_field1[, predictor_field2, ...] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... , "parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"trees"

Is the number of decision trees in the forest. Allowed values are integers greater than 10. The default value is "100".

"feature_importances"

Specifies whether to compute feature importances. Valid values are "yes" and "no". The default value is "yes".

"train_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for training the model. The default value is "0.8".

"test_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"min_values_leaf_grid"

Is a grid of the minimum number of samples required in a node in order to split the node, or a single value. The optimal value is chosen by cross-validation. The default

value is "1,3,5".

predictor_field1[, predictor_field2, ...]

Numeric or Alphanumeric

Are one or more predictor field names.

target_field

Numeric

Is the target field.

Predicting Price Using REGRESS_RF

The following procedure uses REGRESS_RF to predict price, using a random forest with default values for all of the advanced parameters, and with predictors number of doors, body style, height, horsepower, peak RPM, city MPG, and highway MPG.

```
TABLE FILE imports85
PRINT price
COMPUTE predictedPrice/I5 = REGRESS_RF('',
                                     numOfDoors, bodyStyle, height, horsepower,
                                     peakRpm, cityMpg, highwayMpg, price);
WHERE price LT 30000
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>price</u>	<u>predictedPrice</u>
13495	15210
16500	15210
16500	14983
13950	13184
17450	16074
15250	15459
17710	18590
18920	18573
23875	21104
.	16532
16430	12923
16925	14432
20970	19721
21105	20481
24565	23470
5151	5910
6295	6810
6575	8448
5572	6043
6377	6745
7957	8249
6229	6627
6692	7152
7609	7152
8558	9234
8921	9668

REGRESS_XGB: Extreme Gradient Boosting Regression

REGRESS_XGB creates a series of decision trees, where each new tree attempts to improve on the predictive capabilities of the prior trees. Each decision tree arrives at its prediction based on a partitioning of the space spanned by the predictors, using a recursive succession of binary splits. At each split, the values of one predictor are partitioned into two sets. The splits are guided (choice of the split-predictor and the split-point) by the

greedy maximization of an objective function that involves measuring how much alike the y-values of the data points in each partition are (called purity), as well as a regularization term. Early stopping is applied when the predictive capability starts to deteriorate.

Calculate an Extreme Gradient Boosting Regression

```
REGRESS_XGB('options',
            predictor_field1[, predictor_field2, ...] target_field)
```

where:

'options'

Is a dictionary of advanced parameters that control the model attributes, enclosed in single quotation marks. Most of these parameters have a default value, so you can omit them from the request, if you want to use the default values. Even with no advanced parameters, the single quotation marks are required. The format of the advanced parameter dictionary is:

```
'{"parm_name1": "parm_value1", ... ,"parm_namei": "parm_valuei"}'
```

The following advanced parameters are supported:

"trees"

Is the number of decision trees in the forest. Allowed values are integers greater than 10. The default value is "300".

"train_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for training the model. The default value is "0.8".

"test_ratio"

Is a value between 0 and 1 that specifies the fraction of data used for testing the model. The default value is "0.2".

"early_stopping_rounds"

Specifies the number of added trees such that if the algorithm has not improved its performance in this many added trees, it stops. Allowed values are integers between 1 and the number of trees. The default value is "10".

"l2_grid"

Is a grid consisting of comma-separated positive numbers to be used as L2-regularization strengths. The default value is "0,1,1,10". The optimal value is chosen by cross-validation.

"kfold"

Is the number of folds used in the grid-search with cross-validation. Suggested values are integers between "2" and "10". The default value is "4".

"max_depth_grid"

Is the maximum depth of each decision tree. A grid in the form "4,5,6" is allowed. The default value is "5". The optimal value is chosen by cross-validation.

predictor_field1[, predictor_field2, ...]

Numeric or Alphanumeric

Are one or more predictor field names.

target_field

Numeric

Is the target field.

Predicting Price Using REGRESS_XGB

The following procedure uses REGRESS_XGB to predict price, using 400 trees and default values for the other advanced parameters, and with predictors number of doors, body style, height, horsepower, peak RPM, city MPG, and highway MPG.

```
TABLE FILE imports85
PRINT price
COMPUTE predictedPrice/I5 = REGRESS_XGB('{ "trees": "400", "early_stopping_
rounds": "10",
                                     "kfold": "4", "test_ratio": "0.2"}',
```

```

                                numOfDoors, bodyStyle, height, horsepower,
                                peakRpm, cityMpg, highwayMpg, price);
WHERE price LT 30000
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

Partial output is shown in the following image.

<u>price</u>	<u>predictedPrice</u>
13495	15634
16500	15634
16500	14517
13950	13522
17450	14939
15250	15343
17710	19065
18920	19097
23875	21800
.	17161
16430	13499
16925	13738
20970	21822
21105	21352
24565	24267
5151	5704
6295	6414
6575	7402
5572	6201
6377	6821
7957	8410
6229	6778
6692	7566
7609	7566
8558	9300
8921	9204
12964	14641

RUN_MODEL and RUN_MODEL2: Running a Saved Python Model

Once you create a model using one of the machine learning functions by running it on a set of training and test data, you can save the model and run it against new data. The type of data source used to run the model can be any data source that WebFOCUS can read.

Use the RUN_MODEL function when the predictor fields in the new data source have the same field names as the predictor fields used to generate the model. Use the RUN_MODEL2 function if the field names are different. The data types and lengths must be the same in either case.

Save a Python-Based Model

```
ON TABLE HOLD FORMAT PYTHON MODEL fieldname AS app/modelname
```

where:

fieldname

Is the fieldname in the COMPUTE command that returned the value from the machine learning function.

app

Is the application folder in which to save the model.

modelname

Is the name of the saved model.

Saving a Python Model

The following request uses the REGRESS_RF function to return a field named predictedPrice and save it as a model named model5 in the application folder app1/mymodels.

```
TABLE FILE imports85
PRINT price
COMPUTE predictedPrice/I5 = REGRESS_RF('{ "trees": "123", "test_
ratio": "0.20", "train_ratio": "0.80" }',
      make, numOfDoors, bodyStyle, height, horsepower,
      peakRpm, cityMpg, highwayMpg, price);
WHERE OUTPUTLIMIT EQ 1
ON TABLE HOLD FORMAT PYTHON MODEL predictedPrice
  AS app1/mymodels/model5
END
```

Run a Saved Python Model

Use the RUN_MODEL function if the predictor field names are the same in the model and the data.

```
COMPUTE fieldname/fmt = RUN_MODEL('app/modelname');
```

Use the RUN_MODEL2 function if the predictor field names are *not* the same in the model and the data.

```
COMPUTE fieldname/fmt = RUN_MODEL2('app/modelname',
      pfield1, ..., pfieldn);
```

where:

fieldname

Is the name of the field that will contain the returned predictions from the model.

app/modelname'

Is the application folder and saved model name.

pfield1, ..., pfieldn

Are the field names in the data used for running the model that match the predictor fields used to generate the model.

Running a Model Using RUN_MODEL

In the following request, the data source in the request has the same field names that were used to create the model.

```
TABLE FILE imports85
PRINT price COMPUTE predictedPriceFromSaved/I5 =
      RUN_MODEL('app1/mymodels/model5');
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>price</u>	<u>predictedPriceFromSaved</u>
13495	15594
16500	15594
16500	15786
13950	13479
17450	17685
15250	15888
17710	17916
18920	18267
23875	22390
.	18363
16430	14593
16925	15589
20970	20472
21105	20939
24565	23194

Running a Model Using RUN_MODEL2

In the following version of the request, the data source in the request is assumed to have field names that are different from the ones that were used to create the model.

```
TABLE FILE imports2
PRINT price COMPUTE predictedPriceFromSaved/I5 =
    RUN_MODEL2('app1/mymodels/model5',
               type, doors, Style, ht, hpower, Rpm, CMpg, HMpg);
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

Partial output is shown in the following image.

<u>price</u>	<u>predictedPriceFromSaved</u>
13495	15594
16500	15594
16500	15786
13950	13479
17450	17685
15250	15888
17710	17916
18920	18267
23875	22390
.	18363
16430	14593
16925	15589
20970	20472
21105	20939
24565	23194

Simplified System Functions

Simplified system functions have streamlined parameter lists, similar to those used by SQL functions. In some cases, these simplified functions provide slightly different functionality than previous versions of similar functions.

The simplified functions do not have an output argument. Each function returns a value that has a specific data type.

When used in a request against a relational data source, these functions are optimized (passed to the RDBMS for processing).

EDAPRINT: Inserting a Custom Message in the EDAPRINT Log File

The EDAPRINT function enables you to add a text message into the EDAPRINT log file and assign it a message type. The returned value of the function is zero (0).

Insert a Message in the EDAPRINT Log File

```
EDAPRINT(message_type, 'message')
```

where:

message_type

Keyword

Can be one of the following message types.

- **I.** Informational message.
- **W.** Warning message.

- E. Error message.

'message'

Is the message to insert, enclosed in single quotation marks.

Inserting a Custom Message in the EDAPRINT Log File

The following procedure inserts three messages in the EDAPRINT log file.

```
-SET &I = EDAPRINT(I, 'This is a test informational message');
-SET &W = EDAPRINT(W, 'This is a test warning message');
-SET &E = EDAPRINT(E, 'This is a test error message');
```

The output is shown in the following image.

```
01/18/2018 15:28:42.892 I disconnect cmrpht000008 tscomid=11,sesid=15,fctkt=5a6102d5:1-5,fcdir=ht000002010
01/18/2018 15:28:42.892 I request by t3rp11708 to notify disconnect of sesid=15
01/18/2018 15:28:42.892 I statistics cmrpht000008 sesid=15,cpu=0.000s,dbms=0.000s,srv=0.008s
01/18/2018 15:28:42.922 I request by cmrpht000008 to exec <ibiweb> session=5a6102d5:1-5
01/18/2018 15:28:42.922 I request by cmrpht000008 to connect to agent (WC_DEFAULT)
01/18/2018 15:28:42.922 I connecting cmrpht000008 tscomid=11,sesid=16,fctkt=5a6102d5:1-5,fcdir=ht000002010
01/18/2018 15:28:42.927 I This is a test informational message
01/18/2018 15:28:42.927 W This is a test warning message
01/18/2018 15:28:42.927 E This is a test error message
01/18/2018 15:28:42.927 I disconnect cmrpht000008 tscomid=11,sesid=16,fctkt=5a6102d5:1-5,fcdir=ht000002010
01/18/2018 15:28:42.927 I request by t3rp11708 to notify disconnect of sesid=16
01/18/2018 15:28:42.927 I statistics cmrpht000008 sesid=16,cpu=0.000s,dbms=0.000s,srv=0.005s
01/18/2018 15:29:58.170 I accepting cmrpht000009 tcp=fe80::641f:60b7:e7cc:3e56%2:52689
01/18/2018 15:29:58.170 I accepting cmrpht000010 tcp=fe80::641f:60b7:e7cc:3e56%2:52690
01/18/2018 15:29:58.170 I request by cmrpht000009 to exec <webconsole> session=5a6102d5:1-5, page=UPDATELAYOUT
01/18/2018 15:30:21.546 I request by cmrpht000009 to exec <webconsole> session=5a6102d5:1-5, page=WSCONFIGURATION
01/18/2018 15:30:21.718 I request by cmrpht000009 to exec <webconsole> session=5a6102d5:1-5, page=WKSRIBBON
01/18/2018 15:30:21.859 I request by cmrpht000009 to exec <webconsole> session=5a6102d5:1-5, page=WKSFRAMES
01/18/2018 15:30:22.468 I request by cmrpht000009 to exec <webconsole> session=5a6102d5:1-5, page=CONFTRREE
```

ENCRYPT: Encrypting a Password

The ENCRYPT function encrypts an alphanumeric input value using the encryption algorithm configured in the WebFOCUS Reporting Server. The result is returned as a variable length alphanumeric.

Encrypt a Password

```
ENCRYPT(password)
```

where:

password

Fixed length alphanumeric

Is the value to be encrypted.

Encrypting a Password

The following request encrypts the value *guestpassword* using the encryption algorithm configured in the WebFOCUS Reporting Server.

```
-SET &P1 = ENCRYPT('guestpassword');  
-TYPE &P1
```

ENCRYPT encrypts the password *guestpassword*.

```
ENCRYPT('guestpassword')
```

The returned encrypted value is {AES}963AFA754E1763ABE697E8C5E764115E.

GETENV: Retrieving the Value of an Environment Variable

The GETENV function takes the name of an environment variable and returns its value as a variable-length alphanumeric value.

Retrieve the Value of an Environment Variable

```
GETENV(var_name)
```

where:

var_name

fixed length alphanumeric

Is the name of the environment variable whose value is being retrieved.

Retrieving the Value of an Environment Variable

The following request retrieves the value of the WebFOCUS Reporting Server variable EDAEXTSEC.

```
-SET &E1 = GETENV('EDAEXTSEC');  
-TYPE &E1
```

GETENV retrieves the value of the WebFOCUS Reporting Server variable EDAEXTSEC.

```
GETENV('EDAEXTSEC')
```

The value returned is ON if the WebFOCUS Reporting Server was started with security on or OFF if the WebFOCUS Reporting Server was started with security off.

PUTENV: Assigning a Value to an Environment Variable

The PUTENV function assigns a value to an environment variable. The function returns an integer return code whose value is 1 (one) if the assignment is not successful or 0 (zero) if it is successful.

Assign a Value to an Environment Variable

```
PUTENV(var_name, var_value)
```

where:

var_name

Fixed length alphanumeric

Is the name of the environment variable to be set.

var_value

Alphanumeric

Is the value you want to assign to the variable.

Assigning a Value to the UNIX PS1 Variable

The following request assigns the value *FOCUS/Shell:* to the UNIX PS1 variable.

```
-SET &P1 = PUTENV('PS1','FOCUS/Shell:');
```

PUTENV assigns the value *FOCUS/Shell:* to the UNIX PS1 variable.

```
PUTENV('PS1','FOCUS/Shell:')
```

This causes UNIX to display the following prompt when the user issues the UNIX shell command SH:

```
FOCUS/Shell:
```

The following request creates a variable named xxxx and sets it to the value **this is a test**. It then retrieves the value using GETENV.

```
-SET &XXXX=PUTENV(xxxx,'this is a test');
-SET &YYYY=GETENV(xxxx);
-TYPE  Return Code: &XXXX,  Variable value: &YYYY
```

The output is:

```
Return Code: 0,  Variable value: this is a test
```

SLACK: Posting a Message to a Slack Channel

SLACK posts a message to a Slack channel from a WebFOCUS procedure:

- If the message is sent successfully, the function returns the value *true*.
- If the message is not sent successfully, the function returns a blank.

Post a Message to a Slack Channel

```
SLACK(workspace, channel, message)
```

where:

workspace

Is a Workspace name.

channel

Is a Channel name.

message

Is an alphanumeric field containing the message.

Sending a Slack Message From a WebFOCUS Request

The Adapter for Slack has been configured to have a connection to the devibi workspace, as shown in the following image.

? Prerequisites

▼ Connect parameters

? Connection Name

? Client ID

? Client Secret

? Workspace ID

? Workspace Name

? Access Token [Get Access Token](#)

? Change OAuth Scope ☐

> Advanced connection options

> Environment

[Configure](#) [Test](#)


The following request sends a Slack message to the *general* channel of the *devibi* Workspace, when the department is MIS.

```
TABLE FILE ibisamp/EMPLOYEE
SUM
  CURR_SAL
  AND COMPUTE SLACK_MESSAGE/A200 = 'Salary for Department ' | DEPARTMENT
|| ' is ' | LJUST(20, FPRINT(CURR_SAL,'D12.2M'), 'A20');
  AND COMPUTE CURR_SAL_SLACK/A20=IF DEPARTMENT EQ 'MIS'
    THEN SLACK('devibi', 'general', SLACK_MESSAGE) ELSE 'false';
  AS 'Message Sent,to Slack highlighting,Salary'
BY DEPARTMENT
HEADING
"Slack"
"Slack Function Example"
ON TABLE SET PAGE-NUM NOLEAD
ON TABLE NOTOTAL
ON TABLE SET STYLE *
INCLUDE=IBFS:/FILE/IBI_HTML_DIR/javaassist/intl/EN/ENIADefault_
combine.sty,$
ENDSTYLE
END
```

The output is shown in the following image.

Slack Slack Function Example			
DEPARTMENT	CURR_SAL	SLACK_MESSAGE	Message Sent to Slack highlighting Salary
MIS	\$108,002.00	Salary for Department MIS is \$108,002.00	true
PRODUCTION	\$114,282.00	Salary for Department PRODUCTION is \$114,282.00	false

The message in the Slack channel is shown in the following image.



System Functions

System functions call the operating system to obtain information about the operating environment or to use a system service.

For many functions, the output argument can be supplied either as a field name or as a format enclosed in single quotation marks. However, if a function is called from a Dialogue Manager command, this argument must always be supplied as a format, and if a function is called from a Maintain Data procedure, this argument must always be supplied as a field name. For detailed information about calling a function and supplying arguments, see [Accessing and Calling a Function](#).

CHECKPRIVS: Retrieving the Privilege State for the Connected User

Given a privilege code, CHECKPRIVS returns the value Y, if the connected user has that privilege, or N if the user does not have the privilege or the privilege does not exist.

 **Note:** You can see your list of general privileges by clicking the Console (C) button at the top-left corner of the window and selecting **My Console/Show My General Privileges**. A user with Server Administrator privileges can also see the list of general privileges on the Access Control page by right-clicking a user ID, selecting **Properties** from the context menu and clicking the **General Privileges** tab on the Properties page.

Retrieve the Privilege State for the Connected User

```
CHECKPRIVS(privcode, output)
```


where:

privcode

Is the privilege code for which to retrieve the status.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Retrieving the Privilege State for the Connected User

The following request retrieves the privilege state for privilege ADPTP (Configure Data Adapter):

```
-SET &PRIVSTATE = CHECKPRIVS(ADPTP, 'A1');  
-TYPE Privilege State is: &PRIVSTATE
```

The output is:

```
Privilege State is: Y
```

CLSDDREC: Closing All Files Opened by the PUTDDREC Function

The CLSDDREC function closes all files opened by the PUTDDREC function. If PUTDDREC is called in a Dialogue Manager -SET command, the files opened by PUTDDREC are not closed automatically until the end of a request or connection. In this case, you can close the files and free the memory used to store information about the open file by calling the CLSDDREC function.

For information about PUTDDREC, see [PUTDDREC: Writing a Character String as a Record in a Sequential File](#).

Close All Files Opened by the PUTDDREC Function

```
CLSDDREC(output)
```

where:

output

Integer

Is the return code, which can be one of the following values:

- **0**, which indicates that the files are closed.
- **1**, which indicates an error while closing the files.

Closing Files Opened by the PUTDDREC Function

This example closes files opened by the PUTDDREC function:

```
CLSDDREC('I1')
```

FEXERR: Retrieving an Error Message

Available Languages: reporting, Maintain

The FEXERR function retrieves an error message. It is especially useful in a procedure using a command that suppresses the display of output messages.

An error message consists of up to four lines of text. The first line contains the message and the remaining three contain a detailed explanation, if one exists. FEXERR retrieves the first line of the error message.

Retrieve an Error Message

```
FEXERR(error, 'A72')
```

where:

error

Numeric

Is the error number, up to 5 digits long.

'A72'

Is the format of the output value enclosed in single quotation marks. The format is A72, the maximum length of an error message.

Retrieving an Error Message

FEXERR retrieves the error message whose number is contained in the & ERR variable, in this case 650. The result has the format A72.

```
FEXERR(&ERR, 'A72')
```

The result is (FOC650) THE DISK IS NOT ACCESSED.

FEXERR retrieves the error message whose number is contained in the &ERR variable, in this case 650. The result is returned to the variable &&MSGVAR and has the format A72.

```
-SET &ERR = 650;  
-SET &&MSGVAR = FEXERR(&ERR, 'A72');  
-TYPE &&MSGVAR
```

The output is:

```
(FOC650) THE DISK IS NOT ACCESSED
```

FGETENV: Retrieving the Value of an Environment Variable

Available Languages: reporting

The FGETENV function retrieves the value of an environment variable and returns it as an alphanumeric string.

Retrieve the Value of an Environment Variable

```
FGETENV(length, 'varname', outlen, output)
```

where:

length

Integer

Is the number of characters in the environment variable name.

varname

Alphanumeric

Is the name of the environment variable whose value is being retrieved.

outlen

Integer

Is the length of the environment variable value returned or a field in which the environment variable value is stored.

output

Alphanumeric

Is the format of the field in which the environment variable's value is stored.

FINDMEM: Finding a Member of a Partitioned Data Set

Available Languages: reporting, Maintain

The FINDMEM function, available only on z/OS, determines if a specific member of a partitioned data set (PDS) exists. This function is used primarily in Dialogue Manager procedures.

To use this function, allocate the PDS to a ddname because the ddname is required in the function call. You can search multiple PDSs with one function call if they are concatenated to one ddname.

Find a Member of a Partitioned Data Set

```
FINDMEM(ddname, member, output)
```

where:

ddname

A8

Is the ddname to which the PDS is allocated. This value must be an eight-character literal enclosed in single quotation marks, or a variable that contains the ddname. If you supply a literal fewer eight characters, pad it with trailing spaces.

member

A8

Is the member for which you are searching. This value must be eight characters long. If you supply a literal that has less than eight characters, pad it with trailing spaces.

output

A1

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The result is one of the following:

STEVENS	RICHARD ALFRED	\$9,500.00 \$11,000.00

FPUTENV: Assigning a Value to an Environment Variable

Available Operating Systems: IBM i (formerly referred to as i5/OS), Tandem, UNIX, Windows

Available Languages: reporting

The FPUTENV function assigns a character string to an environment variable. Use FPUTENV to set values that are used elsewhere in the system.

Limit: You cannot use FPUTENV to set or change FOCPRINT, FOCPATH, or USERPATH. Once started, these variables are held in memory and not reread from the environment.

Assign a Value to an Environment Variable

```
FPUTENV (varname_length,'varname',value_length, 'value', output)
```

where:

varname_length

Integer

Is the maximum number of characters in the name of the environment variable.

varname

Alphanumeric

Is the name of the environment variable enclosed in single quotation marks. The name must be right-justified and padded with blanks to the maximum length specified by *varname_length*.

value_length

Is the maximum length of the environment variable value.

i Note: The sum of *varname_length* and *value_length* cannot exceed 64.

value

Alphanumeric

Is the value you wish to assign to the environment variable. The string must be right-justified and contain no embedded blanks. Strings that contain embedded blanks are truncated at the first blank.

output

Integer

Is the return code. It can be the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. If the variable is set successfully, the return code is 0. Any other value indicates a failure occurred.

Assigning a Value to an Environment Variable

FPUTENV assigns the value FOCUS/Shell to the PS1 variable and stores it in a field with the format A12:

```
-SET &RC = FPUTENV(3,'PS1', 12, 'FOCUS/Shell:', 'I4');
```

The request displays the following prompt when the user issues the UNIX shell command SH:

```
FOCUS/Shell:
```

GETCOOKIE: Retrieving a Browser Cookie Value

Security credentials can come from many sources and be provided in several different formats. Some security credentials from third-party single sign-on products are passed in

the form of a browser cookie. The WebFOCUS Reporting Server can use the GETCOOKI function to retrieve the value of a browser cookie passed to it by the WebFOCUS Client.

Retrieve a Cookie Value

```
GETCOOKI('cookie_name', length)
```

where:

cookie_name

Alphanumeric

Is the name of the browser cookie whose value is being retrieved. The maximum length of the cookie name is 80 bytes. If the cookie is not set or its name exceeds 80 characters, the function will return **Invalid Cookie Name**.

length

Alphanumeric (An)

Is the length of the cookie. It can be the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. If the length **n** specified is greater than the actual length of the retrieved cookie, the result will be padded with blanks. It is always recommended to use the function TRUNCATE(**arg1**) on return from GETCOOKI to remove extra trailing blanks.

Retrieving the Value of a Browser Cookie

The following function call retrieves the value of the ObSSOCookie created by the Oracle Access manager (formerly Oblix):

```
GETCOOKI('ObSSOCookie', 'A400')
```

GETHEADR: Retrieving an HTTP Header Variable

The HTTP header contains variables whose values describe the Web Server environment and can specify credentials coming from the Web Server or a third-party single sign-on product. The WebFOCUS Reporting Server can use the GETHEADR function to retrieve the value of an HTTP Header variable from an HTTP header passed to it by the WebFOCUS Client.

Retrieve an HTTP Header Variable

```
GETHEADR('varname', output)
```

where:

varname

Alphanumeric

Is the name of the HTTP header variable whose value is being retrieved.

output

Alphanumeric

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks.

Retrieving the Value of an HTTP Header Variable

The following is a sample HTTP header:

☒ Show incoming http header	
Header	Value
cookie	JSESSIONID=3576041321067E425A4E2AC87D6E425E
connection	Keep-Alive
accept-encoding	gzip, deflate
referer	http://edamvt4:8080/ibi_apps_77/webconsole/webconsole/admin?IBIS_page=NODETREE
accept	image/gif, image/x-bitmap, image/jpeg, image/png, application/x-shockwave-flash, application/vnd.ms-excel, application/vnd.ms-powerpoint, application/msword, */*
content-length	62
cache-control	no-cache
accept-language	en-us
user-agent	Mozilla/4.0 (compatible; MSIE 6.0; Windows NT 5.1; SV1; .NET CLR 1.1.4322; .NET CLR 2.0.50727; MS-RTC LM
content-type	application/x-www-form-urlencoded
host	edamvt4:8080

The following function call retrieves the value **application/x-www-form-urlencoded** from the HTTP Header:

```
GETHEADR('content-type', 'A150')
```

The following function call retrieves the value **en-us** from the HTTP Header:

```
GETHEADR('accept-language', 'A10')
```

GETPDS: Determining If a Member of a Partitioned Data Set Exists

Available Operating Systems: z/OS

Available Languages: reporting, Maintain

The GETPDS function determines if a specific member of a partitioned data set (PDS) exists, and if it does, returns the PDS name. This function is used primarily in Dialogue Manager procedures.

To use this function, allocate the PDS to a ddname because the ddname is required in the function call. You can search multiple PDSs with one function call if they are concatenated to one ddname.

GETPDS is almost identical to FINDMEM, except that GETPDS provides either the PDS name or returns a different set of status codes.

Determine If a PDS Member Exists

```
GETPDS(ddname, member, output)
```

where:

ddname

A8

Is the ddname to which the PDS is allocated. This value must be an eight-character literal enclosed in single quotation marks, or a variable that contains the ddname. If you supply a literal fewer than eight characters, pad it with trailing spaces.

member

A8

Is the member for which the function searches. This value must be eight characters long. If you supply a literal with fewer than eight characters, pad it with trailing spaces.

output

A44

Is the name of the field that contains the result, or the format of the output value enclosed in single quotation marks. The maximum length of a PDS name is 44. The result is one of the following:

PDS name is the name of the PDS that contains the member, if it exists.

*D indicates the ddname is not allocated to a data set.

*M indicates the member does not exist in the PDS.

*E indicates an error occurred. For example, the data set allocated to the ddname is not a PDS (and may be a sequential file).

Determining If a PDS Member Exists

GETPDS searches for the member specified by &MEMBER in the PDS allocated to &DDNAME, and returns the result to &PNAME. The result has the format A44.

```

-SET &DDNAME = 'MASTER  ';
-SET &MEMBER = 'EMPLOYEE';
-SET &PNAME = '                                     ';
-SET &PNAME = GETPDS(&DDNAME, &MEMBER, 'A44');
-IF &PNAME EQ '*D' THEN GOTO DDNOAL;
-IF &PNAME EQ '*M' THEN GOTO MEMNOF;
-IF &PNAME EQ '*E' THEN GOTO DDERROR;
-★
- TYPE MEMBER &MEMBER IS FOUND IN
- TYPE THE PDS &PNAME
- TYPE ALLOCATED TO &DDNAME
-★
-EXIT
- DDNOAL
-★
- TYPE DDNAME &DDNAME NOT ALLOCATED
-★
-EXIT
- MEMNOF
-★
- TYPE MEMBER &MEMBER NOT FOUND UNDER DDNAME &DDNAME
-★
-EXIT
- DDERROR
-★
- TYPE ERROR IN GETPDS; DATA SET PROBABLY NOT A PDS.
-★
-EXIT

```

The output is similar to the following:

```

MEMBER EMPLOYEE IS FOUND IN
THE PDS USER1.MASTER.DATA
ALLOCATED TO MASTER

```

Displaying the Attributes of a PDS

To view the attributes of the PDS that contains a specific member, this Dialogue Manager procedure can search for the EMPLOYEE member in the PDS allocated to the ddname MASTER and, based on its existence, allocate the PDS to the ddname TEMPMAS. Dialogue Manager system variables are used to display the attributes.

where:

output

Alphanumeric, at least A8

Is the result field, whose length depends on the platform on which the function is issued. Provide a length as long as required for your platform; otherwise the output will be truncated.

Retrieving a User ID

GETUSER retrieves the user ID of the person running the flow.

```
GETUSER(USERID)
```

GETUSER retrieves the user ID of the person running the request:

```
DEFINE FILE EMPLOYEE
  USERID/A8 WITH EMP_ID = GETUSER(USERID);
END
```

```
TABLE FILE EMPLOYEE
  SUM CURR_SAL AS 'TOTAL SALARIES'
  BY DEPARTMENT
  HEADING
  "SALARY REPORT RUN FROM USERID: <USERID>"
  " "
  END
```

The output is:

```
SALARY REPORT RUN FROM USERID: doccar
```

DEPARTMENT

MIS
PRODUCTION

TOTAL SALARIES

\$108,002.00
\$114,282.00

GRPLIST: Retrieving the Group List of the Connected User

Available Languages: reporting

GRPLIST returns a group name or a list of group names (separated by colons) for the connected user. This function is supported for LDAP security with all types of connections.

If the group list is empty or there is an error in the function parameters, the function returns blanks.

Retrieve a List of Group Memberships for the Connected User

```
GRPLIST(outputLength, outformat)
```

where:

outputLength

Is the length of the output string.

outformat

Is the format of the output string enclosed in single quotation marks (').

Retrieving the Group List for the Connected User

The following request retrieves the group list for the connected user into a Dialogue Manager variable named &LIST:

```
-SET &LIST = GRPLIST(300, 'A300');  
-TYPE &LIST
```

The output is:


```
#All_Technical_Staff;#CTSS_ADV;#CTSS_ADV;#CTSS_ADVT;#DSEDA
```

Issuing the same request for user pgmuser1 shows that this user belongs to a single group:

```
pgmgrp1
```

JOBNAME: Retrieving the Current Process Identification String

The JOBNAME function retrieves the raw identification string of the current process from the operating system. This is also commonly known as a process PID at the operating system level. The function is valid in all environments, but is typically used in Dialogue Manager and returns the value as an alphanumeric string (even though a PID is pure numeric on some operating systems).

i Note: JOBNAME strings differ between some operating systems in terms of look and length. For example, Windows, UNIX, and z/OS job names are pure numeric (typically a maximum of 8 characters long), while an IBM i job name is a three-part string that has a 26 character maximum length. Since an application may eventually be run in another (unexpected) environment in the future, it is good practice to use the maximum length of 26 to avoid accidental length truncation in the future. Applications using this function for anything more than simple identification may also need to account for the difference in the application code.

Retrieve the Current Process Identification String

```
JOBNAME(length, output)
```

where:

length

Integer

Is the maximum number of characters to return from the PID system call.

output

Alphanumeric

Is the returned process identification string, whose length depends on the platform on which the function is issued. Provide a length as long as required for your platform.

Otherwise, the output will be truncated.

Retrieving a Process Identification String

The following example uses the JOBNAME function to retrieve the current process identification string to an A26 string and then truncate it for use in a -TYPE statement:

```
-SET &JOBNAME = JOBNAME(26, 'A26');  
-SET &JOBNAME = TRUNCATE(&JOBNAME);  
-TYPE The Current system PID &JOBNAME is processing.
```

For example, on Windows, the output is similar to the following:

```
The Current system PID 2536 is processing.
```

MVSDYNAM: Passing a DYNAM Command to the Command Processor

Available Operating Systems: z/OS

Available Languages: reporting, Maintain

The MVSDYNAM function transfers a FOCUS DYNAM command to the DYNAM command processor. It is useful in passing allocation commands to the processor in a compiled MODIFY procedure after the CASE AT START command.

Pass a DYNAM Command to the Command Processor

```
MVSDYNAM(command, length, outfield)
```

where:

command

Alphanumeric

Is the DYNAM command enclosed in single quotation marks, or a field or variable that contains the command. The function converts lowercase input to uppercase.

length

Numeric

Is the maximum length of the command, in characters, between 1 and 256.

outfield

I4

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

MVSDYNAM returns one of the following codes:

0 indicates the DYNAM command transferred and executed successfully.

positive number is the error number corresponding to a FOCUS error.

negative number is the FOCUS error number corresponding to a DYNAM failure.

In Dialogue Manager, you must specify the format.

PUTCOOKIE: Submitting a Value to a Browser Cookie

The PUTCOOKIE function allows you to submit a value to the cookie to be used by a third-party single sign-on software product for connection to the WebFOCUS Reporting Server or

an adapter. In order to retrieve an appropriate cookie value, you must have an existing exit that calls an external procedure which obtains the value of a single sign-on browser cookie. This feature was initially developed for the MYSAPSSO2 cookie for the SAP RFC connection.

Submit a Cookie Value

```
PUTCOOKI('cookie_name', 'cookie_value')
```

where:

cookie_name

Alphanumeric

Is the name of the browser cookie whose value is being set.

cookie_value

Alphanumeric

Is the value to submit for the cookie. It can be the name of the field that contains the result, or the format of the output value enclosed in single quotation marks

Submitting a Value to a Browser Cookie

The following function call submits the value created by an external custom exit or set by SAP EP configured for SSO with SAP Logon Tickets:

```
SET &COOKIE_VALUE=CUSTOM_EXIT();  
PUTCOOKI('MYSAPSSO2', &COOKIE_VALUE )
```

PUTDDREC: Writing a Character String as a Record in a Sequential File

The PUTDDREC function writes a character string as a record in a sequential file. The file must be identified with a FILEDEF (DYNAM on z/OS) command. If the file is defined as an

existing file (with the APPEND option), the new record is appended. If the file is defined as NEW and it already exists, the new record overwrites the existing file.

PUTDDREC opens the file if it is not already open. Each call to PUTDDREC can use the same file or a new one. All of the files opened by PUTDDREC remain open until the end of a request or connection. At the end of the request or connection, all files opened by PUTDDREC are automatically closed.

For information about closing files opened by PUTDDREC in order to free the memory used, see [CLSDDREC: Closing All Files Opened by the PUTDDREC Function](#).

- The open, close, and write operations are handled by the operating system. Therefore, the requirements for writing to the file and the results of deviating from the instructions when calling PUTDDREC are specific to your operating environment. Make sure you are familiar with and follow the guidelines for your operating system when performing input/output operations.
- You can call PUTDDREC in a DEFINE FILE command or in a DEFINE in the Master File. However, PUTDDREC does not open the file until its field name is referenced in a request.

If PUTDDREC is called in a Dialogue Manager -SET command, the files opened by PUTDDREC are not closed automatically until the end of a request or connection. In this case, you can close the files and free the memory used to store information about the open file by calling the CLSDDREC function.

Write a Character String as a Record in a Sequential File

```
PUTDDREC(ddname, dd_len, record_string, record_len, output)
```

where:

ddname

Alphanumeric

Is the logical name assigned to the sequential file in a FILEDEF command.

dd_len

Numeric

Is the number of characters in the logical name.

record_string

Alphanumeric

Is the character string to be added as the new record in the sequential file.

record_len

Numeric

Is the number of characters to add as the new record.

It cannot be larger than the number of characters in *record_string*. To write all of *record_string* to the file, *record_len* should equal the number of characters in *record_string* and should not exceed the record length declared in the FILEDEF command. If *record_len* is shorter than the declared length, the resulting file may contain extraneous characters at the end of each record. If *record_string* is longer than the declared length, *record_string* may be truncated in the resulting file.

output

Integer

Is the return code, which can have one of the following values:

0 - Record is added.

-1 - FILEDEF statement is not found.

-2 - Error while opening the file.

-3 - Error while adding the record to the file.

Writing a Character String as a Record in a Sequential File

Using the CAR synonym as input,

```
FILEDEF LOGGING DISK baseapp/logging.dat
```

```
PUTDDREC('LOGGING', 7, 'Country:' | COUNTRY, 20, 'I5')
```

would return the value 0, and would write the following lines to logging.dat:

Country: ENGLAND

Country: JAPAN

Country: ITALY

Country: W GERMANY

Country: FRANCE

Calling PUTDDREC in a TABLE Request

The following example defines a new file whose logical name is PUTDD1. The TABLE request then calls PUTDDREC for each employee in the EMPLOYEE data source and writes a record to the file composed of the employee's last name, first name, employee ID, current job code, and current salary (converted to alphanumeric using the EDIT function). The return code of zero (in OUT1) indicates that the calls to PUTDDREC were successful:

```
FILEDEF PUTDD1 DISK putdd1.datTABLE FILE EMPLOYEE
PRINT EMP_ID CURR_JOBCODE AS 'JOB' CURR_SAL
COMPUTE SALA/A12 = EDIT(CURR_SAL); NOPRINT
COMPUTE EMP1/A50= LAST_NAME|FIRST_NAME|EMP_ID|CURR_JOBCODE|SALA;
NOPRINT
COMPUTE OUT1/I1 = PUTDDREC('PUTDD1',6, EMP1, 50, OUT1);
BY LAST_NAME BY FIRST_NAME
END
```

The output is:

LAST_NAME	FIRST_NAME	EMP_ID	JOB	CURR_SAL	OUT1
-----	-----	-----	---	-----	----
BANNING	JOHN	119329144	A17	\$29,700.00	0
BLACKWOOD	ROSEMARIE	326179357	B04	\$21,780.00	0
CROSS	BARBARA	818692173	A17	\$27,062.00	0
GREENSPAN	MARY	543729165	A07	\$9,000.00	0
IRVING	JOAN	123764317	A15	\$26,862.00	0
JONES	DIANE	117593129	B03	\$18,480.00	0
MCCOY	JOHN	219984371	B02	\$18,480.00	0
MCKNIGHT	ROGER	451123478	B02	\$16,100.00	0
ROMANS	ANTHONY	126724188	B04	\$21,120.00	0
SMITH	MARY	112847612	B14	\$13,200.00	0
	RICHARD	119265415	A01	\$9,500.00	0
STEVENS	ALFRED	071382660	A07	\$11,000.00	0

After running this request, the sequential file contains the following records:

BANNING	JOHN	119329144A170000000029700
BLACKWOOD	ROSEMARIE	326179357B040000000021780
CROSS	BARBARA	818692173A170000000027062
GREENSPAN	MARY	543729165A07000000009000
IRVING	JOAN	123764317A150000000026862
JONES	DIANE	117593129B030000000018480
MCCOY	JOHN	219984371B020000000018480
MCKNIGHT	ROGER	451123478B020000000016100
ROMANS	ANTHONY	126724188B040000000021120
SMITH	MARY	112847612B140000000013200
SMITH	RICHARD	119265415A01000000009500
STEVENS	ALFRED	071382660A070000000011000

Calling PUTDDREC and CLSDDREC in Dialogue Manager -SET Commands

The following example defines a new file whose logical name is PUTDD1. The first -SET command creates a record to add to this file. The second -SET command calls PUTDDREC to add the record. The last -SET command calls CLSDDREC to close the file. The return codes are displayed to make sure operations were successful:

```
FILEDEF PUTDD1 DISK putdd1.dat -SET &EMP1 = 'SMITH'|'MARY'|'A07'|'27000';
- TYPE DATA = &EMP1
```



```
-SET &OUT1 = PUTDDREC('PUTDD1',6, &EMP1, 17, 'I1');
-TYPE PUT RESULT = &OUT1
-SET &OUT1 = CLSDDREC('I1');
-TYPE CLOSE RESULT = &OUT1
```

The output is:

```
DATA = SMITHMARYA0727000
PUT RESULT = 0
CLOSE RESULT = 0
```

After running this procedure, the sequential file contains the following record:

```
SMITHMARYA0727000
```

SLEEP: Suspending Execution for a Given Number of Seconds

Available Languages: reporting, Maintain

The SLEEP function suspends execution for the number of seconds you specify as its input argument.

This function is most useful in Dialogue Manager when you need to wait to start a specific procedure. For example, you can start a FOCUS Database Server and wait until the server is started before initiating a client application.

This function is only supported in Dialogue Manager. It is useful when you need to wait to start a specific procedure or application.

Suspend Execution for a Specified Number of Seconds

```
SLEEP(delay, output);
```

where:

delay

Numeric

Is the number of seconds to delay execution. The number can be specified down to the millisecond.

output

Numeric

Is the name of a field or a format enclosed in single quotation marks. The value returned is the same value you specify for delay.

Suspending Execution for Four Seconds

SLEEP suspends execution for four seconds:

```
-SET &DELAY = SLEEP(4.0, 'I2');
```

The following example computes the current date and time, suspends execution for 4 seconds, and computes the current date and time after the delay:

```
TABLE FILE VIDEOTRK
PRINT TRANSDATE NOPRINT
COMPUTE
START_TIME/HYYMDSa = HGETC(8, START_TIME);
DELAY/I2 = SLEEP(4.0, 'I2');
END_TIME/HYYMDSa = HGETC(8, END_TIME);
IF RECORDLIMIT EQ 1
END
```

The output is:

START_TIME		DELAY	END_TIME
-----		-----	-----
2007/10/26 5:04:36pm		4	2007/10/26 5:04:40pm

SPAWN: Creating a Subprocess From a Procedure

Available Operating Systems: UNIX

Available Languages: reporting

The SPAWN function creates a subprocess from a procedure that executes a system command without terminating the current procedure.

Limit: On UNIX, you can invoke this function only from a COMPUTE or DEFINE command.

Create a Subprocess From a Procedure

```
SPAWN(inlength, command, outcode)
```

where:

inlength

Numeric

Is the length, in characters, of *command*.

command

Alphanumeric

Is a UNIX command, or a .COM file you want to execute.

outcode

D

Is the return code specifying whether or not the spawn was successful, or the format of the output value enclosed in single quotation marks. Zero indicates a successful spawn; a non-zero value indicates an unsuccessful spawn.

Creating a Subprocess From a Procedure on UNIX

SPAWN executes the echo command, which displays Hello at the beginning of the procedure:

```
MODIFY FILE EMPLOYEE
PROMPT EMP_ID
MATCH EMP_ID
ON MATCH DELETE
CASE AT START
COMPUTE
MESSAGE/38=SPAWN (10, 'echo Hello', 'D8');
ENDCASE
DATA
```

SYSTEM: Calling a System Program

Available Operating Systems: Windows

Available Languages: reporting

The SYSTEM function calls a DOS program, a batch program, or a Windows application from a procedure. SYSTEM passes a command string to DOS or Windows and the program is executed as if it had been entered at the DOS command-line or the command-line field in the Windows Program Manager Run dialog box. When you exit the program, control returns to WebFOCUS.

SYSTEM suspends FOCUS execution of subsequent commands until you exit the application. It has an advantage over the FOCUS DOS command, which also enables you to call DOS programs and Windows applications from a procedure.

When executing a command from SYSTEM, the command executes as follows:

- If the command name in the string passed to SYSTEM contains a .COM or .EXE extension, the command is called directly rather than using the DOS command interpreter.
- If the command name in the string does not contain a suffix or contains a .BAT extension, SYSTEM calls the DOS command interpreter COMMAND.COM to perform the specified command and then exit.
- SYSTEM passes the following commands to FOCUS, not to the DOS command

interpreter: CD, CLS, COPY, DEL, DIR, *drive:*, REN, TYPE. As a result, these commands are interpreted directly by FOCUS, not by DOS, and you may observe a slightly different behavior. If you want SYSTEM to pass these commands to the DOS command interpreter instead, use the following syntax:

```
SYSTEM(length, 'COMMAND /C string', returncode)
```

Call a DOS or Windows Program

```
SYSTEM(length, 'string ', returncode)
```

where:

length

Integer

Is the length, in characters, of *string*.

string

Alphanumeric

Is a valid Windows or DOS command with command-line parameters enclosed in single quotation marks.

returncode

Double precision

Is the name or length of the variable that contains the value of the DOS error level.

Executing the DIR Command

SYSTEM passes the DIR command to the DOS command interpreter to create a sorted directory listing with no heading information or summary, and redirects the output to a file named DIR.LIS:

```
-SET &RETCODE = SYSTEM(31,'COMMAND /C DIR /O-N /B >DIR.LIS','D4');
```

Changing the Default Directory

SYSTEM changes the default directory and suspends processing until the operation is complete:

```
-SET &ERRORLEVEL = SYSTEM(15,'CHDIR \CARDATA','D4');
```

Running the Check Disk Program

SYSTEM runs the check disk program and redirects the output to a file called CHKDSK.TXT. (Redirecting the output to a file makes it accessible to a program that might want to read it.)

```
-SET &RETCODE=SYSTEM(19,'CHKDSK > CHKDSK.TXT','D4');
```

SYSVAR: Retrieving the Value of a z/OS System Variable

Available Operating Systems: z/OS

The SYSVAR function populates a Dialogue Manager amper variable with the contents of any z/OS system variable. System variables are in the format [&]*name*[], where the dot is optional. They can be provided by the operating system or can be user-defined. The function can be called in a -SET command.

Retrieve the Value of a z/OS System Variable

```
-SET &dmvar = SYSVAR('length',' [&]sysvar[.]','outfmt');
```

where:

&dmvar

Alphanumeric

Is the name of the Dialogue Manager variable to be populated with the value of the z/OS system variable.

length

Alphanumeric

Is the length of the next parameter in the call. Do not include the escape character in the length, if one is present in the *sysvar* argument.

[&]sysvar[.]

Alphanumeric

Is the name of the system variable to be retrieved. Note that the ampersand (&) and the dot (.) are optional. If the ampersand is included, it must be followed by the escape character (|).

outfmt

Alphanumeric

Is the format of the returned value enclosed in single quotation marks.

Retrieving the Value of the z/OS SYSNAME Variable

The following example populates the Dialogue Manager variable named &MYSNAME2 with the value of the z/OS SYSNAME variable:

```
-SET &MYSNAME2=SYSVAR('7','SYSNAME','A8');  
-TYPE SYSNAME:&MYSNAME2
```

The output is similar to the following:

```
SYSNAME:IBI1
```

Simplified Geography Functions

The simplified geography functions perform location-based calculations and retrieve geocoded points for various types of location data. They are used by the WebFOCUS location intelligence products that produce maps and charts. Some of the geography functions use GIS services and require valid credentials for accessing Esri ArcGIS proprietary data.

Sample Geography Files

Some of the examples for the geography functions use geography sample files. One file, `esri-citibike.csv` has station names, latitudes and longitudes, and trip start times and end times. The other file, `esri-geo10036.ftm` has geometry data. To run the examples that use these files, create an application named *esri*, and place the following files into the application folder.

esri-citibike.mas

```
FILENAME=ESRI-CITIBIKE, SUFFIX=DFIX      ,
DATASET=esri/esri-citibike.csv, $
SEGMENT=CITIBIKE_TRIPDATA, SEGTYPE=S0, $
  FIELDNAME=TRIPDURATION, ALIAS=tripduration, USAGE=I7, ACTUAL=A5V,
  TITLE='tripduration', $
  FIELDNAME=STARTTIME, ALIAS=starttime, USAGE=HMDYYS, ACTUAL=A18,
  TITLE='starttime', $
  FIELDNAME=STOPTIME, ALIAS=stoptime, USAGE=HMDYYS, ACTUAL=A18,
  TITLE='stoptime', $
  FIELDNAME=START_STATION_ID, ALIAS='start station id', USAGE=I6,
ACTUAL=A4V,
  TITLE='start station id', $
  FIELDNAME=START_STATION_NAME, ALIAS='start station name',
USAGE=A79V,
  ACTUAL=A79BV, TITLE='start station name', $
  FIELDNAME=START_STATION_LATITUDE, ALIAS='start station latitude',
USAGE=P20.15,
  ACTUAL=A18V, TITLE='start station latitude',
  GEOGRAPHIC_ROLE=LATITUDE, $
  FIELDNAME=START_STATION_LONGITUDE, ALIAS='start station longitude',
```



```

USAGE=P20.14,
  ACTUAL=A18V, TITLE='start station longitude',
  GEOGRAPHIC_ROLE=LONGITUDE, $
  FIELDNAME=END_STATION_ID, ALIAS='end station id', USAGE=I6,
  ACTUAL=A4V, TITLE='end station id', $

```

```

  FIELDNAME=END_STATION_NAME, ALIAS='end station name', USAGE=A79V,
  ACTUAL=A79BV, TITLE='end station name', $
  FIELDNAME=END_STATION_LATITUDE, ALIAS='end station latitude',
USAGE=P20.15,
  ACTUAL=A18V, TITLE='end station latitude',
  GEOGRAPHIC_ROLE=LATITUDE, $
  FIELDNAME=END_STATION_LONGITUDE, ALIAS='end station longitude',
USAGE=P20.14,
  ACTUAL=A18V, TITLE='end station longitude',
  GEOGRAPHIC_ROLE=LONGITUDE, $
  FIELDNAME=BIKEID, ALIAS=bikeid, USAGE=I7, ACTUAL=A5,
  TITLE='bikeid', $
  FIELDNAME=USERTYPE, ALIAS=usertype, USAGE=A10V, ACTUAL=A10BV,
  TITLE='usertype', $
  FIELDNAME=BIRTH_YEAR, ALIAS='birth year', USAGE=I6, ACTUAL=A4,
  TITLE='birth year', $
  FIELDNAME=GENDER, ALIAS=gender, USAGE=I3, ACTUAL=A1,
  TITLE='gender', $
  SEGMENT=ESRIGEO, SEGTYPE=KU, SEGSUF=FIX, PARENT=CITIBIKE_TRIPDATA,
  DATASET=esri/esri-geo10036.ftm (LRECL 80 RECFM V, CRFILE=ESRI-
  GE010036, $

```

esri-citibike.acx

```

SEGNAME=CITIBIKE_TRIPDATA,
  DELIMITER=',',
  ENCLOSURE="",
  HEADER=NO,
  CDN=OFF, $

```

esri-citibike.csv

i Note: Each complete record must be on a single line. Therefore, you must remove any line breaks that may have been inserted due to the page width in this document.

1094,11/1/2015 0:00,11/1/2015 0:18,537,Lexington Ave & E 24 St,40.74025878,-73.98409214,531,Forsyth St & Broome St,40.71893904,-73.99266288,23959,Subscriber,1980,1

520,11/1/2015 0:00,11/1/2015 0:08,536,1 Ave & E 30 St,40.74144387,-73.97536082,498,Broadway & W 32 St,40.74854862,-73.98808416,22251,Subscriber,1988,1

753,11/1/2015 0:00,11/1/2015 0:12,229,Great Jones St,40.72743423,-73.99379025,328,Watts St & Greenwich St,40.72405549,-74.00965965,15869,Subscriber,1981,1

353,11/1/2015 0:00,11/1/2015 0:06,285,Broadway & E 14 St,40.73454567,-73.99074142,151,Cleveland Pl & Spring St,40.72210379,-73.99724901,21645,Subscriber,1987,1

1285,11/1/2015 0:00,11/1/2015 0:21,268,Howard St & Centre St,40.71910537,-73.99973337,476,E 31 St & 3 Ave,40.74394314,-73.97966069,14788,Customer,,0

477,11/1/2015 0:00,11/1/2015 0:08,379,W 31 St & 7 Ave,40.749156,-73.9916,546,E 30 St & Park Ave S,40.74444921,-73.98303529,21128,Subscriber,1962,2

362,11/1/2015 0:00,11/1/2015 0:06,407,Henry St & Poplar St,40.700469,-73.991454,310,State St & Smith St,40.68926942,-73.98912867,21016,Subscriber,1978,1

2316,11/1/2015 0:00,11/1/2015 0:39,147,Greenwich St & Warren St,40.71542197,-74.01121978,441,E 52 St & 2 Ave,40.756014,-73.967416,24117,Subscriber,1988,2

627,11/1/2015 0:00,11/1/2015 0:11,521,8 Ave & W 31 St,40.75096735,-73.99444208,285,Broadway & E 14 St,40.73454567,-73.99074142,17048,Subscriber,1986,2

1484,11/1/2015 0:01,11/1/2015 0:26,281,Grand Army Plaza & Central Park
S,40.7643971,-73.97371465,367,E 53 St & Lexington Ave,40.75828065,-
73.97069431,16779,Subscriber,,0

284,11/1/2015 0:01,11/1/2015 0:06,247,Perry St & Bleecker
St,40.73535398,-74.00483091,453,W 22 St & 8 Ave,40.74475148,-
73.99915362,17272,Subscriber,1976,1

886,11/1/2015 0:01,11/1/2015 0:16,492,W 33 St & 7 Ave,40.75019995,-
73.99093085,377,6 Ave & Canal St,40.72243797,-
74.00566443,23019,Subscriber,1982,1

1379,11/1/2015 0:01,11/1/2015 0:24,512,W 29 St & 9 Ave,40.7500727,-
73.99839279,445,E 10 St & Avenue A,40.72740794,-
73.98142006,23843,Subscriber,1962,2

179,11/1/2015 0:01,11/1/2015 0:04,319,Fulton St & Broadway,40.711066,-
74.009447,264,Maiden Ln & Pearl St,40.70706456,-
74.00731853,22538,Subscriber,1981,1

309,11/1/2015 0:01,11/1/2015 0:07,160,E 37 St & Lexington
Ave,40.748238,-73.978311,362,Broadway & W 37 St,40.75172632,-
73.98753523,22042,Subscriber,1988,1

616,11/1/2015 0:02,11/1/2015 0:12,479,9 Ave & W 45 St,40.76019252,-
73.9912551,440,E 45 St & 3 Ave,40.75255434,-
73.97282625,22699,Subscriber,1982,1

852,11/1/2015 0:02,11/1/2015 0:16,346,Bank St & Hudson St,40.73652889,-
74.00618026,375,Mercer St & Bleecker St,40.72679454,-
73.99695094,21011,Subscriber,1991,1

1854,11/1/2015 0:02,11/1/2015 0:33,409,DeKalb Ave & Skillman
St,40.6906495,-73.95643107,3103,N 11 St & Wythe Ave,40.72153267,-
73.95782357,22011,Subscriber,1992,1

```
1161,11/1/2015 0:02,11/1/2015 0:21,521,8 Ave & W 31 St,40.75096735,-
73.99444208,461,E 20 St & 2 Ave,40.73587678,-
73.98205027,19856,Subscriber,1957,1
```

```
917,11/1/2015 0:02,11/1/2015 0:17,532,S 5 Pl & S 4 St,40.710451,-
73.960876,393,E 5 St & Avenue C,40.72299208,-
73.97995466,18598,Subscriber,1991,1
```

esri-geo10036.mas

```
FILENAME=ESRI-GEO10036, SUFFIX=FIX      ,
DATASET=esri/esri-geo10036.ftm (LRECL 80 RECFM V, IOTYPE=STREAM, $
SEGMENT=ESRIGEO, SEGTYPE=S0, $
FIELDNAME=GEOMETRY, ALIAS=GEOMETRY, USAGE=TX80L, ACTUAL=TX80,
MISSING=ON, $
```

esri-geo10036.ftm

```
{"rings":[[[-73.9803889998524,40.7541490002762],[-
73.9808779999197,40.7534830001
404],[-73.9814419998484,40.7537140000011],[-
73.9824040001445,40.7541199998382],[-
-73.982461000075,40.7541434001978],[-73.9825620002361,40.7541850001377],
[-73.983
2877000673,40.7544888999428],[-73.9833499997027,40.7545150000673],[-
73.983644399
969,40.7546397998869],[-73.9836849998628,40.7546570003204],[-
73.9841276003085,40
.7548161002829],[-73.984399700086,40.7544544999752],[-
73.9846140004357,40.754165
0001147],[-73.984871999743,40.7542749997914],[-
73.9866590003126,40.7550369998577
],[-73.9874449996869,40.7553720000178],[-
73.9902640001834,40.756570999552],[-73.
9914340001789,40.7570449998269],[-73.9918260002697,40.7572149995726],[-
73.992429
0001982,40.7574769999636],[-73.9927679996434,40.7576240004473],[-
73.993069000034
3,40.7578009996165],[-73.9931059999419,40.7577600004237],[-
73.9932120003335,40.7
576230004012],[-73.9933250001486,40.7576770001934],[-
73.9935390001247,40.7577669
```

```

998472], [-73.993725999755, 40.7578459998931], [-
73.9939599997542, 40.757937999639],
[-73.9940989998689, 40.7579839999617], [-
73.9941529996611, 40.7579959996157], [-73.9
942220001452, 40.7580159996387], [-73.9943040003293, 40.7580300002843], [-
73.9943650
004444, 40.7580330004227], [-73.99446499966, 40.7580369997078], [-
73.9945560002591, 4
0.7580300002843], [-73.9946130001898, 40.7580209998693], [-
73.9945689999594, 40.7580
809999383], [-73.9945449997519, 40.7581149997075], [-
73.9944196999092, 40.7582882001
404], [-73.9943810002829, 40.7583400001909], [-
73.9953849998179, 40.7587409997973], [
-73.9959560000693, 40.7589690004191], [-
73.9960649996999, 40.7590149998424], [-73.99
68730000888, 40.7593419996336], [-73.996975000296, 40.7593809996335], [-
73.997314999
7874, 40.7595379996789], [-73.9977009996014, 40.7597030000935], [-
73.998039999946, 40
.7598479995856], [-73.998334000014, 40.7599709998618], [-
73.9987769997587, 40.760157
0003453], [-73.9990089996656, 40.7602540003219], [-
74.0015059997021, 40.761292999672

```

```

2], [-74.0016340002089, 40.7613299995799], [-
74.0015350001401, 40.7614539999022], [-7
4.0014580001865, 40.7615479997405], [-74.0013640003483, 40.7616560002242],
[-74.0013
050003255, 40.7617199995784], [-74.0011890003721, 40.7618369995779], [-
74.0010579997
269, 40.7619609999003], [-74.0009659999808, 40.7620389999], [-
74.0008649998198, 40.76
21230001764], [-74.0008390004195, 40.7621430001993], [-
74.0006839995669, 40.76226100
0245], [-74.000531999752, 40.7623750001062], [-
74.0003759997525, 40.7624849997829], [
-74.0002840000066, 40.7625510001286], [-73.9998659996161, 40.762850999574],
[-73.999
8279996624, 40.7628779999198], [-73.9995749996864, 40.7630590001727], [-
73.999312000
1487, 40.7632720001028], [-73.9991639996189, 40.7633989996642], [-
73.998941000127, 40
.7636250001936], [-73.9987589998279, 40.7638580001466], [-
73.9986331999622, 40.76402
77004181], [-73.9986084002574, 40.7640632002565], [-

```

```

73.9984819996445,40.76423400039
89],[ -73.9983469997142,40.7644199999831],[ -
73.998171999738,40.7646669996823],[ -7
3.9980319995771,40.7648580003964],[ -73.9979881998955,40.7649204996813],
[ -73.9979
368000432,40.7649942000224],[ -73.9978947999051,40.7650573998791],[ -
73.9977017001

733,40.7653310995507],[ -73.9975810003629,40.765481000348],[ -
73.9975069996483,40.
7654519999099],[ -73.9956019999323,40.7646519998899],[ -
73.9955379996789,40.764625
0004434],[ -73.9954779996099,40.7646030003282],[ -
73.9949389999348,40.764369000329
1],[ -73.9936289997785,40.7638200001929],[ -
73.9934620001711,40.7637539998473],[ -7
3.9931520002646,40.7636270002859],[ -73.992701000151,40.7634409998023],[ -
73.99244
19000736,40.7633312995998],[ -73.9898629996777,40.7622390001298],[ -
73.98861200044
34,40.761714000201],[ -73.988021000169,40.761460000179],[ -
73.987028000242,40.7610
439998808],[ -73.9867690998141,40.7609346998765],[ -
73.9848240002274,40.7601130001
149],[ -73.9841635003452,40.7598425002312],[ -
73.9813259998949,40.7586439998208],[
-73.9805479999902,40.7583159999834],[ -73.9793569999256,40.757814000216],
[ -73.978
1150002071,40.7572939996184],[ -73.9785670003668,40.7566709996669],[ -
73.979014000
2958,40.7560309998308],[ -73.9794719998329,40.7554120000638],[ -
73.9799399998311,4
0.7547649999048],[ -73.9802380000836,40.7543610001601],[ -
73.9803889998524,40.7541
490002762]]]}
%$

```

GIS_DISTANCE: Calculating the Distance Between Geometry Points

The GIS_DISTANCE function uses a GIS service to calculate the distance between two geometry points.

Calculate the Distance Between Geometry Points

```
GIS_DISTANCE(geo_point1,geo_point2)
```

where:

geo_point1,geo_point2

Fixed length alphanumeric, large enough to hold the JSON describing the point (for example, A200).

Are the geometry points for which you want to calculate the distance.

 **Note:** You can generate a geometry point using the GIS_POINT function.

Calculating the Distance Between Two Geometry Points

The following uses a citibike .csv file that contains station names, latitudes and longitudes, and trip start times and end times. It uses the GIS_POINT function to define geometry points for start stations and end stations. It then uses GIS_DISTANCE to calculate the distance between them.

```
DEFINE FILE esri/esri-citibike
STARTPOINT/A200 = GIS_POINT('4326', START_STATION_LONGITUDE, START_
STATION_LATITUDE);
ENDPOINT/A200 = GIS_POINT('4326', END_STATION_LONGITUDE, END_STATION_
LATITUDE);
Distance/P10.2 = GIS_DISTANCE(ENDPOINT, STARTPOINT);
END
TABLE FILE esri/esri-citibike
PRINT END_STATION_NAME AS End Distance
BY START_STATION_NAME AS Start
ON TABLE SET PAGE NOLEAD
END
```

The output is shown in the following image.

Start	End	Distance
1 Ave & E 30 St	Broadway & W 32 St	.83
8 Ave & W 31 St	Broadway & E 14 St	1.15
	E 20 St & 2 Ave	1.23
9 Ave & W 45 St	E 45 St & 3 Ave	1.10
Bank St & Hudson St	Mercer St & Bleecker St	.83
Broadway & E 14 St	Cleveland Pl & Spring St	.92
DeKalb Ave & Skillman St	N 11 St & Wythe Ave	2.13
E 37 St & Lexington Ave	Broadway & W 37 St	.54
Fulton St & Broadway	Maiden Ln & Pearl St	.30
Grand Army Plaza & Central Park S	E 53 St & Lexington Ave	.45
Great Jones St	Watts St & Greenwich St	.87
Greenwich St & Warren St	E 52 St & 2 Ave	3.62
Henry St & Poplar St	State St & Smith St	.78
Howard St & Centre St	E 31 St & 3 Ave	2.01
Lexington Ave & E 24 St	Forsyth St & Broome St	1.54
Perry St & Bleecker St	W 22 St & 8 Ave	.71
S 5 Pl & S 4 St	E 5 St & Avenue C	1.32
W 29 St & 9 Ave	E 10 St & Avenue A	1.80
W 31 St & 7 Ave	E 30 St & Park Ave S	.55
W 33 St & 7 Ave	6 Ave & Canal St	2.07

GIS_DRIVE_ROUTE: Calculating the Driving Directions Between Geometry Points

The GIS_DRIVE_ROUTE function uses a GIS service to calculate the driving route between two geometry points.



Note: This function uses GIS services and requires an Esri ArcGIS adapter connection with named credentials.

Calculate the Drive Route Between Geometry Points

```
GIS_DRIVE_ROUTE(geo_start_point,geo_end_point)
```

where:

geo_start_point,geo_point2

Fixed length alphanumeric, large enough to hold the JSON describing the point (for example, A200).

Is the starting point for which you want to calculate the drive route.

 **Note:** You can generate a geometry point using the GIS_POINT function.

geo_end_point,geo_point2

Fixed length alphanumeric, large enough to hold the JSON describing the point (for example, A200).

Is the ending point for which you want to calculate the drive route.

 **Note:** You can generate a geometry point using the GIS_POINT function.

The format of the field to which the drive route will be returned is TX.

Calculating the Drive Route Between Two Geometry Points

The following uses a citibike .csv file that contains station names, latitudes and longitudes, and trip start times and end times. It uses the GIS_POINT function to define geometry points for start stations and end stations. It then uses GIS_DRIVE_ROUTE to calculate the route to get from the end point to the start point.

```

DEFINE FILE esri/esri-citibike
STARTPOINT/A200 = GIS_POINT('4326', START_STATION_LONGITUDE, START_
STATION_LATITUDE);
ENDPOINT/A200 = GIS_POINT('4326', END_STATION_LONGITUDE, END_STATION_
LATITUDE);
Route/TX140 (GEOGRAPHIC_ROLE=GEOMETRY_LINE) =
GIS_DRIVE_ROUTE(ENDPOINT, STARTPOINT);
END
TABLE FILE esri/esri-citibike
PRINT START_STATION_NAME AS Start END_STATION_NAME AS End Route
WHERE START_STATION_ID EQ 147
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
TYPE=REPORT, GRID=OFF, SIZE=11,$
ENDSTYLE
END

```

The output is shown in the following image.

Start	End	Route
Greenwich St & Warren St	E 52 St & 2 Ave	{"spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPolyline", "geometry": {"paths": [[[[[-73.967401732999974, 40.756047761000048], [-73.965229999999963, 40.7551300000000065], [-73.964739999999949, 40.7557900000000047], [-73.962869999999953, 40.7583400000000032], [-73.961959999999976, 40.7596100000000066], [-73.961609999999951, 40.7600900000000048], [-73.961499999999944, 40.7602400000000067], [-73.959829999999954, 40.7595100000000034], [-73.959569999999985, 40.7594000000000028], [-73.959259999999972, 40.7592800000000047], [-73.959179999999947, 40.7593900000000053], [-73.958949999999959, 40.7597200000000073], [-73.958869999999933, 40.7598300000000079], [-73.958789999999965, 40.7599400000000029], [-73.958589999999958, 40.7602100000000029], [-73.958339999999964, 40.7605300000000074], [-73.958189999999945, 40.7607300000000081], [-73.957859999999982, 40.7611500000000043], [-73.957319999999982, 40.7609500000000037], [-73.957139999999981, 40.7608800000000043], [-73.956929999999943, 40.760660000000003], [-73.957879999999989, 40.7597600000000028], [-73.957919999999945, 40.7597100000000041], [-73.958119999999951, 40.7594000000000028], [-73.958489999999983, 40.7589600000000059], [-73.958609999999965, 40.7587700000000027], [-73.958639999999946, 40.7587200000000039], [-73.958689999999933, 40.7586500000000046], [-73.958739999999977, 40.7585800000000052], [-73.958969999999965, 40.758280000000007], [-73.959369999999979, 40.7577100000000031], [-73.959849999999966, 40.7573500000000031], [-73.960149999999942, 40.756990000000003], [-73.960489999999936, 40.7565000000000074], [-73.961799999999982, 40.7552200000000065], [-73.961939999999997, 40.7550900000000052], [-73.963129999999978, 40.7538900000000069], [-73.963889999999935, 40.7530600000000062], [-73.964119999999998, 40.7528000000000036], [-73.964639999999974, 40.7522300000000054], [-73.96509999999995, 40.7517800000000053], [-73.966719999999953, 40.749800000000005], [-73.968079999999986, 40.7481400000000035], [-73.968179999999961, 40.7480200000000054], [-73.968259999999987, 40.7479300000000053], [-73.968379999999968, 40.7477800000000034], [-73.968639999999937, 40.747440000000004], [-73.970579999999984, 40.7454100000000049], [-73.971699999999942, 40.7438800000000047], [-73.972109999999986, 40.7432100000000033], [-73.972149999999942, 40.7431300000000065], [-73.972659999999962, 40.7417900000000037], [-73.972819999999956, 40.7410100000000074], [-73.973059999999975, 40.7398600000000078], [-73.973479999999938, 40.7388300000000064], [-73.974089999999933, 40.7379200000000031], [-73.974449999999933, 40.7374600000000056], [-73.974729999999965, 40.7370500000000067], [-73.975049999999953, 40.7362700000000047], [-73.974979999999996, 40.7354100000000059], [-73.974409999999978, 40.733260000000003], [-73.974259999999995, 40.7326700000000041], [-73.974179999999933, 40.7323400000000079], [-73.973819999999989, 40.7312400000000071], [-73.972349999999949, 40.7298600000000031], [-73.972029999999961, 40.7294500000000043], [-73.971819999999998, 40.7289500000000054], [-73.971769999999935, 40.7282700000000066], [-73.971829999999954, 40.727830000000004], [-73.971959999999967, 40.726850000000007], [-73.972009999999955, 40.7266100000000051], [-73.973299999999938, 40.7242800000000078], [-73.974449999999933, 40.7223200000000025], [-73.974659999999972, 40.7213900000000042], [-73.974729999999965, 40.7207500000000066], [-73.974959999999953, 40.7189600000000038], [-73.974979999999996, 40.7187600000000032], [-73.975229999999954, 40.7175800000000055], [-73.976309999999955, 40.7152400000000051], [-73.976549999999975, 40.7147700000000044], [-73.976699999999937, 40.7144800000000037], [-73.976859999999988, 40.7141600000000049], [-73.977689999999939, 40.7125500000000078], [-73.978309999999965, 40.7117900000000065], [-73.978529999999978, 40.7116300000000071], [-73.97868999999997, 40.7115200000000064], [-73.979819999999961, 40.7110200000000076], [-73.981799999999964, 40.7108200000000069], [-73.985259999999982, 40.7105600000000044], [-73.991719999999987, 40.7097400000000068], [-73.992799999999988, 40.7095900000000048], [-73.994009999999946, 40.709420000000008], [-73.994579999999985, 40.7093400000000054], [-73.995429999999942, 40.7092300000000048], [-73.995919999999956, 40.7091600000000054], [-73.996199999999988, 40.7091200000000041], [-73.996899999999982, 40.7090200000000066], [-73.997399999999971, 40.7089400000000041], [-73.998499999999979, 40.7086300000000028], [-73.999599999999987, 40.7081200000000065], [-74.002469999999996, 40.7065200000000069], [-74.003479999999968, 40.705930000000008], [-74.004169999999988, 40.7054700000000048], [-74.007859999999937, 40.7031100000000038], [-74.009209999999939, 40.702280000000003], [-74.009979999999985, 40.7019500000000068], [-74.010919999999942, 40.7017300000000055], [-74.011149999999986, 40.7016800000000067], [-74.011989999999969, 40.701480000000006], [-74.012239999999963, 40.7014200000000041], [-74.012679999999989, 40.7013200000000067], [-74.013289999999984, 40.701210000000006], [-74.014119999999954, 40.7012200000000035], [-74.014759999999967, 40.7014000000000035], [-74.015359999999987, 40.7017500000000061], [-74.015429999999981, 40.7018000000000048], [-74.015479999999968, 40.7018500000000036], [-74.015729999999962, 40.7021400000000043], [-74.015999999999963, 40.7026200000000024], [-74.01604999999995, 40.7027700000000044], [-74.016299999999944, 40.7034000000000045], [-74.016639999999938, 40.7046500000000072], [-74.016609999999957, 40.7049500000000053], [-74.016569999999945, 40.7051200000000079], [-74.016099999999937, 40.7064700000000024], [-74.015719999999988, 40.7072100000000032], [-74.01589999999995, 40.7072800000000026], [-74.015619999999956, 40.7074600000000026], [-74.015589999999975, 40.7075300000000077], [-74.015399999999943, 40.7079700000000046], [-74.014719999999954, 40.709780000000008], [-74.014599999999973, 40.7103600000000037], [-74.014489999999967, 40.7108900000000063], [-74.014449999999966, 40.7110100000000044], [-74.014229999999941, 40.7120800000000071], [-74.013749999999959, 40.7136800000000068], [-74.013429999999971, 40.7144200000000075], [-74.013369999999952, 40.7145900000000044], [-74.013229999999965, 40.715210000000007], [-74.013079999999945, 40.7157500000000071], [-74.012929999999983, 40.7163900000000047], [-74.011109999999974, 40.7153900000000077], [-74.011519794999969, 40.715405758000031]]]]]}

Charting a Driving Route Between Two Geometry Points

The following request uses GIS_DRIVE_ROUTE to generate a driving route between a station start point and end point and charts the route on an Esri map.

```
DEFINE FILE esri-citibike
STARTPOINT/A200 = GIS_POINT('4326', START_STATION_LONGITUDE, START_
STATION_LATITUDE);
ENDPOINT/A200 = GIS_POINT('4326', END_STATION_LONGITUDE, END_STATION_
LATITUDE);
Route/TX80 (GEOGRAPHIC_ROLE=GEOMETRY_LINE) =
GIS_DRIVE_ROUTE(ENDPOINT, STARTPOINT);
END
```

```
GRAPH FILE ESRI-CITIBIKE
PRINT
START_STATION_NAME
END_STATION_NAME
WHERE START_STATION_ID EQ 147
ON TABLE PCHOLD FORMAT JSCHART
ON TABLE SET LOOKGRAPH CHOROPLETH
ON TABLE SET EMBEDHEADING ON
ON TABLE SET AUTOFIT ON
ON TABLE SET STYLE *
TYPE=REPORT, TITLETEXT='Map', PAGESIZE=E, CHART-LOOK=com.esri.map, $
TYPE=DATA, COLUMN=N1, /*START_STATION_NAME*/
BUCKET=tooltip, $
TYPE=DATA, COLUMN=N2, /*END_STATION_NAME*/
```

```
*GRAPH_JS_FINAL
"legend": {"visible": true},
"extensions" : { "com.esri.map" :
{ "scalebar" :
{
"scalebarUnit": "dual",
"attachTo" : "bottom-left"
},
},
"baseMapInfo": {
"drawBasemapControl" : false,
"showArcGISBasemaps" : false,
```


```

        "customBaseMaps" : [
            {"ibiBaseLayer" : "dark-gray"}
        ],
        "overlayLayers":
        [
            {
                "ibiDataLayer": {"map-geometry" : {"map_by_field" : "Route"}},
                "title" : "Chart"
            }
        ],
        "introAnimation": "{\\"enabled\\":false}"
    }

    *END
    ENDSTYLE
    HEADING
    "Chart Drive Route"
    END

```

The output is shown in the following image.

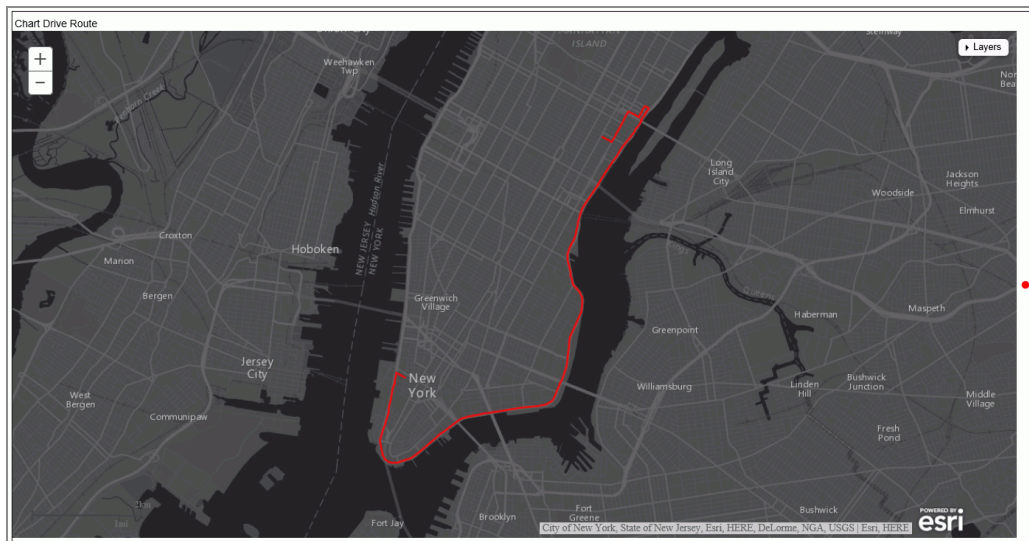

GIS_GEOCODE_ADDR: Geocoding a Complete Address

GIS_GEOCODE_ADDR uses a GIS geocoding service to obtain the geometry point for a complete address.

i Note: This function uses GIS services and requires an Esri ArcGIS adapter connection with named credentials.

Geocode a Complete Address

```
GIS_GEOCODE_ADDR(address[, country])
```

where:

address

Fixed length alphanumeric

Is the complete address to be geocoded.

country

Fixed length alphanumeric

Is a country name, which is optional if the country is the United States.

Geocoding a Complete Address

The following request creates a complete address by concatenating the street address, city, state, and ZIP code. It then uses GIS_GEOCODE_ADDR to create a GIS point for the address.

```
DEFINE FILE WF_RETAIL_LITE
GADDRESS/A200 =ADDRESS_LINE_1 || ' ' | CITY_NAME || ' ' | STATE_PROV_
NAME || ' ' | POSTAL_CODE;
GEOCODE1/A200 = GIS_GEOCODE_ADDR(GADDRESS);
END
TABLE FILE WF_RETAIL_LITE
PRINT ADDRESS_LINE_1 AS Address GEOCODE1
BY POSTAL_CODE AS Zip
WHERE CITY_NAME EQ 'New York'
WHERE POSTAL_CODE FROM '10013' TO '10020'
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

Zip	Address	GEOCODE1
10013	125 Worth St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -74.00269, "y": 40.71543}}
10016	139 E 35Th St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97911, "y": 40.74705}}
10017	2 United Nations Plz	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97115, "y": 40.75111}}
	405 E 42Nd St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.96956, "y": 40.74867}}
	405 E 42Nd St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.96956, "y": 40.74867}}
	219 E 42Nd St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97333, "y": 40.75030}}
	330 Madison Ave	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97906, "y": 40.75316}}
10018	119 W 40Th St F1 10	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98599, "y": 40.75398}}
	11 West 40Th Street	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98235, "y": 40.75245}}
10019	31 West 52Nd Street	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97776, "y": 40.76044}}
	1301 Ave Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97945, "y": 40.76125}}
	1345 Avenue Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97843, "y": 40.76264}}
	745 7Th Ave	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98340, "y": 40.76077}}
10020	1221 Avenue Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98129, "y": 40.75874}}
	1271 Avenue Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98018, "y": 40.76025}}

GIS_GEOCODE_ADDR_CITY: Geocoding an Address Line, City, and State

GIS_GEOCODE_ADDR_CITY uses a GIS geocoding service to obtain the geometry point for an address line, city, state, and optional country. The returned value is a fixed-length alphanumeric format, large enough to hold the JSON describing the geographic location (for example, A200).



Note: This function uses GIS services and requires an Esri ArcGIS adapter connection with named credentials.

Geocode an Address Line, City, and State

```
GIS_GEOCODE_ADDR_CITY( street_addr, city , state [, country])
```

where:

street_addr

Fixed length alphanumeric

Is the street address to be geocoded.

city

Fixed length alphanumeric

Is the city name associated with the street address.

state

Fixed length alphanumeric

Is the state name associated with the street address.

country

fixed length alphanumeric

Is a country name, which is optional if the country is the United States.

Geocoding a Street Address, City, and State

The following request geocodes a street address using GIS_GEOCODE_ADDR_CITY.

```
DEFINE FILE WF_RETAIL_LITE
GEOCODE1/A200 = GIS_GEOCODE_ADDR_CITY(ADDRESS_LINE_1, CITY_NAME , STATE_
PROV_NAME);
END
TABLE FILE WF_RETAIL_LITE
PRINT ADDRESS_LINE_1 AS Address GEOCODE1
BY POSTAL_CODE AS Zip
WHERE CITY_NAME EQ 'New York'
WHERE POSTAL_CODE FROM '10013' TO '10020'
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

Zip	Address	GEOCODE1
10013	125 Worth St	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -74.00269, "y": 40.71543 } }
10016	139 E 35Th St	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.94483, "y": 40.65194 } }
10017	2 United Nations Plz	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.97115, "y": 40.75111 } }
	405 E 42Nd St	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.96956, "y": 40.74867 } }
	405 E 42Nd St	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.96956, "y": 40.74867 } }
	219 E 42Nd St	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.97333, "y": 40.75030 } }
	330 Madison Ave	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.97906, "y": 40.75316 } }
10018	119 W 40Th St Fl 10	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.98599, "y": 40.75398 } }
	11 West 40Th Street	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.98235, "y": 40.75245 } }
10019	31 West 52Nd Street	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.97776, "y": 40.76044 } }
	1301 Ave Of The Americas	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.97945, "y": 40.76125 } }
	1345 Avenue Of The Americas	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.97843, "y": 40.76264 } }
	745 7Th Ave	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.98340, "y": 40.76077 } }
10020	1221 Avenue Of The Americas	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.98129, "y": 40.75874 } }
	1271 Avenue Of The Americas	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.98018, "y": 40.76025 } }

GIS_GEOCODE_ADDR_POSTAL: Geocoding an Address Line and Postal Code

GIS_GEOCODE_ADDR_POSTAL uses a GIS geocoding service to obtain the geometry point for an address line, postal code and optional country. The returned value is a fixed-length alphanumeric format, large enough to hold the JSON describing the geographic location (for example, A200).

Note: This function uses GIS services and requires an Esri ArcGIS adapter connection with named credentials.

Geocode an Address Line and Postal Code

```
GIS_GEOCODE_ADDR_POSTAL( street_addr, postal_code [, country])
```

where:

street_addr

fixed length alphanumeric

Is the street address to be geocoded.

postal_code

fixed length alphanumeric

Is the postal code associated with the street address.

country

fixed length alphanumeric

Is a country name, which is optional if the country is the United States.

Geocoding a Street Address and Postal Code

The following request geocodes a street address using GIS_GEOCODE_ADDR_POSTAL.

```
DEFINE FILE WF_RETAIL_LITE
GEOCODE1/A200 = GIS_GEOCODE_ADDR_POSTAL(ADDRESS_LINE_1, POSTAL_CODE);
END
TABLE FILE WF_RETAIL_LITE
PRINT ADDRESS_LINE_1 AS Address GEOCODE1
BY POSTAL_CODE AS Zip
WHERE CITY_NAME EQ 'New York'
WHERE POSTAL_CODE FROM '10013' TO '10020'
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

Zip	Address	GEOCODE1
10013	125 Worth St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -74.00269, "y": 40.71543}}
10016	139 E 35Th St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97911, "y": 40.74705}}
10017	2 United Nations Plz	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97115, "y": 40.75111}}
	405 E 42Nd St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.96956, "y": 40.74867}}
	405 E 42Nd St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.96956, "y": 40.74867}}
	219 E 42Nd St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97333, "y": 40.75030}}
	330 Madison Ave	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97906, "y": 40.75316}}
10018	119 W 40Th St Fl 10	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98599, "y": 40.75398}}
	11 West 40Th Street	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98235, "y": 40.75245}}
10019	31 West 52Nd Street	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97776, "y": 40.76044}}
	1301 Ave Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97945, "y": 40.76125}}
	1345 Avenue Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.97806, "y": 40.76309}}
	745 7Th Ave	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98340, "y": 40.76077}}
10020	1221 Avenue Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98129, "y": 40.75874}}
	1271 Avenue Of The Americas	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPoint", "geometry": {"x": -73.98018, "y": 40.76025}}

GIS_GEOMETRY: Building a JSON Geometry Object

The GIS_GEOMETRY function builds a JSON Geometry object given a geometry type, WKID, and a geometry.

Build a JSON Geometry Object

```
GIS_GEOMETRY(geotype, wkid, geometry)
```

where:

geotype

Alphanumeric

Is a geometry type, for example, 'esriGeometryPolygon', 'esriGeometryPolyline', 'esriGeometryMultipoint', 'EsriGeometryPoint', 'EsriGeometryExtent'..

wkid

Alphanumeric

Is a valid spatial reference ID. WKID is an abbreviation for Well-Known ID, which identifies a projected or geographic coordinate system.

geometry

TX

A geometry in JSON.

The output is returned as TX.

Building a JSON Geometry Object

The following request builds a polygon geometry of the area encompassing ZIP code 10036 in Manhattan. The input geometry object is stored in a text (.ftm) file that is cross-

referenced in the esri-citibike Master File. The field containing the geometry object is GEOMETRY.

```
DEFINE FILE esri/esri-citibike
WKID/A10 = '4326';
MASTER_GEOMETRY/TX256 (GEOGRAPHIC_ROLE=GEOMETRY_AREA) =
    GIS_GEOMETRY( 'esriGeometryPolygon', WKID , GEOMETRY );
END
TABLE FILE esri/esri-citibike
PRINT
    START_STATION_NAME AS Station
    START_STATION_LATITUDE AS Latitude
    START_STATION_LONGITUDE AS Longitude
    MASTER_GEOMETRY AS 'JSON Geometry Object'
WHERE START_STATION_ID EQ 479
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
type=report, grid=off, size=10,$
ENDSTYLE
END
```

The output is shown in the following image.

Station	Latitude	Longitude	JSON Geometry Object
9 Ave & W 45 St	40.760192520000000	-73.99125510000000	{ "spatialReference": { "wkid": 4326}, "geometryType": "esriGeometryPolygon", "geometry": ["rings":[[[-73.9803889998524,40.7541490002762],[-73.9808779999197,40.7534830001404],[-73.9814419998484,40.7537140000011],[-73.9824040001445,40.7541199998382],[-73.982461000075,40.7541434001978],[-73.9825620002361,40.7541850001377],[-73.9832877000673,40.7544888999428],[-73.9833499997027,40.7545150000673],[-73.983644399969,40.7546397998869],[-73.9836849998628,40.7546570003204],[-73.9841276003085,40.7548161002829],[-73.984399700086,40.7544544999752],[-73.9846140004357,40.7541650001147],[-73.984871999743,40.7542749997914],[-73.9866590003126,40.7550369998577],[-73.9874449996869,40.7553720000178],[-73.9902640001834,40.756570999552],[-73.9914340001789,40.7570449998269],[-73.9918260002697,40.7572149995726],[-73.9924290001982,40.7574769999636],[-73.9927679996434,40.7576240004473],[-73.9930690000343,40.7578009996165],[-73.9931059999419,40.7577600004237],[-73.9932120003335,40.7576230004012],[-73.9933250001486,40.7576770001934],[-73.9935390001247,40.7577669998472],[-73.993725999755,40.7578459998931],[-73.9939599997542,40.757937999639],[-73.9940989998689,40.757983999617],[-73.9941529996611,40.757995996157],[-73.9942220001452,40.7580159996387],[-73.9943040003293,40.7580300002843],[-73.9943650004444,40.7580330004227],[-73.99446499966,40.7580369997078],[-73.994560002591,40.7580300002843],[-73.9946130001898,40.7580209998693],[-73.994568999594,40.7580809999383],[-73.9945449997519,40.7581149997075],[-73.9944196999092,40.7582882001404],[-73.9943810002829,40.7583400001909],[-73.9953849998179,40.7587409997973],[-73.995956000069,40.7589690004191],[-73.9960649996999,40.7590149998424],[-73.9968730000888,40.7593419996336],[-73.996975000296,40.7593809996335],[-73.9973149997874,40.7595379996789],[-73.9977009996014,40.7597030000935],[-73.9980399999946,40.7598479995856],[-73.99833400001,40.7599709998618],[-73.9987769997587,40.7601570003453],[-73.9990889996656,40.7602540003219],[-74.0015059997021,40.7612929996722],[-74.0016340002089,40.7613299995799],[-74.0015350001401,40.7614539999022],[-74.0014580001865,40.7615479997405],[-74.001364000,3483,40.7616560002242],[-74.0013050003255,40.7617199995784],[-74.0011890003721,40.7618369995779],[-74.0010579997269,40.7619609999003],[-74.0009659999808,40.7620389999],[-74.0008649998198,40.7621230001764],[-74.0008390004195,40.7621430001993],[-74.000683999,5669,40.762261000245],[-74.000531999752,40.7623750001062],[-74.0003759997525,40.7624849997829],[-74.0002840000066,40.7625510001286],[-73.9998659996161,40.762850999574],[-73.9998279996624,40.7628779999198],[-73.9995749996864,40.7630590001727],[-73.999312000,1487,40.7632720001028],[-73.9991639996189,40.7633989996642],[-73.998941000127,40.7636250001936],[-73.9987589998279,40.7638580001466],[-73.9986331999622,40.7640277004181],[-73.9986804002574,40.7640632002565],[-73.9984819996445,40.7642340003989],[-73.9983469,997142,40.764419999831],[-73.998171999738,40.7646669996823],[-73.9980319995771,40.7648580003964],[-73.9979881999955,40.7649204996813],[-73.997938000432,40.7649942000224],[-73.9978947999051,40.7650573998791],[-73.9977017001733,40.7653310995507],[-73.99758,10003629,40.765481000348],[-73.9975069996483,40.7654519999099],[-73.9956019999323,40.7646519998899],[-73.9955379996789,40.7646250004434],[-73.9954779996099,40.7646030003282],[-73.9949389999348,40.7643690003291],[-73.9936289997785,40.7638200001929],[-73.993,4620001711,40.7637539998473],[-73.9931520002646,40.7636270002859],[-73.992701000151,40.7634409998023],[-73.9924419000736,40.7633312995998],[-73.9898629996777,40.7622390001298],[-73.9886120004434,40.761714000201],[-73.988021000169,40.761460000179],[-73.9870,28000242,40.7610439998808],[-73.9867690998141,40.7609346998765],[-73.9848240002274,40.7601130001149],[-73.9841635003452,40.7598425002312],[-73.9813259998949,40.7586439998208],[-73.9805479999902,40.7583159999834],[-73.9793569999256,40.757814000216],[-73.978,1150002071,40.7572939996184],[-73.9785670003668,40.7566709996669],[-73.9790140002958,40.7560309998308],[-73.9794719998329,40.7554120000638],[-73.9799399998311,40.7547649999048],[-73.9802380000836,40.7543610001601],[-73.9803889998524,40.7541490002762]]]]}

Charting a Geometry Object

The following request uses GIS_GEOMETRY to build a geometry object and chart it on an Esri map.

```

DEFINE FILE esri-citibike
WKID/A10 = '4326';
  MASTER_GEOMETRY/TX256 (GEOGRAPHIC_ROLE=GEOMETRY_AREA) =
    GIS_GEOMETRY( 'esriGeometryPolygon', WKID , GEOMETRY );
END

```

```

GRAPH FILE ESRI-CITIBIKE
PRINT
  START_STATION_NAME
  END_STATION_NAME
  ON TABLE PCHOLD FORMAT JSCHART
ON TABLE SET LOOKGRAPH CHOROPLETH
ON TABLE SET EMBEDHEADING ON
ON TABLE SET AUTOFIT ON
ON TABLE SET STYLE *
  TYPE=REPORT, TITLETEXT='Map', PAGESIZE=E, CHART-LOOK=com.esri.map, $
  TYPE=DATA, COLUMN=N1, /*START_STATION_NAME*/
  BUCKET=tooltip, $
  TYPE=DATA, COLUMN=N2, /*END_STATION_NAME*/

```

```

*GRAPH_JS_FINAL

"legend": {"visible": true},
"extensions" : { "com.esri.map" :
  { "scalebar" :
    {
      "scalebarUnit": "dual",
      "attachTo" : "bottom-left"
    },
    "baseMapInfo": {
      "drawBasemapControl" : false,
      "showArcGISBasemaps" : false,
      "customBaseMaps" : [
        {"ibiBaseLayer" : "dark-gray"}
      ]
    },
    "overlayLayers":
    [{
      "ibiDataLayer": {"map-geometry" : {"map_by_field" : "MASTER_
GEOMETRY"}}}, {"title" : "Chart"}]
    },
    "introAnimation": "{\\"enabled\\":false}"
  }

*END

```

```

ENDSTYLE
HEADING
  "Chart Geometry Object"
END

```

The output is shown in the following image.



GIS_IN_POLYGON: Determining if a Point is in a Complex Polygon

Given a point and a polygon definition, the GIS_IN_POLYGON function returns the value 1 (TRUE) if the point is in the polygon or 0 (FALSE) if the point is not in the polygon. The value is returned in integer format.

Determine if a Point is in a Complex Polygon

```
GIS_IN_POLYGON(point, polygon_definition)
```

where:

point

Alphanumeric or text

Is the geometry point.

polygon_definition

Text

Is the geometry area (polygon) definition.

Determining if a Point is in a Polygon

The following example determines if a station is inside the ZIP code 10036. GIS_IN_POLYGON returns 1 for a point inside the polygon definition and 0 for a point outside. The polygon definition being passed is the same one used in the example for the GIS_GEOMETRY function described previously and defines the polygon for ZIP code 10036 in Manhattan in New York City. The value 1 is translated to Yes and 0 to No for display on the output.

```

DEFINE FILE esri/esri-citibike
WKID/A10 = '4326';
MASTER_GEOMETRY/TX256 (GEOGRAPHIC_ROLE=GEOMETRY_AREA) =
  GIS_GEOMETRY( 'esriGeometryPolygon', WKID , GEOMETRY );
START_STATION_POINT/A200=GIS_POINT(WKID, START_STATION_LONGITUDE, START_
STATION_LATITUDE);
STATION_IN_POLYGON/I4=GIS_IN_POLYGON(START_STATION_POINT, MASTER_
GEOMETRY);
IN_POLYGON/A5 = IF STATION_IN_POLYGON EQ 1 THEN 'Yes' ELSE 'No';
END
TABLE FILE esri/esri-citibike
PRINT
  START_STATION_NAME AS Station
  IN_POLYGON AS 'Station in zip, code 10036?'
BY START_STATION_ID AS 'Station ID'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
type=report, grid=off, size=10,$
type=data, column=in_polygon, style=bold, color=red, when = in_polygon
eq 'Yes', $
ENDSTYLE
END

```

The output is shown in the following image.

<u>Station ID</u>	<u>Station</u>	<u>Station in zip code 10036?</u>
147	Greenwich St & Warren St	No
160	E 37 St & Lexington Ave	No
229	Great Jones St	No
247	Perry St & Bleecker St	No
268	Howard St & Centre St	No
281	Grand Army Plaza & Central Park S	No
285	Broadway & E 14 St	No
319	Fulton St & Broadway	No
346	Bank St & Hudson St	No
379	W 31 St & 7 Ave	No
407	Henry St & Poplar St	No
409	DeKalb Ave & Skillman St	No
479	9 Ave & W 45 St	Yes
492	W 33 St & 7 Ave	No
512	W 29 St & 9 Ave	No
521	8 Ave & W 31 St	No
	8 Ave & W 31 St	No
532	S 5 Pl & S 4 St	No
536	1 Ave & E 30 St	No
537	Lexington Ave & E 24 St	No

GIS_LINE: Building a JSON Line

Given two geometry points or lines, GIS_LINE builds a JSON line. The output is returned in text format.

Build a JSON Line

```
GIS_LINE(geometry1, geometry2)
```

where:

geometry1

Alphanumeric or text

Is the first point or line for defining the beginning of the new line.

geometry2

Alphanumeric or text

Is the second point or line for the concatenation of the new line.

Building a JSON Line

The following request prints start stations and end stations and builds a JSON line between them.

```
DEFINE FILE ESRI/ESRI-CITIBIKE
STARTPOINT/A200 = GIS_POINT('4326', START_STATION_LONGITUDE, START_
STATION_LATITUDE);
ENDPOINT/A200 = GIS_POINT('4326', END_STATION_LONGITUDE, END_STATION_
LATITUDE);
CONNECTION_LINE/TX80 (GEOGRAPHIC_ROLE=GEOMETRY_LINE) =
    GIS_LINE(STARTPOINT, ENDPOINT);
END
TABLE FILE ESRI/ESRI-CITIBIKE
PRINT END_STATION_NAME AS End CONNECTION_LINE AS 'Connecting Line'
BY START_STATION_NAME AS Start
WHERE START_STATION_NAME LE 'D'
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
TYPE=REPORT, GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

Start	End	Connecting Line
1 Ave & E 30 St	Broadway & W 32 St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPolyline", "geometry": {"paths": [[[-73.97536082000000, 40.741443870000000], [-73.98808416000000, 40.748548620000000]]]}}
8 Ave & W 31 St	Broadway & E 14 St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPolyline", "geometry": {"paths": [[[-73.99444208000000, 40.750967350000000], [-73.99074142000000, 40.734545670000000]]]}}
	E 20 St & 2 Ave	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPolyline", "geometry": {"paths": [[[-73.99444208000000, 40.750967350000000], [-73.98205027000000, 40.735876780000000]]]}}
9 Ave & W 45 St	E 45 St & 3 Ave	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPolyline", "geometry": {"paths": [[[-73.99125510000000, 40.760192520000000], [-73.97282625000000, 40.752554340000000]]]}}
Bank St & Hudson St	Mercer St & Bleecker St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPolyline", "geometry": {"paths": [[[-74.00618026000000, 40.736528890000000], [-73.99695094000000, 40.726794540000000]]]}}
Broadway & E 14 St	Cleveland Pl & Spring St	{ "spatialReference": {"wkid": 4326}, "geometryType": "esriGeometryPolyline", "geometry": {"paths": [[[-73.99074142000000, 40.734545670000000], [-73.99724901000000, 40.722103790000000]]]}}

Charting Geometry Lines

The following request generates geometry lines and charts them on an Esri map.

```

DEFINE FILE ESRI-CITIBIKE
CONNECTION_LINE/TX80 (GEOGRAPHIC_ROLE=GEOMETRY_LINE) =GIS_LINE(START_
STATION_POINT, END_STATION_POINT);
DISTANCE/P33.11 TITLE 'Distance'=GIS_DISTANCE(START_STATION_POINT, END_
STATION_POINT);
END

```

```

GRAPH FILE ESRI-CITIBIKE
PRINT
START_STATION_NAME
END_STATION_NAME
DISTANCE
ON TABLE PCHOLD FORMAT JSCHART
ON TABLE SET LOOKGRAPH BUBBLEMAP
ON TABLE SET EMBEDHEADING ON
ON TABLE SET AUTOFIT ON
ON TABLE SET STYLE *
TYPE=REPORT, TITLETEXT='Map', PAGESIZE=E, CHART-LOOK=com.esri.map, $
TYPE=DATA, COLUMN=N1, /*START_STATION_NAME*/
BUCKET=tooltip, $

```

```

TYPE=DATA, COLUMN=N2, /*END_STATION_NAME*/
  BUCKET=tooltip, $
TYPE=DATA, COLUMN=N3, /*DISTANCE*/
  BUCKET=tooltip, $

```

```

*GRAPH_JS_FINAL
"legend": {"visible": true},
"extensions" : { "com.esri.map" :
  { "scalebar" :
    {
      "scalebarUnit": "dual",
      "attachTo" : "bottom-left"
    },
    "baseMapInfo": {
      "drawBasemapControl" : false,
      "showArcGISBasemaps" : false,
      "customBaseMaps" : [
        {"ibiBaseLayer" : "dark-gray"}
      ]
    },
    "overlayLayers":
    [{
      "ibiDataLayer": {"map-geometry" : {"map_by_field" : "CONNECTION_
LINE"}}, "title" : "Chart"}]
    },
    "introAnimation": "{\\"enabled\\":false}"
  }

*END
ENDSTYLE
HEADING
  "Chart Geometry Lines"
END

```

The output is shown in the following image.



GIS_POINT: Building a Geometry Point

Given a WKID (Well-Known ID) spatial reference, longitude, and latitude, the GIS_POINT function builds a JSON point defining a Geometry object with the provided WKID, longitude, and latitude. The function is optimized for those SQL engines that can build a JSON geometry object.

The field to which the point is returned should have fixed length alphanumeric format, large enough to hold the JSON describing the point (for example, A200).

Build a Geometry Point

```
GIS_POINT(wkid, longitude, latitude)
```

where:

wkid

Fixed length alphanumeric

Is a spatial reference code (WKID). WKID is an abbreviation for Well-Known ID, which identifies a projected or geographic coordinate system.

longitude

D20.8

Is the longitude for the point.

latitude

D20.8

Is the latitude for the point.

Building a Geometry Point

The following request uses the spatial reference code 4326 (decimal degrees) and state capital longitudes and latitudes to build a geometry point.

```
DEFINE FILE WF_RETAIL_LITE
GPOINT/A200 = GIS_POINT('4326', STATE_PROV_CAPITAL_LONGITUDE, STATE_
PROV_CAPITAL_LATITUDE);
END
TABLE FILE WF_RETAIL_LITE
SUM FST.STATE_PROV_CAPITAL_LONGITUDE AS Longitude
FST.STATE_PROV_CAPITAL_LATITUDE AS Latitude
FST.GPOINT AS Point
BY STATE_PROV_CAPITAL_NAME AS Capital
WHERE COUNTRY_NAME EQ 'United States'
WHERE STATE_PROV_CAPITAL_NAME LT 'C'
ON TABLE SET PAGE NOPAGE
END
```

The output is shown in the following image.

Capital	Longitude	Latitude	Point
Albany	-73.76000000	42.66000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -73.76000000, "y": 42.66000000 } }
Annapolis	-76.49000000	38.95000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -76.49000000, "y": 38.95000000 } }
Atlanta	-84.27000000	33.94000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -84.27000000, "y": 33.94000000 } }
Augusta	-69.77000000	44.32000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -69.77000000, "y": 44.32000000 } }
Austin	-97.75000000	30.40000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -97.75000000, "y": 30.40000000 } }
Baton Rouge	-91.17000000	30.38000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -91.17000000, "y": 30.38000000 } }
Bismarck	-100.77000000	46.82000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -100.77000000, "y": 46.82000000 } }
Boise	-116.16000000	43.60000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -116.16000000, "y": 43.60000000 } }
Boston	-71.10000000	42.35000000	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPoint", "geometry": { "x": -71.10000000, "y": 42.35000000 } }

Charting Geometry Points

The following request generates geometry points using GIS_POINT charts them on an Esri map.

```
DEFINE FILE WF_RETAIL
GPOINT/A200 = GIS_POINT('4326', STATE_PROV_CAPITAL_LONGITUDE, STATE_
PROV_CAPITAL_LATITUDE);
END
```

```
GRAPH FILE WF_RETAIL
PRINT
STATE_PROV_NAME
WHERE STATE_PROV_CAPITAL_LONGITUDE NE MISSING
ON TABLE PCHOLD FORMAT JSCHART
ON TABLE SET LOOKGRAPH BUBBLEMAP
ON TABLE SET EMBEDHEADING ON
ON TABLE SET AUTOFIT ON
ON TABLE SET STYLE *
TYPE=REPORT, TITLETEXT='Map', PAGESIZE=E, CHART-LOOK=com.esri.map, $
TYPE=DATA, COLUMN=N1,
BUCKET=tooltip, $
```

```
*GRAPH_JS_FINAL
"bubbleMarker": {"maxSize": "10%"},
"legend": {"visible": true},
"extensions" : { "com.esri.map" :
{ "scalebar" :
```


```

{
  "scalebarUnit": "dual",
  "attachTo" : "bottom-left"
},
"baseMapInfo": {
  "drawBasemapControl" : false,
  "showArcGISBasemaps" : false,
  "customBaseMaps" : [
    {"ibiBaseLayer" : "gray"}
  ]
},
"overlayLayers":
[
  {
    "ibiDataLayer": {"map-geometry" : {"map_by_field" : "GPOINT"}}},
    "title" : "Report"]
  ],
  "introAnimation": "{\\"enabled\\":false}"
}

*END
ENDSTYLE
HEADING
  "Chart Geometry Points"
END

```

The output is shown in the following image.

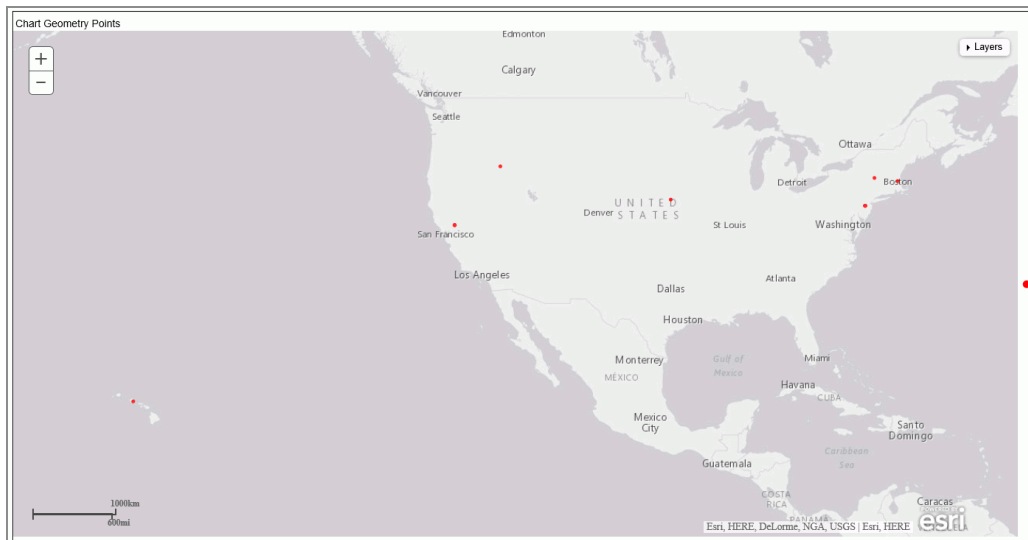

GIS_REVERSE_COORDINATE: Returning a Geographic Component

Given longitude and latitude values and the name of a geographic component, GIS_REVERSE_COORDINATE returns the specified geographic component values associated with those coordinates.



Note: This function uses GIS services and requires an Esri ArcGIS adapter connection with named credentials.

Return a Geographic Component

```
GIS_REVERSE_COORDINATE(longitude, latitude, component)
```

where:

longitude

Numeric

Is the longitude of the component to return.

latitude

Numeric

Is the latitude of the component to return.

component

Keyword

Is one of the following components:

- MATCH_ADDRESS, which returns the matching address.
- METROAREA, which returns the metro area name.
- REGION, which returns the region name.

- SUBREGION, which returns the subregion name.
- CITY, which returns the city name.
- POSTAL, which returns the postal code.

The value is returned as text and can be assigned to a field with text or alphanumeric (fixed or variable length) format.

Returning Geographic Components Associated With Coordinates

The following request uses city longitude and city latitude to return the matching address, postal code, region, and subregion.

```
TABLE FILE WF_RETAIL_GEOGRAPHY
SUM FST.CITY_LONGITUDE AS Longitude FST.CITY_LATITUDE AS Latitude
COMPUTE
  MatchingAddress/A250 = GIS_REVERSE_COORDINATE(CITY_LONGITUDE,
                                                  CITY_LATITUDE, MATCH_ADDRESS);
  PostalCode/A250 = GIS_REVERSE_COORDINATE(CITY_LONGITUDE,
                                            CITY_LATITUDE, POSTAL);
  Region/A250 = GIS_REVERSE_COORDINATE(CITY_LONGITUDE, CITY_LATITUDE,
                                         REGION);
  Subregion/A250 = GIS_REVERSE_COORDINATE(CITY_LONGITUDE, CITY_LATITUDE,
                                            SUBREGION);
BY CITY_NAME AS City
WHERE COUNTRY_NAME EQ 'United States'
WHERE TOTAL PostalCode NE ' '
WHERE RECORDLIMIT EQ 20
ON TABLE SET PAGE NOLEAD
END
```

The output is shown in the following image.

City	Longitude	Latitude	MatchingAddress	PostalCode	Region	Subregion
Annapolis	-76.54540000	38.98790000	Annapolis Mall, Annapolis, Maryland, 21401	21401	Maryland	Anne Arundel County
Baton Rouge	-91.09780000	30.44990000	233 E Parkland Dr, Baton Rouge, Louisiana, 70806	70806	Louisiana	East Baton Rouge Parish
Cincinnati	-84.45690000	39.16200000	2070-2098 Elm Ave, Cincinnati, Ohio, 45212	45212	Ohio	Hamilton County
Daytona Beach	-81.04740000	29.19310000	511 S Clyde Morris Blvd, Daytona Beach, Florida, 32114	32114	Florida	Volusia County
Detroit	-83.05980000	42.34630000	133 Davenport St, Detroit, Michigan, 48201	48201	Michigan	Wayne County
Harrington Park	-73.98330000	40.99070000	247 Lynn St, Harrington Park, New Jersey, 07640	07640	New Jersey	Bergen County
Johnston	-93.72040000	41.70310000	Camp Dodge	50131	Iowa	Polk County
Lake Mary	-81.33970000	28.75780000	127-129 E Plantation Blvd, Lake Mary, Florida, 32746	32746	Florida	Seminole County
Laredo	-99.50350000	27.51330000	1501-1599 Santa Ursula Ave, Laredo, Texas, 78040	78040	Texas	Webb County
Latham	-73.78040000	42.75260000	1 Lear Jet Ln, Latham, New York, 12110	12110	New York	Albany County
Louisville	-85.69180000	38.20850000	2714 Lamont Rd, Louisville, Kentucky, 40205	40205	Kentucky	Jefferson County
Medley	-80.38390000	25.85880000	33178, Miami, Florida	33178	Florida	Miami-Dade County
North Kansas City	-94.56220000	39.13000000	1201-1499 Quebec St, Kansas City, Missouri, 64116	64116	Missouri	Clay County
Rochester	-77.61560000	43.15480000	1-35 Plymouth Ave S, Rochester, New York, 14614	14614	New York	Monroe County
Waco	-97.13820000	31.55100000	1200 Austin Ave, Waco, Texas, 76701	76701	Texas	McLennan County

GIS_REVERSE_COORDINATE returns the REGION, given a city longitude and city latitude.

```
GIS_REVERSE_COORDINATE(CITY_LONGITUDE, CITY_LATITUDE, REGION)
```

For Annapolis, the result is Maryland.

For Baton Rouge, the result is Louisiana.

GIS_SERVICE_AREA: Calculating a Geometry Area Around a Given Point

The GIS_SERVICE_AREA function uses a GIS service to calculate the geometry area with access boundaries within the given time or distance from the provided geometry point. The output is returned in text format.



Note: This function uses GIS services and requires an Esri ArcGIS adapter connection with named credentials.

Calculate a Geometry Area Around a Point

```
GIS_SERVICE_AREA(geo_point, distance, travel_mode)
```

where:

geo_point

Alphanumeric

Is the starting geometry point.

distance

Alphanumeric

Is the travel limitation in either time or distance units.

travel_mode

Alphanumeric

Is a valid travel mode as defined in `gis_serv_area.mas` in the Catalog directory, located in `drive:\ibi\WebFOCUS\srv\home\catalog`. The accepted travel modes are;

- **'Miles'**. This is the default value.
- **'TravelTime'**.
- **'TruckTravelTime'**.
- **'WalkTime'**.
- **'Kilometers'**.

Calculating a Service Area Around a Geometry Point

The following request calculates the geometry area that is a five-minute walk around a station.

```
DEFINE FILE esri/esri-citibike
WKID/A10='4326';
START_STATION_POINT/A200=GIS_POINT(WKID, START_STATION_LONGITUDE, START_
STATION_LATITUDE);
DISTANCE/A10='5';
TRAVEL_MODE/A10='WalkTime';
STATION_SERVICE_AREA/TX80 (GEOGRAPHIC_ROLE=GEOMETRY_AREA)=
  GIS_SERVICE_AREA(START_STATION_POINT, DISTANCE, TRAVEL_MODE);
END
TABLE FILE esri/esri-citibike
PRINT
  START_STATION_ID AS 'Station ID'
```

```

START_STATION_NAME AS 'Station Name'
STATION_SERVICE_AREA AS '5-Minute Walk Service Area Around Station'
WHERE START_STATION_ID EQ 479 OR 512;
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
TYPE=REPORT, GRID=OFF, SIZE=12,$
ENDSTYLE
END

```

The output is shown in the following image.

Station ID	Station Name	5-Minute Walk Service Area Around Station
512	W 29 St & 9 Ave	<pre> { "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPolygon", "geometry": { "rings": [[[-73.995542525999952, 40.749246597000081], [-73.995094298999959, 40.7483 46329000071], [-73.995542525999952, 40.74767494200006], [-73.996665954999969, 40.747 449875000029], [-73.99778938299994, 40.748571396000045], [-73.998462676999964, 40.74 8571396000045], [-73.998462676999964, 40.747449875000029], [-73.999135970999987, 40. 746999741000025], [-73.999586104999935, 40.747224808000055], [-74.000932692999982, 4 0.746103287000039], [-74.00160789499995, 40.746549606000031], [-74.002056121999942, 40.748121262000041], [-74.000484466999978, 40.749471664000055], [-74.00025939899995 8, 40.749471664000055], [-74.000034331999984, 40.749917984000035], [-74.002729415999 966, 40.750818253000034], [-74.00317954999997, 40.751489639000056], [-74.00272941599 9966, 40.752614975000029], [-74.001831054999968, 40.752614975000029], [-74.000932692 999982, 40.75328636200004], [-74.000034331999984, 40.752840042000059], [-73.99981117 1999966, 40.75171470600003], [-73.99778938299994, 40.751043320000065], [-73.99756431 5999966, 40.75036811800004], [-73.995542525999952, 40.749246597000081]]]]} </pre>
479	9 Ave & W 45 St	<pre> { "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPolygon", "geometry": { "rings": [[[-73.990602492999983, 40.760248184000034], [-73.988132476999965, 40.7593 51730000049], [-73.98768234299996, 40.758451462000039], [-73.988580703999958, 40.757 555008000054], [-73.98992919899996, 40.757780075000028], [-73.990827559999957, 40.75 6658554000069], [-73.992399215999967, 40.75732994100008], [-73.992849349999972, 40.7 56433487000038], [-73.993745803999957, 40.756208420000064], [-73.994644164999954, 40. 757104874000049], [-73.994421004999936, 40.758230209000033], [-73.995094298999959, 40.760026932000073], [-73.994195937999962, 40.760923386000059], [-73.99262428299994 1, 40.760248184000034], [-73.991950988999974, 40.760923386000059], [-73.991725921999 944, 40.760923386000059], [-73.99150085399998, 40.760923386000059], [-73.99150085399 998, 40.761148453000033], [-73.990602492999983, 40.760698318000038], [-73.9906024929 99983, 40.760248184000034]]]]} </pre>

Charting a Geometry Service Area Around a Point

The following request generates service areas that are 5-minute walking distances from start station geometry points and charts them on an Esri map.

```

DEFINE FILE esri-citibike
WKID/A10='4326';

```

```

START_STATION_POINT/A200=GIS_POINT(WKID, START_STATION_LONGITUDE, START_
STATION_LATITUDE);
DISTANCE/A10='5';
TRAVEL_MODE/A10='WalkTime';
STATION_SERVICE_AREA/TX80 (GEOGRAPHIC_ROLE=GEOMETRY_AREA)=
  GIS_SERVICE_AREA(START_STATION_POINT, DISTANCE, TRAVEL_MODE);
END

```

```

GRAPH FILE ESRI-CITIBIKE
PRINT
  START_STATION_NAME
  END_STATION_NAME
  DISTANCE
ON TABLE PCHOLD FORMAT JSCHART
ON TABLE SET LOOKGRAPH CHOROPLETH
ON TABLE SET EMBEDHEADING ON
ON TABLE SET AUTOFIT ON
ON TABLE SET STYLE *
  TYPE=REPORT, TITLETEXT='Map', PAGESIZE=E, CHART-LOOK=com.esri.map, $
  TYPE=DATA, COLUMN=N1, /*START_STATION_NAME*/
    BUCKET=tooltip, $
  TYPE=DATA, COLUMN=N2, /*END_STATION_NAME*/
    BUCKET=tooltip, $
  TYPE=DATA, COLUMN=N3, /*DISTANCE*/
    BUCKET=tooltip, $

```

```

*GRAPH_JS_FINAL
"legend": {"visible": true},
"extensions" : { "com.esri.map" :
  { "scalebar" :
    {
      "scalebarUnit": "dual",
      "attachTo" : "bottom-left"
    },
    "baseMapInfo": {
      "drawBasemapControl" : false,
      "showArcGISBasemaps" : false,
      "customBaseMaps" : [
        {"ibiBaseLayer" : "dark-gray"}
      ]
    },
    "overlayLayers":
    [{
      "ibiDataLayer": {"map-geometry" : {"map_by_field" : "STATION_SERVICE_
AREA"}}, "title" : "Chart"}]

```

```

    },
    "introAnimation": "{\\"enabled\\":false}"
  }

  *END
ENDSTYLE
HEADING
  "Chart Geometry Service Area"
END

```

The output is shown in the following image.



GIS_SERV_AREA_XY: Calculating a Service Area Around a Given Coordinate

The GIS_SERV_AREA_XY function uses a GIS service to calculate the geometry area with access boundaries within the given time or distance from the provided coordinate. The output is returned in text format.

i Note: This function uses GIS services and requires an Esri ArcGIS adapter connection with named credentials.

Calculate a Geometry Area Around a Coordinate

```
GIS_SERV_AREA_XY(longitude, latitude, distance, travel_mode[, wkid])
```

where:

longitude

Alphanumeric

Is the longitude of the starting point.

latitude

Alphanumeric

Is the latitude of the starting point.

distance

Integer

Is the travel limitation in either time or distance units.

travel_mode

Alphanumeric

Is a valid travel mode as defined in `gis_serv_area.mas` in the Catalog directory, located in `drive:\ibi\WebFOCUS\srv\home\catalog`. The accepted travel modes are;

- **'Miles'**. This is the default value.
- **'TravelTime'**.
- **'TruckTravelTime'**.
- **'WalkTime'**.
- **'Kilometers'**.

wkid

Alphanumeric

Is the spatial reference ID for the coordinate. WKID is an abbreviation for Well-Known ID, which identifies a projected or geographic coordinate system. The default value is '4326', which represents decimal degrees.

Calculating a Service Area Around a Coordinate

The following request calculates the geometry area that is a five-minute walk around a station, using the longitude and latitude that specify the station location.

```

DEFINE FILE esri/esri-citibike
DISTANCE/I4=5;
WKID/A10='4326';
TRAVEL_MODE/A10='WalkTime';
STATION_SERVICE_AREA/TX80 (GEOGRAPHIC_ROLE=GEOMETRY_AREA)=
    GIS_SERV_AREA_XY(START_STATION_LONGITUDE, START_STATION_LATITUDE,
DISTANCE, TRAVEL_MODE, WKID);
END
TABLE FILE esri/esri-citibike
PRINT
    START_STATION_ID AS 'Station ID'
    START_STATION_NAME AS 'Station Name'
    STATION_SERVICE_AREA
        AS '5-Minute Walk Service Area Around Station Coordinate'
WHERE START_STATION_ID EQ 479 OR 512;
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
TYPE=REPORT, GRID=OFF, SIZE=12,$
ENDSTYLE
END

```

The output is shown in the following image.

Station ID	Station Name	5-Minute Walk Area Around Station Coordinate
512	W 29 St & 9 Ave	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPolygon", "geometry": { "rings": [[[-73.996217727999976, 40.748571396000045], [-73.996891021999943, 40.748121262000041], [-73.998462676999964, 40.748571396000045], [-73.998237609999933, 40.747900009000034], [-73.998687743999938, 40.747224808000055], [-74.000932692999982, 40.746999741000025], [-74.001382827999976, 40.748121262000041], [-74.000034331999984, 40.749917984000035], [-74.002281188999973, 40.750818253000034], [-74.002504348999935, 40.75171470600003], [-74.002056121999942, 40.752389908000055], [-74.001831054999968, 40.752389908000055], [-74.001382827999976, 40.752614975000029], [-74.001382827999976, 40.752840042000059], [-73.996665954999969, 40.750143051000066], [-73.995992660999946, 40.749246597000081], [-73.996217727999976, 40.748571396000045]]]] }
479	9 Ave & W 45 St	{ "spatialReference": { "wkid": 4326 }, "geometryType": "esriGeometryPolygon", "geometry": { "rings": [[[-73.988357543999939, 40.758676529000007], [-73.989255904999936, 40.757780075000028], [-73.99127578699995, 40.758451462000039], [-73.991725921999944, 40.75755008000054], [-73.993297576999964, 40.756658554000069], [-73.994195937999962, 40.75755008000054], [-73.993745803999957, 40.758451462000039], [-73.994195937999962, 40.759576797000079], [-73.993745803999957, 40.760248184000034], [-73.992399215999967, 40.760248184000034], [-73.99150085399998, 40.760923386000059], [-73.99150085399998, 40.761148453000033], [-73.990827559999957, 40.760923386000059], [-73.990602492999983, 40.760248184000034], [-73.988805770999988, 40.759801865000043], [-73.988357543999939, 40.758676529000007]]]] }

Charting a Geometry Service Area Around a Coordinate

The following request generates service areas that are 5-minute walking distances from start station coordinates and charts them on an Esri map.

```

DEFINE FILE esri-citibike
WKID/A10='4326';
DISTANCE/A10='5';
TRAVEL_MODE/A10='WalkTime';
STATION_SERVICE_AREA/TX80 (GEOGRAPHIC_ROLE=GEOMETRY_AREA)=
    GIS_SERV_AREA_XY(START_STATION_LONGITUDE, START_STATION_LATITUDE,
DISTANCE, TRAVEL_MODE, WKID);
END

```

```

GRAPH FILE ESRI-CITIBIKE
PRINT
    START_STATION_NAME
    END_STATION_NAME
    DISTANCE
ON TABLE PCHOLD FORMAT JSCHART
ON TABLE SET LOOKGRAPH CHOROPLETH

```



```

ON TABLE SET EMBEDHEADING ON
ON TABLE SET AUTOFIT ON
ON TABLE SET STYLE *
  TYPE=REPORT, TITLETEXT='Map', PAGESIZE=E, CHART-LOOK=com.esri.map, $
  TYPE=DATA, COLUMN=N1, /*START_STATION_NAME*/
    BUCKET=tooltip, $
  TYPE=DATA, COLUMN=N2, /*END_STATION_NAME*/
    BUCKET=tooltip, $
  TYPE=DATA, COLUMN=N3, /*DISTANCE*/
    BUCKET=tooltip, $

```

```

*GRAPH_JS_FINAL
"legend": {"visible": true},
"extensions" : { "com.esri.map" :
  { "scalebar" :
    {
      "scalebarUnit": "dual",
      "attachTo" : "bottom-left"
    },
    "baseMapInfo": {
      "drawBasemapControl" : false,
      "showArcGISBasemaps" : false,
      "customBaseMaps" : [
        {"ibiBaseLayer" : "dark-gray"}
      ]
    },
    "overlayLayers":
    [{
      "ibiDataLayer": {"map-geometry" : {"map_by_field" : "STATION_SERVICE_
AREA"}}, "title" : "Chart"}]
    },
    "introAnimation": "{\\"enabled\\":false}"
  }

*END
ENDSTYLE
HEADING
  "Chart Geometry Service Area"
END

```

The output is shown in the following image.



SQL Character Functions

SQL character functions manipulate alphanumeric fields and character strings.

They can be used in SQL Translator requests and, where supported by the DBMS, in Direct SQL Passthru requests.

LOCATE: Returning the Position of a Substring in a String

Given a substring, a source string and a starting position (the default is 1), LOCATE returns the position of the first occurrence of the substring, starting the search at the starting position. If the substring is not found, LOCATE returns zero (0). The search is case insensitive.

Return the Position of a Substring in a String

```
LOCATE(substr, source [,start])
```

where:

substr

Alphanumeric

Is the search string.

source

Alphanumeric

Is the source string.

start

Numeric

Is the optional starting position for the search. If omitted, it defaults to 1.

Returning the Position of a Substring in a String

The following SQL SELECT statement searches for the character *a* in FULLNAME, starting at position 3, and starting at position 1.

```
SQL
SELECT FULLNAME,
  LOCATE('a', FULLNAME, 3) AS 'START AT 3',
  LOCATE('a', FULLNAME) AS 'START AT 1'
FROM
  WF_RETAIL_CUSTOMER T1
FETCH FIRST 5 ROWS ONLY;
TABLE
HEADING CENTER
"Search for the Character 'a'"
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
TYPE=HEADING, STYLE=BOLD, SIZE=16, $
ENDSTYLE
END
```

The output is shown in the following image.

Search for the Character 'a'		
<u>Full</u> <u>Name</u>	<u>START AT 3</u>	<u>START AT 1</u>
Tyler Nolan	10	10
Joshua Bull	6	6
Zara Wood	4	2
Callum McKenzie	0	2
Bradley Charlton	3	3

LOCATE searches for the substring 'a' in CustomerName, starting the search in position 3.

```
LOCATE('a', CustomerName, 3)
```

For Sandra Arzola, the result 6:

SQL Miscellaneous Functions

The SQL functions described in this chapter perform a variety of conversions, tests, and manipulations.

They can be used in SQL Translator requests and, where supported by the DBMS, in Direct SQL Passthru requests.

CHR: Returning the ASCII Character Given a Numeric Code

Given a number code as an argument, CHR returns the ASCII character.

Return the ASCII Character Given a Numeric Code

```
CHR(number)
```

where:

number

Numeric

Is the numeric code to be translated to an ASCII character.

Returning the ASCII Character Given a Numeric Code

The following SELECT statement places a colon character between last name and first name.

```
SQL
SELECT
  LAST_NAME AS ' ', CHR(58) AS ' ', FIRST_NAME AS ' '
FROM EMPLOYEE
;
TABLE
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

STEVENS	:	ALFRED
SMITH	:	MARY
JONES	:	DIANE
SMITH	:	RICHARD
BANNING	:	JOHN
IRVING	:	JOAN
ROMANS	:	ANTHONY
MCCOY	:	JOHN
BLACKWOOD	:	ROSEMARIE
MCKNIGHT	:	ROGER
GREENSPAN	:	MARY
CROSS	:	BARBARA

CHR translates the numeric code 190 to ASCII.

```
CHR(190)
```

The result is ¾.

Trigonometric Functions

The trigonometric functions provide trigonometric calculations, inverse trigonometric calculations, and angle conversion functions.

ACOS: Calculating an Angle Given its Cosine

Given the cosine of an angle in radians, ACOS (arccosine) returns an angle between 0 (zero) and pi radians.

Calculate an Angle Given its Cosine

```
ACOS(expression)
```

where:

expression

Numeric

Is the cosine of an angle.

Calculating the Arccosine of a Value

The following request calculates the arccosine of 0, PI/2 radians, PI/4 radians, and PI radians.

```
DEFINE FILE ggsales  
PI1 = PI();  
PI2 = PI()/2;  
PI4 = PI()/4;  
COS1 = COS(0);  
COS2 = COS(PI2);
```



```

COS3 = COS(PI4);
COS4 = COS(PI1);
END

TABLE FILE ggsales
PRINT
COS1 COS2 COS3 COS4
OVER
COMPUTE
ARCCOS1/D12.2 = ACOS(COS1);
ARCCOS2/D12.2 = ACOS(COS2);
ARCCOS3/D12.2 = ACOS(COS3);
ARCCOS4/D12.2 = ACOS(COS4);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

Date								
1997/04/01	COS1	1.00	COS2	.00	COS3	.71	COS4	-1.00
	ARCCOS1	.00	ARCCOS2	1.57	ARCCOS3	.79	ARCCOS4	3.14

ACOS calculates the arccosine of -1.00.

```
ACOS(-1.00)
```

The result is pi (3.14).

ASIN: Calculating an Angle Given its Sine

Given the sine of an angle in radians, ASIN (arcsine) returns an angle between $-(\pi/2)$ and $\pi/2$ radians.

Calculate an Angle Given its Sine

ASIN(expression)

where:

expression

Numeric

Is the sine of an angle.

Calculating the Arcsine of a Value

The following request calculates the arcsine of 0, $\pi/2$ radians, $\pi/4$ radians, and π radians.

```

DEFINE FILE ggsales
PI1 = PI();
PI2 = PI()/2;
PI4 = PI()/4;
SIN1 = SIN(0);
SIN2 = SIN(PI2);
SIN3 = SIN(PI4);
SIN4 = SIN(PI1);
END

TABLE FILE ggsales
PRINT
SIN1 SIN2 SIN3 SIN4
OVER
COMPUTE
ARCSIN1/D12.2 = ASIN(SIN1);
ARCCSIN2/D12.2 = ASIN(SIN2);
ARCSIN3/D12.2 = ASIN(SIN3);
ARCSIN4/D12.2 = ASIN(SIN4);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

Date								
1997/04/01	SIN1	.00	SIN2	1.00	SIN3	.71	SIN4	.00
	ARCSIN1	.00	ARCCSIN2	1.57	ARCSIN3	.79	ARCSIN4	.00

ASIN calculates the arcsine of pi.

```
ASIN(PI())
```

The result is 0 (zero).

ATAN: Calculating an Angle Given its Tangent

Given the tangent of an angle in radians, ATAN (arctangent) returns an angle between - (pi/2) and pi/2 radians.

Calculate an Angle Given its Tangent

```
ATAN(expression)
```

where:

expression

Numeric

Is the tangent of an angle.

Calculating the Arctangent of a Value

The following request calculates the arctangent of 0, PI/4 radians, and PI radians.

```
DEFINE FILE ggsales
PI1 = PI();
PI4 = PI()/4;
TAN1 = TAN(0);
TAN3 = TAN(PI4);
```

```

TAN4 = TAN(PI1);
END

TABLE FILE ggsales
PRINT
TAN1 TAN2 TAN3 TAN4
OVER
COMPUTE
  ARCTAN1/D12.2 = ATAN(TAN1);
  ARCTAN3/D12.2 = ATAN(TAN3);
  ARCTAN4/D12.2 = ATAN(TAN4);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Date</u>						
1997/04/01	TAN1	.00	TAN3	1.00	TAN4	.00
	ARCTAN1	.00	ARCTAN3	.79	ARCTAN4	.00

ATAN calculates the arctangent of 0 (zero).

```
ATAN(0)
```

The result is 0 (zero).

ATAN2: Calculating an Angle Given the Coordinates of its Tangent

Given the coordinates of the tangent of an angle in radians, ATAN2 (arctangent2) returns an angle between -pi and pi radians.

Calculate an Angle Given the Coordinates of its Tangent

`ATAN2(x,y)`

where:

x

Numeric

Is the x-coordinate in radians of the tangent of an angle.

y

Numeric

Is the y-coordinate in radians of the tangent of an angle.

Calculating the Arctangent of a Set of Coordinates

The following request calculates the arctangent of (PI,0), (PI/4,PI/4), and (PI,PI).

```

DEFINE FILE ggssales
PI4 = PI()/4;
END

TABLE FILE ggssales
PRINT
TAN1 TAN2 TAN3 TAN4
OVER
COMPUTE
  ATAN2A/D12.2 = ATAN2(PI(),0);
  ATAN2B/D12.2 = ATAN2(PI4,PI4);
  ATAN2C/D12.2 = ATAN2(PI(),PI());
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Date</u>	<u>ATAN2A</u>	<u>ATAN2B</u>	<u>ATAN2C</u>
1997/04/01	1.57	.79	.79

ATAN2 calculates the arctangent of (pi,0).

```
ATAN(PI(),0)
```

The result is 1.57.

COS: Calculating the Cosine of an Angle

Given an angle in radians, COS calculates the cosine of the angle.

Calculate the Cosine of an Angle

```
COS(expression)
```

where:

expression

Numeric

Is an angle in radians.

Calculating the Cosine of an Angle

The following request calculates the cosine of 0, PI/2 radians, PI/4 radians, and PI radians, then calculates the arccosine of those cosines.

```
DEFINE FILE ggsales
PI1 = PI();
PI2 = PI()/2;
PI4 = PI()/4;
```

```

END

TABLE FILE ggsales
PRINT COMPUTE
COSINE1 = COS(0);
COSINE2 = COS(PI2);
COSINE3 = COS(PI4);
COSINE4 = COS(PI1);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Date</u>	<u>COSINE1</u>	<u>COSINE2</u>	<u>COSINE3</u>	<u>COSINE4</u>
1997/04/01	1.00	.00	.71	-1.00

COS calculates the cosine of PI radians.

```
COS(PI())
```

The result is -1.00.

COT: Calculating the Cotangent of an Angle

Given an angle in radians, COT calculates the cotangent of the angle.

Calculate the Cotangent of an Angle

```
COT(expression)
```

where:

expression

Numeric

Is an angle in radians.

Calculating the Cotangent of an Angle

The following request calculates the cotangent of $\pi/2$ and $\pi/4$ radians.

```

DEFINE FILE ggsales
PI2 = PI()/2;
PI4 = PI()/4;
END

TABLE FILE ggsales
PRINT COMPUTE
COTGENT2 = COT(PI2);
COTGENT3 = COT(PI4);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Date</u>	<u>COT1</u>	<u>COT2</u>
1997/04/01	.00	1.00

COT calculates the cotangent of $\pi/2$ radians.

```
COT(1.57)
```

The result is 0 (zero).

DEGREES: Converting Radians to Degrees

DEGREES converts an angle in radians to an angle in degrees.

Convert Radians to Degrees

DEGREES(expression)

where:

expression

Numeric

Is an angle in radians.

Converting Radians to Degrees

The following request converts 0, PI/2, PI/4, and PI radians to degrees.

```
DEFINE FILE ggsales
PI2 = PI()/2;
PI4 = PI()/4;
END

TABLE FILE ggsales
PRINT COMPUTE
DEG1/D12.2 = DEGREES(0);
DEG2/D12.2 = DEGREES(PI2);
DEG3/D12.2 = DEGREES(PI4);
DEG4/D12.2 = DEGREES(PI());
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Date</u>	<u>DEG1</u>	<u>DEG2</u>	<u>DEG3</u>	<u>DEG4</u>
1997/04/01	.00	90.00	45.00	180.00

DEGREES converts pi radians to degrees.

```
DEGREES(PI())
```

The result is 180.

PI: Returning the Constant Pi

PI returns the constant pi as a floating-point number.

Returning the Value Pi

```
PI()
```

Returning the Constant Pi

The following request returns the constant pi rounded to two decimal places and rounded to 10 decimal places.

```
TABLE FILE ggsales
PRINT COMPUTE
  PI2/D12.2 = PI();
  PI10/D12.10 = PI();
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Date</u>	<u>PI2</u>	<u>PI10</u>
1997/04/01	3.14	3.1415926536

PI() calculates the value Pi.

```
PI()
```

For format D12.2, the result is 3.14.

RADIANS: Converting Degrees to Radians

RADIANS converts an angle in degrees to an angle in radians.

Convert Degrees to Radians

```
RADIANS(expression)
```

where:

expression

Numeric

Is an angle in degrees.

Converting Radians to Degrees

The following request converts 0, 45, 90, and 180 degrees to radians.

```
TABLE FILE ggssales
PRINT COMPUTE
RAD1/D12.2 = RADIANS(0);
RAD2/D12.2 = RADIANS(45);
RAD3/D12.2 = RADIANS(90);
RAD4/D12.2 = RADIANS(180);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Date</u>	<u>RAD1</u>	<u>RAD2</u>	<u>RAD3</u>	<u>RAD4</u>
1997/04/01	.00	.79	1.57	3.14

RADIANS converts 180 degrees to radians.

```
RADIANS(180)
```

The result is 3.14.

SIN: Calculating the Sine of an Angle

Given an angle in radians, SIN calculates the sine of the angle.

Calculate the Sine of an Angle

```
SIN(expression)
```

where:

expression

Numeric

Is an angle in radians.

Calculating the Sine of an Angle

The following request calculates the sine of 0, PI/2 radians, PI/4 radians, and PI radians.

```
DEFINE FILE ggsales
PI1 = PI();
PI2 = PI()/2;
PI4 = PI()/4;
END
```

```
TABLE FILE ggssales
PRINT COMPUTE
  SINE1 = SIN(0);
  SINE2 = SIN(PI2);
  SINE3 = SIN(PI4);
  SINE4 = SIN(PI1);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END
```

The output is shown in the following image.

<u>Date</u>	<u>SINE1</u>	<u>SINE2</u>	<u>SINE3</u>	<u>SINE4</u>
1997/04/01	.00	1.00	.71	.00

SIN calculates the sine of PI radians.

```
SIN(PI())
```

The result is 0 (zero).

TAN: Calculating the Tangent of an Angle

Given an angle in radians, TAN calculates the tangent of the angle.

Calculate the Tangent of an Angle

```
TAN(expression)
```

where:

expression

Numeric

Is an angle in radians.

Calculating the Tangent of an Angle

The following request calculates the tangent of 0, $\pi/4$ radians, and π radians.

```

DEFINE FILE ggsales
PI1 = PI();
PI4 = PI()/4;
END

TABLE FILE ggsales
PRINT COMPUTE
TANGENT1 = TAN(0);
TANGENT2 = TAN(PI4);
TANGENT3 = TAN(PI1);
BY DATE
WHERE RECORDLIMIT EQ 1
ON TABLE SET PAGE NOLEAD
ON TABLE SET STYLE *
GRID=OFF,$
ENDSTYLE
END

```

The output is shown in the following image.

<u>Date</u>	<u>TANGENT1</u>	<u>TANGENT2</u>	<u>TANGENT3</u>
1997/04/01	.00	1.00	.00

TAN calculates the tangent of π radians.

```
TAN(PI())
```

The result is 0 (zero).

Creating a Subroutine

You can create custom subroutines to use in addition to the functions provided by WebFOCUS. The process of creating a subroutine consists of the following steps:

- Writing a subroutine using any language that supports subroutine calls. Some of the most common languages are FORTRAN, COBOL, PL/I, Assembler, and C. For details, see [Writing a Subroutine](#).
- Compiling the subroutine. For details, see [Compiling and Storing a Subroutine](#).
- Storing the subroutine in a separate file; do not include it in the main program. For details, see [Compiling and Storing a Subroutine](#).
- Testing the subroutine. For details, see [Testing the Subroutine](#).

i Note: On z/OS, all subroutines called by WebFOCUS must be fully LE-compliant.

Writing a Subroutine

You can write a subroutine in any language that supports subroutines. If you intend to make your subroutine available to other users, be sure to document what your subroutine does, what the arguments are, what formats they have, and in what order they must appear in the subroutine call.

When you write a subroutine you need to consider the requirements and limits that affect it. These are:

- Naming conventions. For details, see [Writing a Subroutine](#).
- Argument considerations. For details, see [Writing a Subroutine](#).
- Language considerations. For details, see [Writing a Subroutine](#).
- Programming considerations. For details, see [Writing a Subroutine](#).

If you write a program named INTCOMP that calculates the amount of money in an account earning simple interest, the program reads a record, tests if the data is acceptable, and

then calls a subroutine called SIMPLE that computes the amount of money. The program and the subroutine are stored together in the same file.

The program and the subroutine shown here are written in pseudocode (a method of representing computer code in a general way):

```
Begin program INTCOMP.
Execute this loop until end-of-file.
  Read next record, fields: PRINCPAL, DATE_PUT, YRRATE.
  If PRINCPAL is negative or greater than 100,000,
    reject record.
  If DATE_PUT is before January 1, 1975, reject record.
  If YRRATE is negative or greater than 20%, reject record.
  Call subroutine SIMPLE (PRINCPAL, DATE_PUT, YRRATE, TOTAL).
  Print PRINCPAL, YEARRATE, TOTAL.
End of loop.
End of program.
```

```
Subroutine SIMPLE (AMOUNT, DATE, RATE, RESULT).
Retrieve today's date from the system.
Let NO_DAYS = Days from DATE until today's date.
Let DAY_RATE = RATE / 365 days in a year.
Let RESULT = AMOUNT * (NO_DAYS * DAY_RATE + 1).
End of subroutine.
```

If you move the SIMPLE subroutine into a file separate from the main program and compile it, you can call the subroutine. The following report request shows how much money employees would accrue if they invested salaries in accounts paying 12%:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME DAT_INC SALARY AND COMPUTE
      INVESTED/D10.2 = SIMPLE(SALARY, DAT_INC, 0.12, INVESTED);
BY EMP_ID
END
```

i Note: The subroutine is designed to return only the amount of the investment, not the current date because a subroutine can return only a single value each time it is called.

Naming a Subroutine

A subroutine name can be up to eight characters long unless the language you are using to write the subroutine requires a shorter name. A name must start with a letter and can consist of a combination of letters and/or numbers. Special symbols are not permitted.

Creating Arguments

When you create arguments for a subroutine, you must consider the following issues:

- **Maximum number of arguments.** A subroutine may contain up to 200 arguments. You can bypass this restriction by creating a subroutine that accepts multiple calls, as described in [Writing a Subroutine](#).
- **Argument types.** You can use the same types of arguments in a subroutine as in a function. For details on these argument types, see [Supplying an Argument in a Function](#).
- **Input arguments.** Input arguments are passed to a subroutine using standard conventions. Register one points to the list of arguments.
You should not assume that input parameters are stored in contiguous memory.
- **Output arguments.** A subroutine returns only one output argument. This argument must be the last in the subroutine. You can choose any format for the output argument except in Dialogue Manager which requires the argument to have the format of the output field.
- **Internal processing.** A subroutine's arguments are processed as follows:
 - An alphanumeric argument is not changed.
 - A numeric argument is converted to floating-point double-precision format except in an operating system RUN command or when storing the output in a variable.
- **Dialogue Manager requirements.** If you are writing a subroutine specifically for Dialogue Manager, the subroutine may need to perform a conversion. For details on using a subroutine with Dialogue Manager, see [Calling a Function From a Dialogue Manager Command](#).
- **COBOL requirements.** All parameters must be defined at the same level in the COBOL FD. Alternatively, you can concatenate all of the parameters into one string,

and break them apart within the subroutine.

The lengths of the calling arguments as defined in WebFOCUS must match the lengths of the corresponding arguments defined in the subroutine.

Any deviation from these rules may result in problems in using the subroutine. It is recommended that you modify the subroutine to conform to the stated rules and then link it above the line. In order to load subroutines above the line, the following are the required link-edit options for compiling and storing the subroutine:

- AMODE 31 (Addressing Mode - 31-bit addressing)
- RMODE ANY (System can load this routine anywhere)

Language Considerations

When writing a subroutine, you must consider the following language issues:

Language and memory. If you write a subroutine in a language that brings libraries into memory (for example, FORTRAN and COBOL), the libraries reduce the amount of memory available to the subroutine.

FORTRAN. TSO supports FORTRAN input/output operations.

COBOL. When writing a subroutine in COBOL:

- The subroutine must use the GOBACK command to return to the calling program. STOPRUN is not supported.
- Numeric arguments received from a request must be declared as COMP-2 (double precision floating point).
- The format described in the DEFINE or COMPUTE command determines the format of the output argument:

WebFOCUSFormat	Picture
An	Xn

WebFOCUSFormat	Picture
I	S9(9) COMP
P	S9(n) [V9(m)] where: (1+n+m)/2 = 8 for small packed numbers. (1+n+m)/2 = 16 for large packed numbers.
D	COMP-2
F	COMP-1

PL/I. When writing a subroutine in PL/I:

- The RETURNS attribute cannot be used.
- The following attribute must be in the procedure (PROC) statement:

```
OPTIONS (COBOL)
```

- Alphanumeric arguments received from a request must be declared as

```
CHARACTER (n)
```

where:

n

Is the field length as defined by the request. Do not use the VARYING attribute.

- Numeric arguments received from a request must be declared as

```
DECIMAL FLOAT (16)
```

or

BINARY FLOAT (53)

- The format described in the DEFINE or COMPUTE command determines the format of the output argument:

WebFOCUSFormat	PL/I Declaration for Output
An	CHARACTER (n)
I	BINARY FIXED (31)
F	DECIMAL FLOAT (6) or BINARY FLOAT (21)
D	DECIMAL FLOAT (16) or BINARY FLOAT (53)
P	DECIMAL FIXED (15) (for small packed numbers, 8 bytes) DECIMAL FIXED (31) (for large packed numbers, 16 bytes)

- Variables that are not arguments with the STATIC attribute must be declared. This avoids dynamically allocating these variables every time the subroutine is executed.

C language. When writing a subroutine in C:

- Do not return a value with the return statement.
- Declare double-precision fields as Double.
- The format defined in the DEFINE or COMPUTE command determines the format of the output argument:

WebFOCUSFormat	C Declaration for Output
An	<pre>char *xxx n</pre> Alphanumeric fields are not terminated with a null byte and cannot be processed by many of the string manipulation subroutines in the run-time library.
I	<pre>long *xxx</pre>
F	<pre>float *xxx</pre>
D	<pre>double *xxx</pre>
P	No equivalent in C.

Programming a Subroutine

Consider the following when planning your programming requirements:

- Write the subroutine to include an argument that specifies the output field.
- If the subroutine initializes a variable, it must initialize it each time it is executed (serial reusability).
- Since a single request may execute a subroutine numerous times, code the subroutine as efficiently as possible.
- If you create your subroutine in a text file or text library, the subroutine must be 31-bit addressable.
- The last argument, which is normally used for returning the result of the subroutine, can also be used to provide input from the subroutine.

You can add flexibility to your subroutine by using a programming technique. A programming technique can be one of the following:

- Executing a subroutine at an entry point. An entry point enables you to use one algorithm to produce different results. For details, see [Writing a Subroutine](#).
- Creating a subroutine with multiple subroutine calls. Multiple calls enable the subroutine to process more than 200 arguments. For details, see [Writing a Subroutine](#).

Executing a Subroutine at an Entry Point

A subroutine is usually executed starting from the first statement. However, a subroutine can be executed starting from any place in the code designated as an *entry point*. This enables a subroutine to use one basic algorithm to produce different results. For example, the DOWK subroutine calculates the day of the week on which a date falls. By specifying the subroutine name DOWK, you obtain a 3-letter abbreviation of the day. If you specify the entry name DOWKL, you obtain the full name. The calculation, however, is the same.

Each entry point has a name. To execute a subroutine at an entry point, specify the entry point name in the subroutine call instead of the subroutine name. How you designate an entry point depends on the language you are using.

Execute a Subroutine at an Entry Point

```
{subroutine|entrypoint} (input1, input2,...outfield)
```

where:

subroutine

Is the name of the subroutine.

entrypoint

Is the name of the entry point to execute the subroutine at.

input1, input2,...

Are the subroutine's arguments.

outfield

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

In Dialogue Manager, you must specify the format. In Maintain Data, you must specify the name of the field.

Executing a Subroutine at an Entry Point

The FTOC subroutine, written in pseudocode below, converts Fahrenheit temperature to Centigrade. The entry point FTOK (designated by the Entry command) sets a flag that causes 273 to be subtracted from the Centigrade temperature to find the Kelvin temperature. The subroutine is:

```
Subroutine FTOC (FAREN, CENTI).
  Let FLAG = 0.
  Go to label X.
  Entry FTOK (FAREN, CENTI).
  Let FLAG = 1.
  Label X.
  Let CENTI = (5/9) * (FAREN - 32).
  If FLAG = 1 then CENTI = CENTI - 273.
  Return.
End of subroutine.
```

The following is a shorter way to write the subroutine. Notice that the *kelv* output argument listed for the entry point is different from the *centi* output argument listed at the beginning of the subroutine:

```
Subroutine FTOC (FAREN, CENTI).
  Entry FTOK (FAREN, KELV).
  Let CENTI = (5/9) * (FAREN - 32).
  KELV = CENTI - 273.
  Return.
End of Subroutine.
```

To obtain the Centigrade temperature, specify the subroutine name FTOC in the subroutine call. The subroutine processes as:

```
CENTIGRADE/D6.2 = FTOC (TEMPERATURE, CENTIGRADE);
```

To obtain the Kelvin temperature, specify the entry name FTOK in the subroutine call. The subroutine processes as:

```
KELVIN/D6.2 = FTOK (TEMPERATURE, KELVIN);
```

Including More Than 200 Arguments in a Subroutine Call

A subroutine can specify a maximum of 200 arguments including the output argument. To process more than 200 arguments, the subroutine must specify two or more call statements to pass the arguments to the subroutine.

Use the following technique for writing a subroutine with multiple calls:

1. Divide the subroutine into segments. Each segment receives the arguments passed by one corresponding subroutine call.

The argument list in the beginning of your subroutine must represent the same number of arguments in the subroutine call, including a call number argument and an output argument.

Each call contains the same number of arguments. This is because the argument list in each call must correspond to the argument list in the beginning of the subroutine. You may process some of the arguments as dummy arguments if you have an unequal number of arguments. For example, if you divide 32 arguments among six segments, each segment processes six arguments; the sixth segment processes two arguments and four dummy arguments.

Subroutines may require additional arguments as determined by the programmer who creates the subroutine.

2. Include a statement at the beginning of the subroutine that reads the call number (first argument) and branches to a corresponding segment. Each segment processes the arguments from one call. For example, number-one branches to the first segment, number two to the second segment, and so on.
3. Have each segment store the arguments it receives in other variables (which can be processed by the last segment) or accumulate them in a running total.

End each segment with a command returning control back to the request (RETURN

command).

4. The last segment returns the final output value to the request.

You can also use the entry point technique to write subroutines that process more than 200 arguments. For details, see [Writing a Subroutine](#).

Create a Subroutine With Multiple Call Statements

```
field = subroutine (1, group1, field)
;field = subroutine (2, group2, field);
.
.
.outfield = subroutine (n, groupn, outfield);
```

where:

field

Is the name of the field that contains the result of the segment or the format of the field enclosed in single quotation marks. This field must have the same format as *outfield*.

Do not specify *field* for the last call statement; use *outfield*.

subroutine

Is the name of the subroutine up to eight characters long.

n

Is a number that identifies each subroutine call. It must be the first argument in each subroutine call. The subroutine uses this call number to branch to segments of code.

group1, group2,...

Are lists of input arguments passed by each subroutine call. Each group contains the same number of arguments, and no more than 26 arguments each.

The final group may contain dummy arguments.

outfield

Is the field that contains the result, or the format of the output value enclosed in single quotation marks.

In Dialogue Manager, you must specify the format. In Maintain Data, you must specify the name of the field.

Creating a Subroutine Divided Into Segments

The ADD32 subroutine, written in pseudocode, sums 32 numbers. It is divided into six segments, each of which adds six numbers from a subroutine call. (The total number of input arguments is 36 but the last four are dummy arguments.) The sixth segment adds two arguments to the SUM variable and returns the result. The sixth segment does not process any values supplied for the four dummy arguments.

The subroutine is:

```
Subroutine ADD32 (NUM, A, B, C, D, E, F, TOTAL).
If NUM is 1 then goto label ONE
else if NUM is 2 then goto label TWO
else if NUM is 3 then goto label THREE
else if NUM is 4 then goto label FOUR
else if NUM is 5 then goto label FIVE
else goto label SIX.

Label ONE.
Let SUM = A + B + C + D + E + F.
Return.

Label TWO
Let SUM = SUM + A + B + C + D + E + F
Return

Label THREE
Let SUM = SUM + A + B + C + D + E + F
Return

Label FOUR
Let SUM = SUM + A + B + C + D + E + F
Return

Label FIVE
Let SUM = SUM + A + B + C + D + E + F
```

```
Return
```

```
Label SIX
```

```
LET TOTAL = SUM + A + B
```

```
Return
```

```
End of subroutine
```

To use the ADD32 subroutine, list all six call statements, each call specifying six numbers. The last four numbers, represented by zeros, are dummy arguments. The DEFINE command stores the total of the 32 numbers in the SUM32 field.

```
DEFINE FILE EMPLOYEE
DUMMY/D10 = ADD32 (1, 5, 7, 13, 9, 4, 2, DUMMY);
DUMMY/D10 = ADD32 (2, 5, 16, 2, 9, 28, 3, DUMMY);
DUMMY/D10 = ADD32 (3, 17, 12, 8, 4, 29, 6, DUMMY);
DUMMY/D10 = ADD32 (4, 28, 3, 22, 7, 18, 1, DUMMY);
DUMMY/D10 = ADD32 (5, 8, 19, 7, 25, 15, 4, DUMMY);
SUM32/D10 = ADD32 (6, 3, 27, 0, 0, 0, 0, SUM32);
END
```

Compiling and Storing a Subroutine

After you write a subroutine, you need to compile and store it. This topic discusses compiling and storing your subroutine for Windows and z/OS.

Compiling and Storing a Subroutine on z/OS

Compile the subroutine, then link-edit it and store the module in a load library. If your subroutine calls other subroutines, compile and link-edit all the subroutines together in a single module. Do not store the subroutine in the FUSELIB load library (FUSELIB.LOAD), as it may be overwritten when your site installs the next release of WebFOCUS.

If the subroutine is written in PL/I, include the following when link-editing the subroutine

```
ENTRY subroutine
```

where:

subroutine

Is the name of the subroutine.

Compiling and Storing a Subroutine on UNIX

Run the program GENCPGM, which creates a .DLL file. Then check the location of your dynamic link functions library file as specified by the IBICPG environment variable, and save the .DLL file to this location.

Compiling and Storing a Subroutine on Windows

Run the program GENCPGM, which creates a .DLL file. Then check the location of your dynamic link functions library file as specified by the IBICPG environment variable, and save the .DLL file to this location.

Testing the Subroutine

After compiling and storing a subroutine, you can test it in a report request. In order to access the subroutine, you need to issue the ALLOCATE command for z/OS.

If an error occurs during testing, check to see if the error is in the request or in the subroutine.

Determine the Location of Error

You can determine the location of an error with the following:

Procedure

1. Write a dummy subroutine that has the same arguments but returns a constant.

2. Execute the request with the dummy subroutine.

Result

If the request executes the dummy subroutine normally, the error is in your subroutine. If the request still generates an error, the error is in the request.

Using a Custom Subroutine: The MTHNAM Subroutine

This topic discusses the MTHNAM subroutine as an example. The MTHNAM subroutine converts a number representing a month to the full name of that month. The subroutine processes as follows:

1. Receives the input argument from the request as a double-precision number.
2. Adds .000001 to the number which compensates for rounding errors. Rounding errors can occur since floating-point numbers are approximations and may be inaccurate in the last significant digit.
3. Moves the number into an integer field.
4. If the number is less than one or greater than 12, it changes the number to 13.
5. Defines a list containing the names of months and an error message for the number 13.
6. Sets the index of the list equal to the number in the integer field. It then places the corresponding array element into the output argument. If the number is 13, the argument contains the error message.
7. Returns the result as an output field.

Writing the MTHNAM Subroutine

The MTHNAM subroutine can be written in FORTRAN, COBOL, PL/I, BAL Assembler, and C.

MTHNAM Subroutine Written in FORTRAN

This is a FORTRAN version of the MTHNAM subroutine where:

MTH

Is the double-precision number in the input argument.

MONTH

Is the name of the month. Since the character string 'September' contains nine letters, MONTH is a three-element array. The subroutine passes the three elements back to your application which concatenates them into one field.

A

Is a two dimensional, 13 by 3 array, containing the names of the months. The last three elements contain the error message.

IMTH

Is the integer representing the month.

The subroutine is:

```
SUBROUTINE MTHNAM (MTH,MONTH)
  REAL*8      MTH
  INTEGER*4    MONTH(3),A(13,3),IMTH
  DATA
+   A( 1,1)/'JANU'/, A( 1,2)/'ARY '/, A( 1,3)/'  '/,
+   A( 2,1)/'FEBR'/, A( 2,2)/'UARY'/, A( 2,3)/'  '/,
+   A( 3,1)/'MARC'/, A( 3,2)/'H   '/, A( 3,3)/'  '/,
+   A( 4,1)/'APRI'/, A( 4,2)/'L   '/, A( 4,3)/'  '/,
+   A( 5,1)/'MAY '/, A( 5,2)/'   '/, A( 5,3)/'  '/,
+   A( 6,1)/'JUNE'/, A( 6,2)/'   '/, A( 6,3)/'  '/,
+   A( 7,1)/'JULY'/, A( 7,2)/'   '/, A( 7,3)/'  '/,
+   A( 8,1)/'AUGU'/, A( 8,2)/'ST  '/, A( 8,3)/'  '/,
+   A( 9,1)/'SEPT'/, A( 9,2)/'EMBE'/, A( 9,3)/'R  '/,
+   A(10,1)/'OCTO'/, A(10,2)/'BER '/, A(10,3)/'  '/,
+   A(11,1)/'NOVE'/, A(11,2)/'MBER'/, A(11,3)/'  '/,
+   A(12,1)/'DECE'/, A(12,2)/'MBER'/, A(12,3)/'  '/,
+   A(13,1)/'**ER'/, A(13,2)/'ROR*'/, A(13,3)/'*  '/
  IMTH=MTH+0.000001
  IF (IMTH .LT. 1 .OR. IMTH .GT. 12) IMTH=13
  DO 1 I=1,3
1  MONTH(I)=A(IMTH,I)
```

```
RETURN
END
```

MTHNAM Subroutine Written in COBOL

This is a COBOL version of the MTHNAM subroutine where:

MONTH-TABLE

Is a field containing the names of the months and the error message.

MLINE

Is a 13-element array that redefines the MONTH-TABLE field. Each element (called A) contains the name of a month; the last element contains the error message.

A

Is one element in the MLINE array.

IX

Is an integer field that indexes MLINE.

IMTH

Is the integer representing the month.

MTH

Is the double-precision number in the input argument.

MONTH

Is the name of the month corresponding to the integer in IMTH.

The subroutine is:

```
IDENTIFICATION DIVISION.
PROGRAM-ID. MTHNAM.
ENVIRONMENT DIVISION.
CONFIGURATION SECTION.
SOURCE-COMPUTER. IBM-370.
OBJECT-COMPUTER. IBM-370.
```

```

DATA DIVISION.
WORKING-STORAGE SECTION.
  01 MONTH-TABLE.
    05 FILLER PIC X(9) VALUE 'JANUARY  '.
    05 FILLER PIC X(9) VALUE 'FEBRUARY '.
    05 FILLER PIC X(9) VALUE 'MARCH    '.
    05 FILLER PIC X(9) VALUE 'APRIL     '.
    05 FILLER PIC X(9) VALUE 'MAY      '.
    05 FILLER PIC X(9) VALUE 'JUNE     '.
    05 FILLER PIC X(9) VALUE 'JULY     '.
    05 FILLER PIC X(9) VALUE 'AUGUST   '.
    05 FILLER PIC X(9) VALUE 'SEPTEMBER'.
    05 FILLER PIC X(9) VALUE 'OCTOBER  '.
    05 FILLER PIC X(9) VALUE 'NOVEMBER '.
    05 FILLER PIC X(9) VALUE 'DECEMBER '.
    05 FILLER PIC X(9) VALUE '**ERROR**'.
  01 MLIST REDEFINES MONTH-TABLE.
    05 MLINE OCCURS 13 TIMES INDEXED BY IX.
      10 A PIC X(9).
  01 IMTH PIC S9(5) COMP.
LINKAGE SECTION.
  01 MTH COMP-2.
  01 MONTH PIC X(9).
PROCEDURE DIVISION USING MTH, MONTH.
BEG-1.
  ADD 0.000001 TO MTH.
  MOVE MTH TO IMTH.
  IF IMTH < +1 OR > 12
    SET IX TO +13
  ELSE
    SET IX TO IMTH.
  MOVE A (IX) TO MONTH.
  GOBACK.

```

MTHNAM Subroutine Written in PL/I

This is a PL/I version of the MTHNAM subroutine where:

MTHNUM

Is the double-precision number in the input argument.

FULLMTH

Is the name of the month corresponding to the integer in MONTHNUM.

MONTHNUM

Is the integer representing the month.

MONTH_TABLE

Is a 13-element array containing the names of the months. The last element contains the error message.

The subroutine is:

```
MTHNAM:  PROC(MTHNUM,FULLMTH) OPTIONS(COBOL);
DECLARE MTHNUM  DECIMAL FLOAT (16) ;
DECLARE FULLMTH CHARACTER (9) ;
DECLARE MONTHNUM FIXED BIN (15,0)  STATIC ;
DECLARE MONTH_TABLE(13) CHARACTER (9)  STATIC
        INIT ('JANUARY',
              'FEBRUARY',
              'MARCH',
              'APRIL',
              'MAY',
              'JUNE',
              'JULY',
              'AUGUST',
              'SEPTEMBER',
              'OCTOBER',
              'NOVEMBER',
              'DECEMBER',
              '**ERROR**') ;

MONTHNUM = MTHNUM + 0.000001 ;
IF MONTHNUM < 1 | MONTHNUM > 12 THEN
    MONTHNUM = 13 ; FULLMTH = MONTH_TABLE(MONTHNUM) ;
RETURN;
END MTHNAM;
```

MTHNAM Subroutine Written in BAL Assembler

This is a BAL Assembler version of the MTHNAM subroutine:

```
* =====
*
*   A SIMPLE MAIN ASSEMBLE ROUTINE THAT CALLS THE LE CALLABLE SERVICES
*
```

```

* =====
MTHNAM  CEEENTRY PPA=MAINPPA,AUTO=WORKSIZE,MAIN=NO
        USING WORKAREA,13
*
        L      3,0(0,1)      LOAD ADDR OF FIRST ARG  INTO R3
        LD      4,=D'0.0'    CLEAR OUT FPR4 AND FPR5
        LE      6,0(0,3)    FP NUMBER IN FPR6
        LPER    4,6          ABS VALUE IN FPR4
        AW      4,=D'0.00001' ADD ROUNDING CONSTANT
        AW      4,DZERO      SHIFT OUT FRACTION
        STD     4,FPNUM      MOVE TO MEMORY
        L      2,FPNUM+4     INTEGER PART IN R2
        TM      0(3),B'10000000' CHECK SIGN OF ORIGINAL NO
        BNO     POS         BRANCH IF POSITIVE
        LCR     2,2         COMPLEMENT IF NEGATIVE
*
POS      LR      3,2        COPY MONTH NUMBER INTO R3
        C      2,=F'0'     IS IT ZERO OR LESS?
        BNP     INVALID    YES. SO INVALID
        C      2,=F'12'    IS IT GREATER THAN 12?
        BNP     VALID      NO. SO VALID
INVALID  LA      3,13(0,0)  SET R3 TO POINT TO ITEM 13 (ERROR)
*
VALID    SR      2,2        CLEAR OUT R2
        M      2,=F'9'     MULTIPLY BY SHIFT IN TABLE
*
        LA      6,MTH(3)    GET ADDR OF ITEM IN R6

        L      4,4(0,1)    GET ADDR OF SECOND ARG IN R4
        MVC     0(9,4),0(6) MOVE IN TEXT
*
*   TERMINATE THE CEE ENVIRONMENT AND RETURN TO THE CALLER
*
        CEETERM  RC=0
* =====
*   CONSTANTS
* =====
        DS      0D          ALIGNMENT
FPNUM    DS      D          FLOATING POINT NUMBER
DZERO    DC      X'4E00000000000000' SHIFT CONSTANT
MTH      DC      CL9'DUMMYITEM' MONTH TABLE
        DC      CL9'JANUARY'
        DC      CL9'FEBRUARY'
        DC      CL9'MARCH'
        DC      CL9'APRIL'
        DC      CL9'MAY'

```

```

        DC      CL9 'JUNE '
        DC      CL9 'JULY '
        DC      CL9 'AUGUST '
        DC      CL9 'SEPTEMBER '
        DC      CL9 'OCTOBER '
        DC      CL9 'NOVEMBER '
        DC      CL9 'DECEMBER '
        DC      CL9 '**ERROR** '
*
MAINPPA  CEEPPA                                CONSTANTS DESCRIBING THE CODE BLOCK
* =====
*          THE WORKAREA AND DSA
* =====
WORKAREA DSECT
        ORG      *+CEEDSASZ          LEAVE SPACE FOR THE DSA FIXED PART
PLIST    DS      0D
PARM1    DS      A
PARM2    DS      A
PARM3    DS      A
PARM4    DS      A
PARM5    DS      A
*
FOCPARM1 DS      F          SAVE FIRST PARAMETER PASSED
FOCPARM2 DS      F          SAVE SECOND PARAMETER PASSED
*
        DS      0D
WORKSIZE EQU      *-WORKAREA
        CEEDSA          MAPPING OF THE DYNAMIC SAVE AREA
        CEECAA          MAPPING OF THE COMMON ANCHOR AREA
*
        END      MTHNAM          NOMINATE MTHNAM AS THE ENTRY POINT
/*

```

MTHNAM Subroutine Written in C

This is a C-language version of the MTHNAM subroutine:

```

void mthnam(double *,char *);
void mthnam(mth,month)
double *mth;
char *month;
{
char *nmonth[13] = {"January ",

```

```

        "February ",
        "March    ",
        "April     ",
        "May       ",
        "June      ",
        "July       ",
        "August    ",
        "September",
        "October   ",
        "November  ",
        "December  ",
        "**Error**"};

int imth, loop;
imth = *mth + .00001;
imth = (imth < 1 || imth > 12 ? 13 : imth);
for (loop=0; loop < 9; loop++)
    month[loop] = nmonth[imth-1][loop];
}

```

Calling the MTHNAM Subroutine From a Request

You can call the MTHNAM subroutine from a report request.

Calling the MTHNAM Subroutine

The DEFINE command extracts the month portion of the pay date. The MTHNAM subroutine then converts it into the full name of the month, and stores the name in the PAY_MONTH field. The report request prints the monthly pay of Alfred Stevens.

```

DEFINE FILE EMPLOYEE
MONTH_NUM/M = PAY_DATE;
PAY_MONTH/A12 = MTHNAM (MONTH_NUM, PAY_MONTH);
END
TABLE FILE EMPLOYEE
PRINT PAY_MONTH GROSS
BY EMP_ID BY FIRST NAME BY LAST_NAME
BY PAY_DATE

```

```
IF LN IS STEVENS
END
```

The output is:

EMP_ID	FIRST NAME	LAST_NAME	PAY_DATE	PAY_MONTH	GROSS
-----	-----	-----	-----	-----	-----
071382660	ALFRED	STEVENS	81/11/30	NOVEMBER	\$833.33
			81/12/31	DECEMBER	\$833.33
			82/01/29	JANUARY	\$916.67
			82/02/26	FEBRUARY	\$916.67
			82/03/31	MARCH	\$916.67
			82/04/30	APRIL	\$916.67
			82/05/28	MAY	\$916.67
			82/06/30	JUNE	\$916.67
			82/07/30	JULY	\$916.67
			82/08/31	AUGUST	\$916.67

Subroutines Written in REXX

A request can call a subroutine coded in REXX. These subroutines, also called FUSREXX macros, provide a 4GL option to the languages supported for user-written subroutines.

REXX subroutines are supported in the z/OS environment. A REXX subroutine contains REXX source code. Compiled REXX code is not supported.

A REXX subroutine contains REXX source code. Compiled REXX code is not supported.

REXX subroutines are not necessarily the same in all operating environments. Therefore, some of the examples may use REXX functions that are not available in your environment.

Because of CPU requirements, the use of REXX subroutines in large production jobs should be monitored carefully.

For more information on REXX subroutines, see your REXX documentation.

Storing and Searching for a REXX Subroutine

To store a REXX subroutine, DDNAME FUSREXX must be allocated to a PDS. This library is searched before other z/OS libraries.

The search order for a REXX subroutine is:

1. FUSREXX.
2. Standard z/OS search order.

Call a REXX Subroutine

```
DEFINE FILE filename  
fieldname/{An|In} = subname(inlen1, inparm1, ..., outlen, outparm);  
END
```

or

```
{DEFINE|COMPUTE} fieldname/{An|In} = subname(inlen1, inparm1, ...,  
outlen, outparm);
```

or

```
-SET &var = subname(inlen1, inparm1, ..., outlen, outparm);
```

where:

fieldname

Is the field that contains the result.

An, In

Is the format of the field that contains the result.

subname

Is the name of the REXX subroutine.

inlen1, inparm1 ...

Are the input parameters. Each parameter consists of a length and an alphanumeric parameter value. You can supply the value, the name of an alphanumeric field that contains the value, or an expression that returns the value. Up to 13 input parameter pairs are supported. Each parameter value can be up to 256 bytes long.

Dialogue Manager converts numeric arguments to floating-point double-precision format. Therefore, you can only pass alphanumeric input parameters to a REXX subroutine using -SET.

outlen, outparm

Is the output parameter pair, consisting of a length and a result. In most cases, the result should be alphanumeric, but integer results are also supported. The result can be a field or a Dialogue Manager variable that contains the value, or the format of the value enclosed in single quotation marks. The return value can be a minimum of one byte long and a maximum (for an alphanumeric value) of 256 bytes.



Note: If the value returned is an integer, the *outlen* must be 4 because WebFOCUS reserves four bytes for integer fields.

&var

Is the name of the Dialogue Manager variable that contains the result.

Returning the Day of the Week

The REXX subroutine DOW returns the day of the week corresponding to the date an employee was hired. The routine contains one input parameter pair and one return field pair.

```
DEFINE FILE EMPLOYEE
1. AHDT/A6 = EDIT(HIRE_DATE) ;
2. DAY_OF_WEEK/A9 WITH AHDT = DOW(6, AHDT, 9, DAY_OF_WEEK);
END
```

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME HIRE_DATE DAY_OF_WEEK
END
```

The procedure processes as follows:

1. The EDIT function converts HIRE_DATE to an alphanumeric format and stores the result in a field with the format A6.
2. The result is stored in the DAY_OF_THE_WEEK field, and can be up to nine bytes long.

The output is:

LAST_NAME	HIRE_DATE	DAY_OF_WEEK
-----	-----	-----
STEVENS	80/06/02	Monday
SMITH	81/07/01	Wednesday
JONES	82/05/01	Saturday
SMITH	82/01/04	Monday
BANNING	82/08/01	Sunday
IRVING	82/01/04	Monday
ROMANS	82/07/01	Thursday
MCCOY	81/07/01	Wednesday
BLACKWOOD	82/04/01	Thursday
MCKNIGHT	82/02/02	Tuesday
GREENSPAN	82/04/01	Thursday
CROSS	81/11/02	Monday

The REXX subroutine appears below. It reads the input date, reformats it to MM/DD/YY format, and returns the day of the week using a REXX DATE call.

```
/* DOW routine. Return WEEKDAY from YYMMDD format date */
Arg ymd .
Return Date('W',Translate('34/56/12',ymd,'123456'),'U')
```

Passing Multiple Arguments to a REXX Subroutine

The REXX subroutine INTEREST has four input parameters.

```
DEFINE FILE EMPLOYEE
1. AHDT/A6      = EDIT(HIRE_DATE);
2. ACSAL/A12    = EDIT(CURR_SAL);
3. DCSAL/D12.2  = CURR_SAL;
4. PV/A12      = INTEREST(6, AHDT, 6, '&YMD', 3, '6.5', 12, ACSAL, 12,
PV);
```



```

END

TABLE FILE EMPLOYEE
PRINT LAST_NAME FIRST_NAME HIRE_DATE DCSAL PV
END

```

The procedure processes as follows:

1. EDIT converts HIRE_DATE to alphanumeric format and stores the result in AHDT.
2. EDIT converts CURR_SAL to alphanumeric format and stores the result in ACSAL.
3. CURR_SAL is converted to a floating-point double-precision field that includes commas, and the result is stored in DCSAL.
4. The second input field is six bytes long. Data is passed as a character variable &YMD in YYMMDD format.

The third input field is a character value of 6.5, which is three bytes long to account for the decimal point in the character string.

The fourth input field is 12 bytes long. This passes the character field ACSAL.

The return field is up to 12 bytes long and is named PV.

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	DCSAL	PV
-----	-----	-----	-----	--
STEVENS	ALFRED	80/06/02	11,000.00	14055.14
SMITH	MARY	81/07/01	13,200.00	15939.99
JONES	DIANE	82/05/01	18,480.00	21315.54
SMITH	RICHARD	82/01/04	9,500.00	11155.60
BANNING	JOHN	82/08/01	29,700.00	33770.53
IRVING	JOAN	82/01/04	26,862.00	31543.35
ROMANS	ANTHONY	82/07/01	21,120.00	24131.19
MCCOY	JOHN	81/07/01	18,480.00	22315.99
BLACKWOOD	ROSEMARIE	82/04/01	21,780.00	25238.25
MCKNIGHT	ROGER	82/02/02	16,100.00	18822.66
GREENSPAN	MARY	82/04/01	9,000.00	10429.03
CROSS	BARBARA	81/11/02	27,062.00	32081.82

The REXX subroutine appears below. The REXX Format command is used to format the return value.

```

/* Simple INTEREST program. dates are yymmdd format */
Arg start_date,now_date,percent,open_balance, .

begin = Date('B',Translate('34/56/12',start_date,'123456'),'U')
stop  = Date('B',Translate('34/56/12',now_date,'123456'),'U')
valnow = open_balance * (((stop - begin) * (percent / 100)) / 365)

Return Format(valnow,9,2)

```

Accepting Multiple Tokens in a Parameter

A REXX subroutine can accept multiple tokens in a parameter. The following procedure passes employee information (PAY_DATE and MO_PAY) as separate tokens in the first parameter. It passes three input parameters and one return field.

```

DEFINE FILE EMPLOYEE
1.  COMPID/A256 = FN | ' ' | LN | ' ' | DPT | ' ' | EID ;
2.  APD/A6 = EDIT(PAY_DATE);
3.  APAY/A12 = EDIT(MO_PAY);
4.  OK4RAISE/A1 = OK4RAISE(256, COMPID, 6, APD, 12, APAY, 1, OK4RAISE);
    END

TABLE FILE EMPLOYEE
PRINT EMP_ID FIRST_NAME LAST_NAME DEPARTMENT
IF OK4RAISE EQ '1'
END

```

The procedure processes as follows:

1. COMPID is the concatenation of several character fields passed as the first parameter and stored in a field with the format A256. Each of the other parameters is a single argument.
2. EDIT converts PAY_DATE to alphanumeric format.
3. EDIT converts MO_PAY to alphanumeric format.
4. OK4RAISE executes, and the result is stored in OK4RAISE.

The output is:

EMP_ID	FIRST_NAME	LAST_NAME	DEPARTMENT
-----	-----	-----	-----
071382660	ALFRED	STEVENS	PRODUCTION

The REXX subroutine appears below. Commas separate FUSREXX parameters. The ARG command specifies multiple variable names before the first comma and, therefore, separates the first FUSREXX parameter into separate REXX variables, using blanks as delimiters between the variables.

```
/* OK4RAISE routine. Parse separate tokens in the 1st parm, */
/* then more parms */

Arg fname lname dept empid, pay_date, gross_pay, .

If dept = 'PRODUCTION' & pay_date < '820000'
Then retvalue = '1'
Else retvalue = '0'

Return retvalue
```

REXX subroutines should use the REXX RETURN subroutine to return data. REXX EXIT is acceptable, but is generally used to end an EXEC, not a FUNCTION.

Correct

```
/* Some FUSREXX function */
Arg input
some rexx process ..
Return data_to_WebFOCUS
```

Not as Clear

```
/* Another FUSREXX function */
Arg input
some rexx process ...
Exit 0
```

Formats and REXX Subroutines

A REXX subroutine requires input data to be in alphanumeric format. Most output is returned in alphanumeric format. If the format of an input argument is numeric, use the EDIT or FTOA functions to convert the argument to alphanumeric. You can then use the EDIT or ATODBL functions to convert the output back to numeric.

The output length in the subroutine call must be four. Character variables cannot be more than 256 bytes. This limit also applies to REXX subroutines. FUSREXX routines return

variable length data. For this reason, you must supply the length of the input arguments and the maximum length of the output data.

A REXX subroutine does not require any input parameters, but requires one return parameter, which must return at least one byte of data. It is possible for a REXX subroutine not to need input, such as a function that returns USERID.

A REXX subroutine does not support WebFOCUS date input arguments. When working with dates you can do one of the following:

- Pass an alphanumeric field with date display options and have the subroutine return a date value.

Date fields contain the integer number of days since the base date 12/31/1900. REXX has a date function that can accept and return several types of date formats, including one called Base format ('B') that contains the number of days since the REXX base date 01/01/0001. You must account for the difference, in number of days, between the WebFOCUS base date and the REXX base date and convert the result to an integer.

- Pass a date value converted to an alphanumeric format. You must account for the difference in base dates for both the input and output arguments.

Returning a Result in Alphanumeric Format

The NUMCNT subroutine returns the number of copies of each classic movie in alphanumeric format. It passes one input parameter and one return field.

```
TABLE FILE MOVIES
  PRINT TITLE AND COMPUTE
1. ACOPIES/A3 = EDIT(COPIES); AS 'COPIES'
  AND COMPUTE
2. TXTCOPIES/A8 = NUMCNT(3, ACOPIES, 8, TXTCOPIES);
  WHERE CATEGORY EQ 'CLASSIC'
  END
```

The procedure processes as follows:

1. The EDIT field converts COPIES to alphanumeric format, and stores the result in ACOPIES.
2. The result is stored in an 8-byte alphanumeric field TXTCOPIES.

The output is:

TITLE -----	COPIES -----	TXTCOPIES -----
EAST OF EDEN	001	One
CITIZEN KANE	003	Three
CYRANO DE BERGERAC	001	One
MARTY	001	One
MALTESE FALCON, THE	002	Two
GONE WITH THE WIND	003	Three
ON THE WATERFRONT	002	Two
MUTINY ON THE BOUNTY	002	Two
PHILADELPHIA STORY, THE	002	Two
CAT ON A HOT TIN ROOF	002	Two
CASABLANCA	002	Two

The subroutine is:

```
/* NUMCNT routine. */
/* Pass a number from 0 to 10 and return a character value */
Arg numbr .
data = 'Zero One Two Three Four Five Six Seven Eight Nine Ten'
numbr = numbr + 1          /* so 0 equals 1 element in array */
Return Word(data,numbr)
```

Returning a Result in Integer Format

In the following example, the NUMDAYS subroutine finds the number of days between HIRE_DATE and DAT_INC and returns the result in integer format.

```
DEFINE FILE EMPLOYEE
1. AHDT/A6 = EDIT(HIRE_DATE);
2. ADI/A6 = EDIT(DAT_INC);
3. BETWEEN/I6 = NUMDAYS(6, AHDT, 6, ADI, 4, 'I6') ;
END

TABLE FILE EMPLOYEE
PRINT LAST_NAME HIRE_DATE DAT_INC BETWEEN
IF BETWEEN NE 0
END
```

The procedure processes as follows:

1. EDIT converts HIRE_DATE to alphanumeric format and stores the result in AHDT.
2. EDIT converts DAT_INC to alphanumeric format and stores the result in ADI.
3. NUMDAYS finds the number of days between AHDT and ADI and stores the result in integer format.

The output is:

LAST_NAME	HIRE_DATE	DAT_INC	BETWEEN
-----	-----	-----	-----
STEVENS	80/06/02	82/01/01	578
STEVENS	80/06/02	81/01/01	213
SMITH	81/07/01	82/01/01	184
JONES	82/05/01	82/06/01	31
SMITH	82/01/04	82/05/14	130
IRVING	82/01/04	82/05/14	130
MCCOY	81/07/01	82/01/01	184
MCKNIGHT	82/02/02	82/05/14	101
GREENSPAN	82/04/01	82/06/11	71
CROSS	81/11/02	82/04/09	158

The subroutine appears below. The return value is converted from REXX character to HEX and formatted to be four bytes long.

```

/* NUMDAYS routine. */
/* Return number of days between 2 dates in yymmdd format */
/* The value returned will be in hex format */

Arg first,second .

base1 = Date('B',Translate('34/56/12',first,'123456'),'U')
base2 = Date('B',Translate('34/56/12',second,'123456'),'U')

Return D2C(base2 - base1,4)

```

Passing a Date Value as an Alphanumeric Field With Date Options

In the following example, a date is used by passing an alphanumeric field with date options to the DATEREX1 subroutine. DATEREX1 takes two input arguments: an alphanumeric date in A8YYMD format and a number of days in character format. It returns a smart date in

YYMD format that represents the input date plus the number of days. The format A8YYMD corresponds to the REXX Standard format ('S').

The number 693959 represents the difference, in number of days, between the WebFOCUS base date and the REXX base date:

```
/* REXX DATEREX1 routine. Add indate (format A8YYMD) to days */
Arg indate, days .
Return D2C(Date('B',indate,'S')+ days - 693959, 4)
```

The following request uses the DATEREX1 macro to calculate the date that is 365 days from the hire date of each employee. The input arguments are the hire date and the number of days to add. Because HIRE_DATE is in I6YMD format, it must be converted to A8YYMD before being passed to the macro:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME FIRST_NAME HIRE_DATE
AND COMPUTE
  ADATE/YYMD = HIRE_DATE; NOPRINT
AND COMPUTE
  INDATE/A8YYMD= ADATE; NOPRINT
AND COMPUTE
  NEXT_DATE/YYMD = DATEREX1(8, INDATE, 3, '365', 4, NEXT_DATE);
BY LAST_NAME NOPRINT
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	NEXT_DATE
-----	-----	-----	-----
BANNING	JOHN	82/08/01	1983/08/01
BLACKWOOD	ROSEMARIE	82/04/01	1983/04/01
CROSS	BARBARA	81/11/02	1982/11/02
GREENSPAN	MARY	82/04/01	1983/04/01
IRVING	JOAN	82/01/04	1983/01/04
JONES	DIANE	82/05/01	1983/05/01
MCCOY	JOHN	81/07/01	1982/07/01
MCKNIGHT	ROGER	82/02/02	1983/02/02
ROMANS	ANTHONY	82/07/01	1983/07/01
SMITH	MARY	81/07/01	1982/07/01
SMITH	RICHARD	82/01/04	1983/01/04
STEVENS	ALFRED	80/06/02	1981/06/02

Passing a Date as a Date Converted to Alphanumeric Format

In the following example, a date is passed to the subroutine as a smart date converted to alphanumeric format. The DATEREX2 subroutine takes two input arguments: an alphanumeric number of days that represents a smart date, and a number of days to add. It returns a smart date in YYMD format that represents the input date plus the number of days. Both the input date and output date are in REXX base date ('B') format.

The number 693959 represents the difference, in number of days, between the WebFOCUS base date and the REXX base date:

```
/* REXX DATEREX2 routine. Add indate (original format YYMD) to days */
Arg indate, days .
Return D2C(Date('B',indate+693959,'B') + days - 693959, 4)
```

The following request uses DATEREX2 to calculate the date that is 365 days from the hire date of each employee. The input arguments are the hire date and the number of days to add. Because HIRE_DATE is in I6YMD format, it must be converted to an alphanumeric number of days before being passed to the macro:

```
TABLE FILE EMPLOYEE
PRINT LAST_NAME FIRST_NAME HIRE_DATE
AND COMPUTE
  ADATE/YYMD = HIRE_DATE; NOPRINT
AND COMPUTE
  INDATE/A8 = EDIT(ADATE); NOPRINT
AND COMPUTE
  NEXT_DATE/YYMD = DATEREX2(8,INDATE,3,'365',4,NEXT_DATE);
BY LAST_NAME NOPRINT
END
```

The output is:

LAST_NAME	FIRST_NAME	HIRE_DATE	NEXT_DATE
-----	-----	-----	-----
BANNING	JOHN	82/08/01	1983/08/01
BLACKWOOD	ROSEMARIE	82/04/01	1983/04/01
CROSS	BARBARA	81/11/02	1982/11/02

GREENSPAN	MARY	82/04/01	1983/04/01
IRVING	JOAN	82/01/04	1983/01/04
JONES	DIANE	82/05/01	1983/05/01
MCCOY	JOHN	81/07/01	1982/07/01
MCKNIGHT	ROGER	82/02/02	1983/02/02
ROMANS	ANTHONY	82/07/01	1983/07/01
SMITH	MARY	81/07/01	1982/07/01
SMITH	RICHARD	82/01/04	1983/01/04
STEVENS	ALFRED	80/06/02	1981/06/02

ASCII and EBCDIC Codes

The table in this appendix lists ASCII and EBCDIC codes for printable and non-printable characters.

ASCII and EBCDIC Code Chart

This chart shows the standard ASCII characters in numerical order with the corresponding decimal and hexadecimal values.

Decimal	Hex	ASCII		EBCDIC	
0	00	NUL	null	NUL	null
1	01	SOH	start of heading	SOH	start of heading
2	02	STX	start of text	STX	start of text
3	03	ETX	end of text	ETX	end of text
4	04	EOT	end of transmission	SEL	select
5	05	ENQ	enquiry	HT	horizontal tab
6	06	ACK	acknowledge	RNL	required new-line
7	07	BEL	bell	DEL	delete
8	08	BS	backspace	GE	graphic escape
9	09	HT	horizontal tab	SPS	superscript
10	0A	LF	line feed	RPT	repeat

Decimal	Hex	ASCII		EBCDIC	
11	0B	VT	vertical tab	VT	vertical tab
12	0C	FF	form feed	FF	form feed
13	0D	CR	carriage return	CR	carriage return
14	0E	SO	shift out	SO	shift out
15	0F	SI	shift in	SI	shift in
16	10	DLE	data link escape	DLE	data link escape
17	11	DC1	device control 1	DC1	device control 1
18	12	DC2	device control 2	DC2	device control 2
19	13	DC3	device control 3	DC3	device control 3
20	14	DC4	device control 4	RES/ ENP	restore/enable presentation
21	15	NAK	negative acknowledge	NL	new-line
22	16	SYN	synchronous idle	BS	backspace
23	17	ETB	end of transmission block	POC	program-operator communications
24	18	CAN	cancel	CAN	cancel
25	19	EM	end of medium	EM	end of medium
26	1A	SUB	substitute	UBS	unit backspace
27	1B	ESC	escape	CU1	customer use 1
28	1C	FS	file separator	IFS	interchange file

Decimal	Hex	ASCII		EBCDIC	
					separator
29	1D	GS	group separator	IGS	interchange group separator
30	1E	RS	record separator	IRS	interchange record separator
31	1F	US	unit separator	IUS/ ITB	interchange unit separator / intermediate transmission block
32	20	SP	space	DS	digit select
33	21	!	exclamation point	SOS	start of significance
34	22	"	straight double quotation mark	FS	field separator
35	23	#	number sign	WUS	word underscore
36	24	\$	dollar sign	BYP/ INP	bypass/inhibit presentation
37	25	%	percent sign	LF	line feed
38	26	&	ampersand	ETB	end of transmission block
39	27	'	apostrophe	ESC	escape
40	28	(	left parenthesis	SA	set attribute
41	29	)	right parenthesis		
42	2A	*	asterisk	SM/ SW	set model switch

Decimal	Hex	ASCII		EBCDIC	
43	2B	+	addition sign	CSP	control sequence prefix
44	2C	,	comma	MFA	modify field attribute
45	2D	-	subtraction sign	ENQ	enquiry
46	2E	.	period	ACK	acknowledge
47	2F	/	right slash	BEL	bell
48	30	0	0		
49	31	1	1		
50	32	2	2	SYN	synchronous idle
51	33	3	3	IR	index return
52	34	4	4	PP	presentation position
53	35	5	5	TRN	
54	36	6	6	NBS	numeric backspace
55	37	7	7	EOT	end of transmission
56	38	8	8	SBS	subscript
57	39	9	9	IT	indent tab
58	3A	:	colon	RFF	required form feed
59	3B	;	semicolon	CU3	customer use 3
60	3C	<	less-than	DC4	device control 4
61	3D	=	equal	NAK	negative acknowledge

Decimal	Hex	ASCII		EBCDIC	
62	3E	>	greater-than		
63	3F	?	question mark	SUB	substitute
64	40	@	at symbol	SP	space
65	41	A	A		
66	42	B	B		
67	43	C	C		
68	44	D	D		
69	45	E	E		
70	46	F	F		

Decimal	Hex	ASCII		EBCDIC	
71	47	G	G		
72	48	H	H		
73	49	I	I		
74	4A	J	J	¢	cent
75	4B	K	K	.	period
76	4C	L	L	<	less-than
77	4D	M	M	(	left parenthesis
78	4E	N	N	+	addition sign

Decimal	Hex	ASCII		EBCDIC	
79	4F	O	O		logical or
80	50	P	P	&	ampersand
81	51	Q	Q		
82	52	R	R		
83	53	S	S		
84	54	T	T		
85	55	U	U		
86	56	V	V		
87	57	W	W		
88	58	X	X		
89	59	Y	Y		
90	5A	Z	Z	!	exclamation mark
91	5B	[	left bracket	\$	dollar sign
92	5C	\	left slant	*	asterisk
93	5D	]	right bracket	)	right parenthesis
94	5E	^	hat, circumflex	;	semicolon
95	5F	_	underscore	¬	logical not
96	60	`	grave	-	subtraction sign
97	61	a	a	/	right slash

Decimal	Hex	ASCII		EBCDIC	
98	62	b	b		
99	63	c	c		
100	64	d	d		
101	65	e	e		
102	66	f	f		
103	67	g	g		
104	68	h	h		
105	69	i	i		
106	6A	j	j		split vertical bar
107	6B	k	k	,	comma
108	6C	l	l	%	percent sign
109	6D	m	m	_	underscore
110	6E	n	n	>	greater-than
111	6F	o	o	?	question mark
112	70	p	p		
113	71	q	q		
114	72	r	r		
115	73	s	s		
116	74	t	t		

Decimal	Hex	ASCII		EBCDIC	
117	75	u	u		
118	76	v	v		
119	77	w	w		
120	78	x	x		
121	79	y	y	`	grave
122	7A	z	z	:	colon
123	7B	{	opening brace	#	number sign
124	7C		vertical line	@	at symbol
125	7D	}	closing brace	'	apostrophe
126	7E	~	tilde	=	equal
127	7F			"	straight double quotation mark
128	80				
129	81			a	a
130	82			b	b
131	83			c	c
132	84			d	d
133	85			e	e
134	86			f	f

Decimal	Hex	ASCII		EBCDIC	
135	87			g	g
136	88			h	h
137	89			i	i
138	8A				
139	8B				
140	8C				
141	8D				
142	8E				
143	8F				
144	90				
145	91			j	j
146	92			k	k
147	93			l	l
148	94			m	m
149	95			n	n
150	96			o	o
151	97			p	p
152	98			q	q
153	99			r	r

Decimal	Hex	ASCII		EBCDIC	
154	9A				
155	9B				
156	9C				
157	9D				
158	9E				
159	9F				
160	A0				
161	A1			~	similar, tilde
162	A2			s	s
163	30			t	t
164	A4			u	u
165	A5			v	v
166	A6			w	w
167	A7			x	x
168	A8			y	y
169	A9			z	z
170	AA				
171	AB				
172	AC				

Decimal	Hex	ASCII		EBCDIC	
173	AD				
174	AE				
175	AF				
176	B0				
177	B1				
178	B2				
179	B3				
180	B4				

Decimal	Hex	ASCII		EBCDIC	
181	B5				
182	B6				
183	B7				
184	B8				
185	B9				
186	BA				
187	BB				
188	BC				
189	BD				

Decimal	Hex	ASCII		EBCDIC	
190	BE				
191	BF				
192	C0			{	left brace
193	C1			A	A
194	C2			B	B
195	C3			C	C
196	C4			D	D
197	C5			E	E
198	C6			F	F
199	C7			G	G
200	C8			H	H
201	C9			I	I
202	CA				
203	CB				
204	CC				
205	CD				
206	CE				
207	CF				
208	D0			}	right brace

Decimal	Hex	ASCII		EBCDIC	
209	D1			J	J
210	D2			K	K
211	D3			L	L
212	D4			M	M
213	D5			N	N
214	D6			O	O
215	D7			P	P
216	D8			Q	Q
217	D9			R	R
218	DA				
219	DB				
220	DC				
221	DD				
222	DE				
223	DF				
224	E0			\	left slash
225	E1				
226	E2			S	S
227	E3			T	T

Decimal	Hex	ASCII		EBCDIC	
228	E4			U	U
229	E5			V	V
230	E6			W	W
231	E7			X	X
232	E8			Y	Y
233	E9			Z	Z
234	EA				
235	EB				
236	EC				
237	ED				
238	EE				
239	EF				
240	F0			0	0
241	F1			1	1
242	F2			2	2
243	F3			3	3
244	F4			4	4
245	F5			5	5
246	F6			6	6

Decimal	Hex	ASCII		EBCDIC	
247	F7			7	7
248	F8			8	8
249	F9			9	9
250	FA				vertical line
251	FB				
252	FC				
253	FD				
254	FE				
255	FF			EO	eight ones

ibi Documentation and Support Services

For information about this product, you can read the documentation, contact Support, and join Community.

How to Access ibi Documentation

Documentation for ibi products is available on the [Product Documentation website](#), mainly in HTML and PDF formats.

The [Product Documentation website](#) is updated frequently and is more current than any other documentation included with the product.

Product-Specific Documentation

The documentation for this product is available on the [ibi™ WebFOCUS® Documentation](#) page.

How to Contact Support for ibi Products

You can contact the Support team in the following ways:

- To access the Support Knowledge Base and getting personalized content about products you are interested in, visit our [product Support website](#).
- To create a Support case, you must have a valid maintenance or support contract with a Cloud Software Group entity. You also need a username and password to log in to the [product Support website](#). If you do not have a username, you can request one by clicking **Register** on the website.

How to Join ibi Community

ibi Community is the official channel for ibi customers, partners, and employee subject matter experts to share and access their collective experience. ibi Community offers access to Q&A forums, product wikis, and best practices. It also offers access to extensions, adapters, solution accelerators, and tools that extend and enable customers to gain full value from ibi products. For a free registration, go to [ibi Community](#).

Legal and Third-Party Notices

SOME CLOUD SOFTWARE GROUP, INC. (“CLOUD SG”) SOFTWARE AND CLOUD SERVICES EMBED, BUNDLE, OR OTHERWISE INCLUDE OTHER SOFTWARE, INCLUDING OTHER CLOUD SG SOFTWARE (COLLECTIVELY, “INCLUDED SOFTWARE”). USE OF INCLUDED SOFTWARE IS SOLELY TO ENABLE THE FUNCTIONALITY (OR PROVIDE LIMITED ADD-ON FUNCTIONALITY) OF THE LICENSED CLOUD SG SOFTWARE AND/OR CLOUD SERVICES. THE INCLUDED SOFTWARE IS NOT LICENSED TO BE USED OR ACCESSED BY ANY OTHER CLOUD SG SOFTWARE AND/OR CLOUD SERVICES OR FOR ANY OTHER PURPOSE.

USE OF CLOUD SG SOFTWARE AND CLOUD SERVICES IS SUBJECT TO THE TERMS AND CONDITIONS OF AN AGREEMENT FOUND IN EITHER A SEPARATELY EXECUTED AGREEMENT, OR, IF THERE IS NO SUCH SEPARATE AGREEMENT, THE CLICKWRAP END USER AGREEMENT WHICH IS DISPLAYED WHEN ACCESSING, DOWNLOADING, OR INSTALLING THE SOFTWARE OR CLOUD SERVICES (AND WHICH IS DUPLICATED IN THE LICENSE FILE) OR IF THERE IS NO SUCH LICENSE AGREEMENT OR CLICKWRAP END USER AGREEMENT, THE LICENSE(S) LOCATED IN THE “LICENSE” FILE(S) OF THE SOFTWARE. USE OF THIS DOCUMENT IS SUBJECT TO THOSE SAME TERMS AND CONDITIONS, AND YOUR USE HEREOF SHALL CONSTITUTE ACCEPTANCE OF AND AN AGREEMENT TO BE BOUND BY THE SAME.

This document is subject to U.S. and international copyright laws and treaties. No part of this document may be reproduced in any form without the written authorization of Cloud Software Group, Inc.

ibi, the ibi logo, FOCUS, and TIBCO are either registered trademarks or trademarks of Cloud Software Group, Inc. in the United States and/or other countries.

All other product and company names and marks mentioned in this document are the property of their respective owners and are mentioned for identification purposes only. You acknowledge that all rights to these third party marks are the exclusive property of their respective owners. Please refer to Cloud SG’s Third Party Trademark Notices (<https://www.cloud.com/legal>) for more information.

This document includes fonts that are licensed under the SIL Open Font License, Version 1.1, which is available at: <https://scripts.sil.org/OFL>

Copyright (c) Paul D. Hunt, with Reserved Font Name Source Sans Pro and Source Code Pro.

Cloud SG software may be available on multiple operating systems. However, not all operating system platforms for a specific software version are released at the same time. See the “readme” file for the availability of a specific version of Cloud SG software on a specific operating system platform.

THIS DOCUMENT IS PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

THIS DOCUMENT COULD INCLUDE TECHNICAL INACCURACIES OR TYPOGRAPHICAL ERRORS. CHANGES ARE PERIODICALLY ADDED TO THE INFORMATION HEREIN; THESE CHANGES WILL BE INCORPORATED IN NEW EDITIONS OF THIS DOCUMENT. CLOUD SG MAY MAKE IMPROVEMENTS AND/OR CHANGES IN THE PRODUCT(S), THE PROGRAM(S), AND/OR THE SERVICES DESCRIBED IN THIS DOCUMENT AT ANY TIME WITHOUT NOTICE.

THE CONTENTS OF THIS DOCUMENT MAY BE MODIFIED AND/OR QUALIFIED, DIRECTLY OR INDIRECTLY, BY OTHER DOCUMENTATION WHICH ACCOMPANIES THIS SOFTWARE, INCLUDING BUT NOT LIMITED TO ANY RELEASE NOTES AND "README" FILES.

This and other products of Cloud SG may be covered by registered patents. For details, please refer to the Virtual Patent Marking document located at <https://www.cloud.com/legal>.

Copyright © 2021-2025. Cloud Software Group, Inc. All Rights Reserved.